

TABLE OF CONTENTS

1.	SCOPE.....	3
2.	REFERENCES.....	3
2.1	Applicable Publications	3
2.1.1	SAE Publications.....	3
2.2	Related Publications	3
2.2.1	SAE Publications.....	3
2.2.2	Federal Publications	4
2.2.3	European Community/United Nations Publication.....	4
3.	DEFINITIONS	4
3.1	Stop Lamp.....	4
4.	LIGHTING IDENTIFICATION CODE.....	4
5.	TESTS.....	4
5.1	Test Methods, etc.....	4
5.1.1	Vibration Test.....	4
5.1.2	Moisture Test	4
5.1.3	Dust Test.....	4
5.1.4	Corrosion Test.....	4
5.1.5	Photometry Test.....	4
5.1.6	Warpage Test for Devices with Plastic Components.....	5
5.2	Color Test.....	5
5.3	Material Test	5
6.	REQUIREMENTS	5
6.1	Performance Requirements	5
6.1.1	Vibration	5
6.1.2	Moisture	5
6.1.3	Dust.....	5
6.1.4	Corrosion.....	5
6.1.5	Photometry.....	5
6.1.6	Warpage.....	6
6.2	Color.....	6
6.3	Materials Requirements	6
6.4	Design Requirements	6
6.5	Design Guidelines	6
6.6	Installation Requirements	7
7.	GUIDELINES	11
7.1	Installation Guidelines.....	11
8.	NOTES.....	11
8.1	Marginal Indicia.....	11

1. SCOPE

This SAE Standard provides test procedures, requirements, and guidelines for stop lamps intended for use on vehicles of less than 2032 mm in overall width.

2. REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J567	Lamp Bulb Retention System
SAE J575	Tests Methods and Equipment for Lighting Devices and Components for Use on Vehicles Less than 2032 mm in Overall Width
SAE J576	Plastic Materials or Materials for Use in Optical Parts Such as Lenses and Reflex Reflectors of Motor Vehicle Lighting Devices
SAE J578	Color Specification
SAE J759	Lighting Identification Code
SAE J1319	Fog Tail Lamp (Rear Fog Light) Systems
SAE J1889	L.E.D. Signal and Marking Lighting Devices

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this document.

2.2.1 SAE Publications

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J222	Parking Lamps (Front Position Lamps)
SAE J387	Terminology—Motor Vehicle Lighting
SAE J585	Tail Lamps (Rear Position Lamps) for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J588	Turn Signal Lamps for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J592	Sidemarkers Lamps for Use on Road Vehicles Less than 2032 mm in Overall Width
SAE J594	Reflex Reflectors
SAE J1050	Describing and Measuring the Driver's Field of View
SAE J1957	Center High Mounted Stop Lamp Standard for Use on Vehicles Less than 2032 mm Overall Width

- SAE J2040 Tail Lamps (Rear Position Lamps) for Use on Vehicles 2032 mm or More in Overall Width
- SAE J2042 Clearance, Sidemarkers, and Identification Lamps for Use on Motor Vehicles 2032 mm or More in Overall Width
- SAE J2261 Stop Lamps and Front- and Rear-Turn Signal Lamps for Use on Motor Vehicles 2032 mm or More in Overall Width

2.2.2 Federal Publications

Available from the Superintendent of Documents, U.S. Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9320.

CFR Title 49 Part 571.108 Lamps, Reflective Devices and Associated Equipment (FMVSS 108)
<http://www.gpoaccess.gov/cfr/index/html>.

2.2.3 European Community/United Nations Publication

Available from United Nations Economic Commission for Europe, Palais des Nations, CH-1211, Geneva 10, Switzerland, Tel: +41-0-22-917-12-34, <http://www.unece.org/trans/main/wp29/wp29regs.html>

ECE Regulation No. 7 Uniform Provisions Concerning the Approval of Front and Rear Position (side) Lamps, Stop-Lamps and End-Outline Marker Lamps for Motor Vehicles (except Motorcycles) and their Trailers

3. DEFINITIONS

3.1 Stop Lamp

A stop lamp is a lamp giving a steady light to the rear of a vehicle to indicate the intentional retardation of the longitudinal movement or stopping of a vehicle.

3.2 SAE J387 is a part of this document.

4. LIGHTING IDENTIFICATION CODE

Stop lamps for use on vehicles less than 2032 mm in overall width may be identified by the code "S" in accordance with SAE J759.

5. TESTS

5.1 Test Methods, etc

SAE J575 is a part of this document. The following tests are applicable with modifications as indicated.

5.1.1 Vibration Test

5.1.2 Moisture Test

5.1.3 Dust Test

5.1.4 Corrosion Test

5.1.5 Photometry Test

- 5.1.5.1 Test distance shall be at least 3 m or at least 10 times the maximum linear extent of the effective projected luminous area of the stop lamp, whichever is greater. The H-V axis shall be taken as parallel to the axis of reference of the lamp as mounted on the vehicle.
- 5.1.5.2 The photometric requirements specified in Figures 3, 4 and 5 shall be applied based on the Effective Projected Luminous Area depicted in Table 1.

TABLE 1 - EFFECTIVE PROJECTED LUMINOUS AREAS

Effective Projected Luminous Area	Size
Less than 225 cm ²	1
225 to 450 cm ²	2
Greater than 450 cm ²	3

- 5.1.5.3 Photometric measurements of multiple lamp arrangements shall be made by one of the following methods:
- 5.1.5.3.1 If a multiple lamp arrangement is used to obtain the stop function, all lamps shall be photometered together provided that a line from the optical axis of each lamp to the center of the photometer sensing device does not make an angle of more than 0.6 degree with the photometer H-V axis. When lamps are photometered together, the H-V axis shall intersect the midpoint between their optical axes.
- 5.1.5.3.2 Each lamp shall be photometered separately by aligning the axis of each lamp with the photometer. The photometric measurement for the multiple lamp arrangement shall be determined by adding the photometric outputs from each individual lamp at corresponding test points.
- 5.1.5.4 SAE J1889 is a part of this document.

5.1.6 Warpage Test for Devices with Plastic Components

5.2 Color Test

SAE J578 is a part of this document.

5.3 Material Test

Plastic materials used in the optical parts shall be tested according to SAE J576.

6. REQUIREMENTS

6.1 Performance Requirements

A device when tested in accordance with the test procedures specified in Section 5, shall meet the following requirements per SAE J575: LED lamps shall also meet the requirements of J1889 and this section when tested to the procedures of J1889 and Section 5.

6.1.1 Vibration

6.1.2 Moisture

6.1.3 Dust

6.1.4 Corrosion

6.1.5 Photometry

- 6.1.5.1 The lamp (size 1, 2 or 3) shall be designed to conform to the zone total photometric requirements of the corresponding Figures 3, 4 or 5 and their footnotes. The summation of the luminous intensity measurements at the test points in a zone shall be at least the value shown.
- 6.1.5.2 A size 2 or size 3 lamp may be used to meet the photometric requirements of a stop lamp. The lamp must meet the photometric requirements of Figures 4 or 5 for the corresponding size.
- 6.1.5.3 If multiple lamps are used and the distance between optical axes does not exceed 560 mm for two lamp arrangements and does not exceed 410 mm for three lamp arrangements, then the combination of lamps must be used to meet the photometric requirements for the corresponding size of lamp (2 lamps meet size 2; 3 lamps meet size 3, figures 4 and 5 respectively). If the distance between adjacent optical axes exceeds the previous dimensions, each lamp shall comply with the photometric requirements for size 1 in Figure 3.
- 6.1.5.4 When a tail lamp is combined with the stop lamp, the stop lamp shall not be less than three times the luminous intensity of the tail lamp at any test point; except that at H-V, H-5L, H-5R, and 5U-V, the stop lamp shall not be less than five times the luminous intensity of the tail lamp. If a size 2, size 3 or multiple lamp arrangement is used and the distance between optical axes for both the tail lamp and stop lamp is within the dimensions specified in 6.1.5.3, the ratio of the stop lamp to the tail lamp shall be computed with the entire lamp or all the lamps lighted. If a multiple lamp arrangement is used and the distance between optical axes for one of the functions exceeds the dimensions specified in 6.1.5.3, the ratio shall be computed for only those lamps where the tail lamp and stop lamp are optically combined. When the tail lamp is combined with the stop lamp, and the maximum luminous intensity of the tail lamp is located below horizontal and within an area generated by a 0.5 degree radius around a test point, the ratio for the test point may be computed using the lowest value of the tail lamp luminous intensity within the generated area.

6.1.6 Warpage

6.2 Color

The color of light from the stop lamps shall be red as specified in SAE J578.

6.3 Materials Requirements

Plastic materials used in the optical parts shall meet the requirements of SAE J576.

6.4 Design Requirements

6.4.1 If a stop lamp is optically combined with the tail lamp and a two-filament bulb used, the bulb shall have an indexing base and the socket shall be designed so that bulbs with nonindexing bases cannot be used. Removable sockets shall have an indexing feature so that they cannot be reinserted into lamp housings in random positions, unless the lamp will perform its intended function with random light source orientation.

6.4.2 The effective projected luminous lens area of a stop lamp shall be at least 50.0 cm².

6.4.3 If multiple lamps are used to meet the photometric requirements, the effective projected luminous lens area of each lamp shall be at least 22 cm².

6.4.4 SAE J 1889 contains the requirements for L.E.D. lamps.

6.5 Design Guidelines


SAE J567 contains the requirements for sockets and gages for bulb retention.

6.6 Installation Requirements

Stop lamps shall meet the following requirements as installed on the vehicle:

- 6.6.1 Each stop lamp arrangement shall be designed to comply with all photometric requirements of Figures 3, 4 or 5 with all vehicular obstructions considered.
- 6.6.2 Each stop lamp arrangement shall be designed to comply with one of the following visibility requirements:
- a. Each lamp arrangement must provide a minimum of 13 cm^2 of unobstructed effective projected luminous lens area, excluding reflex reflector area, in any direction throughout the pattern defined by the specified corner points as follows and shown in Figure 1:

15° above the horizontal, 45° inboard and 45° outboard
 15°* below the horizontal, 45° inboard and 45° outboard

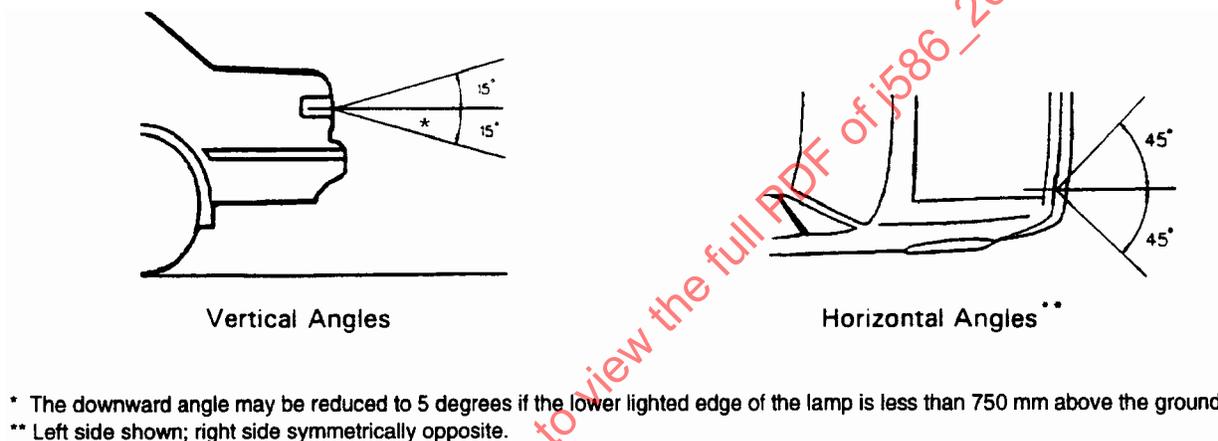


* The downward angle may be reduced to 5 degrees if the lower lighted edge of the lamp is less than 750 mm above the ground.
 ** Left side shown; right side symmetrically opposite.

FIGURE 1 - STOP LAMP VISIBILITY REQUIREMENTS - UNOBSTRUCTED PROJECTED AREA


- b. Each lamp must provide a luminous intensity not less than 0.3 cd throughout the photometric pattern defined by the corner points specified as follows and shown in Figure 2:

15 degrees above horizontal, 45 degrees inboard and outboard
 15 degrees below horizontal*, 45 degrees inboard and outboard

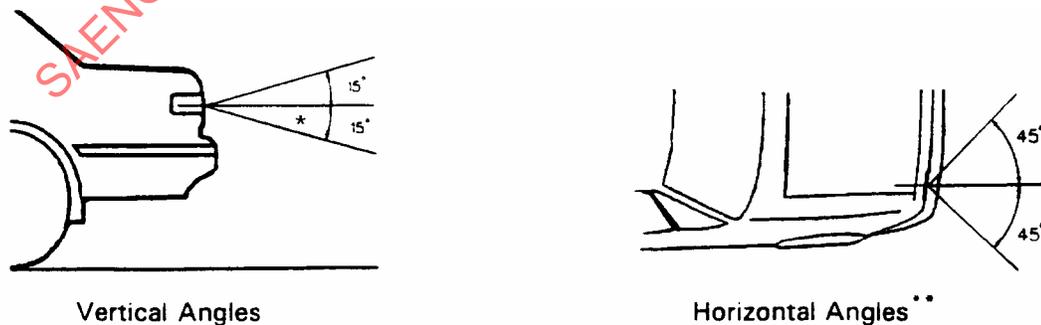

* The downward angle may be reduced to 5 degrees if the lower lighted edge of the lamp is less than 750 mm above the ground.
 ** Left side shown; right side symmetrically opposite.

FIGURE 2 - STOP LAMP VISIBILITY REQUIREMENTS - LUMINOUS INTENSITY

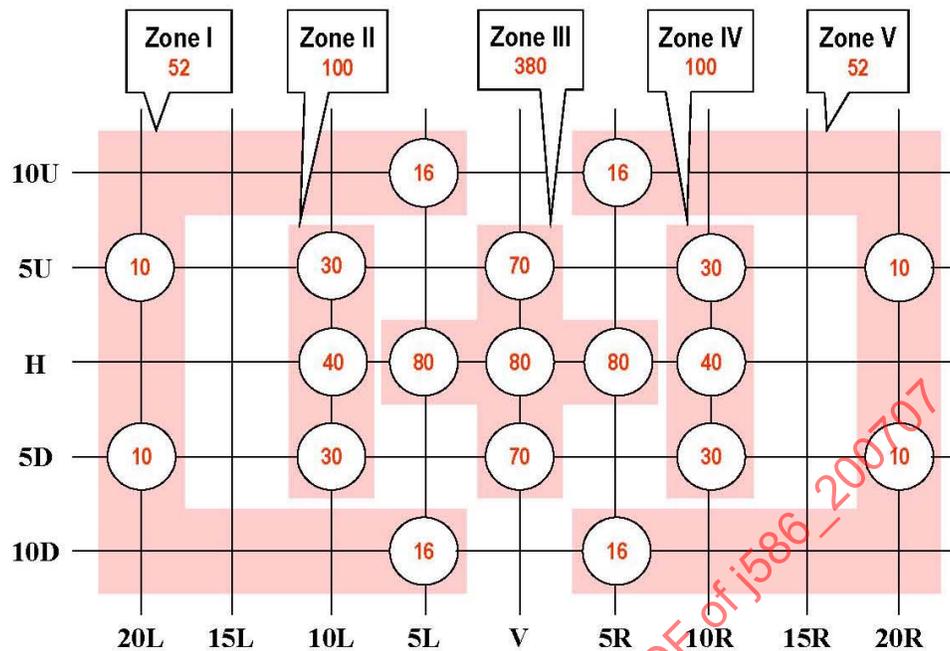

1. The maximum luminous intensity is 300 cd within the photometric pattern shown.
2. The Measured value at each test point shall not be less than 60% of the required minimum value shown for that individual test point location.
3. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the Zone total shown. The luminous intensity measurements at each discrete test point shown within the corresponding zone are the values used to calculate the specified zone total.
4. The listed maximum shall not be exceeded over any area larger than that generated by a 0.5 degree radius within the solid angle defined by the test points.
5. Ratio requirements of 6.1.5.4
6. Multiple lamps requirements of 6.1.5 and its sub paragraphs apply.
7. Where stop lamps are mounted with their axis of reference less than 750 mm above the road surface, photometry requirements below 5° down may be met at 5° down rather than the required downward angle.

FIGURE 3 - PHOTOMETRIC REQUIREMENTS
Minimum Luminous Intensity (cd) Size 1 (less than 225 cm²)