

	SURFACE VEHICLE STANDARD		J594 FEB2010
		Issued 1971-07 Revised 2010-02	
		Superseding J594 DEC2003	
Reflex Reflectors			

RATIONALE

This document was revised to incorporate changes to a new photometry format. There are no photometry requirements changes to this document.

1. SCOPE

This SAE Standard provides test procedures, requirements, and guidelines for reflex reflectors.

2. REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein. Unless otherwise specified, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

- | | |
|----------|---|
| SAE J575 | Test Methods and Equipment for Lighting Devices and Components for Use on Vehicles Less than 2032 mm in Overall Width |
| SAE J576 | Plastic Material or Materials for Use in Optical Parts Such as Lenses and Reflex Reflectors of Motor Vehicle Lighting Devices |
| SAE J578 | Color Specification |
| SAE J759 | Lighting Identification Code |

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this document.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2010 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 SAE WEB ADDRESS: http://www.sae.org

**SAE values your input. To provide feedback
 on this Technical Report, please visit
http://www.sae.org/technical/standards/J594_201002**

2.2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J585	Tail Lamps (Rear Position Lamps) for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J586	Stop Lamps for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J588	Turn Signal Lamps for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J592	Sidemarkers Lamps for Use on Road Vehicles Less than 2032 mm in Overall Width
SAE J1395	Front and Rear Turn Signal Lamps for Use on Motor Vehicles 2032 mm or More in Overall Width
SAE J1398	Stop Lamps for Use on Motor Vehicles 2032 mm or More in Overall Width
SAE J2040	Tail Lamps (Rear Position Lamps) for Use on Vehicles 2032 mm or More in Overall Width
SAE J2041	Reflex Reflectors for Use on Vehicles 2032 mm or More in Overall Width
SAE J2042	Clearance, Sidemarkers, and Identification Lamps for Use on Motor Vehicles 2032 mm or More in Overall Width

2.2.2 Federal Publications

Available from the Document Automation and Production Service (DAPS), Building 4/D, 700 Robbins Avenue, Philadelphia, PA 19111-5094, Tel: 215-697-6257, <http://assis.daps.dla.mil/quicksearch/>.

FMVSS 108 56FR 64733 – 64737 Turn Signal Geometric Visibility Requirements

3. DEFINITIONS

3.1 Reflex Reflectors

Devices that are used on vehicles to give an indication of presence to an approaching driver by reflected light from the headlamps on the approaching vehicle.

3.2 The Observation Angle

The angle between a line from the observation point to the center of the reflector and a second line from the center of the reflector to the source of illumination.

3.3 The Entrance Angle

The angle between the axis of the reflex reflector and a line from the center of the reflector to the source of illumination.

4. IDENTIFICATION CODE

Reflex reflectors may be identified by the Code "A" in accordance with SAE J759.

5. TESTS

5.1 SAE J575 is a part of this report. The following tests are applicable with the modifications as indicated.

5.1.1 Vibration Test

5.1.2 Moisture

5.1.3 Dust Test

5.1.4 Corrosion Test

5.1.5 Photometry

In addition to the test procedures in SAE J575, the following apply:

5.1.5.1 Test Setup

Photometric measurement shall be made at a test distance of at least 30 m with the reflex reflector setup for testing as shown in Figure 1. The reflex reflector shall be mounted in a goniometer with the center of the reflex area at the center of rotation and at the same horizontal level as the source of illumination.

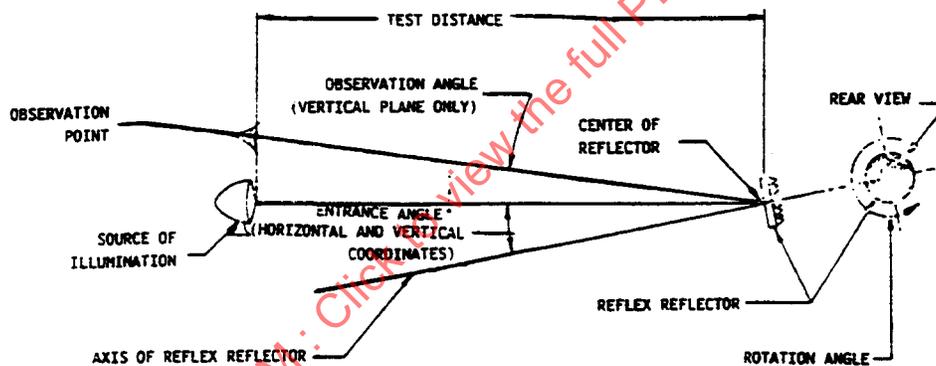


FIGURE 1 - SETUP FOR TESTING

5.1.5.2 Light Source and Sensor

The source of illumination shall be a projector with a $50 \text{ mm} \pm 5 \text{ mm}$ effective diameter and a lamp filament operating at 2856 K (nominal) color temperature. In making photoelectric measurements, the opening to the photo cell shall not be more than 13 mm vertical by 25 mm horizontal with the observation point above (geometrically) the source of illumination.

5.1.5.3 Measurements

Reflex reflectors shall be photometered at the observation and entrance angles shown in Figure 2. The entrance angle shall be designated left, right, up, and down in accordance with the position of the source of illumination with respect to the axis of the reflex reflector as viewed from behind the reflector. The H-V axis of reflex reflectors shall be taken parallel to the longitudinal axis of the vehicle for rear reflectors and perpendicular to a vertical plane parallel to the longitudinal axis of the vehicle for side reflectors.

Photometric measurements shall be made photoelectrically. The recorded value for each test point shall be the quotient of luminous intensity of the reflected light expressed as millicandela (candela) divided by the illumination on the reflector measured in lux (foot candle). Also, the illumination on the reflex reflector from the source of illumination shall be measured in lux (foot candle). Reflex reflectors may have any linear or area dimension; but, for the photometric test, a maximum projected area of 7740 mm² contained within a 254 mm diameter circle shall be exposed.

5.1.5.4 Rotational Position

Reflex reflectors that do not have a fixed rotational position with respect to the vehicle shall be rotated 360 degrees about their axis to find the minimum millicandela per incident lux (candela per incident foot candle), which shall be reported for each test point. If the output falls below the minimum requirement at any test point, the reflector shall be rotated ± 5 degrees about its axis from the angle where the minimum output occurred; and the maximum millicandela per lux (candela per foot candle) within the angular range reported as a tolerance value.

Reflex reflectors that, by their design or construction, permit mounting on the vehicle in fixed rotational position shall be tested in this position. A visual locator, such as the word TOP, shall not be considered adequate to establish a fixed rotational position on the vehicle.

5.1.5.5 Uncolored Reflections

If uncolored reflections from the front surface interfere with photometric readings at any test point, the operator shall check 1 degree above, below, right, and left of the test point, and report the lowest reading and location. The latter must meet the minimum requirement for the test point.

5.2 Color Test

SAE J578 is a part of this report. Additionally, the test sample may be either the reflex reflector or a disc of the same material, technique of fabrication, and dye formulation as the reflex reflector. If a disc is used for color determination by the transmission technique, the thickness should be twice the thickness of the reflector as measured from the face of the lens to the apexes of the reflecting elements. For either sample, a Source "A" illumination shall be used for color measurement.

6. REQUIREMENTS

6.1 Performance Requirements

A reflex reflector, when tested in accordance with the test procedures specified in Section 5, shall meet the following requirements:

6.1.1 Vibration

SAE J575.

6.1.2 Moisture

SAE J575, except that in the case of sealed units the alternate water submersion test (5.2.4) is required.

6.1.3 Dust

SAE J575.

6.1.4 Corrosion

SAE J575.