

	<b>SURFACE VEHICLE STANDARD</b>	<b>SAE</b>	<b>J636 NOV2012</b>
		Issued	1915-08
		Revised	2012-11
		Superseding J636 DEC2001	
V-Belts and Pulleys			

## RATIONALE

Although antiquated in design compared to today's serpentine belt drives, V belts and pulleys are still common in many emerging markets. Additionally more economical manufacturing methods have been introduced over the years for the manufacture of the V belt pulleys. The scope of the revisions are to introduce the industry acceptable tolerance of the alternate manufacturing method of spinning in comparison to cast/machined components.

### 1. SCOPE

This specification covers standard dimensions, tolerances, and methods of measurement of V-belts and pulleys for automotive V-belt drives.

### 2. REFERENCES

There are no referenced publications specified herein.

### 3. V-BELT TYPES

Automotive V-belts are produced in a variety of constructions in a basic trapezoidal shape. The inside circumference of the V-belt can be a plain straight line or corrugated by means of cogs or notches for the purpose of increasing the belt(s) flexibility for use with pulleys in the lower proposed diameter. Belts are to be dimensioned in such a way that they are functional in pulleys dimensioned as described in subsequent sections.

### 4. PULLEYS

Pulleys are to conform to requirements of Figure 1 and Tables 1A, 1B, 2A, and 2B.

SAENORM.COM: Click to buy the full PDF of J636-201211

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."


SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:**    Tel:    877-606-7323 (inside USA and Canada)  
   Tel:    +1 724-776-4970 (outside USA)  
   Fax:    724-776-0790  
   Email: CustomerService@sae.org  
 SAE WEB ADDRESS:                    http://www.sae.org

<b>SAE values your input. To provide feedback on this Technical Report, please visit <a href="http://www.sae.org/technical/standards/J636_201211">http://www.sae.org/technical/standards/J636_201211</a></b>
--

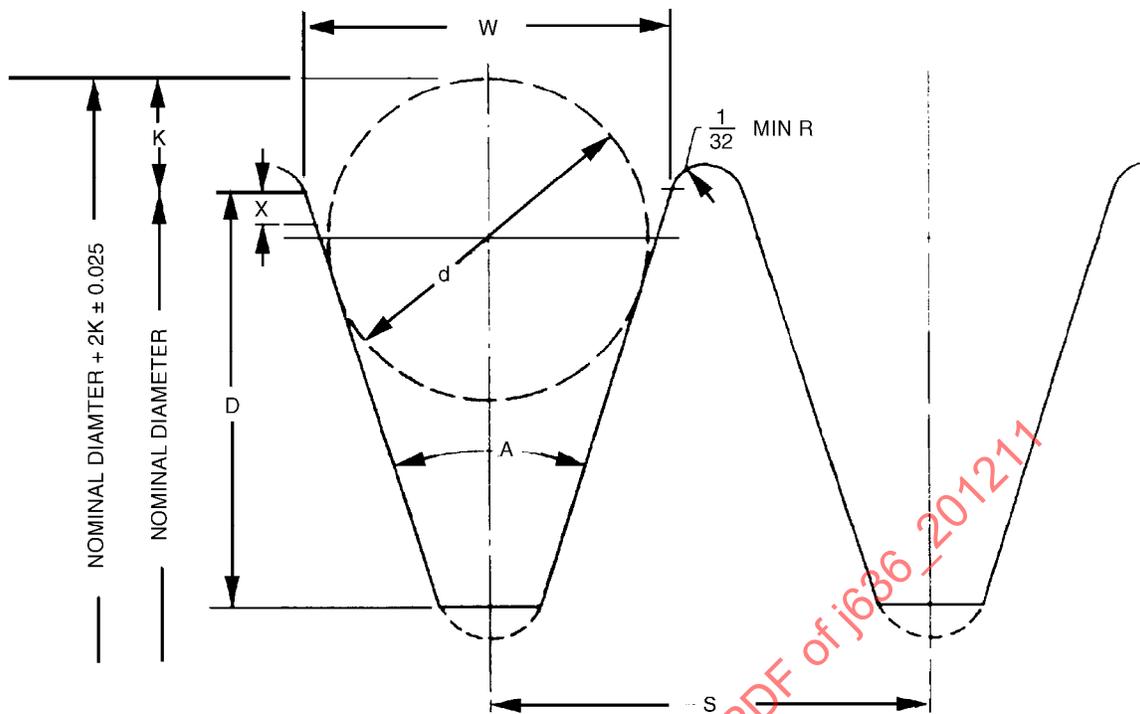

## NOTES:

1. The sides of the groove are to be  $3.2 \mu\text{m}$  ( $125 \mu\text{in}$ ) A. A. maximum.
2. Radial runout is not to exceed  $0.38 \text{ mm}$  ( $0.015 \text{ in}$ ) full indicator movement (FIM). Axial runout is not to exceed  $0.38 \text{ mm}$  ( $0.015 \text{ in}$ ) FIM. Runout in the two directions is measured separately with a ball mounted under spring pressure to follow the groove as the pulley is rotated. Diameter, load, and overhang conditions may require or permit variations in the above-specified runout limits.
3. Bottom corner radii optional, but if used, it shall be below the depth, D.
4. In pulleys for use with belts in multiple on common centers, the diameters over the ball gages are not to vary from groove to groove in the same pulley more than  $0.05 \text{ mm}/25 \text{ mm}$  ( $0.002 \text{ in}/\text{in}$ ) of diameter, with top limit of  $0.30 \text{ mm}$  ( $0.012 \text{ in}$ ) for diameters  $152 \text{ mm}$  ( $6 \text{ in}$ ) and above.
5. Centerline of groove is to be  $90 \text{ degrees} \pm 2 \text{ degrees}$  with pulley axis.
6. The X dimension is radial.  $2X$  is to be subtracted from the effective diameter to obtain "pitch diameter" for speed ratio calculations.

FIGURE 1 - V-BELT PULLEY DIMENSIONS

TABLE 1A - V-BELT PULLEY DIMENSIONS, MM

SAE Size	Recommended <sup>1</sup> Min Effective Dia	A Groove <sup>2</sup> Angle (deg) ±0.5	W Effective Groove Width	D Groove Depth Min	d Ball or Rod Dia (±0.013)	2K 2X Ball <sup>3</sup> Extension	2X <sup>4</sup>	S Groove <sup>5</sup> Spacing (±0.38)
6A	57	36	6.3	7	5.558	4.16	1.0	8.00
8A	57	36	8.0	9	7.142	5.63	1.3	10.49
10A	61	36	9.7	11	7.938	3.77	1.5	13.74
11A	70	36	11.2	13	9.525	5.88	1.8	15.01
13A	76	36	12.7	14	11.113	7.99	2.0	16.79
15A	76	34				6.42		
	Over 102	36	15.2	14	12.700	7.02	0	19.76
	Over 152	38				7.56		
17A	76	34				8.21		
	Over 102	36	16.8	15	14.288	8.82	0.5	21.36
	Over 152	38				9.38		
20A	89	34				11.77		
	Over 114	36	20.0	18	17.463	12.42	1.0	24.54
	Over 152	38				13.02		
23A	102	34				15.67		
	Over 152	36	23.1	21	20.638	16.33	1.5	27.71
	Over 203	38				16.94		

<sup>1</sup>Pulley effective diameters below those recommended should be used with caution, because power transmission and belt life may be reduced.

<sup>2</sup>±1.0 for spun fabricated pulleys.

<sup>3</sup>2K dimensions are calculated in millimeters.

<sup>4</sup>2X is to be subtracted from the effective diameter to obtain "pitch diameter" for speed ratio calculation.

<sup>5</sup>These values are intended for adjacent grooves of the same effective width (W). Choice of pulley manufacture or belt design parameter may justify variance from these values. The S dimension shall be the same on all multiple groove pulleys in a drive using matched belts.

TABLE 1B - V-BELT PULLEY DIMENSIONS, IN

SAE Size	Recommended <sup>6</sup> Min Effective Dia	A Groove <sup>7</sup> Angle (deg) ±0.5	W Effective Groove Width	D Groove Depth Min	d Ball or Rod Dia (±0.0005)	2K 2X Ball Extension	2X <sup>8</sup>	S Groove <sup>9</sup> Spacing (±0.015)
0.250	2.25	36	0.248	0.276	0.2188	0.164	0.04	0.315
0.315	2.25	36	0.315	0.354	0.2812	0.222	0.05	0.413
0.380	2.40	36	0.380	0.433	0.3125	0.154	0.06	0.541
0.440	2.75	36	0.441	0.512	0.3750	0.231	0.07	0.591
0.500	3.00	36	0.500	0.551	0.4375	0.314	0.08	0.661
11/16 (0.600)	3.00	34	0.597	0.551	0.500	0.258	0.00	0.778
	Over 4.00	36				0.280		
	Over 6.00	38				0.302		
3/4 (0.660)	3.00	34	0.660	0.630	0.5625	0.328	0.02	0.841
	Over 4.00	36				0.352		
	Over 6.00	38				0.374		
7/8 (0.790)	3.50	34	0.785	0.709	0.6875	0.472	0.04	0.966
	Over 4.50	36				0.496		
	Over 6.00	38				0.520		
1 (0.910)	4.00	34	0.910	0.827	0.8125	0.616	0.06	1.091
	Over 6.00	36				0.642		
	Over 8.00	38				0.666		

<sup>6</sup>Pulley effective diameters below those recommended should be used with caution, because power transmission and belt life may be reduced.

<sup>7</sup>±1.0 for spun fabricated pulleys.

<sup>8</sup>2X is to be subtracted from the effective diameter to obtain "pitch diameter" for speed ratio calculation.

<sup>9</sup>These values are intended for adjacent grooves of the same effective width (W). Choice of pulley manufacture or belt design parameter may justify variance from these values. The S dimension shall be the same on all multiple groove pulleys in a drive using matched belts.

TABLE 2A - MEASURING PULLEY DIMENSIONS, MM

SAE Size	d <sub>1</sub> Effective Dia (±0.05)	Effective Pulley Circumference	A Groove Angle (deg) ±0.15	W Effective Groove Width	D Groove Depth Min	d Ball or Rod Dia (±0.013)	d <sub>2</sub> Dia <sup>10</sup> Over Balls or Rods (±0.05)
6A	97.03	304.8	36	6.3	7	5.558	101.18
8A	97.03	304.8	36	8.0	9	7.142	102.66
10A	97.03	304.8	36	9.7	11	7.938	100.80
11A	97.03	304.8	36	11.2	13	9.525	102.91
13A	97.03	304.8	36	12.7	14	11.113	105.02
15A	97.03	304.8	34	15.2	14	12.700	103.45
17A	97.03	304.8	34	16.8	16	14.288	105.24
20A	121.29	381.0	34	20.0	18	17.463	133.06
23A	121.29	381.0	34	23.1	21	20.638	136.96


TABLE 2B - MEASURING PULLEY DIMENSIONS, IN

SAE Size US	d <sub>1</sub> Effective Dia (±0.002)	Effective Pulley Circumference	A Groove Angle (deg) ±0.15	W Effective Groove Width	D Groove Depth Min	d Ball or Rod Dia (±0.0005)	d <sub>2</sub> Dia Over Balls or Rods (±0.002)
0.250	3.820	12.000	36	0.248	0.276	0.2188	3.984
0.315	3.820	12.000	36	0.315	0.354	0.2812	4.042
0.380	3.820	12.000	36	0.380	0.433	0.3125	3.974
0.440	3.820	12.000	36	0.441	0.512	0.3750	4.051
0.500	3.820	12.000	36	0.500	0.551	0.4375	4.134
11/16 (0.600)	3.820	12.000	34	0.597	0.551	0.5000	4.078
3/4 (0.660)	3.820	12.000	34	0.660	0.630	0.5625	4.148
7/8 (0.790)	4.775	15.000	34	0.785	0.709	0.6875	5.247
1 (0.910)	4.775	15.000	34	0.910	0.827	0.8125	5.391

<sup>10</sup>d<sub>2</sub> dimensions are calculated in millimeters.


## 5. V-BELT MEASUREMENT

Belt length and SAE size are defined by using effective length and rideout as measured in standard pulleys. These are determined by use of a measuring fixture comprised of two pulleys of equal diameter, a method of applying force, and a means of measuring the center distance between the two pulleys. One of the two pulleys is fixed in position while the other is movable along a graduated scale. The fixture is shown schematically in Figure 2. Specifications for measuring pulley dimensions are given in Tables 2A and 2B and Figure 3.

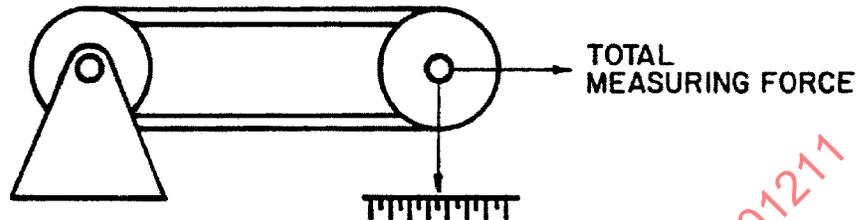

NOTE—The outside diameter and the effective diameter on the measuring pulley are one and the same.

FIGURE 2 - DIAGRAM OF A FIXTURE FOR MEASURING V-BELTS

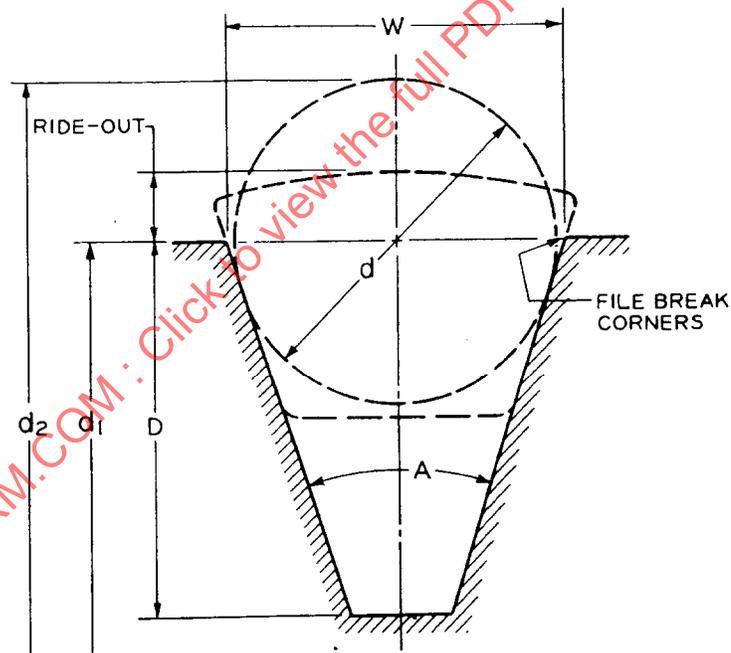

NOTE: The outside diameter and the effective diameter on the measuring pulley are one and the same.

FIGURE 3 - MEASURING PULLEY DIMENSIONS

## 5.1 Length

To measure the length, the belt is placed on the measuring fixture at the force shown in Tables 3A and 3B, and rotated around the pulleys at least two revolutions of the belt to seat the belt properly in the pulley grooves and to divide the total force equally between the two strands of the belt. The mid-point of the center distance travel of the movable pulley defines the center distance and will be measured through one revolution of the belt minimum after the two seating revolutions. The belt effective length is equal to two times the center distance plus the effective pulley circumference. Standard belt center distance tolerances are shown in Tables 4A and 4B.

TABLE 3A - MEASURING CONDITIONS AND RIDEOUT, SI UNITS

SAE Size Metric	Total Measuring Force, N	Rideout <sup>11</sup> mm	Rideout <sup>(11)</sup> Tolerance mm
6A	222	0.8	±0.8
8A	222	0.8	±0.8
10A	267	1.5	±1.1
11A	267	1.0	±1.1
13A	267	1.5	±1.1
15A	267	2.3	±1.1
17A	356	2.3	±1.1
20A	445	2.3	±1.1
23A	534	2.3	±1.1

TABLE 3B - MEASURING CONDITIONS AND RIDEOUT,  
U.S. CUSTOMARY UNITS

SAE Size In	Total Measuring Force, lbf	Rideout <sup>12</sup> in	Rideout <sup>(12)</sup> Tolerance in
0.250	50	0.031	±0.031
0.315	50	0.031	±0.031
0.380	60	0.060	±0.045
0.440	60	0.040	±0.045
0.500	60	0.060	±0.045
11/16 (0.600)	60	0.090	±0.045
3/4 (0.660)	80	0.090	±0.045
7/8 (0.790)	100	0.090	±0.045
1 (0.910)	120	0.090	±0.045

<sup>11</sup>The belt rideout, as measured along the circumference of the belt, must fall within the specified tolerance at all points with the exception of measurements at points of dimension variations inherent to the manufacturing process or product such as material splices, belt identifications, etc.

<sup>12</sup>The belt rideout, as measured along the circumference of the belt, must fall within the specified tolerance at all points with the exception of measurements at points of dimension variations inherent to the manufacturing process or product such as material splices, belt identifications, etc.