

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

SURFACE VEHICLE RECOMMENDED PRACTICE

SAE J694

REV.
JUL97

Issued 1955-05
Revised 1997-07

Superseding J694 SEP88

Submitted for recognition as an American National Standard

(R) DISC WHEEL/HUB OR DRUM INTERFACE DIMENSIONS—COMMERCIAL VEHICLES

1. **Scope**—This SAE Recommended Practice contains dimensions and their tolerances concerning disc wheel to hub or drum interface areas for commercial vehicles and multipurpose passenger vehicles. Stamped disc wheels for single applications and special or less common applications are not covered in this document.
- 1.1 **Purpose**—This document defines wheel mounting systems and documents, the dimensions and tolerances necessary to maintain serviceability, and interchangeability in the interface areas. To be consistent with ISO, it is divided into two sections (I & II). Section I is in concert with ISO 4107, describing mounting systems currently used internationally and nominated for, or included in, the international standard for bolt circle interfaces. Section II records information on current mounting systems also used in North America. **Components of different mounting systems with common bolt patterns could be mis-assembled together and cause service problems. Therefore, it is important to note that each mounting system should be treated individually and their components not be intermixed.**
2. **References**
- 2.1 **Applicable Publications**—The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.
- 2.1.1 **SAE PUBLICATION**—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.
- SAE J393—Nomenclature—Wheels, Hubs and Rims for Commercial Vehicles
- 2.1.2 **ISO PUBLICATIONS**—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.
- ISO 4107—Commercial vehicles—Wheel hub attachment dimensions
ISO 7575—Road vehicles—Wheels for commercial vehicles—Flat attachment—Fixing nuts
- 2.2 **Related Publication**—The following publication is provided for information purposes only and is not a required part of this document.
- 2.2.1 **SAE PUBLICATION**—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.
- J1842—Axle End Standardization

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (412) 772-8512 FAX: (412) 776-0243
TO PLACE A DOCUMENT ORDER: (412) 776-4970 FAX: (412) 776-0790
<http://www.sae.org>

SAE J694 Revised JUL97

3. **Definitions**—A detailed listing of basic nomenclature is contained in SAE J393. Figures 1 to 13 introduce, illustrate, and specify additional nomenclature and definitions.

3.1 **Mounting System**—The combination of wheel/hub or drum interface characteristics that identify uniqueness. These characteristics are: number of bolt holes, bolt circle diameter, and fastener type. Unique mounting systems are identified by the Roman numerals in applicable tables throughout the document. Within a given mounting system, the wheels are interchangeable only by use of the appropriate fasteners and/or hubs with appropriate dimensions for the wheel material shown.

4. **Abbreviations**—Abbreviations used are as follows:

BSN	= Ball seat nut
BSN-AL	= Ball seat nut for aluminum wheels
BSN-HD	= Ball seat nut, heavy duty
FN	= Flange nut
N/A	= Not applicable

5. **Section 1—Disc Wheels/Hub or Drum Interface for ISO Compatible Wheels:**

5.1 Wheel Dimensions

5.1.1 DEFINITIONS OF WHEEL DIMENSIONS—Reference Figures 1 and 2.

A	= Number of bolt holes
B	= Bolt circle diameter
C	= Center hole diameter
D	= Bolt hole diameter
E	= Disc flat clearance diameter
F	= Disc thickness

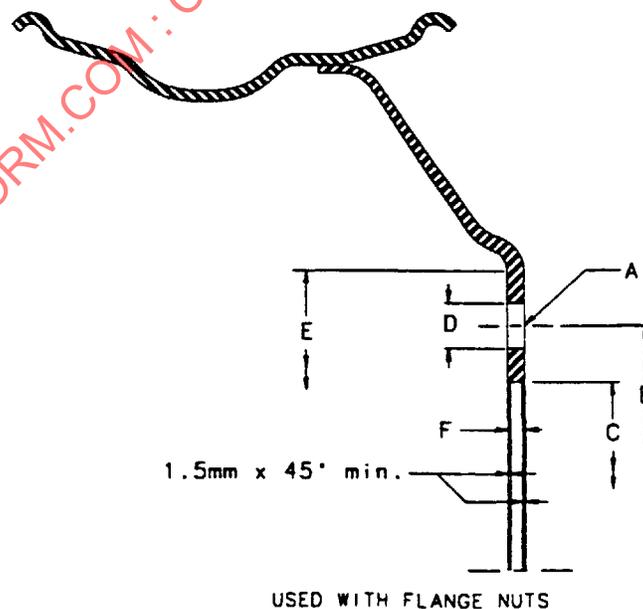


FIGURE 1—FERROUS DISC WHEEL

SAE J694 Revised JUL97

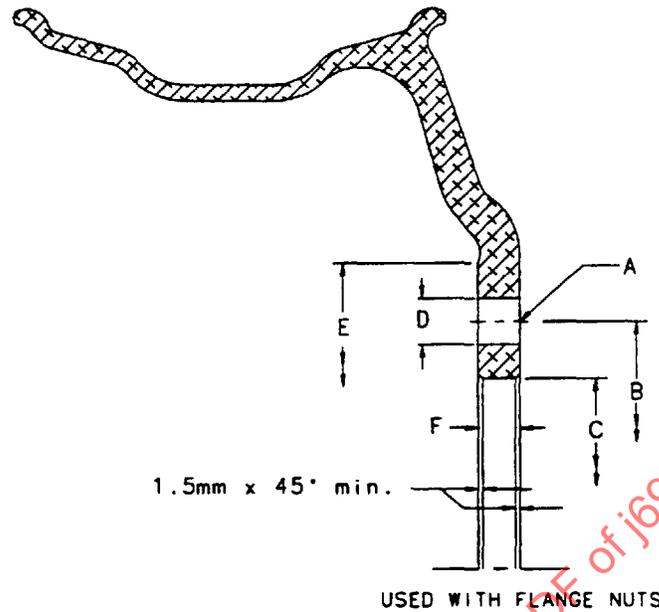


FIGURE 2—ALUMINUM DISC WHEEL

5.1.2 DIMENSIONS AND TOLERANCES OF WHEELS

5.1.2.1 Metric System Mountings—Wheel Dimensions—All dimensions in millimeters. Reference Table 1.

TABLE 1—METRIC SYSTEM MOUNTINGS—WHEEL DIMENSIONS

Mounting System	Mounting Systems # of Bolt Holes A	Mounting Systems Bolt Circle Diameter B ±0.3	Mounting Systems Fastener Type ⁽¹⁾	Mounting Systems Wheel Material ⁽¹⁾	Dimensions	Dimensions	Dimensions	Dimensions
					Center Hole Diameter C +0.2, -0	Bolt Hole Diameter D +1, -0	Disc Flat Clearance Diameter E Minimum	Disc Thickness ⁽¹⁾ F Maximum
II	8	275	FN	Ferrous	221.0	24	325	13
				Aluminum	221.1	24	325	25.4
III	10	285.75	FN	Ferrous	220.0	26	345	14
				Aluminum	220.1	26	345	25.4
IV	10	335	FN	Ferrous	281.0	26	390	14
				Aluminum	281.2	26	390	25.4
XIII	6	205	FN	Ferrous	161.0	21	255	13
				Aluminum	161.1	21	255	20
XV	6	245	FN	Ferrous	202.0	21	295	13
				Aluminum	202.1	21	295	20
XVI	8	222.25	FN	Ferrous	164.0	24	280	13
				Aluminum	164.1	24	280	20

1. Disc thickness, fastener type and aluminum disc wheels are not included in ISO 4107.

SAE J694 Revised JUL97

5.2 Hub or Drum Interface Dimensions

5.2.1 DEFINITIONS OF HUB OR DRUM INTERFACE DIMENSIONS—Reference Figure 3.

- A = Number of studs or bolts
- B = Bolt circle diameter
- C1 = Wheel pilot diameter
- D2 = Stud or bolt size
- E1 = Diameter of wheel backup - hub or outboard drum (usually not coincident with hub flange outside diameter)
- F1 = Wheel pilot length (does not include lead in radius or chamfer)
- G = Stud or bolt standoff beyond wheel mounting face of hub or outboard drum. This is calculated with the maximum wheel thickness plus the maximum nut thickness to permit full thread engagement.

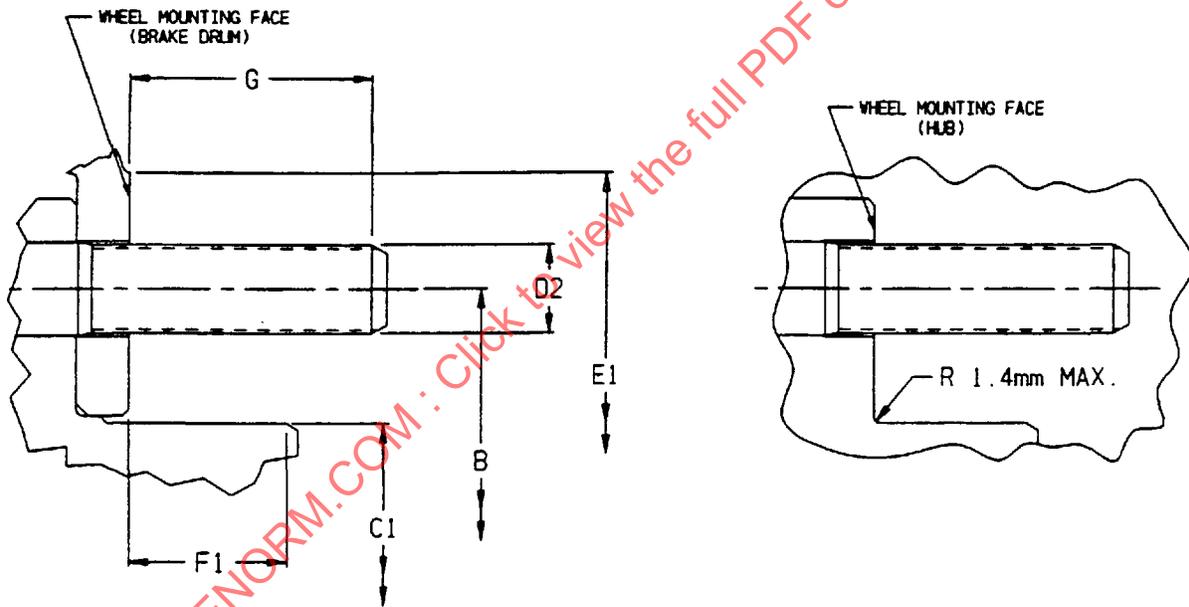


FIGURE 3—HUB OR DRUM INTERFACE DIMENSIONS

SAE J694 Revised JUL97

5.2.2 INTERFACE DIMENSIONS AND TOLERANCES OF HUBS OR DRUMS

5.2.2.1 Metric System Mountings—Hub Dimensions—All dimensions in millimeters. Reference Table 2.

TABLE 2—METRIC SYSTEM MOUNTINGS—HUB DIMENSIONS

Mounting System	Mounting Systems # of Studs or Bolts A	Mounting Systems Bolt Circle Diameter B ⊕ 0.3 Ⓢ	Mounting Systems Fastener Type ⁽¹⁾	Mounting Systems Wheel Material ⁽¹⁾	Dimensions Stud or Bolt Diameter D2	Dimensions Wheel Pilot Diameter C1 +0, -0.2	Dimensions Wheel Backup Diameter E1	Dimensions Wheel Pilot Length Single ⁽¹⁾	Dimensions Wheel Pilot Length Dual ⁽¹⁾	Dimensions Standout Single ⁽¹⁾	Dimensions Standout Dual ⁽¹⁾
								F1 Minimum	F1 Minimum	G Minimum	G Minimum
II	8	275	FN	Ferrous	20	220.8	315/320	13	20	42	55
				Aluminum	20	220.8	315/320	13	35	55	80
III	10	285.75	FN	Ferrous	22	219.8	335/340	13	20	48	62
				Aluminum	22	219.8	335/340	13	35	60	85
IV	10	335	FN	Ferrous	22	280.8	380/385	13	20	48	62
				Aluminum	22	280.8	380/385	13	35	60	85
XIII	6	205	FN	Ferrous	18	160.8	245/250	10	20	40	53
				Aluminum	18	160.8	245/250	10	30	47	67
XV	6	245	FN	Ferrous	18	201.8	285/290	10	20	40	53
				Aluminum	18	201.8	285/290	10	30	47	67
XVI	8	222.25	FN	Ferrous	20	163.8	272/277	10	20	42	55
				Aluminum	20	163.8	272/277	10	30	49	69

1. Wheel pilot length, stud or bolt stand out, fastener type and aluminum disc wheels are not included in ISO 4107.

5.3 Fastener Dimensions and Tolerances

5.3.1 DEFINITIONS OF FASTENER DIMENSIONS—Reference Figure 4.

- a = Distance to first thread from seat end
- d1 = Thread size
- d3 = Flange inner diameter
- d4 = Flange outer diameter
- h = Overall nut height
- j = Hex flat
- s = Nominal width across flats
- w = Width of flange contact

SAE J694 Revised JUL97

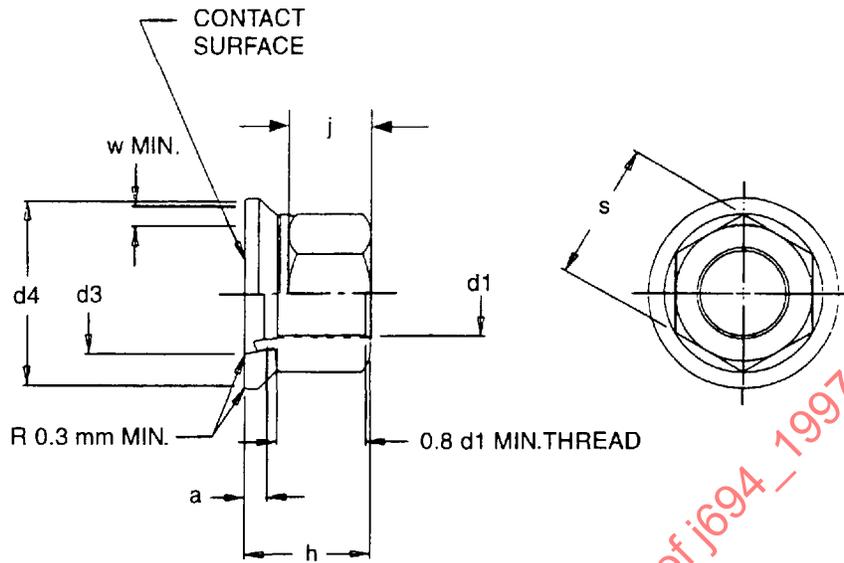


FIGURE 4—TWO-PIECE FLANGE NUT

5.3.2 DIMENSIONS AND TOLERANCES OF TWO-PIECE FLANGE NUTS (FN)

5.3.2.1 Metric System Mountings—All dimensions in millimeters. Reference Table 3.

TABLE 3—METRIC SYSTEM MOUNTINGS

Thread Size $d1$	Hex Size s	Flange Inner Diameter $d3$ Minimum	Flange Outer Diameter $d4$ Minimum	Thread Start a Minimum	Width of Flange Contact w Minimum	Height of Nut & Flange h Maximum	Hex Flat j Minimum
M18 x 1.5	27	23	40	4.5	5.0	27	10.5
M20 x 1.5	30	26	45	4.5	5.5	29	11.0
M22 x 1.5	33	28	49	4.5	6.0	34	12.5

6. Section II—Information on Mounting Systems also Used in North America

6.1 Wheel Dimensions

6.1.1 DEFINITIONS OF WHEEL DIMENSIONS—Reference Figures 5 and 6.

- A = Number of bolt holes
- B = Bolt circle diameter
- C = Center hole diameter
- D = Bolt hole diameter
- E = Disc flat clearance diameter
- F = Disc thickness
- K = Ball Seat Radius
- L = Ball Seat Intersection

SAE J694 Revised JUL97

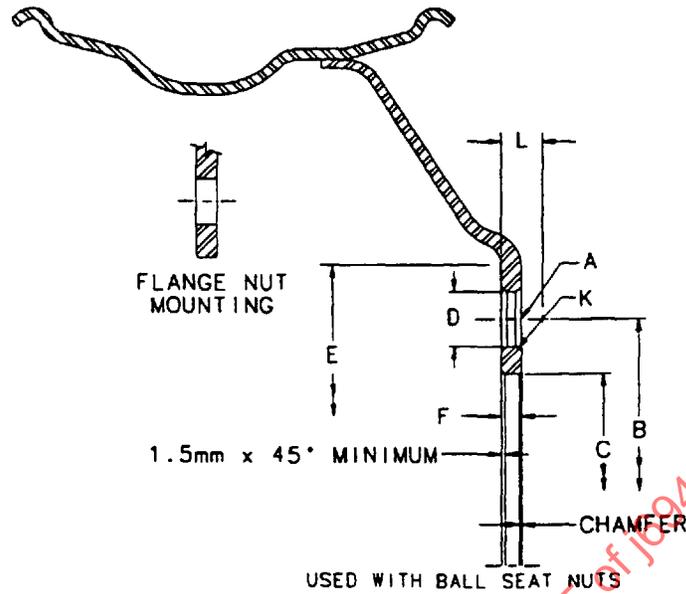


FIGURE 5—FERROUS DISC WHEEL

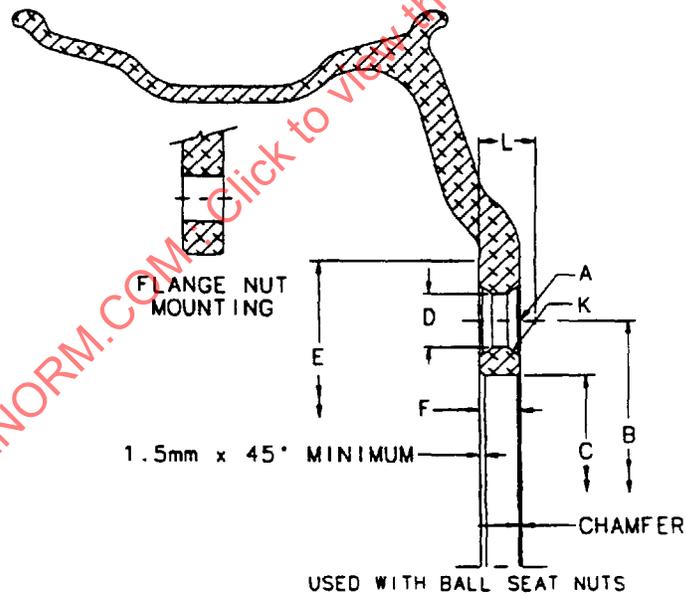


FIGURE 6—ALUMINUM DISC WHEEL

SAE J694 Revised JUL97

6.1.2 DIMENSIONS AND TOLERANCES OF WHEELS

6.1.2.1 Metric System Mounting used with Flange Nuts—Wheel Dimensions—All dimensions in millimeters. Reference Table 4.

TABLE 4—METRIC SYSTEM MOUNTING USED WITH FLANGE NUTS—WHEEL DIMENSIONS

Mounting System	Mounting System # of Bolt Holes A	Mounting System Bolt Circle Diameter B $\oplus 0.3 \oslash$	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions	Dimensions	Dimensions	Dimensions
					Center Hole Diameter C +0.2, -0	Bolt Hole Diameter D +1, -0	Disc Flat Clearance Diameter E Minimum	Disc Thickness F Maximum
XIV	8	275	FN	Ferrous	221.0	26	345	14
			FN	Aluminum	221.1	26	345	25.4

6.1.2.2 Inch System Mountings used with Flange Nuts—Wheel Dimensions—All dimensions in inches. Reference Table 5.

TABLE 5—INCH SYSTEM MOUNTINGS USED WITH FLANGE NUTS—WHEEL DIMENSIONS⁽¹⁾

Mounting System	Mounting System # of Bolt Holes A	Mounting System Bolt Circle Diameter B $\oplus 0.010 \oslash$	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions	Dimensions	Dimensions	Dimensions
					Center Hole Diameter C	Bolt Hole Diameter D +0.09, -0	Disc Flat Clearance Diameter E Minimum	Disc Thickness F Maximum
I	8	6.500	FN	Ferrous	4.878/4.888 ⁽²⁾	0.60	8.60	0.35
			FN	Aluminum	4.880/4.888	0.60	8.60	0.57
VI	8	6.500	FN	Ferrous	4.563/4.573 ⁽³⁾	0.60 ⁽⁴⁾	8.30	0.35
			FN	Aluminum	4.565/4.573	0.60 ⁽⁴⁾	8.30	0.57
VII	10	7.250	FN	Ferrous	5.251/5.261	0.64	9.23	0.36
			FN	Aluminum	5.251/5.254	0.64	9.23	0.57
IX	10	8.750	FN	Ferrous	6.251/6.259	0.72	11.32	0.50
XI	10	11.250	FN	Ferrous	8.665/8.673	1.18	13.56	0.50
			FN	Aluminum	8.669/8.677	1.18	13.56	0.90

1. CAUTION—Components of different mounting systems with common bolt patterns must not be intermixed.
2. Center hole chamfer 0.030 x 45 degrees minimum, non-curb side.
3. Center hole chamfer 0.055 x 45 degrees minimum, non-curb side.
4. 0.75 - for 0.625 diameter stud

SAE J694 Revised JUL97

6.1.2.3 Inch System Mounting used with Ball Seat Nuts—Wheel Dimensions—All dimensions in inches. Reference Table 6.

TABLE 6—INCH SYSTEM MOUNTING USED WITH BALL SEAT NUTS—WHEEL DIMENSIONS

Mounting System	Mounting System # of Bolt Holes A	Mounting System Bolt Circle Diameter B $\oplus 0.010 \text{ } \ominus$	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions Center Hole Diameter C	Dimensions Bolt Hole Diameter D +0.09, -0	Dimensions Disc Flat Clearance Diameter E	Dimensions Ball Seat Radius Reference K	Dimensions Ball Seat Intersection L
							Minimum		Maximum
V	6	8.750	BSN	Ferrous	6.469 min	1.21	11.32	0.875	0.98
			BSN-AL	Aluminum	6.495 min	1.18	11.32	0.875	1.50
VIII	10	8.750	BSN	Ferrous	6.469 min	1.21	11.32	0.875	0.98
X	10	11.250	BSN	Ferrous	8.725 min	1.21	13.56	0.875	1.02
			BSN-AL	Aluminum	8.722 min	1.18	13.56	0.875	1.50
XII	10	13.188	BSN-HD	Ferrous	10.650 min	1.35	15.48	1.188	1.50
			BSN-HD	Aluminum	10.650 min	1.35	15.48	1.188	2.03

6.2 Hub or Drum Interface Dimensions

6.2.1 DEFINITIONS OF HUB OR DRUM INTERFACE DIMENSIONS—Reference Figure 7.

A = Number of studs or bolts

B = Bolt circle diameter

C1 = Wheel pilot diameter

D2 = Stud or bolt size

E1 = Diameter of wheel backup - hub or outboard drum (usually not coincident with hub flange outside diameter)

F1 = Wheel pilot length (does not include lead in radius or chamfer)

G = Stud or bolt standout beyond wheel mounting face of hub or outboard drum. This is calculated with the maximum wheel thickness plus the maximum nut thickness to permit full thread engagement.

SAE J694 Revised JUL97

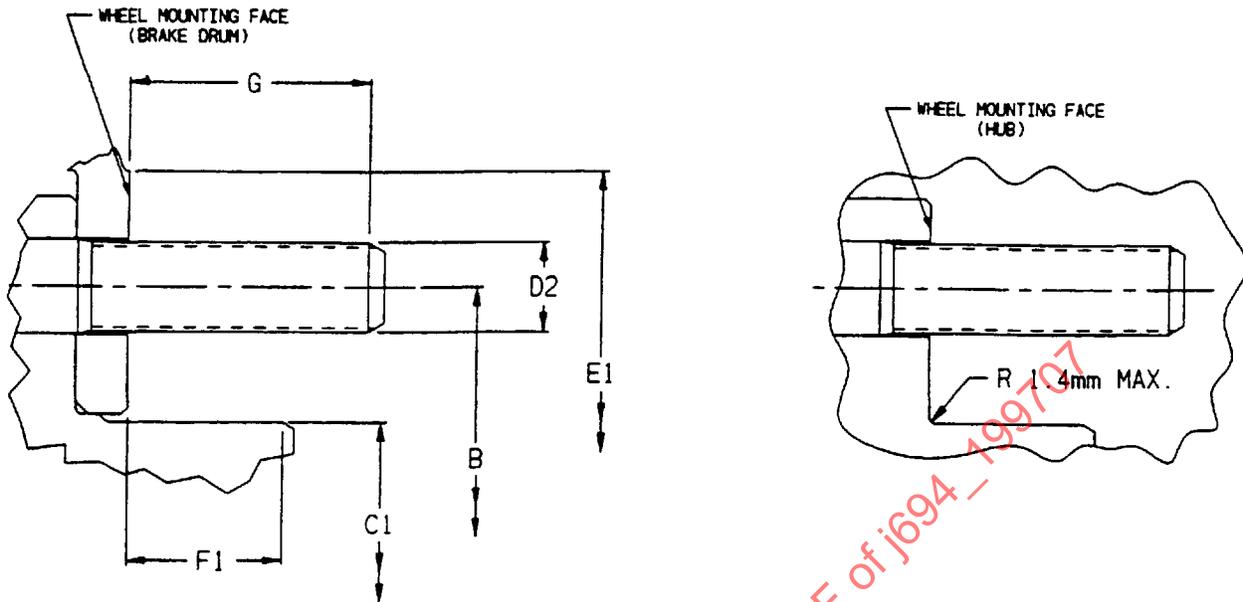


FIGURE 7—HUB OR DRUM INTERFACE DIMENSIONS

6.2.2 INTERFACE DIMENSIONS AND TOLERANCES OF HUBS OR DRUMS

6.2.2.1 Metric System Mountings used with Flange Nuts—Hub Dimensions—All dimensions in millimeters. Reference Table 7.

TABLE 7—METRIC SYSTEM MOUNTING USED WITH FLANGE NUTS—HUB DIMENSIONS

Mounting System	Mounting System # of Studs or Bolts A	Mounting System Bolt Circle Diameter B ± 0.03	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions Stud or Bolt Diameter D2	Dimensions Wheel Pilot Diameter C1 +0, -0.2	Dimensions Wheel Backup Diameter E1	Dimensions Wheel Pilot Length	Dimensions Wheel Pilot Length	Dimensions Standout Single G Minimum	Dimensions Standout Dual G Minimum
								Single F1 Minimum	Dual F1 Minimum		
XIV	8	275	FN	Ferrous	22	220.8	334/343	13	20	49	63
								13	35		

SAE J694 Revised JUL97

6.2.2.2 Inch System Mountings Used with Flange Nuts—Hub Dimensions—All dimensions in inches. Reference Table 8.

TABLE 8—INCH SYSTEM MOUNTING USED WITH FLANGE NUTS—HUB DIMENSIONS⁽¹⁾

Mounting System	Mounting System # of Studs or Bolts A	Mounting System Bolt Circle Diameter B ⊕0.010 ∅	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions Stud or Bolt Diameter D2	Dimensions Wheel Pilot Diameter C1	Dimensions Wheel Backup Diameter E1	Dimensions Wheel Pilot Length Single F1	Dimensions Wheel Pilot Length Dual F1	Dimensions Standout Single G	Dimensions Standout Dual G
								Minimum	Minimum	Minimum	Minimum
I	8	6.500	FN	Ferrous	0.563	4.872/4.877	8.38/8.50	0.28	0.52	1.39	1.74
			FN	Aluminum	0.563	4.872/4.877	8.38/8.50	0.28	0.86	1.61	2.18
VI	8	6.500	FN	Ferrous	0.563	4.554/4.562	8.00/8.25	0.28	0.52	1.44	1.79
			FN	Aluminum	0.563	4.554/4.562	8.00/8.25	0.28	0.86	1.66	2.23
VII	10	7.250	FN	Ferrous	0.625	5.245/5.250	9.00/9.13	0.28	0.52	1.45	1.81
			FN	Aluminum	0.625	5.245/5.250	9.00/9.13	0.28	0.86	1.66	2.23
IX	10	8.750	FN	Ferrous	0.688	6.242/6.250	11.00/11.25	0.28	0.75	1.59	2.09
XI	10	11.250	FN	Ferrous	0.875	8.656/8.660	13.18/13.50	0.45	0.75	1.88	2.38
			FN	Aluminum	0.875	8.656/8.660	13.18/13.50	0.45	1.35	2.28	3.18

1. CAUTION—Components of different mounting systems with common bolt hole patterns must not be intermixed.

6.2.2.3 Inch System Mounting used with Ball Seat Nuts—Hub Dimensions—All dimensions in inches. Reference Table 9.

TABLE 9—INCH SYSTEM MOUNTING USED WITH BALL SEAT NUTS—HUB DIMENSIONS⁽¹⁾

Mounting System	Mounting System # of Studs or Bolts A	Mounting System Bolt Circle Diameter B ⊕0.010 ∅	Mounting System Fastener Type	Mounting System Wheel Material	Dimensions Stud or Bolt Diameter D2	Dimensions Wheel Pilot Diameter C1	Dimensions Wheel Backup Diameter E1	Dimensions Standout Single G	Dimensions Standout Dual G
								Minimum	Minimum
V	6	8.750	BSN	Ferrous	0.750	6.45 max	11.00/11.25	1.28	1.31/1.44 ⁽²⁾
			BSN	Ferrous	1.125	6.45 max	11.00/11.25	1.28	N/A
			BSN-AL	Aluminum	0.750	6.45 max	11.00/11.25	1.80	1.31/1.44 ⁽²⁾
VIII	10	8.750	BSN-AL	Aluminum	1.125	6.45 max	11.00/11.25	1.80	N/A
			BSN	Ferrous	0.750	6.45 max	11.00/11.25	1.28	1.31/1.44 ⁽²⁾
X	10	11.250	BSN	Ferrous	1.125	6.45 max	11.00/11.25	1.28	N/A
			BSN	Ferrous	0.750	8.720 max	13.18/13.50	1.32	1.31/1.44 ⁽²⁾
			BSN	Ferrous	1.125	8.720 max	13.18/13.50	1.32	N/A
XII	10	11.250	BSN-AL	Aluminum	0.750	8.720 max	13.18/13.50	1.80	1.31/1.44 ⁽²⁾
			BSN-AL	Aluminum	1.125	8.720 max	13.18/13.50	1.80	N/A
			BSN-AL	Aluminum	1.125	8.720 max	13.18/13.50	1.80	N/A
XII	10	11.250	BSN-HD	Ferrous	0.938	10.645 max	15.25/15.38	1.98	1.68/1.81 ⁽²⁾
			BSN-HD	Ferrous	1.312	10.645 max	15.25/15.38	1.98	N/A
			BSN-HD	Aluminum	0.938	10.645 max	15.25/15.38	2.51	N/A
			BSN-HD	Aluminum	1.312	10.645 max	15.25/15.38	2.51	N/A

1. CAUTION—Components of different mounting systems with common bolt hole patterns must not be intermixed.

2. Standout for dual BSN wheels is to the end of the stud and includes a maximum chamfer of three threads.

SAE J694 Revised JUL97

6.3 Fastener Types, Dimensions and Tolerances

6.3.1 DEFINITIONS OF FASTENER DIMENSIONS—Reference Figures 8, 9, 10, 11, 12, and 13:

- a = Distance to first thread from seat end
- b = Depth of inner thread from seat end
- c = Distance of outer thread from seat end
- d1 = Thread size
- d2 = Outer thread size
- d3 = Flange inner diameter
- d4 = Flange outer diameter
- e = Seat diameter
- f = Shoulder length
- g = Nominal width across flats
- h = Bottom of nut to top of threads
- r = Ball seat radius (must be appropriate to nut seat of wheel)
- w = Width of flange contact
- x = Ball seat intersection reference diameter

6.3.2 DIMENSIONS AND TOLERANCES OF BALL SEAT NUTS (BSN) FOR INCH SYSTEM MOUNTINGS—All dimensions in inches. Reference Figure 8.

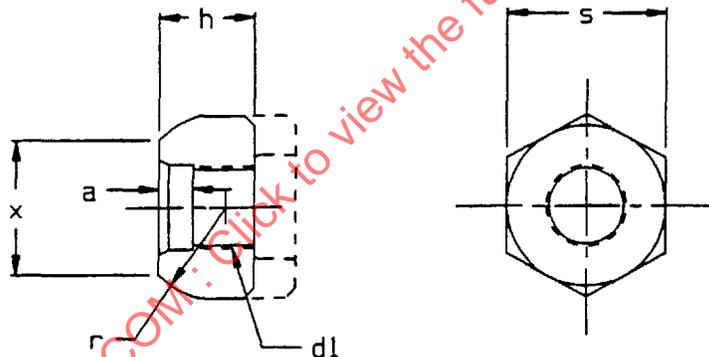


FIGURE 8—SINGLE OR OUTER DUAL BALL SEAT NUT FOR FERROUS WHEELS

6.3.2.1 Single or Outer Dual Ball Seat Nut for Ferrous Wheels (BSN)—Reference Table 10.

TABLE 10—SINGLE OR OUTER DUAL BALL SEAT NUT FOR FERROUS WHEELS (BSN)

Fastener Type	Thread Size d1	Hex Size s	Ball Seat Radius r ±0.010	Thread Start a Minimum	Height to end of Thread h	Reference Intersection Diameter x
BSN	3/4-16	1.50	0.875	0.25	0.91	1.25
BSN	1-1/8-16	1.50	0.875	0.06	0.91	1.25
BSN-HD	15/16-12	1.75	1.188	0.12	1.41	1.47
BSN-HD	1-5/16-12	1.75	1.188	0.12	1.41	1.47

SAE J694 Revised JUL97

6.3.2.2 Inner Dual Ball Seat Nut for Ferrous Wheels (BSN)—Reference Figure 9 and Table 11.

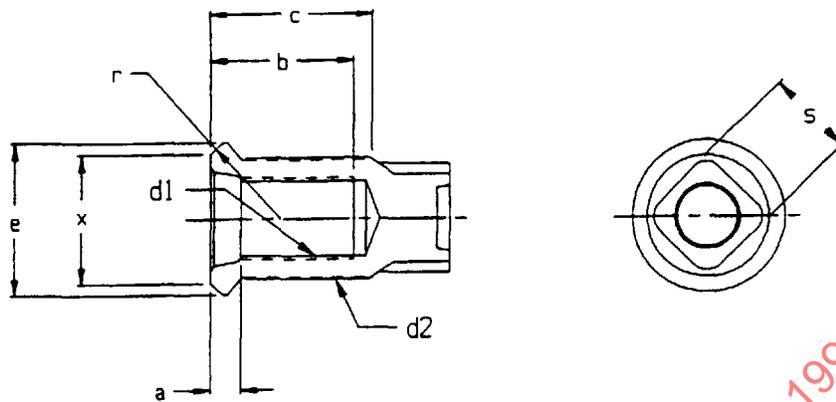


FIGURE 9—INNER DUAL BALL SEAT NUT FOR FERROUS WHEELS

TABLE 11—INNER DUAL BALL SEAT NUT FOR FERROUS WHEELS (BSN)

Fastener Type	Inner Thread d1	Outer Thread d2	Wrench Flat s	Ball Seat Radius r ±0.010	Thread Start a Minimum	Thread Length b Minimum	Thread Length c Minimum	Seat Diameter e	Reference Intersection Diameter x
BSN	3/4-16	1-1/8-16	0.813	0.875	0.250	1.25	1.375	1.425/1.385	1.195
BSN-HD	15/16-12	1-5/16-12	0.938	1.188	0.250	1.88	2.000	1.693/1.677	1.344

SAENORM.COM : Click to view the full PDF of J694 - 199707

SAE J694 Revised JUL97

6.3.2.3 Single or Outer Dual Ball Seat Nut for Aluminum Wheels (BSN-AL)—Reference Figure 10 and Table 12.

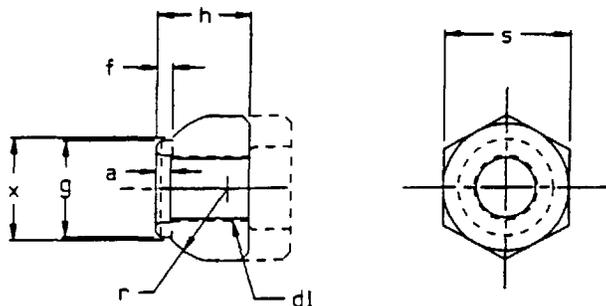


FIGURE 10—SINGLE OR OUTER DUAL BALL SEAT NUT FOR ALUMINUM WHEELS

TABLE 12—SINGLE OR OUTER DUAL BALL SEAT NUT FOR ALUMINUM WHEELS

Fastener Type	Thread Size d1	Hex Size s	Ball Seat Radius r ±0.010	Minimum Thread Start a	Shoulder Length f	Shoulder Diameter g Maximum	Height to End of Thread h	Reference Intersection Diameter x
BSN-AL	3/4-16	1.50	0.875	0.170	0.18/0.28	1.14	1.10	1.187
BSN-AL	1-1/8-16	Same as ball seat nut for ferrous wheels, Reference 6.3.2.1.						

SAENORM.COM : Click to view the full PDF of J694 - 199707