

Issued 1961-03
Reaffirmed 2004-06

Superseding J760 JUN1999

Dimensional Specifications for General Service Sealed Lighting Units

1. **Scope**—This SAE Recommended Practice provides dimensional specifications for general service sealed lighting units, intended for use in such applications as motorcycle headlamps, military headlamps, industrial machinery headlamps, fog lamps, spot lamps, etc. See Figures 1 and 2 and Tables 1 and 2.
2. **References**—There are no referenced publications specified herein.

SAENORM.COM : Click to view the full PDF of j760_200406

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: custsvc@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

SAE J760 Reaffirmed JUN2004

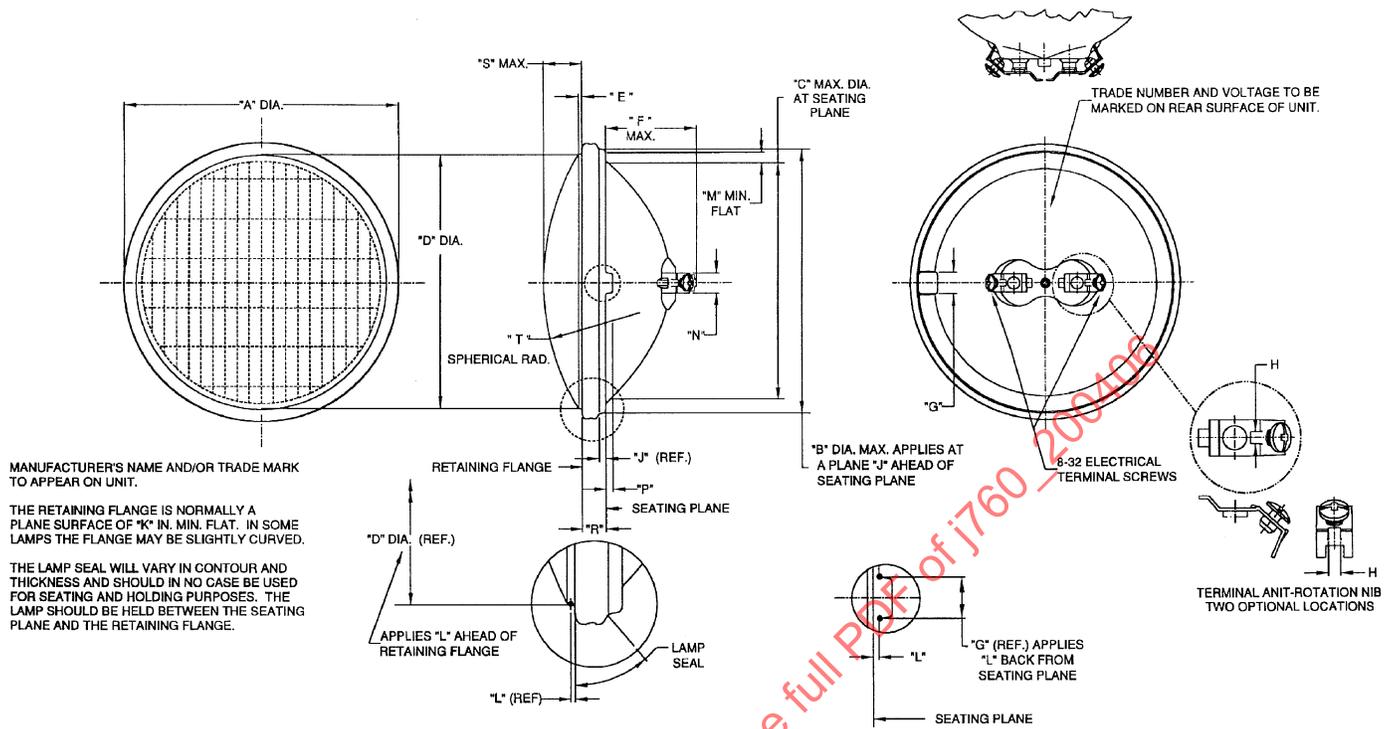


FIGURE 1—DIMENSIONS OF 146 mm (5-3/4 in) DIAMETER SEALED LIGHTING UNIT

TABLE 1—DIMENSIONS OF 146 mm (5-3/4 in) DIAMETER SEALED LIGHTING UNIT

Letter	mm	in	Letter	mm	in
A	144.8 ^{+0.0} _{-2.5}	5.70 ^{+0.00} _{-0.10}	M	3.18	0.125
B	139.06	5.475	N	9.52 ± 0.25	0.375 ± 0.010
C	129.54	5.100	P	3.43 ^{+0.76} _{-0.00}	0.135 ^{+0.030} _{-0.000}
D	133.7 ^{+0.00} _{-0.76}	5.265 ^{+0.000} _{-0.030}	R	13.5 ± 1.0	0.53 ± 0.04
E	2.00 ^{+1.50} _{-0.00}	0.078 ^{+0.062} _{-0.000}	S	23.36	0.92
F	63.5	2.50	T	127.0 ± 3.0	5.00 ± 1.2
G	11.17 ^{+0.00/-0.63}	0.440 ^{+0.000} _{-0.025}			
H	3.17 ± 0.25	0.125 ± 0.010			
J	2.79	1.10			
K	1.57	0.062			
L	0.76	0.030			

SAE J760 Reaffirmed JUN2004

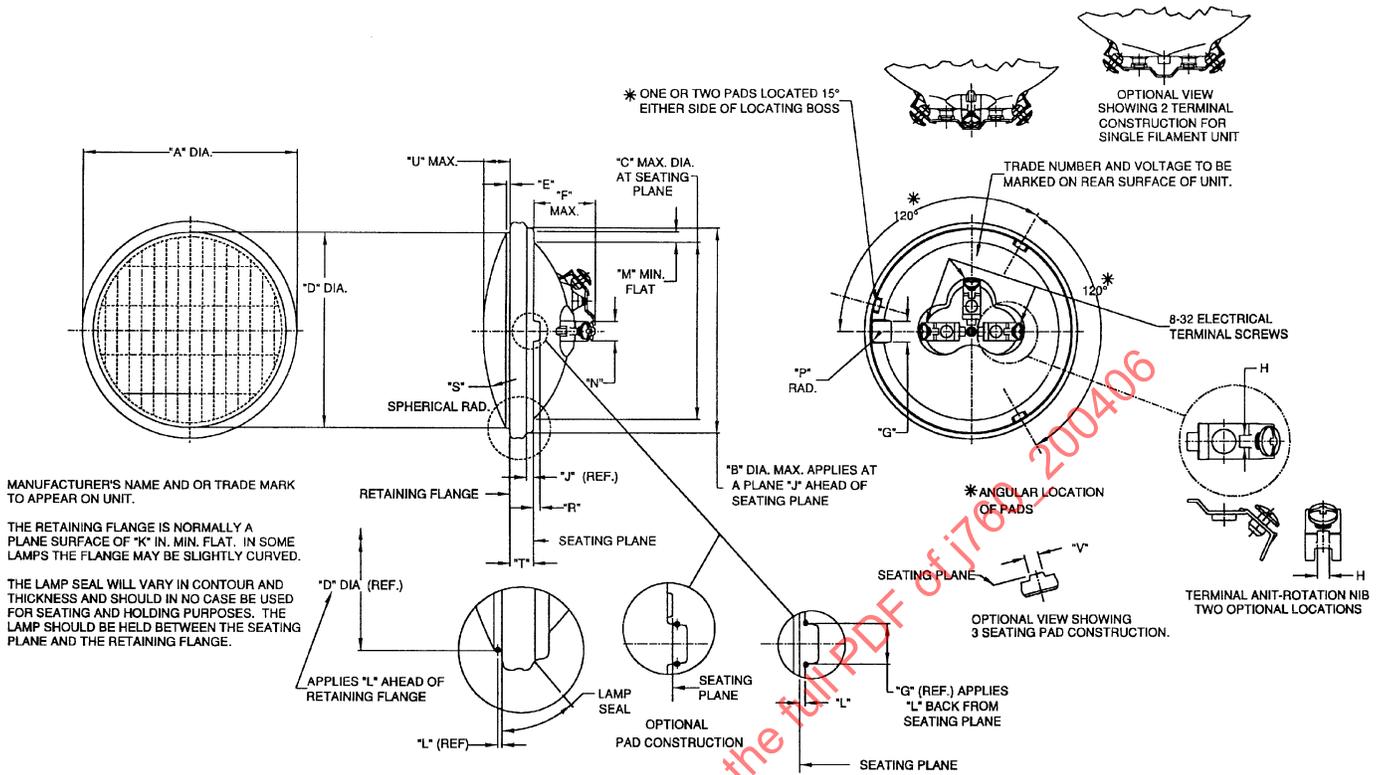


FIGURE 2—DIMENSIONS OF 114 mm (4-1/2 in) DIAMETER SEALED LIGHTING UNIT

TABLE 2—DIMENSIONS OF 114 mm (4-1/2 in) DIAMETER SEALED LIGHTING UNIT

Letter	mm	in	Letter	mm	in
A	113.28 ^{+0.00} _{-2.50}	4.460 ^{+0.000} _{-0.100}	M	3.18	0.125
B	107.06	4.215	N	9.52 ± 0.25	0.375 ± 0.010
C	97.79	3.850	P	1.5	0.06
D	102.87 ^{+0.00} _{-0.76}	4.050 ^{+0.000} _{-0.030}	R	3.43 ^{+0.76} _{-0.00}	0.135 ^{+0.030} _{-0.000}
E	1.98 ^{+1.60} _{-0.00}	0.078 ^{+0.062} _{-0.000}	S	114.3 ± 3.0	4.50 ± 0.12
F	41.27	1.625	T	13.33 ± 1.00	0.525 ± 0.040
G	11.17 ^{+0.00} _{-0.63}	0.440 ^{+0.000} _{-0.025}	U	14.98	0.59
H	3.17 ± 0.25	0.125 ± 0.010	V	7.9 ± 3.0	0.31 ± 0.12
J	2.79	0.110			
K	1.57	0.062			
L	0.76	0.030			

PREPARED BY THE SAE ROAD ILLUMINATION DEVICES STANDARDS COMMITTEE