

	SURFACE VEHICLE RECOMMENDED PRACTICE	SAE J760 DEC2008
		Issued 1961-03 Cancelled 2008-12
		Superseded by J3003 FEB2012
Dimensional Specifications for General Service Sealed Lighting Units		

RATIONALE

This document is being cancelled due to lack of application or very low usage of sealed beams in industry.

1. SCOPE

J760 is obsolete and replaced by a new document J3003.

2. REFERENCES

There are no referenced publications specified herein.

SAENORM.COM : Click to view the full PDF of J760_200812

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: +1 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
 SAE WEB ADDRESS: http://www.sae.org

**SAE values your input. To provide feedback
 on this Technical Report, please visit
http://www.sae.org/technical/standards/J760_200812**

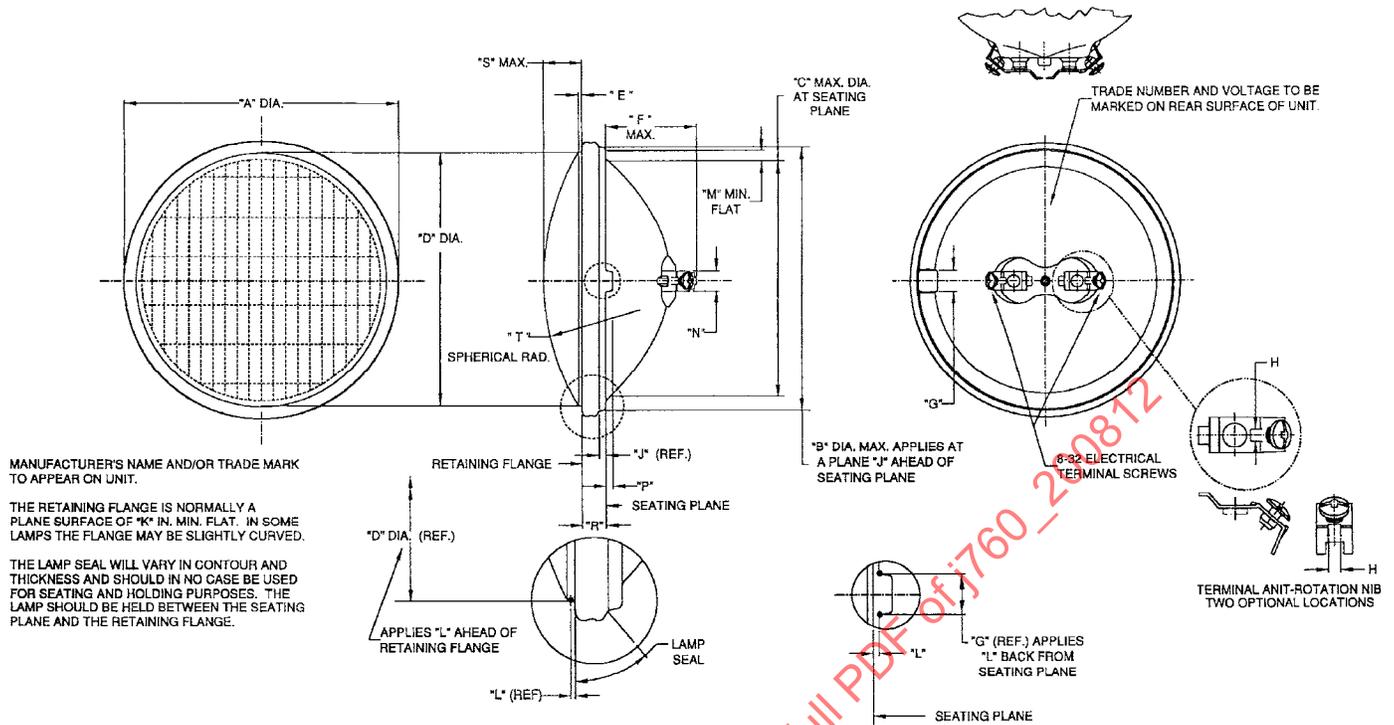


FIGURE 1 - DIMENSIONS OF 146 mm (5-3/4 in) DIAMETER SEALED LIGHTING UNIT

TABLE 1 - DIMENSIONS OF 146 mm (5-3/4 in) DIAMETER SEALED LIGHTING UNIT

Letter	mm	in	Letter	mm	in
A	+0.0 144.8 -2.5	+0.00 5.70 -0.10	M	3.18	0.125
B	139.06	5.475	N	9.52 ± 0.25	0.375 ± 0.010
C	129.54	5.100	P	+0.76 3.43 -0.00	+0.030 0.135 -0.000
D	+0.00 133.7 -0.76	+0.000 5.265 -0.030	R	13.5 ± 1.0	0.53 ± 0.04
E	+1.50 2.00 -0.00	+0.062 0.078 -0.000	S	23.36	0.92
F	63.5	2.50	T	127.0 ± 3.0	5.00 ± 1.2
G	11.17 +0.00/-0.63	+0.000 0.440 -0.025			
H	3.17 ± 0.25	0.125 ± 0.010			
J	2.79	1.10			
K	1.57	0.062			
L	0.76	0.030			