

SAE-J760

ADOPTION NOTICE

SAE-J760, "Dimensional Specifications for General Service Sealed Lighting Units," was adopted on October 3, 1994, for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: SA-ALC/TILDD, 485 Quentin Roosevelt Road, Kelly AFB, TX 78241-6425. DoD activities may obtain copies of this standard from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other Government agencies may purchase copies from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.

Custodians:

Army - ME  
 Navy - SA  
 Air Force - 82

Adopting Activity  
 Air Force - 82

SAENORM.COM : Click to view the full PDF of J760-1974-12


FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release;  
 distribution is unlimited.

**DIMENSIONAL SPECIFICATIONS FOR GENERAL SERVICE SEALED LIGHTING UNITS—SAE J760a**

SAE Recommended Practice

Report of Lighting Committee approved March 1961 and last revised December 1974.

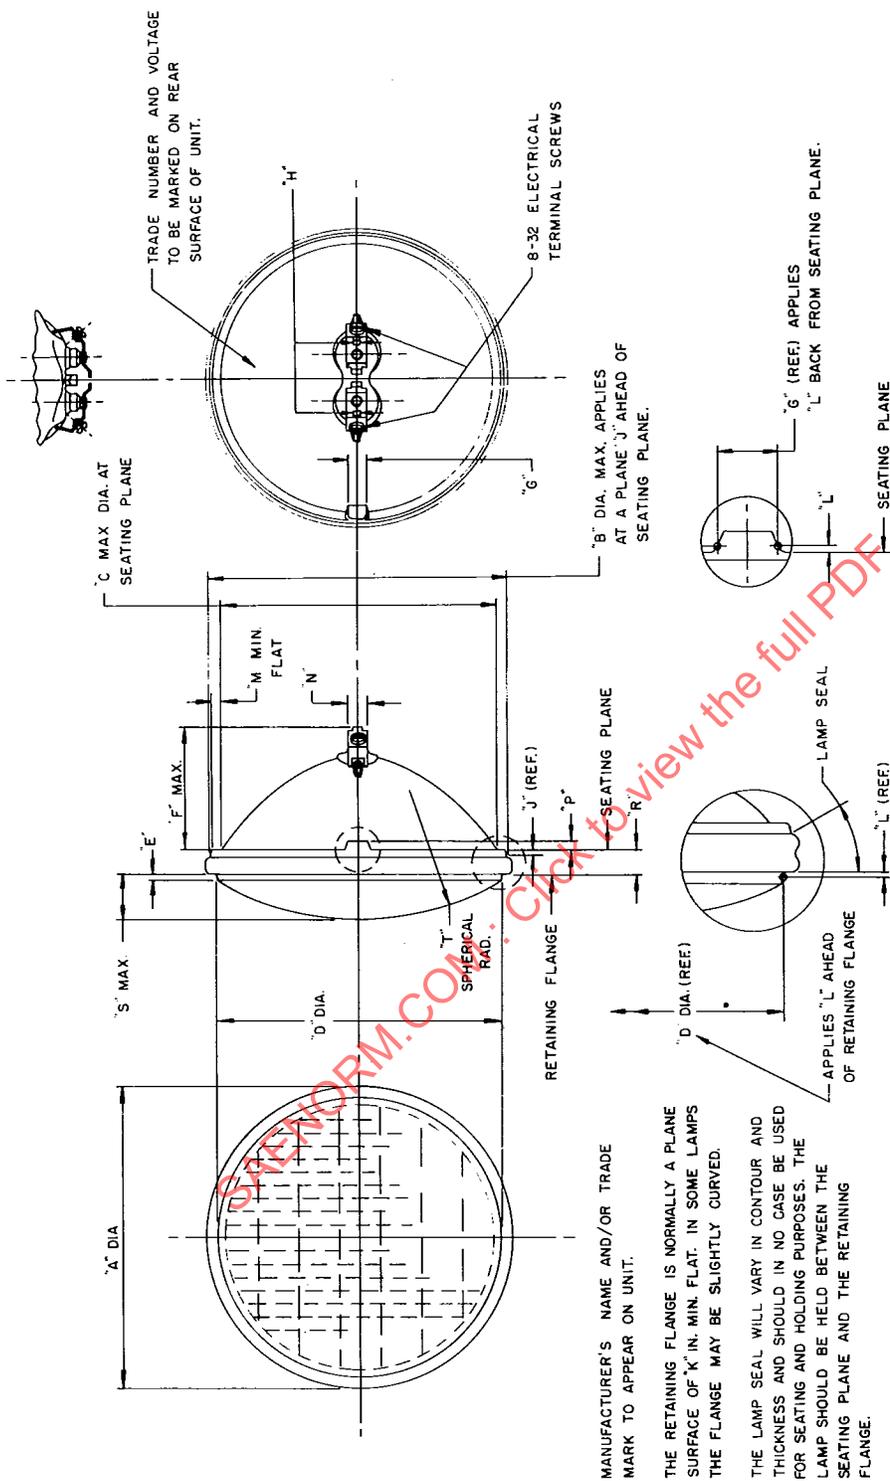

| LETTER | INCH                 | MM                     | LETTER | INCH                | MM                    |
|--------|----------------------|------------------------|--------|---------------------|-----------------------|
| A      | 5.70 +.00<br>-.10    | 144.8 +0.0<br>-2.5     | N      | .375 ±.010          | 9.52 ± 0.25           |
| B      | 5.475                | 139.06                 | P      | .135 +.030<br>-.000 | 3.43 + 0.76<br>- 0.00 |
| C      | 5.100                | 129.54                 | R      | .53 ± .04           | 13.5 ± 1.0            |
| D      | 5.265 +.000<br>-.030 | 133.7 + 0.00<br>- 0.76 | S      | .92                 | 23.36                 |
| E      | .078 +.062<br>-.000  | 2.00 +1.60<br>- 0.00   | T      | 5.00 ± .12          | 127.0 ± 3.0           |
| F      | 2.50                 | 63.5                   |        |                     |                       |
| G      | .440 +.000<br>-.025  | 11.17 + 0.00<br>- 0.63 |        |                     |                       |
| H      | .125 ± 0.10          | 3.17 ± 0.25            |        |                     |                       |
| J      | .110                 | 2.79                   |        |                     |                       |
| K      | .062                 | 1.57                   |        |                     |                       |
| L      | .030                 | 0.76                   |        |                     |                       |
| M      | .125                 | 3.18                   |        |                     |                       |

FIG. 1—DIMENSIONS OF 5/4 IN (146 mm) DIAMETER SEALED LIGHTING UNIT