

SAE *The Engineering Society
For Advancing Mobility
Land Sea Air and Space®*

A Product of the
Cooperative Engineering Program

SAE J823 OCT87

Flasher Test

SAE Standard
Revised October 1987

SAENORM.COM : Click to view the full PDF of J823 - 198710

**S. A. E.
LIBRARY**

Submitted for Recognition as
an American National Standard

SAENORM.COM : Click to view the full PDF of j823_198710

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Copyright 1987 Society of Automotive Engineers, Inc.

Ø FLASHER TEST

1. SCOPE: This technical report specifies the test procedure, test circuitry, and instruments required for measuring the performance of flashers used in motor vehicles.
2. LABORATORY FACILITIES: The laboratory shall be equipped with all of the facilities required to make the tests in this technical report, in accordance with established laboratory practice, including the following:
 - 2.1 Ambient Conditions: Means shall be provided to maintain ambient temperatures of $-32 \pm 3^{\circ}\text{C}$, $-18 \pm 3^{\circ}\text{C}$, $24 \pm 5.5^{\circ}\text{C}$, $52 \pm 3^{\circ}\text{C}$, and $63 \pm 3^{\circ}\text{C}$. The chamber atmosphere shall be air.
 - 2.2 Power Supply - Performance Tests: The power supply for testing performance requirements shall not generate any adverse transients not present in motor vehicles and shall comply with the following specifications:
 - 2.2.1 Output Voltage: Capable of supplying to the input terminals of the standard circuit 11-16 V d-c for 12 V flashers or 5-9 V d-c for 6 V flashers or 23-28 V d-c for 24 V flashers.
 - 2.2.2 Output Current: Capable of supplying required design current(s) continuously and inrush currents as required by the design bulb load complement.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

2.2.3 Regulation:

2.2.3.1 Dynamic: The output voltage shall not deviate more than 1.0 V from 0
Ø to maximum load (including inrush current) and shall recover 63% of its maximum excursion within 100 μ s.

2.2.3.2 Static: The output voltage shall not deviate more than 2% with changes in static load from 0 to maximum (not including inrush current) nor for static line voltage variations.

2.2.4 Ripple Voltage: Maximum 75 mV, peak to peak.

2.3 Power Supply - Durability Tests: The power supply for the durability test requirements shall not generate any adverse transients not present in motor vehicles and shall comply with the following specification:

2.3.1 Output Voltage: Capable of supplying, as required, 14 and 13 V
Ø (7 and 6.5 V d-c or 28 and 26 V), according to the flasher rating, to the input terminals of the standard test circuits shown in Figs. 1 and 2.

2.3.2 Output Current: Capable of supplying a continuous output current of the design load for one flasher times the number of flashers and inrush currents as required by the bulb load complement.

2.3.3 Regulation:

2.3.3.1 Dynamic: The output voltage shall not deviate more than 1.0 V from 0 to
Ø maximum load (including inrush current) and should recover 63% of its maximum excursion within 5 ms.

2.3.3.2 Static: The output voltage shall not deviate more than 2% with changes
Ø in static load from 0 to maximum (not including inrush current), and means shall be provided to compensate for static line voltage variations.

2.3.4 Ripple Voltage: Maximum 300 mV, peak to peak.

3. TEST PROCEDURES:

3.1 The flashers shall be mounted as specified by the manufacturer if special precautions are required.

3.2 The flashers shall be connected in a standard test circuit as shown in
Ø Fig. 1 for turn signal and hazard warning flashers or Fig. 2 for warning lamp alternating flashers using the design load(s) within 0.5% at 12.8 V (6.4 V or 25.6 V) as specified by the flasher manufacturer.

3.3 A suitable high impedance measuring device connected to points X-Y in Fig. 1 or to points X-Y₁, and to points X-Y₂ in Fig. 2 shall be used for measuring flash rate, percent current "on" time, starting time, and voltage drop across the flasher. The measurement of these quantities shall not affect the circuit.

3.4 The resistance at A-B for each load circuit in Fig. 1 or Fig. 2 shall be measured with flasher and bulb loads each shorted out with removable shunt resistances not to exceed 0.005 ohms each.

The effective series resistance in the total circuit (Fig. 1) or in each of the parallel circuits (Fig. 2) between the power supply and bulb sockets (excluding the flasher and bulb loads by using the removable shunt resistances) shall be 0.10 ± 0.01 ohms.

3.5 Adjust the voltage at the bulbs to 12.8 V (6.4 V or 25.6 V) as required for testing at C-D in Fig. 1 or C-D and E-F in Fig. 2 with the flasher shorted out by an effective shunt resistance not to exceed 0.005 ohms. The load current shall be held to the rated value for the total flasher design load(s) within 0.5% at 12.8 V (6.4 V or 25.6 V) by simultaneously adjusting trimmer resistors, R.

3.6 For testing fixed load flashers at other required voltages, adjust the power supply to provide required voltages at required temperatures at C-D in Fig. 1 or C-D and E-F in Fig. 2 without readjustment of trimming resistors, R.

3.7 For testing variable load flashers, the circuit shall be first adjusted at 12.8 V (6.4 V or 25.6 V) at C-D in Fig. 1 or C-D and E-F in Fig. 2 with a minimum required bulb load and the power supply shall be adjusted to provide other required test voltages at required temperatures at C-D in Fig. 1 or C-D and E-F in Fig. 2 without readjustment of trimming resistors, R (each required test voltage shall be set with a minimum bulb load in place). The required voltage tests with a maximum bulb load shall be conducted without readjusting each corresponding power supply voltage previous set with minimum bulb load.

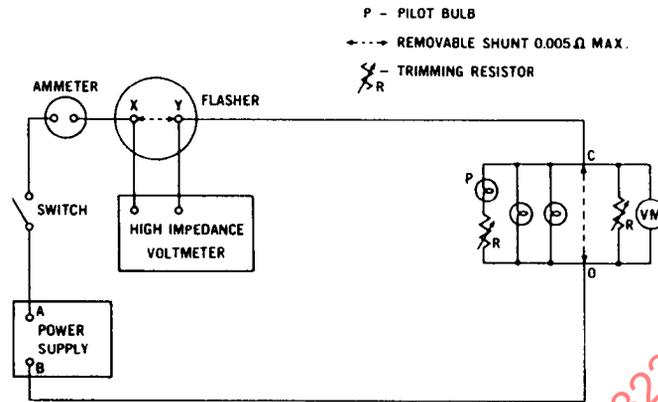


FIG. 1 - STANDARD TEST CIRCUIT - TURN SIGNAL AND HAZARD WARNING FLASHERS

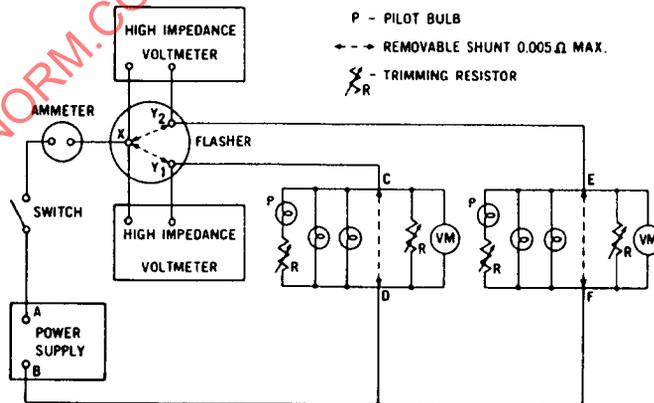


FIG. 2 - STANDARD TEST CIRCUIT - WARNING LAMP ALTERNATING FLASHER

RATIONALE:

PURPOSE OF THE REVISION:

The last revision was in 1975. The purpose of this revision is to update the format of the technical contents of the technical report to be consistent with other SAE Lighting reports. No technical changes are incorporated in this revision. References to 24V systems were added to be consistent with present flasher technical reports.

SPECIFIC REVISIONS BY SECTION:

TITLE - Revised to eliminate the word "Equipment" since the standard also contains a test procedure.

1. The term "technical report" was substituted for "standard." Wording added to limit the scope to flashers used on motor vehicles.
2. The reference to technical report was added to correctly refer to the type of document.
 - 2.1 The title, "Ambient Conditions" was added to provide a section title. All non-metric temperatures were deleted to be consistent with the format of other lighting laboratory type documents.
 - 2.2.1 and 2.3.1 Reference to 24V systems added.
 - 2.3.3 Subsection numbers 2.3.3.1 and 2.3.3.2 were added to identify previously unnumbered sections.
3. The section title was revised to "Test Procedures" to correctly label the section.
 - 3.2, 3.5, 3.7 Reference to 24V systems added.

RELATIONSHIP OF SAE STANDARD TO ISO STANDARD:

Not applicable.

REFERENCE SECTION:

Not applicable.

APPLICATION:

This technical report specifies the test procedure, test circuitry, and instruments required for measuring the performance of flashers used in motor vehicles.

COMMITTEE COMPOSITION:

DEVELOPED BY THE SAE TEST METHODS & EQUIPMENT SUBCOMMITTEE:

D. Richards, Chrysler Corp., Detroit, MI - Chairman
A. E. Ackerly, Jr., North Amer. Philips Lighting, Southfield, MI
L. Bachynski, Federal Mogul Corp., Somerset, NJ
G. G. Bonvallet, ETL Testing Laboratories, Cortland, NY
F. Caesar, Osram Corp., Newburgh, NY
J. Fitzgerald, Wagner Electric Corporation, Whippany, NJ
W. T. Mayer, GMC, Anderson, IN
W. A. McKinney, GMC, Anderson, IN
W. E. L. Pears, Lakewood, CO
F. Skrbina, Ford Motor Company, Dearborn, MI
Z. S. Subotich, Canadian Standards Association, Rexdale, Ontario, Canada
J. R. Vander Linde, GTE, Hillsboro, NH
J. R. Zywicki, Amer. Motors Corp., Detroit, MI

SPONSORED BY THE SAE LIGHTING COMMITTEE:

D. W. Moore, GMC, Anderson, IN - Chairman
R. A. Nixon, Jr., Cooper Industries, Boyertown, PA - Vice Chairman
A. J. Burgess, Orchard Lake, MI - Sponsor
K. E. Alexander, Keeler Automotive, Kentwood, MI
J. E. Bair, Hopkins Mfg. Corp., Emporia, KS
J. E. Bennett, Lawrenceville, IL
V. D. Bhise, Ford Motor Co., Dearborn, MI
G. G. Bonvallet, ETL Testing Laboratories, Cortland, NY
A. L. Burgett, Alexandria, VA
L. Carbary, Chrysler Corp., Detroit, MI
S. A. Darby, Sate-Lite Manufacturing Co., Niles, IL
T. Dawson, Weldon Inc., Columbus, OH
C. J. Devonshire, Chrysler Corp., Detroit, MI
J. A. Erion, Ford Motor Co., Dearborn, MI
E. G. Hitzemeyer, Volkswagenwerk AG, Wolfsburg, Germany, Federal Republic
M. Iwase, Koito Manufacturing Co. Ltd., Shizuoka-ken, Japan
S. F. Kimball III, GTE Products Corp., Salem, MA
G. A. Knapp, DeWitt, NY
P. Lawrenz, Franklin, MI
A. T. Lewry, Ford Motor Co., Dearborn, MI
R. J. Love, Waterford, OH
M. McKala, General Motors Corp., Troy, MI
W. A. McKinney, GMC, Anderson, IN
G. E. Meese, Lyndhurst, OH
H. Miyazawa, Stanley Elec. Co. Ltd., Tokyo, Japan
B. C. Muccioli, Livonia, MI
C. J. Newman, Sedona, AZ
J. L. Purpura, American Motors Corp., Detroit, MI
D. Richards, Chrysler Corp., Detroit, MI
W. F. Sand, K-D Lamp Co., Cincinnati, OH
P. G. Scully, Peterson Manufacturing Co., Grandview, MO
Z. S. Subotich, Canadian Standards Association, Rexdale, Ontario, Canada
F. Takata, Ichikoh Industries Ltd., Washington, DC
D. W. Vescio, Sr., R. E. Dietz Co., Syracuse, NY
R. L. Vile, Lyndhurst, NJ
R. W. Watson, Wixom, MI