

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®

A Product of the
Cooperative Engineering Program

SAE J829 FEB88

**Fuel Tank Filler Cap
and Cap Retainer**

SAE Standard
Reaffirmed February 1988

SAENORM.COM : Click to view the full PDF of J829-198802

S. A. E.
LIBRARY

Submitted for Recognition as
an American National Standard

SAENORM.COM : Click to view the full PDF of j829 _ 198802

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Copyright 1988 Society of Automotive Engineers, Inc.

Submitted for recognition as an American National Standard

FUEL TANK FILLER CAP AND CAP RETAINER

1. PURPOSE:

The purpose of this SAE Standard is to provide dimensions for vented, nonvented, and pressure-vacuum fuel tank filler caps and cap retainers. Use of these dimensions will preclude the use of a vented or nonvented cap with a pressure-vacuum cap retainer. In addition, these dimensions insure that if use of a pressure-vacuum cap is attempted with a vented cap retainer, it will not seal. They will, however, allow the use of a pressure-vacuum cap on a nonvented cap retainer.

2. SCOPE:

This standard was developed primarily for passenger car and truck applications for the sizes indicated, but it may be used in marine, industrial, and similar applications.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE I - Cap and Retainer Dimensions

Nominal Filter Pipe Size (at Fuel Inlet)	A		B		C		D		E		F	
	in	mm	in	mm								
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.47-0.51	11.9-13.0	0.28-0.31	7.1-7.9	0.36-0.38	9.1-9.7	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.47-0.51	11.9-13.0	0.30-0.33	7.6-8.4	0.39-0.41	9.9-10.4	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.47-0.51	11.9-13.0	0.34-0.37	8.6-9.4	0.45-0.48	11.4-12.2	0.01-0.03	0.3-0.8
Nonvented												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.26-0.30	6.6-7.6	0.13-0.16	3.3-4.1	0.20-0.22	5.1-5.6	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.26-0.30	6.6-7.6	0.11-0.14	2.8-3.6	0.20-0.22	5.1-5.6	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.26-0.30	6.6-7.6	0.09-0.12	2.3-3.0	0.20-0.22	5.1-5.6	0.01-0.03	0.3-0.8
Vented												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.26-0.30	6.6-7.6	0.30-0.33	7.6-8.4	0.39-0.41	9.9-10.4	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.26-0.30	6.6-7.6	0.34-0.37	8.6-9.4	0.45-0.48	11.4-12.2	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.26-0.30	6.6-7.6	0.34-0.37	8.6-9.4	0.45-0.48	11.4-12.2	0.01-0.03	0.3-0.8
Pressure Vacuum												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.40-1.43	35.6-36.3	1.17-1.19	29.7-30.2	0.36-0.40	9.1-10.2	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.40-1.43	35.6-36.3	1.33-1.36	33.8-34.5	0.36-0.40	9.1-10.2	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.40-1.43	35.6-36.3	1.48-1.51	37.6-38.4	0.36-0.40	9.1-10.2	0.01-0.03	0.3-0.8
Nonvented												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.40-1.43	35.6-36.3	1.17-1.19	29.7-30.2	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.40-1.43	35.6-36.3	1.33-1.36	33.8-34.5	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.40-1.43	35.6-36.3	1.48-1.51	37.6-38.4	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
Vented												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.40-1.43	35.6-36.3	1.17-1.19	29.7-30.2	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.40-1.43	35.6-36.3	1.33-1.36	33.8-34.5	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.40-1.43	35.6-36.3	1.48-1.51	37.6-38.4	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
Pressure-Vacuum												
1.75 ^a	1.21-1.23	30.7-31.2	1.46-1.49	37.1-37.8	0.57-1.63	39.9-41.4	1.33-1.36	33.8-34.5	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.00	1.37-1.40	34.8-35.6	1.64-1.69	41.7-42.9	0.57-1.63	39.9-41.4	1.48-1.51	37.6-38.4	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8
2.25	1.52-1.55	38.6-39.4	1.90-1.96	48.3-49.8	0.57-1.63	39.9-41.4	1.48-1.51	37.6-38.4	0.21-0.24	5.3-6.1	0.01-0.03	0.3-0.8

^aThe 1.75 in (44.5mm) filter pipe inlet size is not recommended for passenger cars and trucks. Application refers to SAE J1140, MAR80, Filter Pipe and Openings of Motor Vehicle Fuel Tanks.

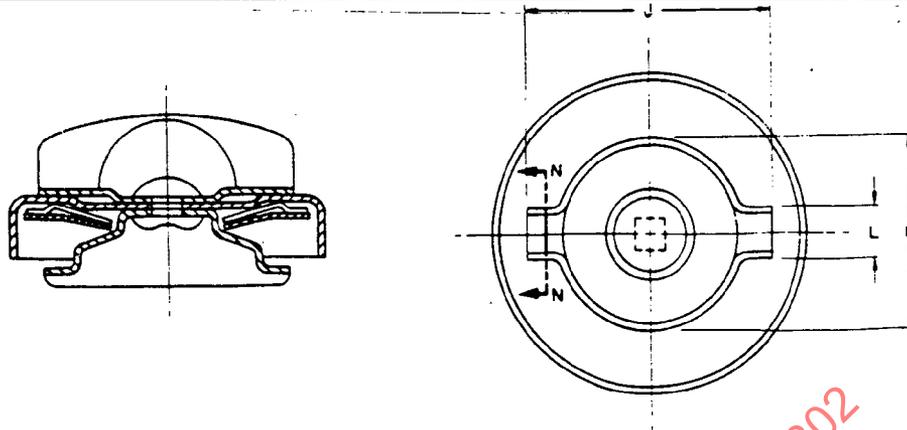


FIGURE 1 - Cap

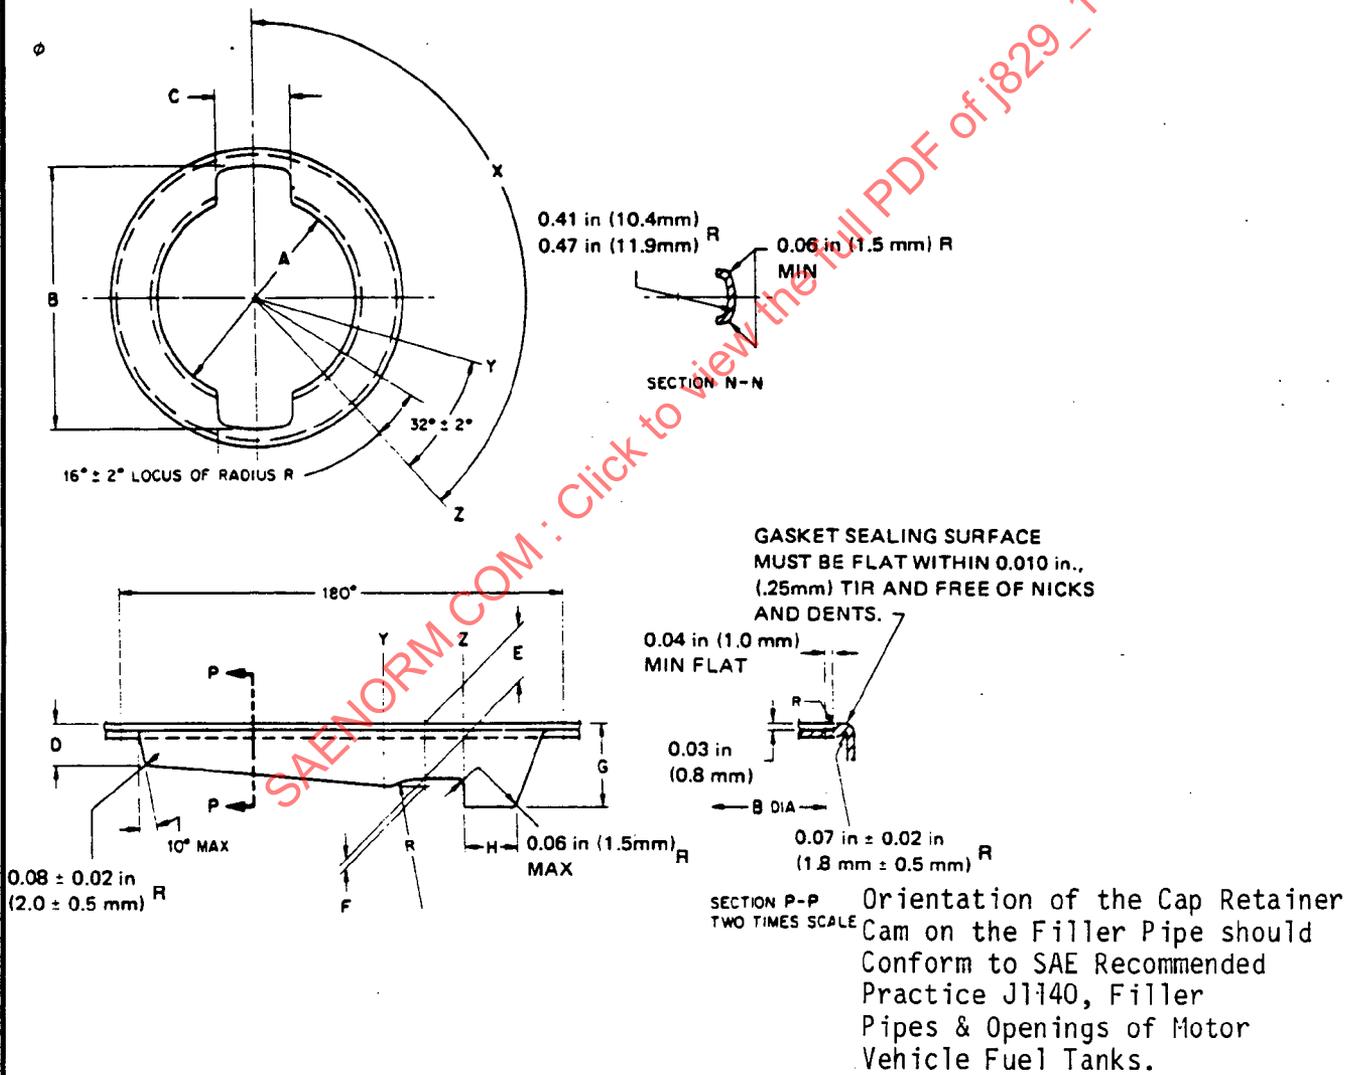


FIGURE 2 - Cap Retainer

J829 FEB88

RATIONALE:

Not applicable.

RELATIONSHIP OF SAE STANDARD TO ISO STANDARD:

Not applicable.

REFERENCE SECTION:

SAE J1140, MAR80, Filler Pipes and Openings of Motor Vehicle Fuel Tanks

APPLICATION:

This standard was developed primarily for passenger car and truck applications for the sizes indicated, but it may be used in marine, industrial, and similar applications.

COMMITTEE COMPOSITION:

DEVELOPED BY THE SAE FUEL SUPPLY SYSTEMS SUBCOMMITTEE:

M. J. Harrigan, Sr., Ford Motor Co., Dearborn, MI - Chairman
G. E. Moore, Dover Corp., Cincinnati, OH - Vice Chairman
J. A. Aibel, Borg-Warner Automotive, Decatur, IL
A. Baker, Volkswagen of America, Inc., Troy, MI
T. J. Carr, Motor Vehicle Mfrs. Assn. of US, Detroit, MI
W. G. Crute, Purolator, Inc., Connersville, IN
T. Detwiler, Parker-Hannifin Corp., Troy, MI
E. Ellsworth, Ford Motor Co., Dearborn, MI
H. Faulconer, National LP-Gas Association, Oak Brook, IL
A. C. Fink, Jr., Husky Corporation, Pacific, MO
L. E. Freeman, General Motors Corp., Warren, MI
R. W. Furrow, Gilbarco Inc., Greensboro, NC
L. W. Gibbs, Underwriters' Labs Inc., Northbrook, IL
S. Hasko, National Bureau of Standards, Washington, DC
K. A. Kerby, Chrysler Corp., Highland Park, MI
R. L. Kirkpatrick, GMC, Lansing, MI
D. K. Lawrence, Amoco Corp., Naperville, IL
M. A. Maher, General Motors Corp., Milford, MI
R. L. Murray, Dover Corporation, Cincinnati, OH
P. R. O'Connell, Fitzsimons Mfg. Co., Detroit, MI