

Issued 1964-08
Reaffirmed 2007-05

Superseding J899 DEC1988

Operator's Seat Dimensions for Off-Road Self-Propelled Work Machines

NOTE: This Standard is similar to ISO 4253.

1. Scope—For off-road work machines as listed in SAE J1116.

1.1 Purpose—This SAE Standard provides seat dimensions and adjustments for the design of operator's seat.

1.2 Rationale—This document has been reaffirmed to comply with the SAE 5-Year Review policy.

2. References

2.1 Applicable Publications—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J826 MAY87—Devices for Use in Defining and Measuring Vehicle Seating Accommodation
SAE J833 DEC83—USA Human Physical Dimensions
SAE J1116 JUN86—Categories of Off-Road Self-Propelled Work Machines
SAE J1163 JAN80—Determining Operator Seat Location on Off-Road Work Machines

2.1.2 ISO PUBLICATIONS—Available from ANSI, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, www.ansi.org.

ISO 4253-1977—Agricultural tractors—Operator's seating dimensions
ISO 5353-1978—Earthmoving machinery—Seat index point

2.1.3 HENRY DREYFUSS ASSOCIATES

Humanscale

2.1.4 DAMON, STOUT, MCFARLAND

The Human Body in Equipment Design

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

3. Discussion

3.1 All seat dimensions and adjustments (if provided), are referenced to the SIP as determined by SAE J1163.

3.2 Nominal values (see Note 1, of Table 1, for definition) are included wherever possible and their use will generally provide maximum ergonomic benefit.

TABLE 1—SEAT DIMENSIONS AND ADJUSTMENTS

Item	Description (See Figure 1)	Notes	Max ⁽¹⁾ mm	Nom ⁽²⁾ mm	Min mm
B	Seat Cushion Length		315	265	215
C	Seat Cushion - Angle	(3)	15 deg	10 deg	5 deg
	- Adjustment	(4)	—	± 5 deg	±3 deg
D	Seat Cushion Width		—	500	430
E	Fore and Aft Adjustment	(5)	—	150	100
F	Vertical Adjustment	(5)	—	75	60
G	Back Cushion Height	(6)	—	400	150
H	Back Cushion Width	(7)	—	500	300
J	Back Cushion Angle	(8)	15 deg	10 deg	5 deg
	- Adjustment	(4)	—	± 5 deg	± 3 deg
K	Armrest Height	(9)	160	140	95
L	Armrest Length		190	140	90
M	Armrest Lateral Spacing		550	500	450
N	Armrest Width		—	75	50
P	Armrest Depth		—	100	50
Q	Lumbar Support	(10)	145	130	115

1. Where no maximum value is listed, the nominal value may be increased arbitrarily.
2. A value which might have the broadest general acceptance.
3. Angle of the top of the seat base of the SIP device after being positioned and weighted using the SAE J1163 procedure.
4. Angle adjustment, if provided, is about the mid-position, not necessarily a latched position.
5. Adjustment values are total adjustments.
6. Where free swing of shoulders and arms over the top of the back is necessary or appropriate for visibility when traveling in the reverse or when controlling rear mounted implements, the maximum back cushion height should be 300.
7. Where free aft swing of the elbows is desired, the maximum width should be 330.
8. Measure the angle of the centerline of the back cushion. If a lumbar support is provided, it should be set at the mid-range position, and the back angle measured on centerline of the back cushion above the lumbar support. For back cushions with the lumbar support, the allowable angles of Table 1 may be increased by 5 deg or more.
9. Armrests attached to the seat should move with the vertical and horizontal seat adjustments. The ability to adjust the armrests vertically to the maximum-minimum values of (K) is desirable. (K) is measured to the top of the pad (if used) at the lateral centerline of the armrest.
10. Radius of curvature of the lumbar support in the vertical plane should be nominally 300 with a minimum of 150.

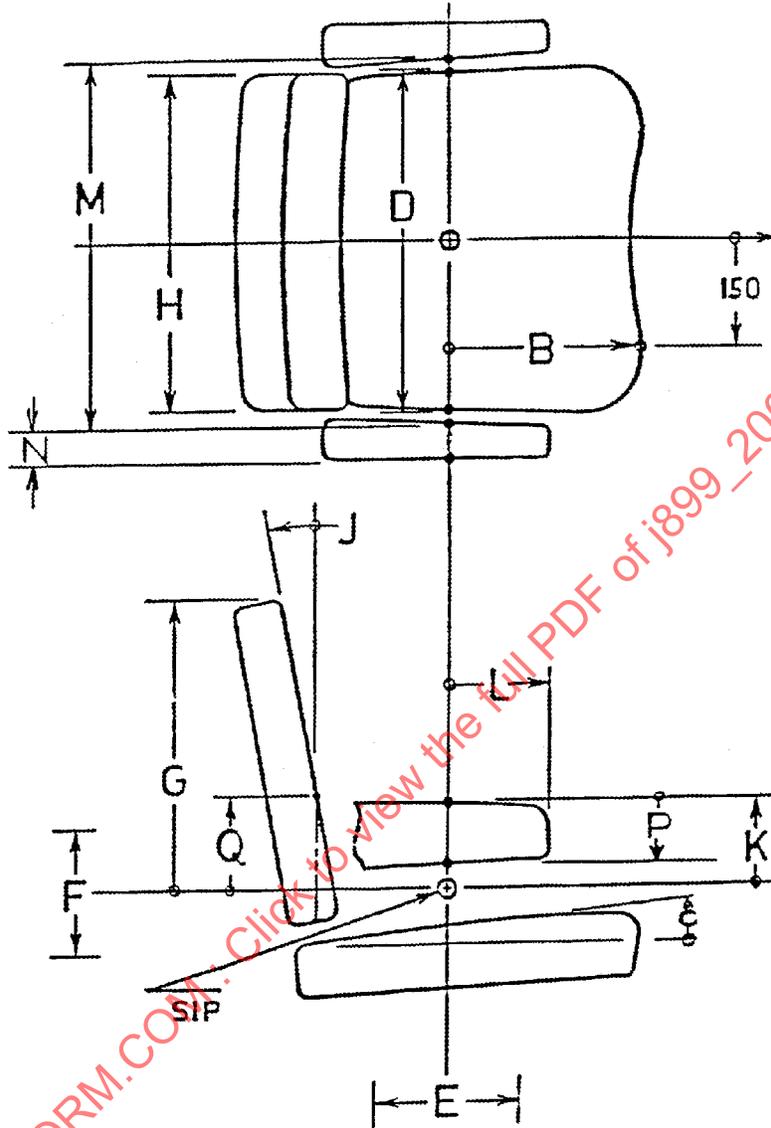


FIGURE 1—SEAT DIMENSIONS AND ADJUSTMENTS

- 3.3** The nominal values are based on the body dimensions of SAE J833 and will accommodate operator sizes from the 5th percentile female through the 95th percentile male of that document. Dimensions or adjustments (or use of), other than those in this standard may be used if they will provide equivalent or greater ergonomic benefit. Consideration may be given for specific controls or operator requirements (that is, smaller worldwide population body dimensions, etc.).
- 3.4** On work machines where a higher SIP is desirable, a reduced back and seat cushion angle should be considered.
- 3.5** Armrests can be rotated up or down or translated down to provide ingress or egress.