

Issued 1965-07
Reaffirmed 1995-03

Superseding J927 NOV88

Submitted for recognition as an American National Standard

FLYWHEELS FOR ENGINE-MOUNTED TORQUE CONVERTERS

Foreword—This reaffirmed document has been changed only to reflect the new SAE Technical Standards Board format.

1. **Scope**—This SAE Recommended Practice defines flywheel configuration to promote standardization of flywheels for engine flywheel mounted torque converters.

Tables 1A and 1B and Figure 1 give dimensions for flywheels mounted-type torque converters. For torque converters using drive ring overcenter type disconnect clutch, see SAE J620.

2. References

- 2.1 **Applicable Publications**—The following publications form a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply.

- 2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J617—Engine Flywheel Housing and Mating Transmission Housing Flanges

SAE J620—Flywheels for Industrial Engines Used With Industrial Power Take-Offs Equipped With Driving-Ring Type Overcenter Clutches and Engine-Mounted Marine Gears and Single Bearing Engine-Mounted Power Generators

SAE J1033—Procedure for Measuring Bore and Face Runout of Flywheels, Flywheel Housings, and Flywheel Housing Adapters

- 2.1.2 ANSI PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI B1.1—Screw Threads

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243
TO PLACE A DOCUMENT ORDER; (724) 776-4970 FAX: (724) 776-0790

SAE J927 Reaffirmed MAR95

TABLE 1A—DIMENSIONS OF FLYWHEEL—mm (in)

Converter Flywheel No.	A mm	A in	B ^{(1),(2)} mm	B ^{(1),(2)} in	C mm	C in	D mm	D in	E ⁽³⁾ mm	E ⁽³⁾ in	F mm	F in
20 ⁽⁴⁾	206.2	(8.12)	241.30	(9.500)	222.25	(8.750)	—	—	71.4	(2.81)	63.5	(2.50)
40	225.6	(8.88)	263.52	(10.375)	244.48	(9.625)	—	—	71.4	(2.81)	76.2	(3.00)
60	314.5	(12.38)	352.42	(13.875)	333.38	(13.125)	203.2	(8.00)	100.1	(3.94)	—	—
80	314.5	(12.38)	352.42	(13.875)	333.38	(13.125)	—	—	100.1	(3.94)	—	—
100	314.5	(12.38)	352.42	(13.875)	333.38	(13.125)	203.2	(8.00)	100.1	(3.94)	66.5	(2.62)
120	349.2	(13.75)	393.70	(15.500)	371.48	(14.625)	228.6	(9.00)	100.1	(3.94)	76.2	(3.00)
140	409.4	(16.12)	466.72	(18.375)	438.15	(17.250)	228.6	(9.00)	100.1	(3.94)	82.6	(3.25)
160	460.2	(18.12)	517.52	(20.375)	488.95	(19.250)	—	—	100.1	(3.94)	104.6	(4.12)
180	498.3	(19.62)	571.52	(22.500)	542.92	(21.375)	—	—	100.1	(3.94)	104.6	(4.12)
210 ⁽⁵⁾	584.2	(23.00)	673.10	(26.500)	641.35	(25.250)	—	—	100.1	(3.94)	146.0	(5.75)
240 ⁽⁶⁾	644.7	(25.38)	733.42	(28.875)	692.15	(27.250)	—	—	100.1	(3.94)	146.0	(5.75)

Suggested tolerances are to be measured on assembled engine; for measuring procedure, see SAE J1033.

1. Diameter tolerance of pilot bore B is +0.13 (0.005), -0.000; maximum eccentricity is 0.13 (0.005) total indicator reading (see footnote 2), face runout maximum total indicator reading is 0.0005 times the measured diameter.
2. Eccentricity between pilot bore B and pilot bore L is not to exceed 0.20 (0.008) total indicator reading.
3. Tolerances for dimensions "G" and "E" not to exceed the tolerance for "E" as defined in SAE J617.
4. Identical to No. 7-1/2 in SAE J620 except for number of tapped holes.
5. Identical to No. 21 in SAE J620.
6. Identical to No. 24 in SAE J620.

TABLE 1B—DIMENSIONS OF FLYWHEELS—mm(in)

Converter Flywheel No.	G ⁽¹⁾ mm	G ⁽¹⁾ in	H mm	H in	J mm	J in	K ⁽²⁾ mm	K ⁽²⁾ in	L ^{(2),(3)} mm	L ^{(2),(3)} in	Tapped Holes ⁽⁴⁾ No.	Tapped Holes ⁽⁴⁾ Size	Normally Used with SAE Housing Size
20 ⁽⁵⁾	30.2	(1.19)	12.7	(0.50)	12.7	(0.50)	17.5	(0.69)	52.000	(2.0472)	12 ⁽⁶⁾	(5/16-18)	6
40	30.2	(1.19)	12.7	(0.50)	12.7	(0.50)	19.0	(0.75)	52.000	(2.0472)	12 ⁽⁶⁾	(5/16-18)	5
60	53.8	(2.12)	23.9	(0.94)	7.9	(0.31)	22.4	(0.88)	52.000	(2.0472)	12 ⁽⁶⁾	(3/8-16)	4
80	66.5	(2.62)	11.2	(0.44)	—	—	22.4	(0.88)	52.000	(2.0472)	12	(3/8-16)	3
100	53.8	(2.12)	15.7	(0.62)	7.9	(0.31)	22.4	(0.88)	62.000	(2.4409)	12	(3/8-16)	3
120	53.8	(2.12)	15.7	(0.62)	4.8	(0.19)	22.4	(0.88)	72.000	(2.8346)	12	(3/8-16)	2
140	50.8	(2.00)	15.7	(0.62)	3.0	(0.12)	22.4	(0.88)	80.000	(3.1496)	12	(1/2-13)	1
160	15.7	(0.62)	44.4	(1.75)	44.4	(1.75)	33.3	(1.31)	80.000	(3.1496)	12	(1/2-13)	1/2
180	15.7	(0.62)	44.4	(1.75)	44.4	(1.75)	33.3	(1.31)	80.000	(3.1496)	12	(5/8-11)	0
210 ⁽⁷⁾	0.0	(0.00)	31.8	(1.25)	31.8	(1.25)	57.2	(2.25)	130.000	(5.1181)	12	(5/8-11)	00
240 ⁽⁸⁾	0.0	(0.00)	31.8	(1.25)	31.8	(1.25)	57.2	(2.25)	130.000	(5.1181)	12	(3/4-10)	00

Suggested tolerances are to be measured on assembled engine; for measuring procedure, see SAE J1033.

1. Tolerances for dimensions "G" and "E" not to exceed the tolerance for "E" as defined in SAE J 617.
2. K is length of pilot bore; L is nominal diameter of bore. Diameter and fit are to suit installation. Maximum eccentricity is 0.13 (0.005) total indicator reading. (See footnote 3.)
3. Eccentricity between pilot bore B and pilot bore L is not to exceed 0.20 (0.008) total indicator reading.
4. Tapped holes shall be threaded in accordance with UNC Class 2B tolerances of ANSI B.1.1 screw threads, and the minimum length of thread engagement shall be 1.5 times the nominal diameter.
5. Identical to No. 7-1/2 in SAE J620 except for number of tapped holes.
6. Compatible with 3, 4, 6, or 12 bolt converter mounting.
7. Identical to No. 21 in SAE J620.
8. Identical to No. 24 in SAE J620.

SAE J927 Reaffirmed MAR95

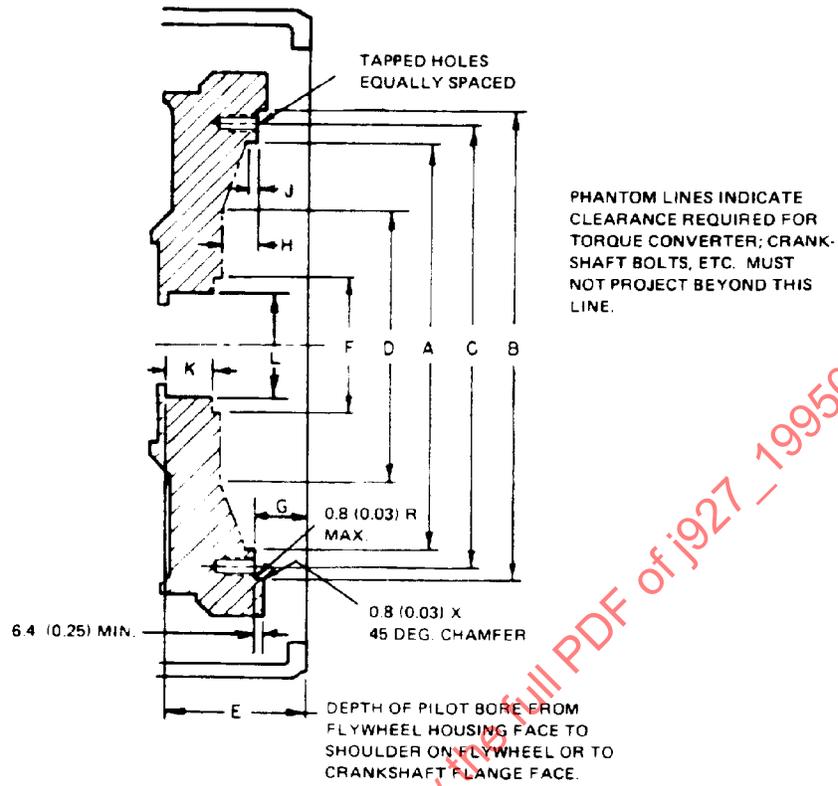


FIGURE 1—DIMENSIONS OF FLYWHEELS FOR ENGINE-MOUNTED TORQUE CONVERTERS

PREPARED BY THE SAE CLUTCH, FLYWHEEL, AND HOUSING STANDARDS COMMITTEE