

Electrical Terminals—Pin and Receptacle Type

Foreword—This Document has also changed to comply with the new SAE Technical Standards Board format.

1. **Scope**—This SAE Standard covers general requirements and terminal interface dimensions of various sizes of pin and receptacle type terminals.

1.1 **General Requirements**—The pin and receptacle type terminals listed in this SAE Standard may be used for terminating wire ends, or for terminating circuits on devices other than wire. Performance requirements for low tension wire terminals are specified in SAE J163 JAN74.

Terminals shall be free from burrs, corrosion, or any foreign matter, and shall be of a temper that will permit attachment to wires or circuits on devices without fracturing or cracking.

Terminals may be applied to wire by crimping, welding, swaging, soldering, or any combination thereof at the conductor grip. Insulation grips shall be used on all terminals assembled to 14 gage (2 mm²) and smaller insulated wire except where usage provides other means of relieving strain.

The type, thickness, and finish of the metal used in fabricating these terminals may vary according to the end product use. The dimensions shown in Tables 1 and 2/Figures 1 and 2 are included to assure proper fits between manufacturing sources.

Terminal sizes other than those listed are permissible, providing they meet the general requirements of this standard and the performance requirements of SAE J163.

Pin terminals fabricated from rod or bar stock must provide suitable stepped internal diameters to fit the wire conductors and insulation consistent with the method by which they are attached.

Insertion and removal forces are also variables that can be adjusted to fit the end use. It is recommended, however, that single connections with indentures should not exceed 67 N (15 lb) and multiple connections without indentures should not exceed 31 N (7 lb) per connection.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TO PLACE A DOCUMENT ORDER: +1 (724) 776-4970 FAX: +1 (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

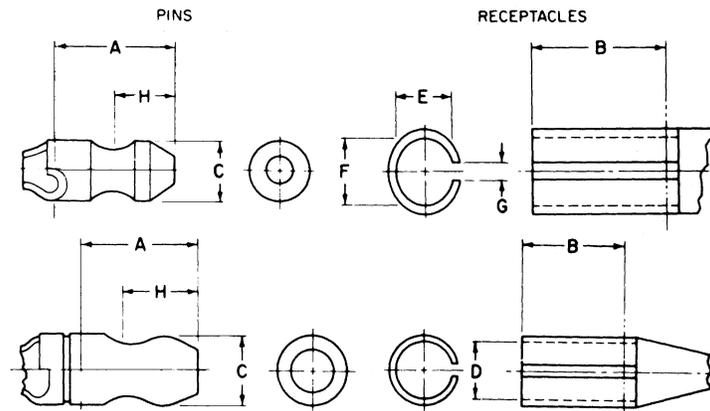


FIGURE 1—TYPE I PIN TERMINALS

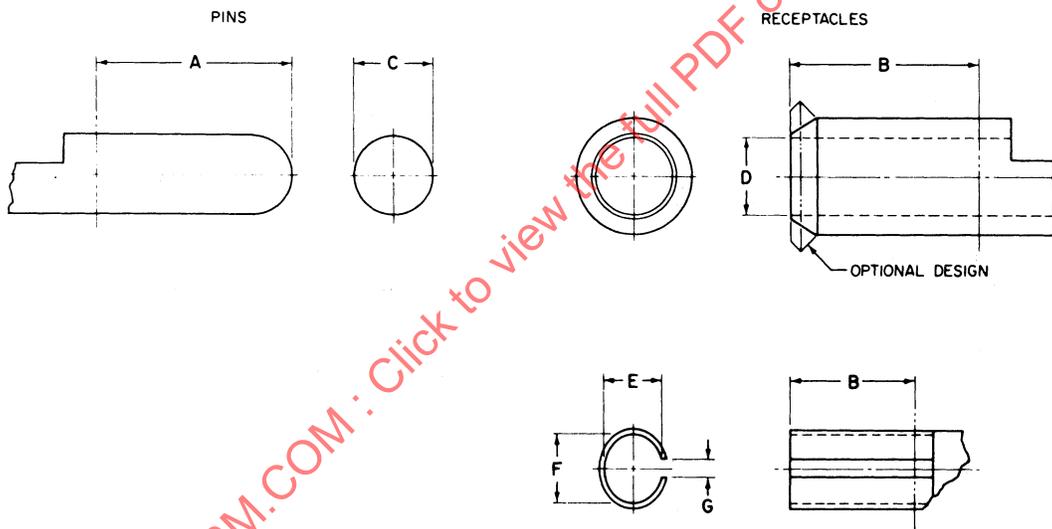


FIGURE 2—TYPE II PIN TERMINALS

SAENORM.COM : Click to view the full PDF of j928_200117

TABLE 1—TYPE I PIN TERMINALS

Nominal dia mm	Nominal Dia in	SAE Wire Size Range	A Min ⁽¹⁾ mm	A Min ⁽¹⁾ in	B Min ⁽¹⁾ mm	B Min ⁽¹⁾ in	C mm	C in	D Nominal mm	D Nominal in	E Nominal mm	E Nominal in	F Nominal mm	F Nominal in	G Nominal mm	G Nominal in	H mm	H in
3.96	0.156	0.35–3.0 mm ² (22–12)	8.7	0.34	8.7	0.34	4.04–3.94	0.159–0.155	3.81	0.150	3.73	0.147	4.60	0.181	0.86	0.034	5.56	0.219
4.57	0.180	0.35–5.0 mm ² (22–10)	10.2	0.40	10.2	0.40	4.62–4.52	0.182–0.178	4.42	0.174	—	—	—	—	—	—	4.83	0.190

1. Minimum insertion length.

NOTE—Detent Female—When a female detent is required, the detent of the receptacle must match the H dimension of the pin.

TABLE 2—TYPE II PIN TERMINALS

Nominal dia mm	Nominal Dia in	SAE Wire Size Range	A Min ⁽¹⁾ mm	A Min ⁽¹⁾ in	B Min ⁽¹⁾ mm	B Min ⁽¹⁾ in	C mm	C in	D Nominal mm	D Nominal in	E Nominal mm	E Nominal in	F Nominal mm	F Nominal in	G Nominal mm	G Nominal in
2.18	0.086	0.35–2.0 mm ² (22–14)	4.4	0.17	4.4	0.17	2.18–2.11	0.086–0.083	2.03	0.080	—	—	—	—	—	—
2.36	0.093	0.35–2.0 mm ² (22–14)	5.4	0.21	5.4	0.21	2.36–2.31	0.093–0.091	2.18	0.086	2.18	0.086	3.40	0.134	0.56	0.022
3.96	0.156	0.35–3.0 mm ² (22–12)	5.1	0.20	5.1	0.20	4.04–3.91	0.159–0.154	3.86	0.152	—	—	—	—	—	—

1. Minimum insertion length.

SAENORM.COM : Click to view the full PDF of 1928_200117

2. References

2.1 Applicable Publications—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATION—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J163 JAN74—Low Tension Wiring and Cable Terminals and Splice Clips

3. Notes

3.1 Marginal Indicia—The change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. An (R) symbol to the left of the document title indicates a complete revision of the report.

PREPARED BY THE SAE ELECTRICAL DISTRIBUTION SYSTEMS STANDARDS COMMITTEE

SAENORM.COM : Click to view the full PDF of J928_200111