

	<b>SURFACE VEHICLE STANDARD</b>	<b>SAE</b>	<b>J928 NOV2010</b>
		Issued 1965-07 Reaffirmed 2010-11	
		Superseding J928 JUN2006	
Electrical Terminals—Pin and Receptacle Type			

## RATIONALE

J928 has been reaffirmed to comply with the SAE 5-Year Review policy.

### 1. SCOPE

This SAE Standard covers general requirements and terminal interface dimensions of various sizes of pin and receptacle type terminals.

#### 1.1 General Requirements

The pin and receptacle type terminals listed in this SAE Standard may be used for terminating wire ends, or for terminating circuits on devices other than wire. Performance requirements for low tension wire terminals are specified in SAE J163.

Terminals shall be free from burrs, corrosion, or any foreign matter, and shall be of a temper that will permit attachment to wires or circuits on devices without fracturing or cracking.

Terminals may be applied to wire by crimping, welding, swaging, soldering, or any combination thereof at the conductor grip. Insulation grips shall be used on all terminals assembled to 2 mm<sup>2</sup> (14 ga) and smaller insulated wire except where usage provides other means of relieving strain.

The type, thickness and finish of the metal used in fabricating these terminals may vary according to the end product use. The dimensions shown in Tables 1 and 2/Figures 1 and 2 are included to assure proper fits between manufacturing sources.

Terminal sizes other than those listed are permissible, providing they meet the general requirements of this standard and the performance requirements of SAE J163.

Pin terminals fabricated from rod or bar stock must provide suitable stepped internal diameters to fit the wire conductors and insulation consistent with the method by which they are attached.

Insertion and removal forces are also variables that can be adjusted to fit the end use. It is recommended, however, that single connections with indentures should not exceed 67 N (15 lb) and multiple connections without indentures should not exceed 31 N (7 lb) per connection.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions. Copyright © 2010 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

**TO PLACE A DOCUMENT ORDER:**  
 Tel: 877-606-7323 (inside USA and Canada)  
 Tel: +1 724-776-4970 (outside USA)  
 Fax: 724-776-0790  
 Email: CustomerService@sae.org  
 http://www.sae.org

SAE WEB ADDRESS:

**SAE values your input. To provide feedback on this Technical Report, please visit [http://www.sae.org/technical/standards/J928\\_201011](http://www.sae.org/technical/standards/J928_201011)**

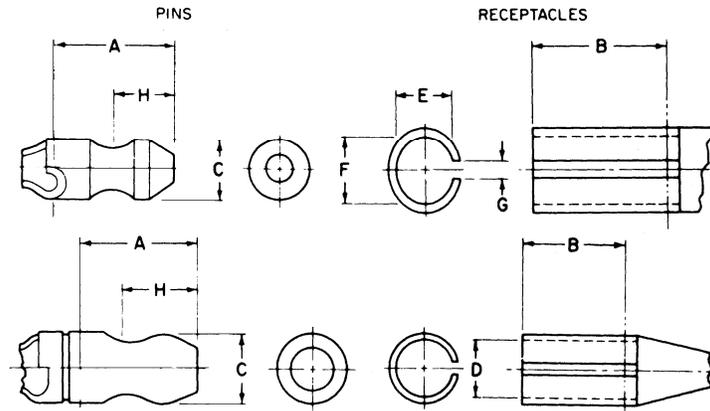


FIGURE 1—TYPE I PIN TERMINALS

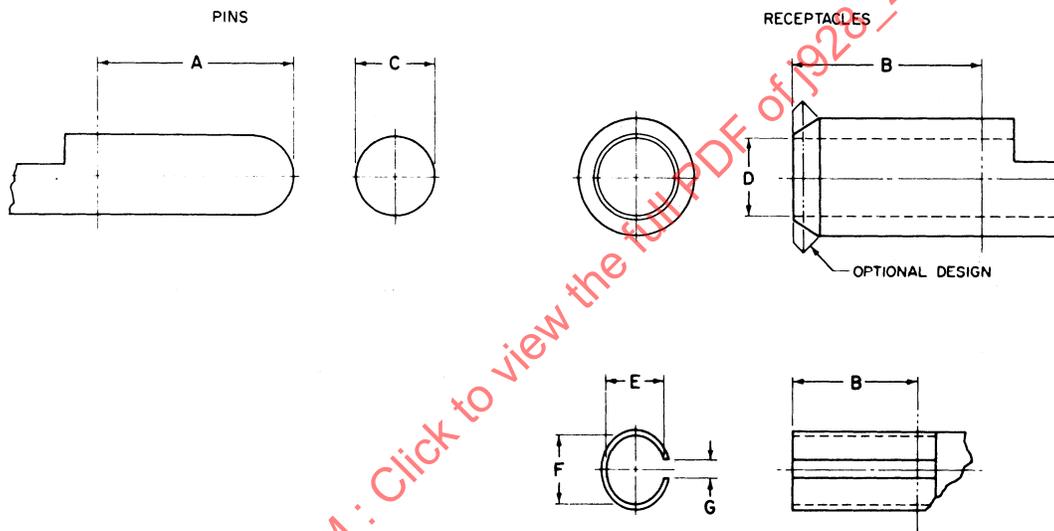


FIGURE 2—TYPE II PIN TERMINALS

TABLE 1 - TYPE I PIN TERMINALS

Nominal Dia mm	Nominal Dia in	SAE Wire Size Range	A		B		C		D		E		F		G			
			Min <sup>(1)</sup> mm	Min <sup>(1)</sup> in	Min <sup>(1)</sup> mm	Min <sup>(1)</sup> in	mm	in	Nominal mm	Nominal in	Nominal mm	Nominal in	Nominal mm	Nominal in	Nominal mm	Nominal in		
3.96	0.156	0.35-3.0 mm <sup>2</sup> (22-12)	8.7	0.34	8.7	0.34	4.04-3.94	0.159-0.155	3.81	0.150	3.73	0.147	4.60	0.181	0.86	0.034	5.56	0.219
4.57	0.180	0.35-5.0 mm <sup>2</sup> (22-10)	10.2	0.40	10.2	0.40	4.62-4.52	0.182-0.178	4.42	0.174	—	—	—	—	—	—	4.83	0.190

1. Minimum insertion length.

NOTE: Detent Female - When a female detent is required, the detent of the receptacle must match the H dimension of the pin.

TABLE 2 - TYPE II PIN TERMINALS

Nominal dia mm	Nominal Dia in	SAE Wire Size Range	A		B		C		D		E		F		G			
			Min <sup>(1)</sup> mm	Min <sup>(1)</sup> in	Min <sup>(1)</sup> mm	Min <sup>(1)</sup> in	mm	in	Nominal mm	Nominal in	Nominal mm	Nominal in	Nominal mm	Nominal in	Nominal mm	Nominal in		
2.18	0.086	0.35-2.0 mm <sup>2</sup> (22-14)	4.4	0.17	4.4	0.17	2.18-2.11	0.086-0.083	2.03	0.080	—	—	—	—	—	—	—	—
2.36	0.093	0.35-2.0 mm <sup>2</sup> (22-14)	5.4	0.21	5.4	0.21	2.36-2.31	0.093-0.091	2.18	0.086	2.18	0.086	3.40	0.134	0.56	0.022	—	—
3.96	0.156	0.35-3.0 mm <sup>2</sup> (22-12)	5.1	0.20	5.1	0.20	4.04-3.91	0.159-0.154	3.86	0.152	—	—	—	—	—	—	—	—

1. Minimum insertion length.

SAENORM.COM. Click to view the full PDF of J928\_201017