

AN AMERICAN NATIONAL STANDARD

FEDERAL SUPPLY CLASS

4730

MA2042

SAE Technica Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

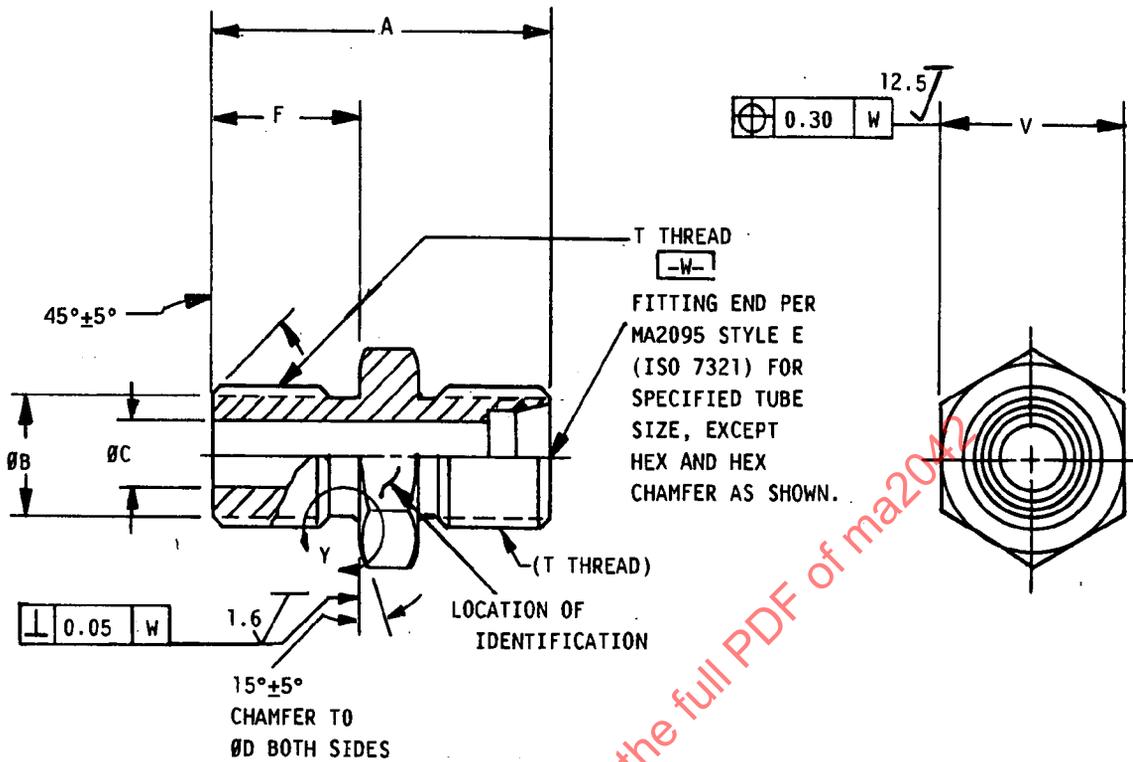


FIGURE 1 - FRONT AND SIDE VIEWS

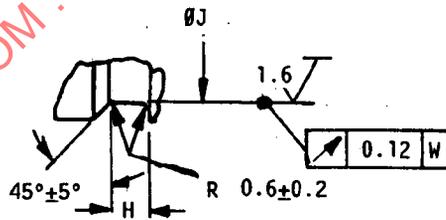


FIGURE 2 - ENLARGED VIEW "Y"

REVISED

ISSUED 1991-06-26

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION MA2005 (ISO7169)

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

ADAPTER, PORT CONNECTION
TO FLARELESS,
24° CONE, METRIC

MA2042

SHEET 1 OF 3

MA2042

TABLE 1 - DIMENSIONS

PART NUMBER	TUBE SIZE /9/ DN	T THREAD PER MA1370 4g6g	B			O		F		H	J	V
			A	0	C	+0.5	0	+0.4				
MA2042()05	05	MJ10X1	24.5	8.6	4.3	16.8	10.0	1.9	8.22- 8.30	16.73-17.00	h13	
MA2042()06	06	MJ12X1.25	27.5	10.2	5.3	18.7	11.5	1.9	10.02-10.10	18.67-19.00	h13	
MA2042()08	08	MJ14X1.5	35.5	11.9	7.1	21.7	15.0	3.4	11.60-11.70	21.67-22.00	h13	
MA2042()10	10	MJ16X1.5	36.5	13.9	9.1	23.7	15.0	3.4	13.60-13.70	23.67-24.00	h13	
MA2042()12	12	MJ18X1.5	36.5	15.9	10.9	26.7	15.0	3.4	15.60-15.70	26.67-27.00	h13	
MA2042()14	14	MJ20X1.5	36.5	17.9	12.5	29.7	15.0	3.4	17.60-17.70	29.67-30.00	h13	
MA2042()16	16	MJ22X1.5	36.5	19.9	14.5	29.7	15.0	3.4	19.60-19.70	29.67-30.00	h13	
MA2042()20	20	MJ27X1.5	36.5	24.9	18.1	35.4	15.0	3.4	24.60-24.70	35.38-36.00	h14	
MA2042()25	25	MJ33X1.5	36.5	30.9	22.5	40.4	15.0	3.4	30.60-30.70	40.38-41.00	h14	
MA2042()32	32	MJ42X2	45.5	39.3	29.3	49.4	19.0	4.3	38.85-39.00	49.38-50.00	h14	
MA2042()40	40	MJ50X2	45.5	47.3	37.3	59.3	19.0	4.3	46.85-47.00	59.26-60.00	h14	

NOTES:

1. MATERIAL SHALL BE IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
 - a. ALUMINUM ALLOY:
 - (1) CODE LETTER D = 2024-T6, T62, OR T851 PER QQ-A-225/6
 - (2) CODE LETTER W = 7075-T73 PER QQ-A-225/9
 - b. CRES:
 - (1) CODE LETTER J = 304 PER QQ-S-763
 - (2) CODE LETTER K = 316 PER QQ-S-763
 - (3) CODE LETTER R = 321 PER QQ-S-763
 - c. TITANIUM ALLOY:
 - (1) CODE LETTER T = 6AL-4V PER AMS 4928
2. FINISH: SEE PROCUREMENT SPECIFICATION.
3. IDENTIFICATION MARKING, CLEANING, AND PACKAGING PER THE PROCUREMENT SPECIFICATION.
4. TITANIUM PARTS SHALL NOT BE USED IN OXYGEN SYSTEMS.
5. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36 AND REQUIREMENTS PER ANSI/ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES ARE TO BE 3.2 μm R_a .
6. BREAK EDGES 0.1 TO 0.4 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONING AND TOLERANCING: ANSI Y14.5M.
8. DIMENSIONING IN MILLIMETERS.
- 9/ DN = NOMINAL TUBE OUTSIDE DIAMETER.
10. THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION IN A COMPLETE FITTING ASSEMBLY. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY A STANDARD PAGE SUPPLEMENT OR SIMILAR MEANS.