

RATIONALE

MA2095C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

REV.
C

MA2095

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

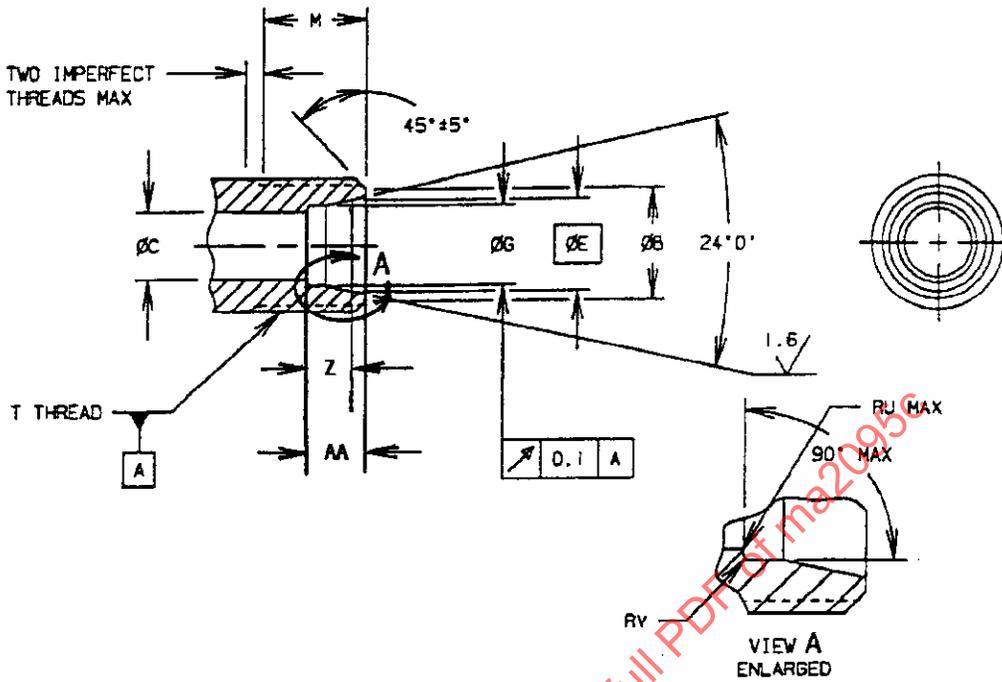


FIGURE 1 - FITTING END DESIGN, STYLE G


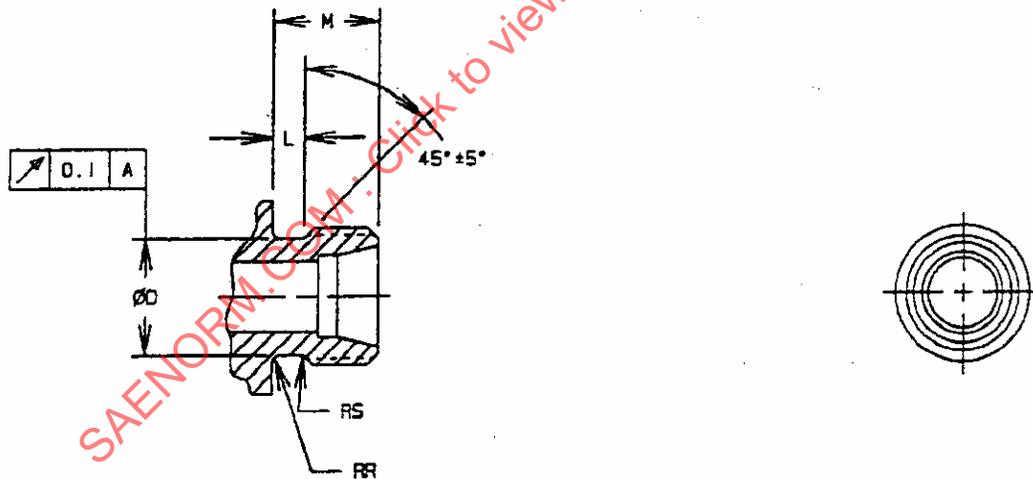


FIGURE 2 - FITTING END DESIGN, STYLE E
SAME AS STYLE G EXCEPT AS SHOWN

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/MA2095C>

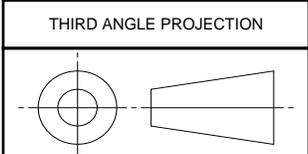

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: NONE /2/



AEROSPACE STANDARD

(R) FITTING END, 24° CONE,
DESIGN STANDARD, METRIC

MA2095
SHEET 1 OF 3

REV.
C

TABLE 1 - DIMENSIONS

BASIC NO. MA2095 /11/ SIZE CODE	(NOMINAL TUBE SIZE DN) /1/	T THREAD PER MA1370 (ISO 5855-3) 4g6g	B 0 -0.5	C	D	E
05	5	MJ 10 X 1	8.6	4.3	8.5	6.5
06	6	MJ 12 X 1.25	10.2	5.3	10.1	7.5
08	8	MJ 14 X 1.5	11.9	7.1	11.8	9.5
10	10	MJ 16 X 1.5	13.9	9.1	13.8	11.5
12	12	MJ 18 X 1.5	15.9	10.9	15.8	13.5
14	14	MJ 20 X 1.5	17.9	12.5	17.8	15.5
16	16	MJ 22 X 1.5	19.9	14.5	19.8	17.5
20	20	MJ 27 X 1.5	24.9	18.1	24.8	21.5
25	25	MJ 33 X 1.5	30.9	22.5	30.8	26.6
32	32	MJ 42 X 2	39.3	29.3	39.2	33.7
40	40	MJ 50 X 2	47.3	37.3	47.2	41.7

TABLE 1A - DIMENSIONS

BASIC NO. MA2095 /11/ SIZE CODE	G ±0.05	L ±0.2	M ±0.2	R	S ±0.10	U	V	Z ±0.12	AA ±0.076
05	5.31	2.2	9.0	0.7	0.40	0.13	0.13-0.25	4.30	5.80
06	6.31	2.7	10.0	0.9	0.50	0.13	0.25-0.40	4.80	6.30
08	8.31	3.2	11.0	1.0	0.55	0.25	0.25-0.40	4.80	6.30
10	10.31	3.2	12.0	1.0	0.55	0.25	0.25-0.40	4.80	6.30
12	12.31	3.2	12.0	1.0	0.55	0.25	0.25-0.40	4.90	7.30
14	14.31	3.2	12.0	1.0	0.55	0.25	0.25-0.40	4.90	7.30
16	16.31	3.2	12.0	1.0	0.55	0.25	0.25-0.40	4.90	7.30
20	20.33	3.2	12.0	1.0	0.55	0.25	0.25-0.40	4.90	7.30
25	25.33	3.2	13.0	1.0	0.55	0.40	0.50-0.70	4.90	7.30
32	32.35	4.2	14.0	1.3	0.70	0.40	0.50-0.70	5.40	7.80
40	40.35	4.2	14.0	1.3	0.70	0.40	0.50-0.70	5.40	7.80



AEROSPACE STANDARD

(R) FITTING END, 24° CONE,
DESIGN STANDARD, METRICMA2095
SHEET 2 OF 3REV.
C