

REV.
A

MA3430

FEDERAL SUPPLY CLASS
5310

RATIONALE

THE DOCUMENT WAS REVISED TO ADD THE CADMIUM STATEMENT.



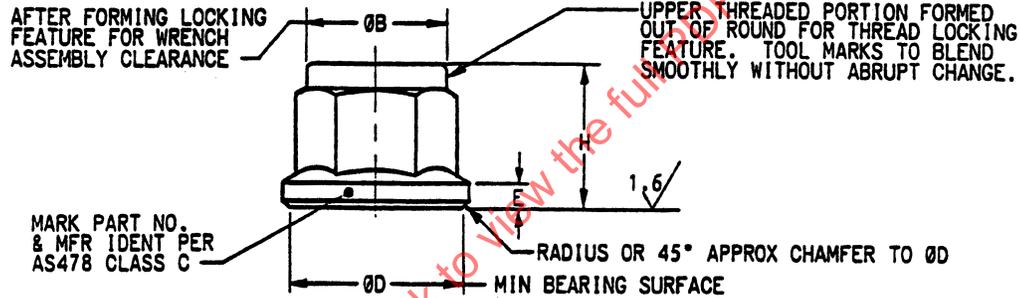


TABLE 1 - DIMENSIONS

PART NO.	THREAD T	AF	1/	AC MIN	A MAX	B MAX	C
MA3430-05	MJ5 x 0.8-4H6H	6.85 - 7.00	h12	7.6	9.1	7.0	5.2 - 5.8
MA3430-06	MJ6 x 1-4H5H	7.85 - 8.00	h12	8.7	10.6	8.0	6.3 - 7.1
MA3430-07	MJ7 x 1-4H5H	8.78 - 9.00	h13	9.8	12.1	9.0	7.3 - 8.1
MA3430-08	MJ8 x 1-4H5H	9.78 - 10.00	h13	10.9	13.6	10.0	8.3 - 9.1
MA3430-10	MJ10 x 1.25-4H5H	11.73 - 12.00	h13	13.2	16.7	12.0	10.3 - 11.1
MA3430-12	MJ12 x 1.25-4H5H	14.73 - 15.00	h13	16.6	19.9	15.0	12.3 - 13.1

1/ TOLERANCE GRADES TO ANSI B4.2-1978

THIRD ANGLE PROJECTION

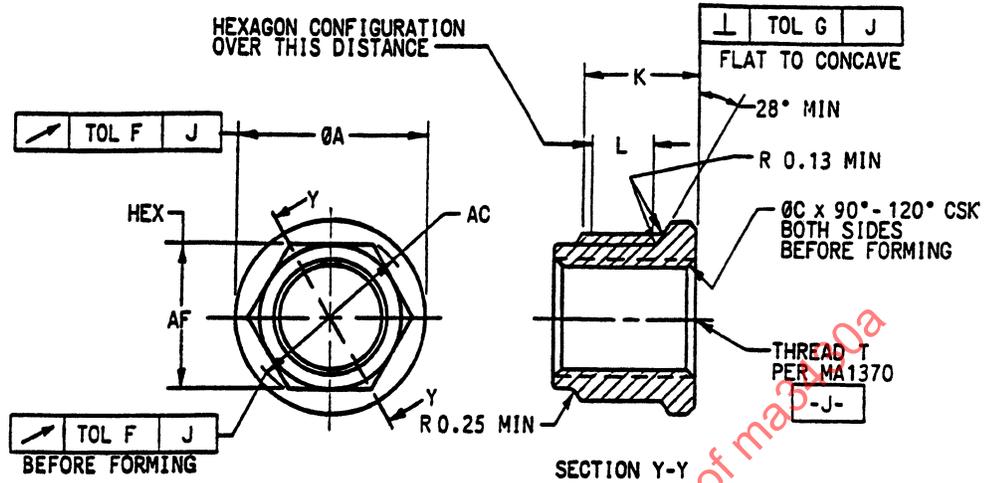

PREPARED BY SAE E-25

SAE Aerospace
An SAE International Group

METRIC AEROSPACE STANDARD

NUT, SELF LOCKING-REDUCED HEX DRIVE,
AMS 6322, CADMIUM PLATED,
MJ THREAD, METRIC

MA3430
SHEET 1 OF 2

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1990-10 NONCURRENT 1996-11 REAFFIRMED 2001-09 REVISED 2007-09