

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

MA3444

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


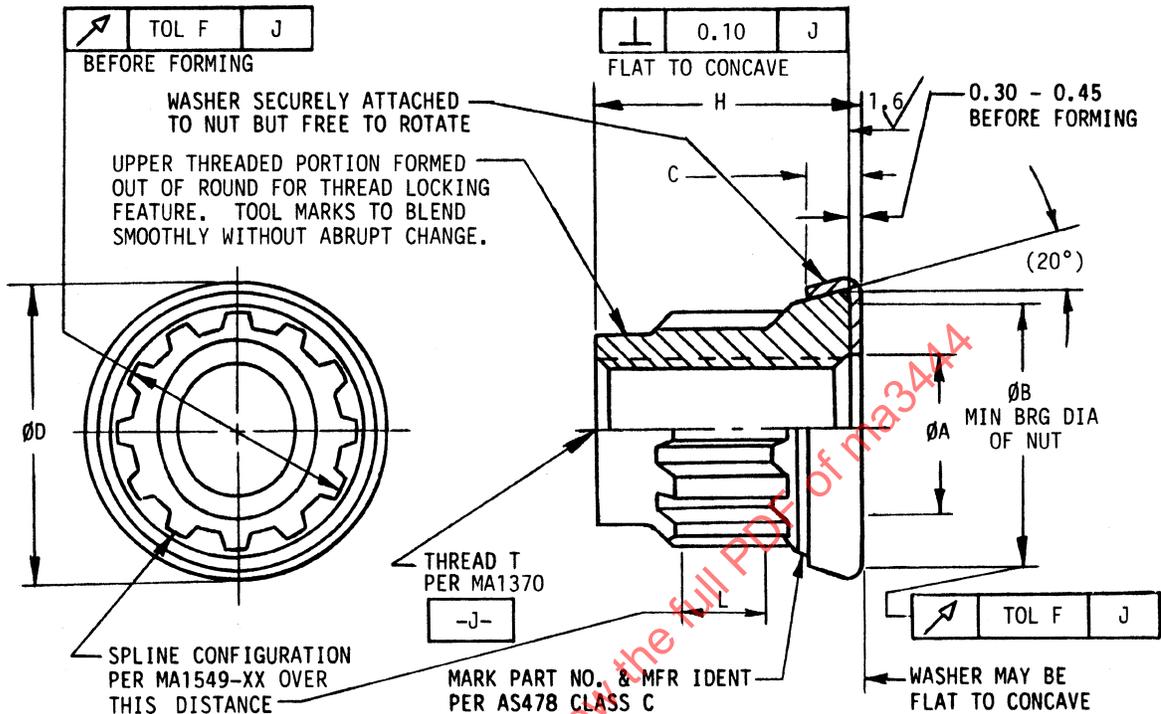


TABLE 1 - DIMENSIONS

PART NO.	THREAD T	XX SPLINE DASH NO.	ØA	ØB MIN	C MAX	ØD MAX	F	H +0.0 -0.6	L MIN	APPROX MASS kg/100
MA3444-05	MJ5 x 0.8-4H6H	07	5.5 - 5.8	8.3	2.6	12.4	0.13	7.5	1.3	0.222
MA3444-06	MJ6 x 1-4H5H	08	6.5 - 6.8	9.8	2.8	13.8	0.15	8.6	1.4	0.302
MA3444-07	MJ7 x 1-4H5H	09	7.5 - 7.8	11.3	3.0	15.2	0.18	9.6	2.0	0.356
MA3444-08	MJ8 x 1-4H5H	10	8.5 - 8.8	12.8	3.2	16.7	0.20	10.9	2.7	0.469

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

METRIC AEROSPACE STANDARD

NUT, SELF LOCKING - SPLINE DRIVE,
CAPTIVE WASHER, UNS S66286,
SILVER PLATE, MJ THREAD, METRIC

MA3444
SHEET 1 OF 2