


RATIONALE

MA4029 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

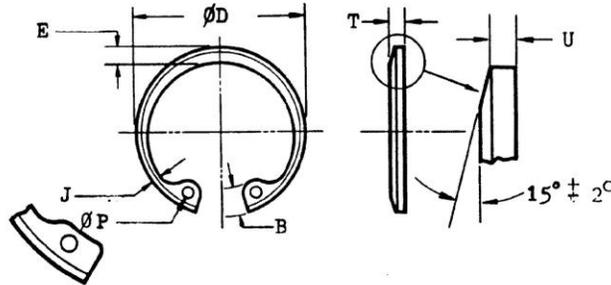

LUG CONFIGURATION
FOR -52 THRU -82


TABLE I. RING DIMENSIONS, FREE STATE

PART NO.	NOM BORE DIA	D	T	U ^{1/}	P	B	E	J	APPROX MASS kg/1000
					MIN	NOM	NOM	NOM	
MA4029-25	25	27.50 - 28.15	1.04 - 1.16	0.81 - 0.87	1.5	4.0	2.6	1.3	1.3
MA4029-26	26	28.60 - 29.25	1.04 - 1.16	0.81 - 0.87	1.5	4.0	2.7	1.4	1.3
MA4029-27	27	29.45 - 30.60	1.24 - 1.36	1.01 - 1.07	1.9	4.6	2.8	1.4	1.7
MA4029-28	28	30.60 - 31.75	1.24 - 1.36	0.99 - 1.05	1.9	4.6	2.9	1.5	1.8
MA4029-30	30	32.90 - 34.05	1.24 - 1.36	0.99 - 1.05	1.9	4.6	3.0	1.5	2.0
MA4029-32	32	34.85 - 36.00	1.24 - 1.36	0.96 - 1.02	1.9	4.6	3.1	1.6	2.2
MA4029-34	34	37.25 - 38.40	1.24 - 1.36	0.94 - 1.00	1.9	4.6	3.2	1.6	2.3
MA4029-35	35	38.25 - 39.40	1.24 - 1.36	0.94 - 1.00	1.9	4.6	3.3	1.6	2.3
MA4029-36	36	39.50 - 40.65	1.24 - 1.36	0.91 - 0.97	1.9	4.6	3.4	1.7	2.6
MA4029-37	37	40.55 - 41.70	1.24 - 1.36	0.91 - 0.97	1.9	4.6	3.4	1.7	2.9
MA4029-38	38	41.65 - 42.80	1.24 - 1.36	0.91 - 0.97	1.9	4.6	3.4	1.7	3.0
MA4029-40	40	43.60 - 45.15	1.52 - 1.68	1.19 - 1.25	1.9	5.1	4.0	2.0	4.0
MA4029-42	42	45.95 - 47.50	1.52 - 1.68	1.16 - 1.22	1.9	5.8	4.2	2.1	4.7
MA4029-45	45	49.30 - 50.85	1.52 - 1.68	1.14 - 1.20	1.9	6.0	4.3	2.1	5.1
MA4029-46	46	50.40 - 51.95	1.52 - 1.68	1.14 - 1.20	2.3	6.0	4.3	2.1	5.2
MA4029-47	47	51.50 - 53.05	1.52 - 1.68	1.14 - 1.20	2.3	6.0	4.3	2.2	5.8
MA4029-48	48	52.65 - 54.20	1.52 - 1.68	1.14 - 1.20	2.3	6.0	4.5	2.3	6.1
MA4029-50	50	54.70 - 56.25	1.52 - 1.68	1.14 - 1.20	2.3	6.0	4.6	2.3	6.2
MA4029-52	52	57.15 - 58.90	1.92 - 2.08	1.48 - 1.56	2.3	6.4	4.7	2.3	8.1
MA4029-55	55	60.35 - 62.10	1.92 - 2.08	1.46 - 1.54	2.3	6.7	5.1	2.5	8.9
MA4029-57	57	62.50 - 64.25	1.92 - 2.08	1.46 - 1.54	2.3	6.9	5.2	2.5	9.9
MA4029-58	58	63.65 - 65.40	1.92 - 2.08	1.46 - 1.54	2.3	6.9	5.3	2.6	10.1
MA4029-60	60	66.05 - 67.80	1.92 - 2.08	1.43 - 1.51	2.3	6.9	5.3	2.6	10.5
MA4029-62	62	67.85 - 69.60	1.92 - 2.08	1.41 - 1.49	2.7	7.1	5.3	2.6	11.5
MA4029-63	63	69.15 - 70.90	1.92 - 2.08	1.41 - 1.49	2.7	7.1	5.4	2.7	11.6
MA4029-65	65	71.45 - 73.20	2.32 - 2.48	1.80 - 1.90	2.7	7.4	5.6	2.8	15.4
MA4029-68	68	74.95 - 76.70	2.32 - 2.48	1.75 - 1.85	2.7	7.6	5.8	2.9	15.9

^{1/} DIMENSION U IS USED IN THE CALCULATION OF THE LOCATION OF THE GROOVE.

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/MA4029>

THIRD ANGLE PROJECTION

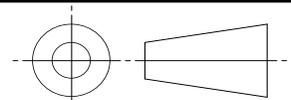

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

METRIC AEROSPACE STANDARD

RING, RETAINING - INTERNAL,
BEVELED, TAPERED, TYPE II, CLASS 1
AMS 5520, METRIC

SAE MA4029
SHEET 1 OF 3

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

SAE MA4029



ISSUED 1987-09 REAFFIRMED 2012-12

TABLE I. RING DIMENSIONS, FREE STATE, (CONTINUED)

PART NO.	NOM BORE DIA	D	T	U 1/	P MIN	B NOM	E NOM	J NOM	APPROX MASS kg/1000
MA4029-70	70	76.75 - 78.50	2.32 - 2.48	1.75 - 1.85	2.7	7.6	5.8	2.9	16.1
MA4029-72	72	78.85 - 80.60	2.32 - 2.48	1.75 - 1.85	2.7	7.6	5.8	2.9	16.3
MA4029-75	75	82.55 - 84.30	2.32 - 2.48	1.70 - 1.80	2.7	7.9	6.2	3.1	19.3
MA4029-78	78	85.40 - 88.20	2.72 - 2.88	2.04 - 2.16	3.1	7.9	6.5	3.2	24.0
MA4029-80	80	87.70 - 90.50	2.72 - 2.88	2.04 - 2.16	3.1	7.9	6.7	3.3	25.9
MA4029-82	82	89.70 - 92.50	2.72 - 2.88	2.04 - 2.16	3.1	8.7	6.9	3.4	27.2

NOTES:

1. MATERIAL: CRES, AMS 5520 (UNS S15700)
2. HEAT TREATMENT: AUSTENITE CONDITIONED & PRECIPITATION HEAT TREATED PER MIL. SPEC.
3. HARDNESS: 44 - 51 HRC OR EQUIVALENT.
4. FINISH: PASSIVATE IN ACCORDANCE WITH MA4036
5. PROCUREMENT SPECIFICATION: MA 4036.
6. SURFACE TEXTURE: REQUIREMENTS PER ANSI B46.1-19 85 SURFACES TO BE 1.6 MICROMETRES Ra MAX EXCEPT INSIDE AND OUTSIDE EDGES.
7. DIMENSIONING AND TOLERANCING: ANSI Y14.5M-1982.
8. DIMENSIONS IN MILLIMETRES.
9. REMOVE BURRS AND SHARP EDGES.
10. DO NOT USE UNASSIGNED PART NUMBERS.

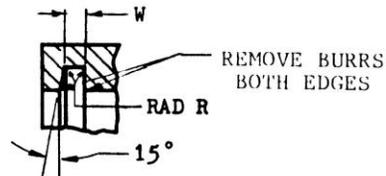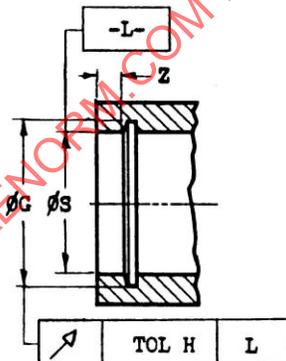

DETAIL OF GROOVE

MA & AMS ARE SAE PUBLICATIONS.

ANSI IS AMERICAN NATIONAL STANDARDS INSTITUTE PUBLICATION.