



UL 1278

STANDARD FOR SAFETY

Movable and Wall-or Ceiling-Hung
Electric Room Heaters

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 1278 2022

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 1278 2022

UL Standard for Safety for Movable and Wall- or Ceiling-Hung Electric Room Heaters, UL 1278

Fourth Edition, Dated March 21, 2014

Summary of Topics

This revision of ANSI/UL 1278 dated February 21, 2022 includes Warning and Markings to Address Hyperthermia Hazards; [67.13](#), [67.14](#), [67.25](#), [Figure 67.2](#), [68.2.1](#), [68.3.3](#), [69.1](#), [69.2](#), [69.3](#).

Text that has been changed in any manner or impacted by UL's electronic publishing system is marked with a vertical line in the margin.

The new and revised requirements are substantially in accordance with Proposal(s) on this subject dated December 17, 2021.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of UL.

UL provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will UL be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if UL or an authorized UL representative has been advised of the possibility of such damage. In no event shall UL's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold UL harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 1278 2022

MARCH 21, 2014
(Title Page Reprinted: February 21, 2022)



ANSI/UL 1278-2022

1

UL 1278

Standard for Movable and Wall- or Ceiling-Hung Electric Room Heaters

First Edition – September, 1992
Second Edition – September, 1994
Third Edition – June, 2000

Fourth Edition

March 21, 2014

This ANSI/UL Standard for Safety consists of the Fourth Edition including revisions through February 21, 2022.

The most recent designation of ANSI/UL 1278 as an American National Standard (ANSI) occurred on February 21, 2022. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to UL at any time. Proposals should be submitted via a Proposal Request in UL's On-Line Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

UL's Standards for Safety are copyrighted by UL. Neither a printed nor electronic copy of a Standard should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

COPYRIGHT © 2022 UNDERWRITERS LABORATORIES INC.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 1278 2022

CONTENTS

INTRODUCTION

1	Scope	9
2	General	9
	2.1 General	9
	2.2 Terminology	9
3	Glossary	9
4	Components	12
	4.1 General	12
	4.2 Attachment plugs, receptacles, connectors, and terminals	13
	4.3 Controls	13
	4.4 Internal wiring	15
	4.5 Film-coated wire (magnet wire)	16
	4.6 Printed wiring boards	16
	4.7 Semiconductors and small electronic components	16
	4.8 Supplemental insulation, insulating bushings, and assembly aids	17
	4.9 Switches	17
	4.10 Transformers	18
5	Units of Measurement	18
6	References	19

CONSTRUCTION

7	Enclosure	19
8	Accessibility of Live Parts	21
9	Accessibility of Moving Parts	28
10	Guarding of Heating Elements	29
	10.1 General	29
	10.2 Panel-type heaters	35
11	Parts Subject to Pressure	35
12	Polymeric Materials	37
13	Heat Transfer Fluids	37
14	Assembly of Components	37
15	Protection Against Corrosion	38
16	Supply Connections	38
17	Special Protection Devices	43
18	Static Load Test For Hanging Means	44
19	Current-Carrying Parts	44
20	Internal Wiring	45
	20.1 General	45
	20.2 Protection of wiring	45
	20.3 Wire connectors	46
	20.4 Separation of circuits	47
21	Heating Elements	47
22	Heating Element Supports	48
23	Electrical Insulation	48
24	Thermal Insulation	48
25	Motors	49
26	Motor Overload Protection	49
27	Overcurrent Protection	50
	27.1 General	50
	27.2 Heating elements	51
	27.3 Motors and motor-circuits	51

27.4	Tapped high-voltage control circuits	51
27.5	High-voltage transformers	53
27.6	Low-voltage transformers	54
28	Secondary Circuits	54
28.1	General.....	54
28.2	Limited-energy-secondary circuits.....	54
29	Temperature Limiting Means	55
30	Alarms.....	57
31	Lampholders.....	57
32	Pilot Lights	57
33	Switches.....	58
34	Automatic Controls and Control Circuits	60
34.1	General.....	60
34.2	Terminals and actuating members of safety and temperature limiting controls	61
35	Spacings	61
36	Grounding	62

PERFORMANCE

37	General	63
38	Power Input Test	63
39	Leakage Current Test	63
40	Normal Temperature Tests	66
40.1	General.....	66
40.2	Temperature controls	70
40.3	Specified test conditions.....	71
41	Alarm Device Endurance Test	72
42	Abnormal Operation Tests.....	72
42.1	General.....	72
42.2	Overvoltage test	73
42.3	Stalled-fan test	73
42.4	Tip-over test	74
42.5	Vertical-wall test	74
42.6	Terry cloth drape test.....	75
42.7	Terry cloth band drape test	75
42.8	Wall-hung heaters.....	77
42.9	Abnormal ambient test	79
42.10	Motor overload and stalled motor – motors protected by a remote protective device....	80
42.11	Impedance-protected motors	81
42.12	Motor connected across heating elements	81
43	Endurance Test.....	82
43.1	Temperature Control	82
43.2	Electrical wiring	82
44	Short Circuit Tests	84
45	Overload Test – High-Voltage Transformers	85
46	Burnout Test – High-Voltage Transformers	86
47	Component Failure Test.....	86
48	Dielectric Voltage-Withstand Test	87
49	Insulation Resistance Test	87
50	Water Spray Test.....	87
51	Stability of Movable Heaters	90
52	Element Support Impact Tests.....	90
53	Drop Test.....	91
54	Test for Permanence of Cord Tag.....	92
54.1	General.....	92
54.2	Test conditions	92

54.3 Test method	93
55 Protection Against Injury to Persons Test	93
56 Knob Securement Test	94
57 Strength of Adjustment Stop Test.....	94
58 Hydrostatic Test	95
59 Strain Relief Test	95
60 Permanence of Marking.....	95

MANUFACTURING AND PRODUCTION TESTS

61 Production-Line Dielectric Voltage-Withstand	96
62 Production-Line Grounding Continuity.....	97
63 Production-Line Tip Over	97
64 Production Leakage Test (Fluid-Filled Heaters)	97
65 Hydrostatic Test	97

RATINGS

66 Details.....	98
-----------------	----

MARKINGS

67 Details.....	98
68 Instructions for Use and Care	103
68.1 General.....	103
68.2 Important instructions.....	103
68.3 User instructions.....	105
68.4 Grounding instructions	105
68.5 Heater carton information	106
69 Cord Tag Markings	107

SUPPLEMENT SA – CERTAIN RADIANT ROOM HEATERS

INTRODUCTION

SA1 Scope.....	109
----------------	-----

CONSTRUCTION

SA2 Enclosure.....	109
SA2.1 General.....	109
SA2.2 Guards.....	110
SA3 Stability.....	110
SA4 Supply Connections.....	111
SA5 Internal Wiring.....	111
SA6 Automatic Controls and Control Circuits	111
SA7 Spacings.....	112

PERFORMANCE

SA8 General.....	112
SA9 Normal Temperature Test	113
SA9.1 General.....	113
SA9.2 Normal temperature	113

SA10	Padded Surface and Blanketing Test	114
SA11	Curtain Drape Test	115
SA12	Shredded Paper Test	115

MANUFACTURING AND PRODUCTION TESTS

SA13	General	116
------	---------------	-----

MARKING

SA14	Details	117
------	---------------	-----

SUPPLEMENT SB – HEATERS INTENDED FOR USE IN BATHROOMS, LAUNDRY AREAS AND SIMILAR INDOOR LOCATIONS

INTRODUCTION

SB1	Scope	119
-----	-------------	-----

CONSTRUCTION

SB2	Enclosure	119
SB3	Current-Carrying Parts	119
SB4	Thermal Insulation	119
SB5	Immersion Detection Circuit Interrupters (IDCIS)	119
SB6	Ground Fault Circuit Interrupters (GFCIS)	120
SB7	Other Protective Devices	120
SB8	Switches	120
SB9	Grounding	121

PERFORMANCE

SB10	Immersion Leakage Current Tests	121
SB10.1	General	121
SB10.2	Rising water immersion	121
SB10.3	Drop immersion	122
SB10.4	Tip-over immersion test	122
SB10.5	Saturation immersion test	122
SB11	Dew Point Test	122
SB12	Splash Test	122

MANUFACTURING AND PRODUCTION TESTS

SB13	Production Line Trip-Time Measurement	123
SB14	Test Button Activation	123

MARKINGS

SB15	Details	123
SB16	Instructions for Use and Care	123

SUPPLEMENT SC – MOVABLE ELECTRIC ROOM HEATERS WITH SEMICONDUCTOR HEATING ELEMENTS

INTRODUCTION

SC1	Scope.....	125
-----	------------	-----

CONSTRUCTION

SC2	Heating Element.....	125
SC3	Fan Speed Control, Semiconductor Type	125
SC4	Switches.....	125

PERFORMANCE

SC5	General	125
SC6	Input Test.....	126
SC7	Normal Temperature Test.....	126
SC8	Low Ambient Temperature Starting Test	126
SC9	Restricted Inlet, Abnormal Operation Test.....	126
SC10	DC Offset Voltage Temperature Test	126
SC11	Fan Speed Controls, Abnormal Operation Tests	127
SC12	Endurance Test	128
SC13	Input Current Test	128
SC14	Overload and Endurance Test.....	128

SUPPLEMENT SD – DIRECT PLUG-IN HEATERS**INTRODUCTION**

SD1	Scope.....	131
-----	------------	-----

CONSTRUCTION

SD2	General	131
SD3	Enclosure	135
SD4	Input Connections.....	135
SD5	Grounding.....	135
SD6	Blade Secureness Test	135
SD7	Security of Input Contacts Test	136
SD8	Positioning	136
SD9	Abuse Tests – General.....	136
SD10	Abuse Tests – Impact Tests	136
SD11	Abuse Tests – Rod Pressure.....	136
SD12	Abuse Tests – Resistance to Crushing.....	137
SD13	Abuse Tests – Switch Retainment	137
SD14	Abuse Tests – Rotating Plug Assembly Torque Test.....	137
SD15	Abuse Tests – Static Load-Retainer Plate	137
SD16	Marking.....	137
SD17	Limitations	137
SD18	Abnormal Operation Tests	138

SUPPLEMENT SE – CONNECTED HEATERS**INTRODUCTION**

SE1	Scope.....	139
-----	------------	-----

CONSTRUCTION

SE2	General.....	139
-----	--------------	-----

PERFORMANCE

SE3	Movement Detection Test, Moveable Heaters	141
SE4	Ambient Temperature Test	141
SE5	Enabled Timeout Test, Initiating a Heating Function.....	142
SE6	Enabled Timeout Test, Increasing a Temperature Setting.....	142
SE7	Resistance to Electro Magnetic Phenomena (Immunity)	142

MARKINGS

SE8	Details	143
SE9	Instructions	143

ULNORM.COM : Click to view the full PDF of UL 1278 2022

INTRODUCTION

1 Scope

1.1 These requirements cover movable and wall- or ceiling-hung electric room-heating equipment rated 600 volts or less to be employed in ordinary locations in accordance with the National Electrical Code, ANSI/NFPA 70.

1.2 These requirements do not cover fixed heaters, location-dedicated heaters, baseboard heaters, duct heaters, central-heating furnaces, fan-coil units, panel- or cable-type radiant-heating equipment, electric boilers, or any other electric heating equipment or appliances that are covered in or as a part of separate, individual requirements.

2 General

2.1 General

2.1.1 If the operation of a heater involves the generation and confining under pressure of steam or other gas, consideration is to be given to the possibility of risk of explosion incident to such operation. This applies in the case of an appliance having immersed electrodes, if the electrolysis of water may result in the accumulation of oxygen and hydrogen. The appliance is not acceptable unless its strength is such that it will withstand any risk of explosion that may be involved.

2.1.2 The requirements of this standard are based upon operation of a heater where it is manually placed by the user. The heater shall not be capable of moving autonomously or via remote control from the location in which it is manually placed by the user.

2.2 Terminology

2.2.1 Unless indicated otherwise, all voltage and current values mentioned in this standard are rms.

3 Glossary

3.1 For the purposes of this standard the following definitions apply.

3.2 ANGLE OF CRITICAL BALANCE – The minimum angle through which a heater must be tipped to cause it to tip over due solely to the force of gravity.

3.3 APPLIANCE COUPLER – A single-outlet, female contact device for attachment to a flexible cord as part of a detachable power-supply cord to be connected to an appliance inlet (motor attachment plug).

3.4 APPLIANCE INLET (Motor Attachment Plug) – A male contact device mounted on an end product appliance to provide an integral blade configuration for the connection of an appliance coupler or cord connector.

3.5 APPLIANCE (FLATIRON) PLUG – An appliance coupler type of device having a cord guard and a slot configuration specified for use with heating or cooking appliances.

3.6 CHARRING WITH CROSSCHECKING – Manifestation of ignition by separation of wood fibers in the direction with the grain and also in the direction across the grain.

3.7 COMMERCIAL/INDUSTRIAL HEATER – Any heater that is either:

- a) Rated 2 kilowatts or greater and marked as a commercial/industrial heater in accordance with [67.10](#),
- b) Rated greater than 250 volts,
- c) A polyphase heater, or
- d) Rated greater than 6 kilowatts.

3.8 COMPONENT – A device or fabricated part of the appliance covered by the scope of a safety standard dedicated to the purpose. When incorporated in an appliance, equipment otherwise typically field installed (e.g. luminaire) is considered to be a component. Unless otherwise specified, materials that compose a device or fabricated part, such as thermoplastic or copper, are not considered components.

3.9 CONTROL CIRCUIT – A circuit that carries the electric signals directing the operation of a controller which, in turn, governs power delivered to a motor or other load. A control circuit does not carry the main power current.

3.10 CORD CONNECTOR – A female contact device wired on flexible cord for use as an extension from an outlet to make a detachable electrical connection to an attachment plug or, as an appliance coupler, to an equipment inlet.

3.10.1 ELECTRICAL CONNECTION – The physical interface between two points in a circuit such as spade terminals, pin terminals, micro switch contacts, relay contacts, timer contacts, crimped connections, and connections that are welded or soldered.

3.11 ELEVATED USE LOCATION – A stationary horizontal surface (for example, table, desk or shelf) where a heater is likely to be used if the heater weighs less than 8 lbs (3.6 kg), and:

- a) The heater advertised as being suitable for use at an elevated location in literature or operating instructions furnished with the heater or by marking on the heater or its packaging, or
- b) The overall dimensions of the heater, including any permanently extending handles, grilles, feet or stands do not exceed any one of the following:
 - 1) Total added dimensions of length, height, and depth – 30 inches (76.2 cm).
 - 2) Length – 24 inches (61 cm).
 - 3) Height – 14 inches (35.6 cm).

3.12 FIXED HEATER – A heater that is fastened or otherwise assigned to a specific location, and is permanently wired to the branch circuit.

3.13 FLASH POINT – The minimum temperature of a flammable liquid at which sufficient vapor is given off to form an ignitable mixture with the air near the surface of the liquid or within the vessel used, as determined by appropriate test procedure and apparatus.

3.14 IGNITION – Glowing, emission of embers, or flaming of the materials described in [42.1.9](#) – [42.1.13](#). Charring without glowing or without emission of embers is not ignition.

3.15 LINE-VOLTAGE CIRCUIT – A circuit involving a potential of not more than 600 volts, and having circuit characteristics in excess of those of a low-voltage or an isolated-limited-secondary circuit.

3.16 LOCATION-DEDICATED HEATER – A cord-connected heater that is normally placed in one location for usage such as:

- a) Cord-connected wall- or ceiling-mounted heater, or
- b) Freestanding cord-connected heater that exceeds the weight and/or dimension limitations of a movable heater.

3.17 LOW-VOLTAGE (SECONDARY) CIRCUIT – A circuit involving a potential of not more than 30 volts alternating-current, (42.4 volt peak or direct-current), and supplied by a primary battery or by a standard Class 2 transformer, or by a combination of transformer and fixed impedance that, as a unit, complies with all the performance requirements for a Class 2 transformer. A circuit derived from a source of supply classified as a line voltage circuit, using resistance in series with the supply circuit as a means of limiting the voltage and current, is not considered to be a low voltage nor an isolated limited secondary circuit.

3.18 MOVABLE HEATER – A freestanding cord and plug connected heater that does not exceed 65 pounds (29.4 kg) and has no dimension greater than 8 feet (2.4 m). A wall- or ceiling-hung heater which may be used as a movable heater without further guiding or propping, is also considered a movable heater.

3.18.1 PRODUCT ENCLOSURES – That part of the product (metallic or nonmetallic) that:

- a) Renders inaccessible all or any parts of the equipment that may otherwise present a risk of electric shock, injury to persons, and
- b) Retards propagation of flame initiated by electrical disturbances occurring within.

3.19 TEMPERATURE CONTROLS – Devices that respond with a change in temperature (thermostatic devices) may be one of the following types:

- a) Regulating – Functions only to regulate the temperature of the heater under intended conditions of use, and whose malfunction would not result in a risk of fire.
- b) Limiting – Functions only under conditions that produce abnormal temperatures. The malfunction of such a device will result in a risk of fire.
- c) Auxiliary – Thermostatic device other than of the regulating or limiting type.
- d) Operating Control – A control intended to start or regulate the heater during normal operation. An example would be a temperature-regulating control. An operating control could provide Type 1 or Type 2 action. (See definitions [3.20](#) – [3.23](#)).
- e) Protective Control – A control intended to reduce the risk of electric shock, fire, or injury to persons during abnormal operation of the heater. An example would be a temperature limiting control. A protective control always provides Type 2 action. (See definitions [3.20](#) – [3.23](#)).

3.20 TYPE 1 ACTION – Automatic action for which the manufacturing deviation and the drift of its operating value, operating time, or operating sequence have not been declared and tested to the Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

3.21 TYPE 2 ACTION – Automatic action for which the manufacturing deviation and the drift of its operating value, operating time, or operating sequence have been declared and tested to the Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

3.22 TYPE 2.H ACTION – So designed that the contacts cannot be prevented from opening and which may automatically reset to the closed position if the reset means is held in the reset position. The control shall not reset automatically at any temperature above -35°C.

3.23 TYPE 2.J ACTION – So designed that the contacts cannot be prevented from opening, and the control is not permitted to function as an automatic reset device if the reset means is held in the reset position. The control shall not reset automatically at any temperature above -35°C.

3.24 VISIBLY GLOWING HEATING ELEMENT – A heating element whose visible portion attains a temperature of at least 650°C (1202°F) under intended conditions of operation.

3.25 WALL (OR CEILING) HUNG HEATER – A cord-connected heater having a mass not exceeding 50 pounds (22.7 kg) that is attached to the wall (or ceiling) in such a manner that it can be removed without the use of tools.

3.26 WALL (OR CEILING) MOUNTED HEATER – A heater that is permanently attached to the wall (or ceiling) in such a manner that tools are necessary for its removal.

4 Components

4.1 General

4.1.1 A component of a product covered by this standard shall:

- a) Comply with the requirements for that component as indicated in [4.2](#) – [4.10](#);
- b) Be used in accordance with its rating(s) established for the intended conditions of use;
- c) Be used within its established use limitations or conditions of acceptability;
- d) Additionally comply with the applicable requirements of this end product standard; and

Exception No. 1: A component of a product covered by this standard is not required to comply with a specific component requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product;*
- b) Is superseded by a requirement in this standard; or*
- c) Is separately investigated when forming part of another component, provided the component is used within its established ratings and limitations.*

Exception No. 2: A component that complies with a UL component standard other than those specified in [4.2](#) – [4.10](#) is acceptable if:

- a) The component also complies with the applicable component standard specified in [4.2](#) – [4.10](#); or*
- b) The component standard:*
 - 1) Is compatible with the ampacity and overcurrent protection requirements in the National Electrical Code, ANSI/NFPA 70 where applicable;*
 - 2) Considers long-term thermal properties of polymeric insulating materials in accordance with the Standard for Polymeric Materials - Long Term Property Evaluations, UL 746B; and*

3) Any use limitations of the other component standard is identified and appropriately accommodated in the end use application. For example, a component used in a household application, but intended for industrial use and complying with the relevant component standard may assume user expertise not common in household applications.

4.1.2 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

4.1.3 A component that is also intended to perform other functions, such as over current protection, ground-fault circuit-interruption, surge suppression, any other similar functions, or any combination thereof, shall comply additionally with the requirements of the applicable UL standard(s) that cover devices that provide those functions.

Exception: Where these other functions are not required for the application and not identified as part of markings, instructions, or packaging for the appliance, the additional component standard(s) need not be applied.

4.1.4 A component not anticipated by the requirements of this end product standard, not specifically covered by the component standards in [4.2](#) – [4.10](#), and that involves a risk of fire, electric shock, or injury to persons, shall be additionally investigated in accordance with the applicable UL standard, and shall comply with [4.1.1\(b\)](#) – (e).

4.1.5 With regard to a component being additionally investigated, reference to construction and performance requirements in another UL end product standard is suitable where that standard anticipates normal and abnormal use conditions consistent with the application of this end product standard.

4.2 Attachment plugs, receptacles, connectors, and terminals

4.2.1 Attachment plugs, receptacles, appliance couplers, appliance inlets (motor attachment plugs), and appliance (flatiron) plugs, shall comply with the Standard for Attachment Plugs and Receptacles, UL 498. See [4.2.2](#).

Exception: Attachment plugs and appliance couplers integral to cord sets or power supply cords that are investigated in accordance with the Standard for Cord Sets and Power Supply Cords, UL 817 are not required to comply with UL 498.

4.2.2 Female devices (such as receptacles, appliance couplers, and connectors) that are intended, or that may be used, to interrupt current in the end product, shall be suitably rated for current interruption of the specific type of load, when evaluated with its mating plug or connector. For example, an appliance coupler that can be used to interrupt the current of a motor load shall have a suitable horsepower rating when tested with its mating plug.

4.3 Controls

4.3.1 General

4.3.1.1 Auxiliary controls shall be evaluated in accordance with the applicable requirements of this end product standard unless otherwise specified; see [4.3.1.7](#).

4.3.1.2 Operating (regulating) controls shall be evaluated in accordance with the applicable component standard requirements specified in [4.3.2](#) – [4.3.6](#), if applicable, unless otherwise specified in this end product standard; see [4.3.1.7](#).

4.3.1.3 Operating controls that rely upon software for the normal operation of the end product where deviation or drift of the control may result in a risk of fire, electric shock, or injury to persons, such as a speed control unexpectedly changing its output, shall comply with one of the following:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, and the Standard for Software in Programmable Components, UL 1998; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

4.3.1.4 Protective (limiting) controls shall be evaluated in accordance with the applicable component standard requirements specified in [4.3.2](#) – [4.3.6](#), unless otherwise specified in this end product standard.

4.3.1.5 Solid-state protective controls that do not rely upon software as a protective component shall comply with one of the following:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, except the Controls Using Software requirements, Clause H 11.12.

4.3.1.6 Solid-state protective controls that rely upon software as a protective component shall comply with one of the following:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991, and the Standard for Software in Programmable Components, UL 1998; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

4.3.1.7 An electronic, auxiliary or operating control (e.g. a non-protective control), the failure of which would not increase the risk of fire, electric shock, or injury to persons, need only be subjected to the applicable requirements of this end product standard.

4.3.2 Electromechanical and electronic controls

4.3.2.1 A control, other than as specified in [4.3.3](#) – [4.3.6](#), shall comply with one of the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873; or
- c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

4.3.3 Liquid level controls

4.3.3.1 A liquid level control shall comply with one of the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;
- c) The Standard for Industrial Control Equipment, UL 508; or
- d) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, and;

1) Deleted

2) Deleted

3) The Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Air Flow, Water Flow and Water Level Sensing Controls, UL 60730-2-15.

4.3.4 Motor and speed controls

4.3.4.1 A control used to start, stop, regulate or control the speed of a motor shall comply with one of the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;
- c) The Standard for Industrial Control Equipment, UL 508;
- d) Deleted
- e) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; or
- f) The Standard for Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal and Energy, UL 61800-5-1.

4.3.5 Pressure controls

4.3.5.1 A pressure control shall comply with one of the following:

- a) The Standard for Temperature-Indicating and -Regulating, UL 873;
- b) The Standard for Industrial Control Equipment, UL 508; or
- c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls – Part 2-6: Particular Requirements for Automatic Electrical Pressure Sensing Controls Including Mechanical Requirements, UL 60730-2-6.

4.3.6 Timer controls

4.3.6.1 A timer control shall comply with one of the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.

4.4 Internal wiring

4.4.1 Internal wiring composed of insulated conductors shall comply with the Standard for Appliance Wiring Material, UL 758.

Exception No. 1: Insulated conductors need not comply with UL 758 if they comply with one of the following:

- a) *The Standard for Thermoset-Insulated Wires and Cables, UL 44;*

b) *The Standard for Thermoplastic-Insulated Wires and Cables, UL 83;*

c) *The applicable UL standard(s) for other insulated conductor types specified in Chapter 3, Wiring Methods and Materials, of the National Electrical Code, ANSI/NFPA 70.*

Exception No. 2: Insulated conductors for specialty applications (e.g. data processing or communications) and located in a low-voltage circuit not involving the risk of fire, electric shock or injury to persons need not comply with UL 758.

4.5 Film-coated wire (magnet wire)

4.5.1 The component requirements for film coated wire and Class 105 (A) insulation systems are not specified.

4.5.2 Film coated wire in intimate combination with one or more insulators, and incorporated in an insulation system rated Class 120 (E) or higher, shall comply with the magnet wire requirements in the Standard for Systems of Insulating Materials - General, UL 1446.

4.6 Printed wiring boards

4.6.1 Printed wiring boards, including the coatings, shall comply with the Standard for Printed Wiring Boards, UL 796.

Exception: A printed-wiring board in a Class 2 nonsafety circuit is not required to comply with the bonding requirements in UL 796 if the board is separated from parts of other circuits such that loosening of the bond between the foil conductor and the base material will not result in the foil conductors or components coming in contact with parts of other circuits of the control or of the end-use product.

4.6.2 A printed-wiring board containing circuitry in a line-connected circuit or a safety circuit shall comply with the direct-support requirements for insulating materials in Electrical Insulation, Section [23](#) of this end product standard.

4.6.3 Unless otherwise specified, the flammability class and temperature rating shall be that as specified in Electrical Insulation, Section [23](#) of this end product standard.

4.7 Semiconductors and small electronic components

4.7.1 A power switching semiconductor device that is relied upon to provide isolation to ground shall comply with the Standard for Optical Isolators, UL 1577. The Dielectric Voltage Withstand Tests required by UL 1577 shall be conducted applying the requirements of the Dielectric Voltage Withstand Test, Section [48](#), of this end product standard.

4.7.2 An optical isolator that is relied upon to provide isolation between primary and secondary circuits or between other circuits as required by this end product standard shall comply with the Standard for Optical Isolators, UL 1577. The Dielectric Voltage Withstand Tests required by UL 1577 shall be conducted applying the requirements in Dielectric Voltage Withstand Test, Section [48](#) of this end product standard.

4.7.3 Except as specified in [4.7.4](#), component requirements are not specified for small electronic components on printed wiring boards, including diodes, transistors, resistors, inductors, integrated circuits, and capacitors not directly connected to the supply source.

4.7.4 Where an electronic component is determined to be a critical component during the Abnormal Operation Tests, Section [42](#), one of the following standards shall be applied:

a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; and as applicable, the Standard for Software in Programmable Components, UL 1998 for controls that rely upon software as a protective component; or

b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

4.7.5 A critical component, as specified in [4.7.4](#), is a component that performs one or more safety-related functions whose failure results in a condition, such as the risk of fire, electric shock, or injury to persons, in the end product application.

4.7.6 A critical component as specified in [4.7.4](#), may also be identified using a failure-mode and effect analysis (FMEA) in accordance with the Failure-Mode and Effect Analysis (FMEA) requirements in the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991.

4.7.7 Portions of a circuit comprised of a microcontroller or other programmable device that performs a back-up, limiting, or other safety function intended to reduce the risk of fire, electric shock, or injury to persons shall comply with the Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, Annex H.

4.8 Supplemental insulation, insulating bushings, and assembly aids

4.8.1 The requirements for supplemental insulation (e.g. tape, sleeving or tubing) are not specified unless the insulation or device is required to comply with [20.3](#) or a performance requirement of this end product standard. In such cases, the insulation shall comply with the following applicable standards:

- a) Insulating tape shall comply with the Standard for Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape, UL 510;
- b) Sleeving shall comply with the Standard for Coated Electrical Sleeving, UL 1441; or
- c) Tubing shall comply with the Standard for Extruded Insulating Tubing, UL 224.

4.8.2 Wire positioning devices shall comply with the requirements in Electrical Insulation, Section [23](#). A device that complies with the Standard for Positioning Devices, UL 1565, is considered to comply with this requirement.

4.8.3 Insulating bushings that comply with the requirements in General, Section [4.1](#), of this end product standard, and the Standard for Insulating Bushings, UL 635 are considered to comply with the requirements of this end product standard. Tests specified in this end product standard (e.g. Strain Relief Test, Section [59](#)) may still need to be performed to confirm the combination of the insulating bushing and the supporting part comply with the intent of the requirements.

4.9 Switches

4.9.1 Switches shall comply with one of the following:

- a) *Deleted*
- b) The Standard for Switches for Appliances – Part 1: General Requirements, UL 61058-1;
- c) The Standard for General-Use Snap Switches, UL 20; or
- d) The Standard for Nonindustrial Photoelectric Switches for Lighting Control, UL 773A.

Exception: Switching devices that comply with the applicable UL standards for specialty applications (e.g. transfer switch equipment), industrial use (e.g. contactors, relays, auxiliary devices), or are integral to another component (e.g. switched lampholder) need not comply with this requirement.

4.9.2 A clock-operated switch, in which the switching contacts are actuated by a clock-work, by a gear-train, by electrically-wound spring motors, by electric clock-type motors, or by equivalent arrangements shall comply with one of the following:

- a) The Standard for Clock-Operated Switches, UL 917; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.

4.9.3 A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, shall comply with the requirements for an operating control with Type 1 action for 6000 cycles of operation, or as a manual control for 5000 cycles of operation, in accordance with one of the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.

4.9.4 A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, that functions as a protective control, shall comply with the requirements for a protective control; see [4.3.1.3](#).

4.10 Transformers

4.10.1 General-purpose transformers shall comply with the Standard for Low Voltage Transformers – Part 1: General Requirements, UL 5085-1; and the Standard for Low Voltage Transformers – Part 2: General Purpose Transformers, UL 5085-2.

Exception No. 1: A transformer that is completely enclosed within the end product enclosure, and that complies with the applicable construction and performance requirements of this end product standard when tested in conjunction with the end product, complies with the intent of this requirement.

Exception No. 2: A transformer that complies with the Standard for Transformers and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances, UL 1411, and that is used in a circuit involving an audio or video component complies with the intent of this requirement.

4.10.2 Class 2 and Class 3 transformers shall comply with the Standard for Low Voltage Transformers – Part 1: General Requirements, UL 5085-1; and the Low Voltage Transformers – Part 3: Class 2 and Class 3 Transformers, UL 5085-3.

Exception: Transformers located in a low voltage circuit, and that do not involve a risk of fire, electric shock or injury to persons need not comply with this requirement.

5 Units of Measurement

5.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

6 References

6.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

CONSTRUCTION

7 Enclosure

7.1 The enclosure of a heater shall be so formed and assembled that it will have the strength and rigidity necessary to resist the abuses likely to be encountered during its intended service. The degree of resistance inherent in the appliance shall preclude total or partial collapse with the attendant reduction of spacings, loosening or displacement of parts, and other serious defects which alone or in combination constitute a risk of fire, electric shock, explosion, or injury to persons.

7.2 Among the factors taken into consideration if an enclosure is being judged for acceptability are its:

- a) Mechanical strength,
- b) Resistance to impact,
- c) Moisture-absorption properties,
- d) Flammability,
- e) Resistance to corrosion, and
- f) Resistance to distortion at temperatures

to which the enclosure may be subjected under conditions of intended or abnormal use. For the requirements for a polymeric enclosure or part of an enclosure of a polymeric material, see Polymeric Materials, Section [12](#).

7.3 The enclosure of a heater shall prevent molten metal, burning insulation, flaming particles, or similar material from falling on combustible materials, including the surface upon which the heater is supported.

7.4 The requirement in [7.3](#) necessitates use of a barrier:

a) Under a motor unless:

- 1) The structural parts of the motor or of the heater provide the equivalent of such a barrier.
- 2) The protection provided with the motor is such that no burning insulation or molten material falls to the surface that supports the heater if the motor is energized under each of the following fault conditions:
 - i) Open main winding,
 - ii) Open starting winding, and
 - iii) Starting switch short-circuited
- 3) The motor is provided with a thermal motor protector (a protective device that is sensitive to both temperature and current) that will prevent the temperature of the motor windings from becoming more than 125°C (257°F) under the maximum load under which the motor will run without causing the protector to cycle, and from becoming more than 150°C (302°F) with the rotor of the motor locked, or

4) The motor is impedance protected and the locked-rotor temperature of the motor winding is not more than 150°C (302°F) with the heater otherwise operating as intended.

b) Under wiring, unless the wire insulation is of the flame-retardant type, VW-1 (FR-1) or the equivalent.

It will also necessitate that a switch, transformer, relay, solenoid, or similar device be individually and completely enclosed except at terminals, unless it can be shown that malfunction of the component would not result in a risk of fire or unless there are no openings in the bottom of the enclosure. An opening in the bottom of the enclosure is not acceptable if it is located directly below field- or factory-made connections (splices) or overload or overcurrent protective devices.

7.5 Except as noted in [7.6](#), an opening for ventilation in the enclosure, other than in the bottom, of a heater and an opening associated with the dissipation of heated air from the element shall be provided with one or more baffles that will prevent the emission of flame, molten metal, burning insulation, or similar material from the heater.

7.6 In a compartment other than one that houses an overload or overcurrent protective device, the baffles mentioned in [7.5](#) may be omitted if:

a) No ventilating opening in a vertical wall, other than one associated with the dissipation of heated air from the elements during intended operation of the heater, is more than 3/8 inch (9.5 mm) in width, or

b) The heater is constructed to be acceptable for the purpose, as shown by appropriate investigation.

7.7 Cast- and sheet-metal portions of the enclosure shall not be thinner than indicated in [Table 7.1](#) unless the enclosure is found to be acceptable when judged under considerations such as are mentioned in [7.2](#) and [7.8](#).

Table 7.1
Minimum acceptable thicknesses of enclosure metal

Metal	At small, flat, unreinforced surfaces and at surfaces that are reinforced by curving, ribbing, and similar means (or are otherwise of a shape, size or both) to provide mechanical strength		At relatively large unreinforced flat surfaces	
	Inches	mm	Inches	mm
Die-cast metal	3/64	1.2	5/64	2.0
Cast malleable iron	1/16	1.6	3/32	2.4
Other cast metal	3/32	2.4	1/8	3.2
Uncoated sheet steel	0.026 ^a	0.66 ^a	–	–
Galvanized sheet steel	0.029 ^a	0.74 ^a	–	–
Nonferrous sheet metal	0.036 ^a	0.91 ^a	–	–

^a Thinner sheet metal may be employed if found to be acceptable when the enclosure is judged under considerations such as those mentioned in [7.2](#) and [7.8](#).

7.8 In addition to being considered with reference to the factors mentioned in [7.2](#), an enclosure of sheet metal is to be judged with respect to its size and shape, the thickness of metal, and its acceptability for the particular application, considering the intended use of the heater.

7.9 At points where the face of an attachment-plug receptacle projects through it, the enclosure of a heater shall have a thickness not less than:

- a) 0.032 inch (0.81 mm) if of ferrous metal,
- b) 0.045 inch (1.14 mm) if of nonferrous metal, and
- c) 0.10 inch (2.5 mm) if of insulating material, except that an enclosure of insulating material may be of lesser thickness if formed or reinforced to provide physical strength. The insulating material shall be noncombustible.

7.10 Product enclosures made of non-metallic materials housing current-carrying electrical connections shall have a flammability classification as follows:

- a) A minimum of V-0, VTM-0, or HF-1, in accordance with Tests for Flammability of Plastic Materials for Parts in Devices and Appliances, UL 94, and IEC Test Flames 60695-11-10, or
- b) A minimum of SC-0 or SCTC-0, in accordance with Tests for Flammability of Small Polymeric Component Materials, UL 1694.

7.11 Product enclosures made of non-metallic materials shall comply with the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C, Table 4.1, Path II with a Minimum Flammability Rating V-0.

8 Accessibility of Live Parts

8.1 An electrical part of a heater shall be so located or enclosed that protection against unintentional contact with uninsulated live parts will be provided, except that this requirement does not apply to a visibly glowing open-wire element and the connections immediately adjacent to the element. See [3.1](#), [8.2](#), [33.7](#) and [33.14](#). Insulated motor brush caps do not require additional enclosures.

8.2 The requirement in [8.1](#) does not apply to the sheath of an isolated metal-clad element in a heater having provision for grounding the enclosure, although such a sheath is considered to be a bare live part when spacings are being measured.

8.3 In determining if an opening in an enclosure is acceptable, consideration is to be given to:

- a) The proximity of uninsulated live parts (as determined by applying [8.1](#), [8.2](#), [8.4](#), [8.5](#), and [8.15](#) and
- b) The possibility of the emission of burning insulation, molten metal, and similar materials through the opening (as determined by applying [7.3](#) – [7.6](#).)

8.4 To reduce the likelihood of unintentional contact that may involve a risk of electric shock from an uninsulated live part or film-coated wire, an opening in an enclosure shall comply with either (a) or (b).

- a) For an opening that has a minor dimension (see [8.8](#)) less than 1 inch (25.4 mm), such a part or wire shall not be contacted by the probe illustrated in [Figure 8.3](#).
- b) For an opening that has a minor dimension of 1 inch or more, such a part or wire shall be spaced from the opening as specified in [Table 8.1](#).

Exception: An integral enclosure of a motor need not comply with these requirements if it complies with the requirements in [8.5](#).

8.5 With respect to a part or wire as mentioned in [8.4](#), in an integral enclosure of a motor as mentioned in the exception to [8.4](#):

- a) An opening that has a minor dimension (see [8.8](#)) less than 3/4 inch (19.1 mm) is acceptable if:

- 1) Film-coated wire cannot be contacted by the probe illustrated in [Figure 8.2](#);
 - 2) In a directly accessible motor (see [8.9](#)), an uninsulated live part cannot be contacted by the probe illustrated in [Figure 8.4](#); or
 - 3) In an indirectly accessible motor (see [8.9](#)), an uninsulated live part cannot be contacted by the probe illustrated in [Figure 8.1](#).
- b) An opening that has a minor dimension of 3/4 inch (19.1 mm) or more is acceptable if a part or wire is spaced from the opening as specified in [Table 8.1](#).

Table 8.1
Minimum acceptable distance from an opening to a part that may involve a risk of electric shock

Minor dimension ^a of opening		Minimum distance from opening to part	
Inches ^b	mm ^b	Inches ^b	mm ^b
3/4 ^c	(19.1)	4-1/2	(114.0)
1 ^c	(25.4)	6-1/2	(165.0)
1-1/4	(31.8)	7-1/2	(190.0)
1-1/2	(38.1)	12-1/2	(318.0)
1-7/8	(47.6)	15-1/2	(394.0)
2-1/8	(54.0)	17-1/2	(444.0)
^d		30	(726.0)

^a See [8.8](#).

^b Between 3/4 inch and 2-1/8 inches, interpolation is to be used to determine a value between values specified in the table.

^c Any dimension less than 1 inch applies to a motor only.

^d More than 2-1/8 inches, but not more than 6 inches (152.0 mm).

Figure 8.1
Probe for uninsulated live parts

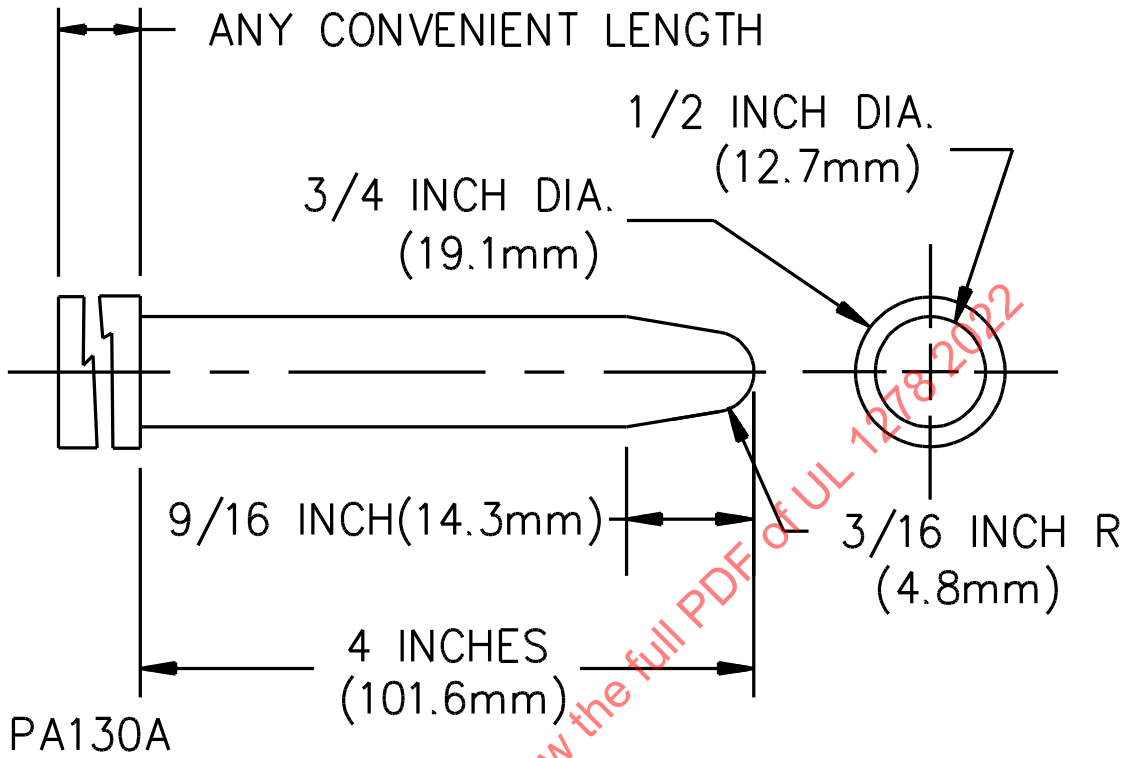


Figure 8.2
Probe for film-coated wire

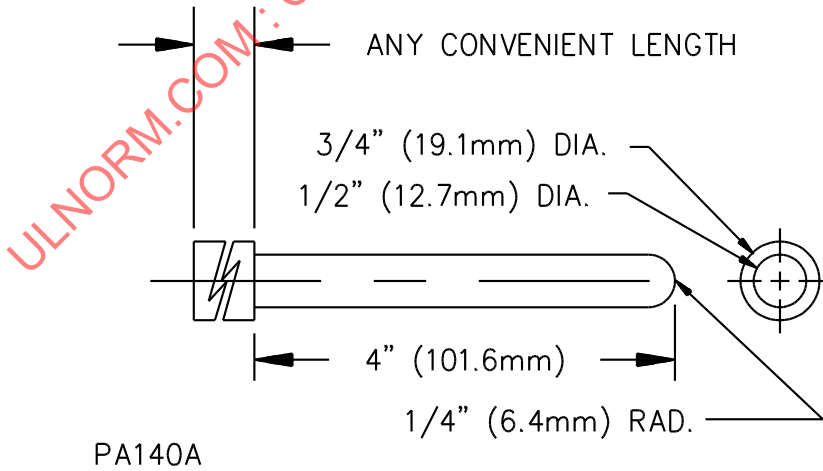


Figure 8.3
Articulate probe with web stop


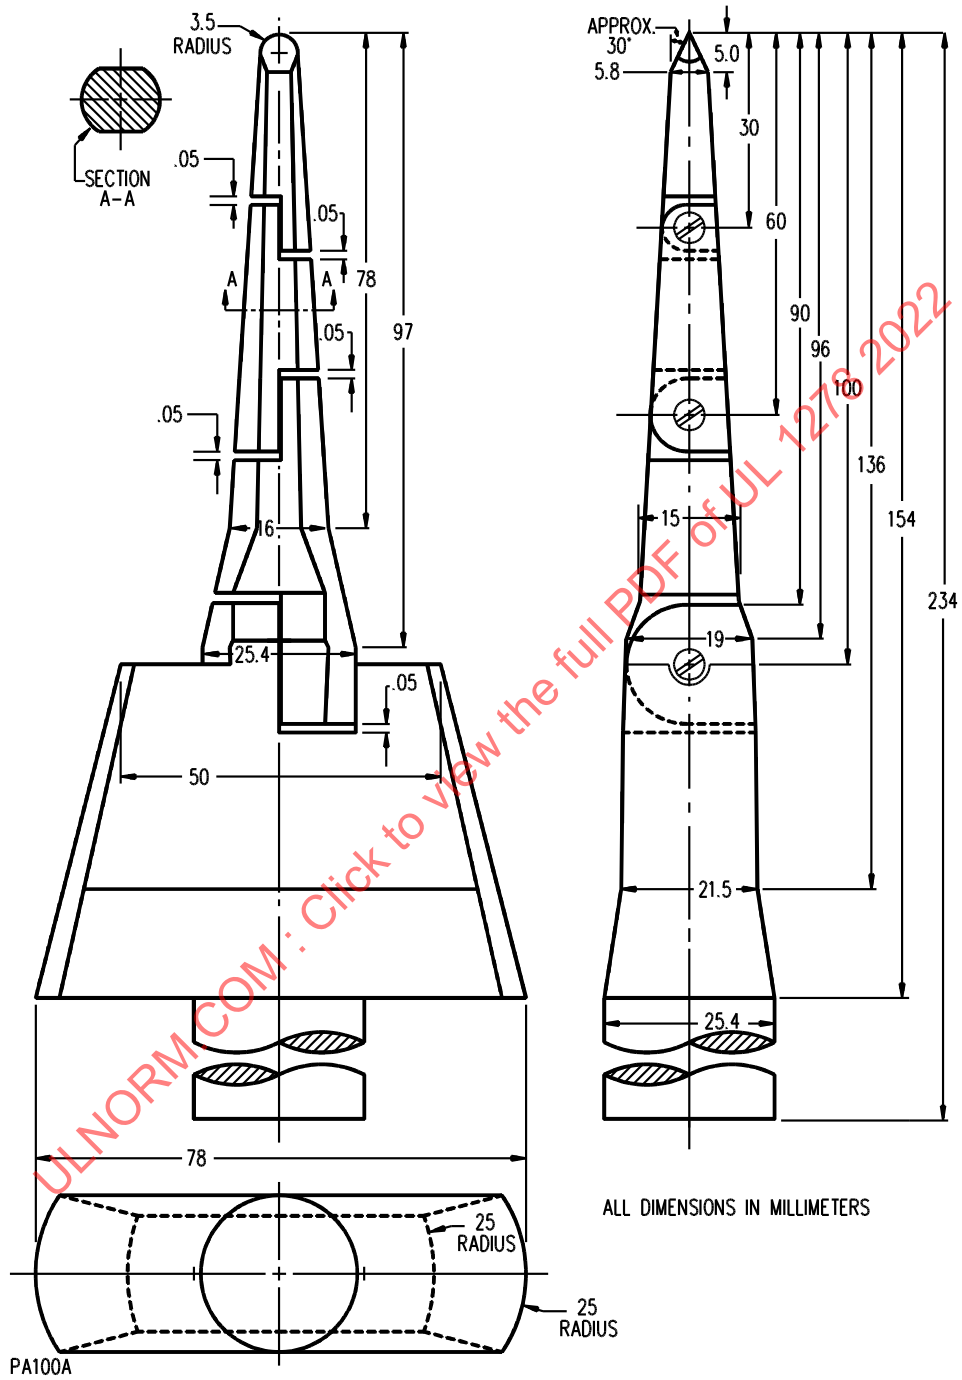


Figure 8.4
Articulate probe

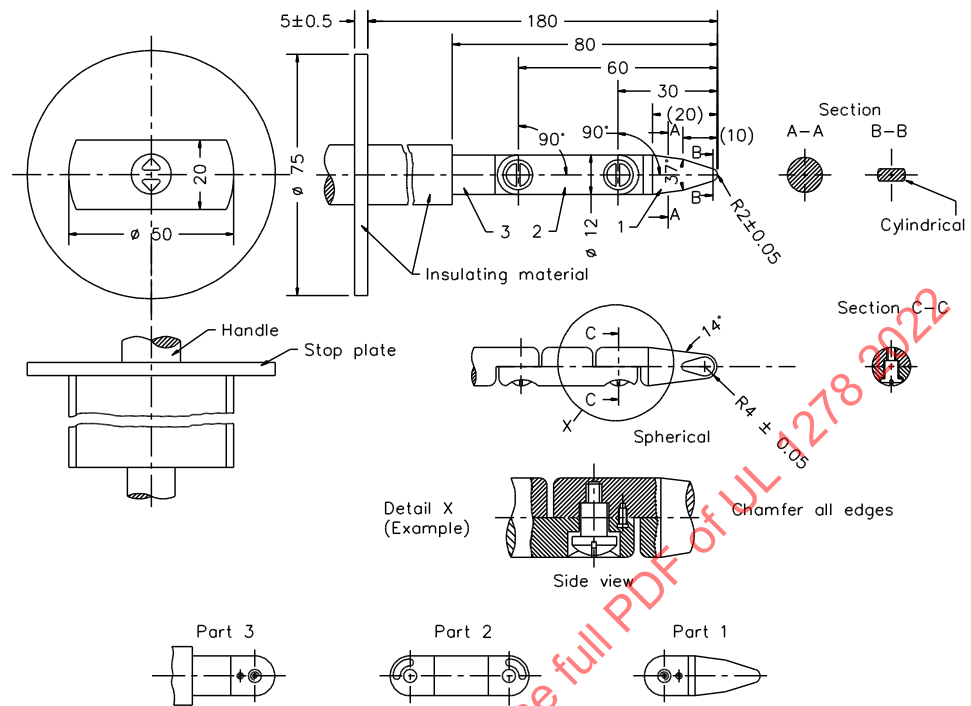

SA1788A

All dimensions in millimeters

ULNORM.COM : Click to view the full PDF of UL 1278 2022