

# INTERNATIONAL STANDARD

**Fibre optic interconnecting devices and passive components – Connector optical interfaces –  
Part 3-10: Connector parameters of non-dispersion shifted single mode physically contacting fibres – Non-angled, ferrule-less, bore alignment connectors**

IECNORM.COM : Click to view the full PDF of IEC 61755-3-10:2016



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

IECNORM.COM : Click to view the IEC Normative Publications 5-340:2016

# INTERNATIONAL STANDARD

---

**Fibre optic interconnecting devices and passive components – Connector optical interfaces –  
Part 3-10: Connector parameters of non-dispersion shifted single mode physically contacting fibres – Non-angled, ferrule-less, bore alignment connectors**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 33.180.20

ISBN 978-2-8322-3687-1

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD .....	3
1 Scope .....	5
2 Normative references .....	5
3 Terms and definitions .....	5
4 Description .....	5
5 Interface parameters .....	6
Bibliography .....	9
Figure 1 – Fibre end face dimensions .....	7
Figure 2 – Alignment bore dimensions .....	8
Table 1 – Optical interface parameter values for a 125 µm diameter optical fibre and an alignment bore .....	8

IECNORM.COM : Click to view the full PDF of IEC 61755-3-10:2016

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – CONNECTOR OPTICAL INTERFACES –****Part 3-10: Connector parameters of non-dispersion shifted single mode physically contacting fibres – Non-angled, ferrule-less, bore alignment connectors**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61755-3-10 has been prepared by sub-committee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

The text of this standard is based on the following documents:

CDV	Report on voting
86B/3990A/CDV	86B/4032/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61755 series, published under the general title *Fibre optic interconnecting devices and passive components – Connector optical interfaces*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IECNORM.COM : Click to view the full PDF of IEC 61755-3-10:2016

## **FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – CONNECTOR OPTICAL INTERFACES –**

### **Part 3-10: Connector parameters of non-dispersion shifted single mode physically contacting fibres – Non-angled, ferrule-less, bore alignment connectors**

#### **1 Scope**

This part of IEC 61755 defines certain dimensional limits of a 125 µm diameter single mode silica fibre optical interface and an alignment bore to meet specific requirements for non-angled fibre-to-fibre interconnection as defined in IEC 61755-2-1. The silica fibre materials specified in this document are suitable for use in categories C, U, E and O as defined in IEC 61753-1.

#### **2 Normative references**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61753-1, *Fibre optic interconnecting devices and passive components – Part 1: General and guidance for performance standard*

IEC 61755-2-1:2006, *Fibre optic connector optical interfaces – Part 2-1: Optical interface standard single mode non-angled physically contacting fibres*

#### **3 Terms and definitions**

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

#### **4 Description**

The performance of a ferrule-less optical interface is determined by the accuracy with which the optical datum targets of two mating fibres are aligned with each other. There are three conditions affecting the alignment of two optical datum targets: lateral offset, angular offset and longitudinal offset.

Parameters influencing the lateral and angular offset of the optical fibre axes of this interface include the following:

- fibre cladding diameter;
- alignment bore diameter;

- length of the bore;
- fibre core location relative to the fibre cladding diameter centerline.


Parameters influencing the optical fibre end face deformation requirements to maintain the physical contact of two mated connectors to which this interface applies:

- end face spherical radius;
- end face angle;
- fibre tip diameter;
- axial force on fibre end face;
- fibre material physical constants.

## 5 Interface parameters

The end face dimensions of prepared fibres are shown in Figure 1. Alignment bore dimensions are shown in Figure 2. Optical interface parameter values for a 125 µm diameter optical fibre and an alignment bore are shown in Table 1.

IECNORM.COM : Click to view the full PDF of IEC 61755-3-10:2016

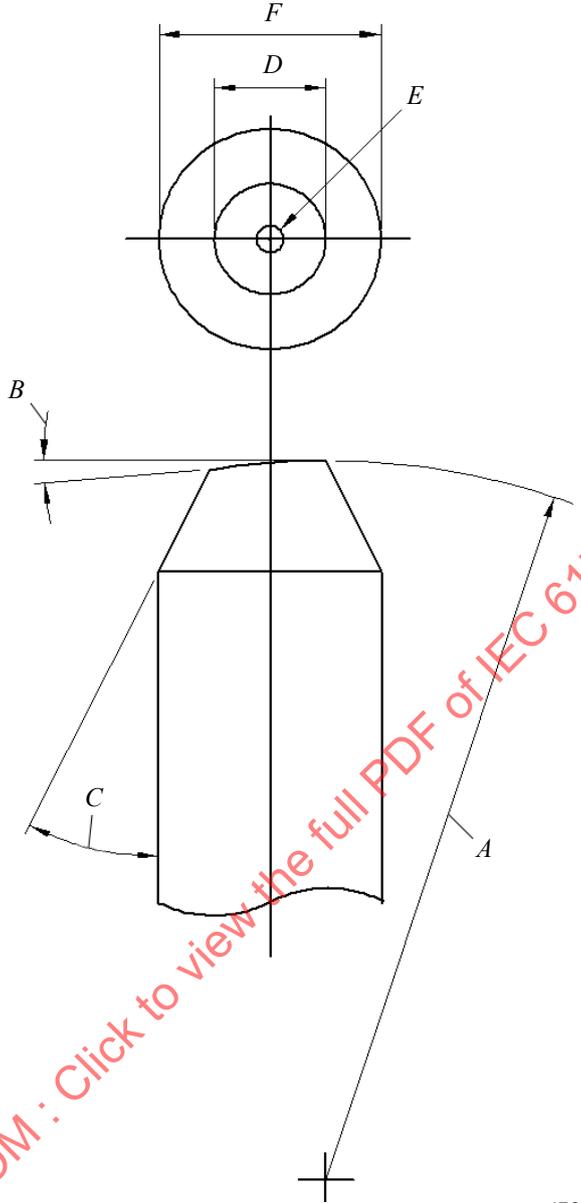

IEC

Figure 1 – Fibre end face dimensions

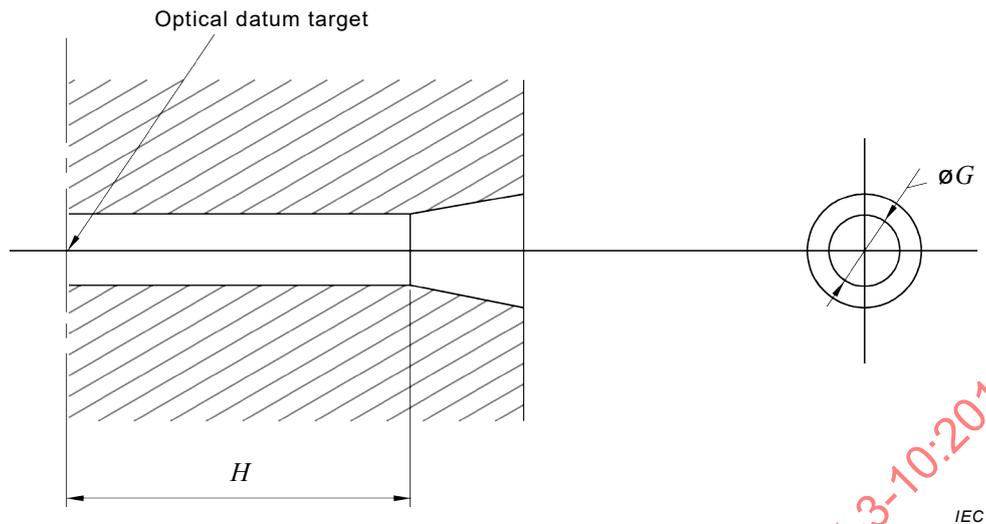


Figure 2 – Alignment bore dimensions

Table 1 – Optical interface parameter values for a 125 µm diameter optical fibre and an alignment bore

Ref.	Parameter values						Units	Remarks
	Grade B		Grade C		Grade D			
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum		
A					4	10	mm	End face radius
B					0	0,7	degrees	End face angle
C					25	65	degrees	Chamfer angle
D					0,03	0,08	mm	Tip diameter
E					0	0,000 6	mm	Core concentricity error
F					0,124 0 <sup>a</sup>	0,126 0 <sup>a</sup>	mm	Cladding diameter
G					0,126 0	0,127 0	mm	Bore diameter
H					0,55	-	mm	Bore length

NOTE 1 The core concentricity error and cladding diameter values specified in this document have been calculated to ensure that the attenuation values specified in IEC 61755-2-1:2006 are met at the wavelength, mode field diameter and nominal index of refraction given in IEC 61755-2-1:2006, Table 3, at the single channel level.

NOTE 2 Refer to Figure 1 and Figure 2 for dimensional references.

<sup>a</sup> IEC 60793-2-50:2015 defines a minimum cladding diameter of 0,124 mm and a maximum cladding diameter of 0,126 mm for categories of B1.1, B1.3, B6\_a1 and B6\_a2 fibre.

Contact force shall be 0,6 N minimum. The optical fibre material shall be fused silica, and the nominal material physical constant values shall be Young's modulus, (72,7 ± 7) GPa, Poisson's ratio, 0,165 ± 0,015.

## Bibliography

IEC 60793-2-50:2015, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 61755-1, *Fibre optic connector optical interfaces – Part 1: Optical interfaces for single mode non-dispersion shifted fibres – General and guidance*

ABE, Y., KOBAYASHI, M., ASAKAWA, S., and NAGASE, R. Analysis of Fiber Endface Shape and Processing Conditions for a Fiber Physical Contact Connector, *IEICE Trans. Electron.*, vol. E86-C, no. 3, p.490-495, March 2003.

---

IECNORM.COM : Click to view the full PDF of IEC 61755-3-10:2016