
**Information technology — CDIF semantic
metamodel —**

**Part 3:
Data definitions**

*Technologies de l'information — Métamodèle sémantique CDIF —
Partie 3: Définition de données*

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

© ISO/IEC 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

| | | |
|--------|---|----|
| 1 | Scope | 1 |
| 2 | Conformance | 2 |
| 2.1 | General | 2 |
| 2.2 | Input conformance | 2 |
| 2.3 | Output conformance | 2 |
| 2.4 | Round-trip conformance | 3 |
| 3 | Normative references | 3 |
| 4 | Terms and definitions | 4 |
| 4.1 | From other International Standards | 4 |
| 4.1.1 | ISO/IEC 15474-1 | 4 |
| 4.1.2 | ISO/IEC 13238-1 | 4 |
| 4.1.3 | For this International Standard | 4 |
| 5 | Symbols (and abbreviated terms) | 5 |
| 5.1 | Naming, diagramming and definition conventions | 5 |
| 5.2 | Abbreviations | 5 |
| 6 | Data definition subject area overview | 5 |
| 6.1 | Introduction | 5 |
| 6.2 | Data Typing | 5 |
| 6.3 | The General Structuring Mechanism | 5 |
| 6.3.1 | Introduction | 5 |
| 6.3.2 | Meta-entities and Meta-relationships | 5 |
| 6.3.3 | DefinitionObject and ComponentObject | 7 |
| 6.4 | Alternate Decompositions | 8 |
| 6.5 | Pointers and Arrays | 10 |
| 6.6 | Data Types | 10 |
| 6.7 | Constraining Data Type and Attribute Values | 11 |
| 6.8 | Units for Numeric DataTypes | 12 |
| 6.9 | Void and Unknown Data Types | 13 |
| 6.10 | Computable Languages | 13 |
| 6.11 | Formats for Computable Values | 13 |
| 6.12 | Diagrams | 16 |
| 7 | Data definitions subject area summary | 21 |
| 7.1 | AttributableMetaObject classification hierarchy | 21 |
| 7.2 | MetaEntity summary | 23 |
| 7.3 | MetaRelationship summary | 37 |
| 8 | Data definitions subject area specification | 39 |
| 8.1 | Introduction | 39 |
| 8.1.1 | Subject area definition | 39 |
| 8.2 | Meta-entity definitions | 39 |
| 8.2.1 | AggregateDataType | 39 |
| 8.2.2 | ApproximateNumericType | 40 |
| 8.2.3 | ArrayQualifier | 41 |
| 8.2.4 | Attribute | 42 |
| 8.2.5 | BasicDataType | 42 |
| 8.2.6 | BinaryCodedDecimalType | 43 |
| 8.2.7 | BinaryType | 43 |
| 8.2.8 | BooleanType | 44 |
| 8.2.9 | BoundedArrayQualifier | 44 |
| 8.2.10 | CartesianComplexType | 45 |

| | | |
|--------|--|----|
| 8.2.11 | ComplexType | 46 |
| 8.2.12 | Data Type | 47 |
| 8.2.13 | Date Type | 48 |
| 8.2.14 | DayTimeIntervalType | 49 |
| 8.2.15 | DefinitionObject | 49 |
| 8.2.16 | EnumerationType | 49 |
| 8.2.17 | ExactNumericType | 50 |
| 8.2.18 | FixedDecimalType | 51 |
| 8.2.19 | FixedLengthBinaryType | 52 |
| 8.2.20 | FixedLengthStringType | 54 |
| 8.2.21 | IntegerType | 55 |
| 8.2.22 | MagnitudeType | 55 |
| 8.2.23 | MoneyType | 56 |
| 8.2.24 | NLFixedLengthStringType | 57 |
| 8.2.25 | NLVariableLengthStringType | 58 |
| 8.2.26 | NumericType | 59 |
| 8.2.27 | PackedDecimalType | 59 |
| 8.2.28 | PointerQualifier | 60 |
| 8.2.29 | PolarComplexType | 60 |
| 8.2.30 | QualifiedDataType | 62 |
| 8.2.31 | Qualifier | 62 |
| 8.2.32 | RefinedDataType | 63 |
| 8.2.33 | SerialType | 63 |
| 8.2.34 | StringType | 65 |
| 8.2.35 | TemporalType | 66 |
| 8.2.36 | TimeIntervalType | 66 |
| 8.2.37 | TimeStampType | 67 |
| 8.2.38 | TimeType | 68 |
| 8.2.39 | UnboundedArrayQualifier | 69 |
| 8.2.40 | Unit | 70 |
| 8.2.41 | ValueDomain | 74 |
| 8.2.42 | ValueDomainEnumeration | 75 |
| 8.2.43 | ValueDomainGroup | 76 |
| 8.2.44 | ValueDomainProcedure | 77 |
| 8.2.45 | ValueDomainRange | 78 |
| 8.2.46 | ValueDomainRule | 80 |
| 8.2.47 | VariableLengthBinaryType | 81 |
| 8.2.48 | VariableLengthStringType | 82 |
| 8.2.49 | VoidType | 84 |
| 8.2.50 | YearMonthIntervalType | 84 |
| 8.3 | Meta-relationship definitions | 85 |
| 7.3.1 | ArrayQualifier.HasType.DataType | 85 |
| 7.3.2 | Data Type.TakesValueFrom.ValueDomain | 85 |
| 7.3.3 | NumericType.IsMeasuredIn.Unit | 86 |
| 8.3.1 | RootEntity.IsRelatedTo.RootEntity | 86 |
| 8.3.2 | QualifiedDataType.IsQualificationOf.DataType | 86 |
| 8.3.3 | QualifiedDataType.IsQualifiedBy.Qualifier | 87 |
| 8.3.4 | RefinedDataType.IsRefinementOf.DataType | 87 |
| 8.3.5 | ValueDomainGroup.Contains.ValueDomain | 88 |

Table of Illustrations

| | | |
|----------|---|---|
| Figure 1 | – CDIF family of International Standards | 1 |
| Figure 2 | – Part of general Structuring Mechanism for data definitions subject area | 6 |
| Figure 3 | – Meta-model fragment for simple attribution with defined DataTypes | 6 |
| Figure 4 | – Instance Diagram showing simple attribution with defined DataTypes | 7 |

| | |
|---|----|
| Figure 5 – Instance diagram of attributes sharing the same structured definition..... | 8 |
| Figure 6 – Instance diagram of alternate Data Structures..... | 9 |
| Figure 7 – Concepts of shared attribute values and definitions..... | 10 |
| Figure 8 – Usage of ValueDomainGroup and ValueDomain..... | 12 |
| Figure 9 – Data Definition Subject Area - Main Diagram..... | 16 |
| Figure 10..... | 17 |
| Figure 11 – MagnitudeType Subtypes..... | 18 |
| Figure 12 – NumericType Subtypes..... | 19 |
| Figure 13 – Subtypes and meta-relationships for Qualifier..... | 20 |
| Figure 14 – ValueDomainGroup and related meta-entities..... | 20 |
| Table of Tables | |
| Table 1 – Formats for Computable Values..... | 13 |
| Table 2 – Notation Used for Computable Values..... | 15 |
| Table 3 – Function Values for Computable Values..... | 15 |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 15476-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 7, *Software and system engineering*.

ISO/IEC 15476 consists of the following parts, under the general title *Information technology — CDIF semantic metamodel*:

- *Part 1: Foundation*
- *Part 2: Common*
- *Part 3: Data definitions*
- *Part 4: Data models*
- *Part 5: Data flow models*
- *Part 6: State/event models*

Introduction

This International Standard will assist the vendors and users of modelling tools and meta-data repositories in developing mechanisms for interchanging information. This International Standard specifies an element of a family of related standards. When used together, these International Standards specify a mechanism for transferring information between tools.

ISO/IEC 15474-1:2002, *Information technology - CDIF framework - Part 1: Overview* and ISO/IEC 15474-2, *Information technology - CDIF framework - Part 2: Modelling and extensibility* should be read first when initially exploring CDIF. The first explains the overall CDIF architecture and how the family of standards fits together. The second explains the scope, and modelling approach in CDIF. The CDIF meta-metamodel and extensibility mechanism are also defined in that document.

This International Standard explains the data definitions subject area of the CDIF semantic metamodel, which defines the primitive data types and the objects which are used for structured data. The CDIF semantic metamodel is used to ensure that the information transferred by tools communicating using CDIF is expressed with an agreed meaning.

This International Standard has been developed with the wide support and participation of vendors, users, academia and government involved in or familiar with the CASE industry, its products and the general requirements associated with interchanging information between these products.

This document is organized into the following Clauses:

— Clause 1 to 5 are prescribed ISO/IEC Clauses.

— Clause 6: Subject area overview:

This Clause gives an overview of the coverage of this subject area.

— Clause 7: Subject area summary:

This Clause gives an overview of the content of this subject area.

— Clause 8: Subject area specification:

This Clause gives the formal specification of all the objects defined in the subject area, and the formal reference to those used, but not defined in the subject area.

This document is intended to be used by anyone wishing to understand and/or use CDIF. This document provides a definition of a single subject area of the CDIF semantic metamodel. It is suitable for:

— Those evaluating CDIF;

— Those who wish to understand the principles and concepts of a CDIF transfer; and

— Those developing importers and exporters.

This document, ISO/IEC 15474-1:2002, *Information technology - CDIF framework - Part 1: Overview*, and the framework document ISO/IEC 15474-2:2002, *Information technology - CDIF framework - Part 2: Modelling and extensibility*, should be read first when initially exploring CDIF and before attempting to read other documents in the CDIF family of International Standards.

While there are no specific prerequisites for reading this document, it will be helpful for the reader to have familiarity with the following:

- Entity-Relationship-Attribute modelling;
- Modelling (CASE) tools;
- Information repositories;
- Data dictionaries; and
- Multiple meta-layer modelling.

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

Information technology — CDIF semantic metamodel —

Part 3: Data definitions

1 Scope

The CDIF family of International Standards is primarily designed to be used as a description of a mechanism for transferring information between modelling tools. It facilitates a successful transfer when the authors of the importing and exporting tools have nothing in common except an agreement to conform to CDIF. The language that is defined for the transfer format also has applicability as a general language for import/export from repositories. The CDIF semantic metamodel defined for CASE also has applicability as the basis of standard definitions for use in repositories.

The International Standards which form the complete family of CDIF standards are documented in ISO/IEC 15474-1:2002, *Information technology — CDIF framework — Part 1: Overview*. These standards cover the overall framework, the transfer format and the CDIF semantic metamodel.

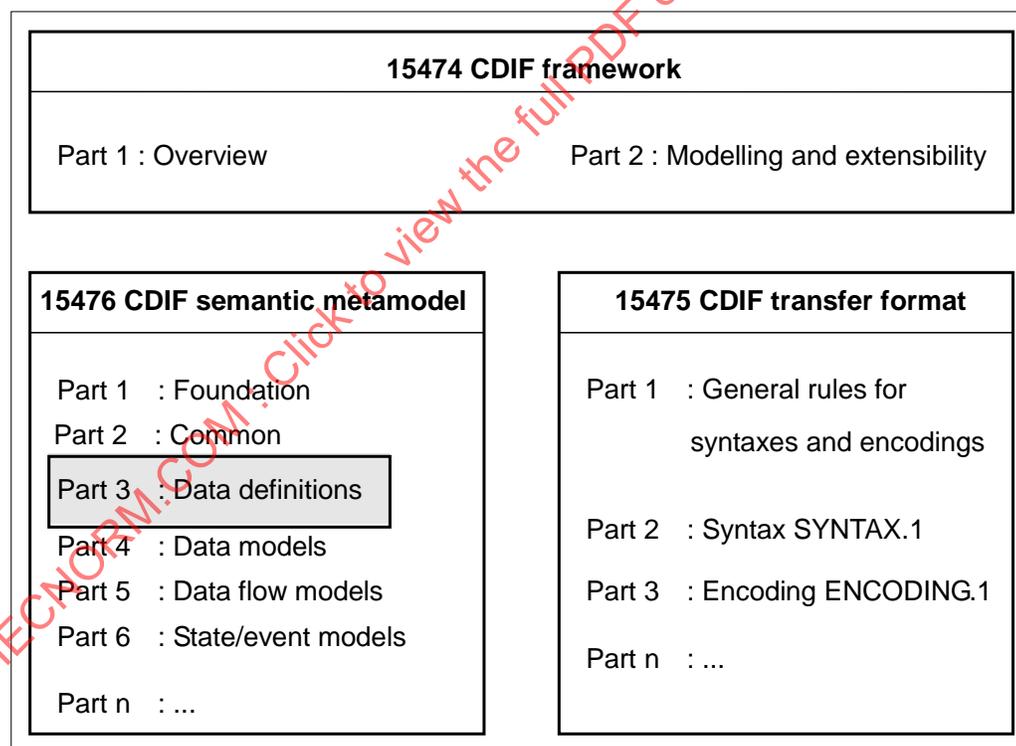


Figure 1 – CDIF family of International Standards

The diagram in Figure 1 depicts the various International Standards that comprise the CDIF family of standards. The shaded box depicts this International Standard and its position in the CDIF family of standards.

This International Standard defines the Data Definition Subject Area of the CDIF semantic metamodel. This subject area contains meta-objects that are used as the basis of the data components of other subject area standards, and also meta-relationships and meta-attributes that are applicable to all data-related meta-objects.

2 Conformance

2.1 General

A product is fully standards conformant to a CDIF subject area standard if and only if it is input-conformant, output-conformant and round-trip conformant to each and every *MetaEntity*, *MetaRelationship*, *MetaAttribute*, and *AttributableMetaObject* which is defined and/or used in that standard, and it is also CDIF architecture conformant. A product may be partially input-conformant, and/or partially output-conformant, and/or partially round-trip conformant to a CDIF subject area standard.

2.2 Input conformance

Input conformance for a specific *MetaEntity*, *MetaRelationship*, *MetaAttribute*, or *AttributableMetaObject* (short: *CollectableMetaObject*) is determined by applying the following test:

A set of meta-data containing all meanings and structures standardized by a CDIF subject area is imported by the product under test. Then the meta-data which has arrived in the product is examined. The following options exist for the relation between the input (CDIF) meta-data and the imported (product) meta-data:

For a specific *CollectableMetaObject*:

- 1 The product is input conformant if each instance of the specific *CollectableMetaObject* has arrived in the product without change of meaning or structure. If the *CollectableMetaObject* is a meta-entity or meta-relationship, its structural relationships to other *CollectableMetaObjects* have been preserved. If the *CollectableMetaObject* is a meta-attribute, the value of the meta-attribute has been preserved.
- 2 The product is input morphing conformant if each instance of the specific *CollectableMetaObject* has arrived in the product, but with some changes in meaning or structure. If the *CollectableMetaObject* is a meta-attribute, the value(s) for some instances of the meta-attribute have changed.
- 3 The product is not input conformant for that *CollectableMetaObject* if neither of the previous tests is satisfied.

2.3 Output conformance

Output conformance for a specific *CollectableMetaObject* is determined by applying the following test:

For the product being tested, a set of meta-data that includes all possible meanings and structures representable in that product is exported. Then the meta-data that has been exported is examined. The following options exist for the relation between the product's meta-data and the exported (CDIF) meta-data:

For a specific *CollectableMetaObject*:

- 1 The product is output conformant if all of the meaning and structure for the specific *CollectableMetaObject* has been represented as meta-data in the product and has been exported as one or more instances of that *CollectableMetaObject*. If the *CollectableMetaObject* is a meta-attribute, the correct value of the meta-attribute has been exported.
- 2 The product is output morphing conformant if each instance of meta-data in the product that has the same meaning and structure as the *CollectableMetaObject* has been exported, but some instances have been exported as a different *CollectableMetaObject* or some of the meaning and structure has been changed.

- 3 If the product does not represent the meaning and structure associated with the *CollectableMetaObject*, output conformance for that *CollectableMetaObject* is not applicable to the product.
- 4 In all other cases, the product is not output conformant for that *CollectableMetaObject*.

2.4 Round-trip conformance

Round-trip conformance for a specific *CollectableMetaObject* is determined by applying the following test:

A set of meta-data containing all meanings and structures standardized by a CDIF subject area is imported by the product under test. Then the meta-data is exported again. The following options exist for the relation between the input meta-data and the output meta-data:

For a specific *CollectableMetaObject*:

- 1 The product is round-trip conformant if the meaning and structure of each instance of the *CollectableMetaObject* is preserved without changes during the round-trip. For a vendor to claim round-trip conformance, it is also necessary for the tool to be able to perform create, read, update, and delete operations on the imported (product) meta-data corresponding to the instances of the *CollectableMetaObject*.
- 2 The product is round-trip morphing conformant if each instance of the input *CollectableMetaObject* is preserved, but with some changes in meaning and/or structure. If the *CollectableMetaObject* is a meta-entity or meta-relationship, some of its instances' structural relationships to other *CollectableMetaObjects* have changed, or some instances have been transformed into other *CollectableMetaObjects*, or instances of other *CollectableMetaObjects* have been transformed into instances of the *CollectableMetaObject*. If the *CollectableMetaObject* is a meta-attribute, the values of some instances of the meta-attribute have changed or the domain of the meta-attribute has changed.
- 3 In all other cases, the product is not round-trip conformant for that *CollectableMetaObject*.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 31-1:1992 *Quantities and units – Part 1: Space and time*

ISO 4217:2001, *Codes for the representation of currencies and funds*

ISO/IEC 9945-1:1996 *Information technology – Portable Operating System Interface (POSIX) –Part 1: System Application Program Interface (API) [C Language]*

ISO/IEC 13238-1, *Information technology - Data management export/import - Part 1: Standardization framework.*

ISO/IEC 15474-1, *Information technology — CDIF framework — Part 1: Overview*

ISO/IEC 15474-2, *Information technology — CDIF framework — Part 2: Modelling and extensibility*

ISO/IEC 15476-1, *Information technology — CDIF semantic metamodel — Part 1: Foundation*

ISO/IEC 15476-2, *Information technology — CDIF semantic metamodel — Part 2: Common*

ISO/IEC 15476-4 *Information technology — CDIF semantic metamodel — Part 4: Data models*

CHARACTER SETS, IANA, available at <<http://www.iana.org/assignments/character-sets>>

4 Terms and definitions

For the purposes of this document, the following definitions apply. Unless otherwise noted, the definitions are specific to this International Standard.

4.1 From other International Standards

4.1.1 ISO/IEC 15474-1

This part of ISO/IEC 15476 makes use of the following terms defined in ISO/IEC 15474-1:

CDIF
CDIF family of standards
CDIF semantic metamodel
CDIF meta-metamodel
CDIF transfer
Instance
Meta-attribute
Meta-entity
Metamodel
Meta-object
Meta-relationship
Model
Subject area
Transfer
Transfer format

4.1.2 ISO/IEC 13238-1

This part of ISO/IEC 15476 makes use of the following terms from ISO/IEC 13238-1:

Exporter
Importer

4.1.3 For this International Standard

For the purpose of this part of ISO/IEC 15476 new terms are defined when introduced. Double quotes are used to introduce new terms (e.g., "model layer")

5 Symbols (and abbreviated terms)

5.1 Naming, diagramming and definition conventions

Conventions for naming, diagramming, describing and defining meta-objects can be found in Clause 7 of the framework document (ISO/IEC 15474-2:2002, *Information technology - CDIF framework - Part 2: Modelling and extensibility*).

5.2 Abbreviations

The following abbreviation is used in this International Standard:

CDIF CASE Data Interchange Format (originally)

6 Data definition subject area overview

6.1 Introduction

The Data Definition Subject Area provides support for describing data objects and provides a data typing scheme. It allows for simple and complex structures, array and pointer qualification and domain specification. The Data Definition Subject Area diagrams are shown in Figure 9 through Figure 14.

6.2 Data Typing

A data type is described by one or more Attributes, and each of these Attributes may have a defined data type, represented by the meta-entity DataType. This Subject Area does not cover the internal representation of information within the basic data types; it only covers the concept of the type of information represented.

Figure 3 shows a fragment of the meta-model illustrating how data typing is represented. Figure 4 is an instance diagram of the model elements in Figure 3. Note that in the instance diagrams, values of meta-attributes (usually Name) are only given where they are required.

The data type of each Attribute is defined by relating it to the meta-entity DataType and its subtypes. These are described in subclauses 6.8 to 6.11. In the instance diagrams, the most appropriate subtype of DataType is used.

The meta-attribute Name of the meta-entity Attribute allows a local name to be defined for the attribute. If no value is given, then it is assumed that the name is the same as that of the underlying DataType. A default value for the Attribute can be defined using the meta-attribute DefaultValue, as can the optionality, using the meta-attribute IsOptional (The meta-attributes, DefaultValue and IsOptional, are defined in ISO/IEC 15476-4 *Data models*).

6.3 The General Structuring Mechanism

6.3.1 Introduction

Support for the decomposition and structuring of objects into other objects, and the reuse of definitions, is provided by a general structuring mechanism. This mechanism is defined in ISO/IEC 15476-2:2002, *Information Technology - CDIF Semantic Metamodel - Part 2: Common*, and is also used in other CDIF subject areas.

In this subject area DataTypes may be structured. Structuring of DataTypes is performed using the general structuring mechanism because its definition may be used for several objects in different contexts.

6.3.2 Meta-entities and Meta-relationships

The general structuring mechanism used in this subject area makes use of the following meta-entities:

- ComponentObject
- DefinitionObject

and the following meta-relationships:

- DefinitionObject.Contains.ComponentObject
- ComponentObject.References.DefinitionObject.

Figure 2 shows the part of meta-model for the general structuring mechanism related to meta-entity DataType.

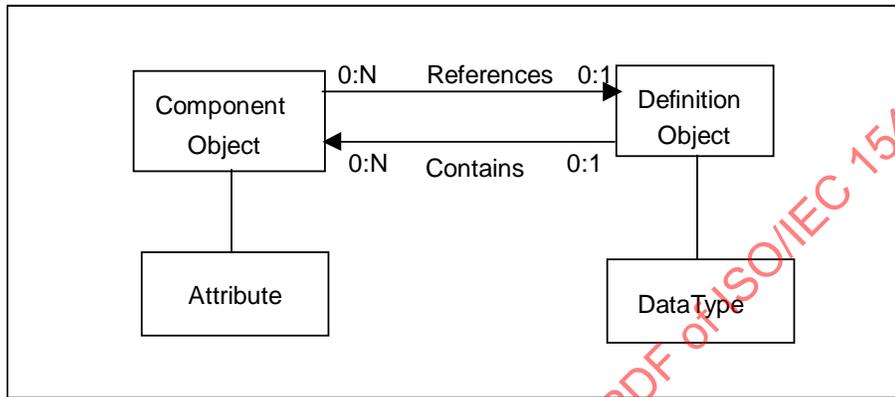


Figure 2 – Part of general Structuring Mechanism for data definitions subject area

Figure 3 and Figure 4 show how the general structuring mechanism represent a hierarchical data structure. The combination of the meta-relationship DefinitionObject.Contains.ComponentObject which is used for data structure and the meta-relationship ComponentObject.References.DefinitionObject which is used for data declaration is shown in Figure 3. The sample instance diagram is Figure 4. In this case, two data named **Customer** and **Order** are defined. Both data definition have fixed length sting type named **CustomerNumber**.

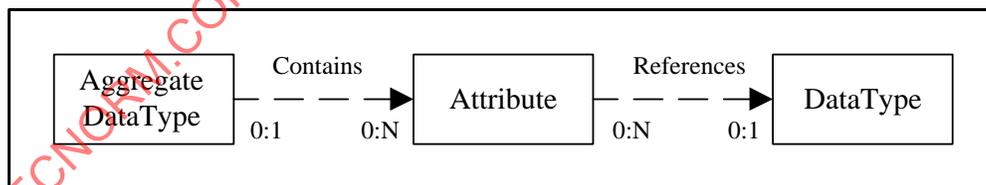


Figure 3 – Meta-model fragment for simple attribution with defined DataTypes

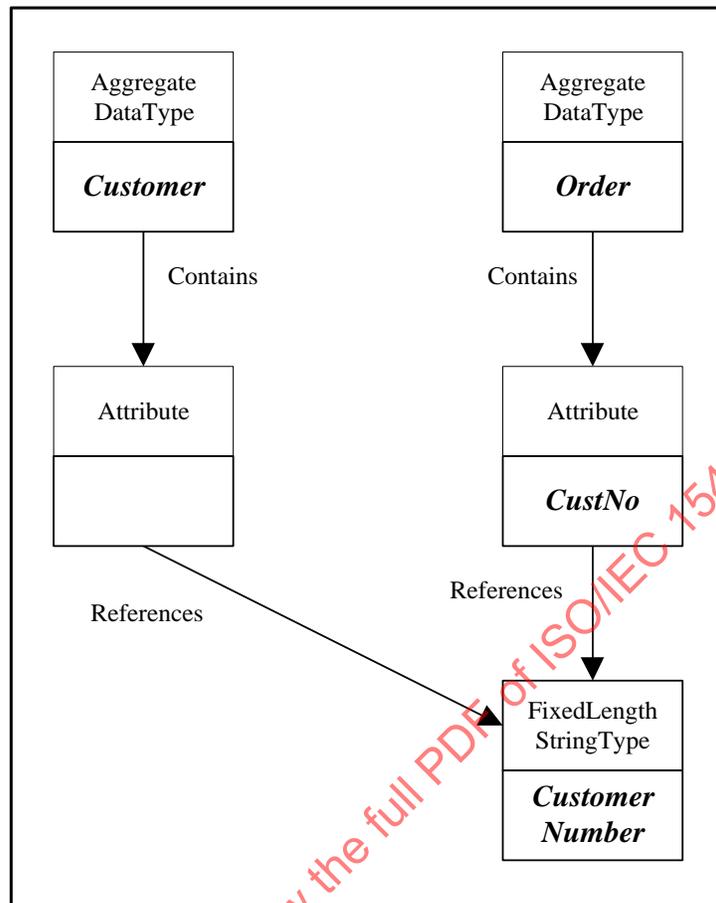


Figure 4 – Instance Diagram showing simple attribution with defined DataTypes

6.3.3 DefinitionObject and ComponentObject

DefinitionObject serves as an abstract supertype for all decomposition and structure definitions that may be reused. A *DefinitionObject* represents the definition of a *ComponentObject*, using meta-relationship *ComponentObject.References.DefinitionObject*. A *DefinitionObject* may contain *ComponentObjects*, using the *DefinitionObject.Contains.ComponentObject* meta-relationship. The *ComponentObjects* contained in a *DefinitionObject* represent the components of the definition.

Both *ComponentObject* and *DefinitionObject* represent abstract concepts and thus shall not be instantiated. Instead, appropriate subtypes, provided by this or other subject areas, are used for instantiating data definitions.

A subtype of *DefinitionObject* may be referenced by any number of *ComponentObjects* indicating that all those *ComponentObjects* share the same definition. For example, in Figure 5, *Attributes a* and *b* share the same definition, *AggregateDataType MyStruct*.

Instances of the subtypes of *ComponentObject* are used to describe the structure of a data described by a *DefinitionObject*. There may be any number instances of *ComponentObjects* per instance of *DefinitionObject*. In Figure 5, *Attributes x* and *y* comprise the structure of *MyStruct*.

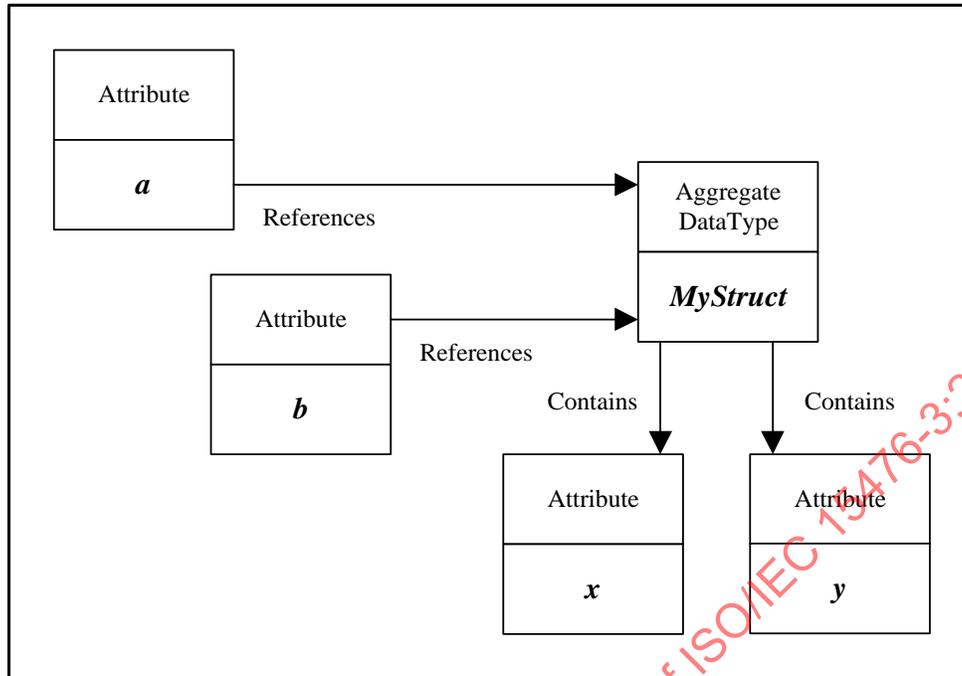


Figure 5 – Instance diagram of attributes sharing the same structured definition

For example, if a structure is built containing two components that share the same definition, the instance of structured *DefinitionObject* will contain two distinct instances of *ComponentObject* which refer to the same shared instance of the *DefinitionObject*.

The general structuring mechanism ensures that, for example, the instances of the components of one structured *Attribute* are different from those of another structured *Attribute* even if both *Attributes* share the same instance of a *Data Type*.

6.4 Alternate Decompositions

This subject area supports alternate decompositions of *DataTypes* using the general structuring mechanism.

Decompositions may have one of two characteristics, represented by the meta-attribute *Operator* of the meta-entity *DefinitionObject*. *Data Type* is a subtype of *DefinitionObject* and thus inherits the meta-attribute *Operator*.

If the instance value of this meta-attribute is **AND**, this indicates that all instances of the all *ComponentObjects* related to the instance of *DefinitionObject* using the instance of meta-relationship *DefinitionObject.Contains.ComponentObject* are contained at the same time (i.e. inclusive).

For example, in Figure 6, the *AggregateDataType* instance **Y1Def** representing a data structure definition would set the value of *Operator* to **AND** because it contains all the attributes concurrently.

The value **XOR** of the *Operator* meta-attribute specifies that the *ComponentObject* instances contained in the *DefinitionObject* instance are exclusive alternates. This means that the object is decomposed into exactly one of the *ComponentObject* instances but which one is not specified. An alternate decomposition leaves it open as to which of the decompositions is to be used.

For example, in Figure 6, if an *Attribute X* has two decompositions into *Attributes A, B* and *C*, or into *Attributes D* and *E*, a *AggregateDataType XDef* is created which is the definition of *Attribute X*, using the instance of meta-relationship *ComponentObject.References.DefinitionObject*. *AggregateDataType* instance **XDef** has its meta-

attribute *Operator* set to **XOR**. There are two *Attribute* instances **Y1** and **Y2** which are contained in **XDef** using meta-relationship *DefinitionObject.Contains.ComponentObject* instance, indicating that the *AggregateDataType* has two possible structures. The *Attribute* instances **Y1** and **Y2** have *AggregateDataType* instances **Y1Def** and **Y2Def**, using *ComponentObject.References.DefinitionObject* instance. Those *AggregateDataType* instances have set their meta-attribute *Operator* to **AND**, indicating that all their components are contained and they do not represent alternates. Note that if the *Operator* meta-attribute has a value of **XOR**, then the contained *Attributes* instances do not actually exist as a part of the containing *Attribute*'s structure, but are simply playing the role of a grouping mechanism. Those *AggregateDataType* instances **Y1Def** and **Y2Def** contain *Attribute* instances **A**, **B** and **C**, or **D** and **E**, respectively.

For example, the "C" programming language supports the union concept. In this case the *AggregateDataType*'s meta-attribute *Operator* would have the value **XOR**.

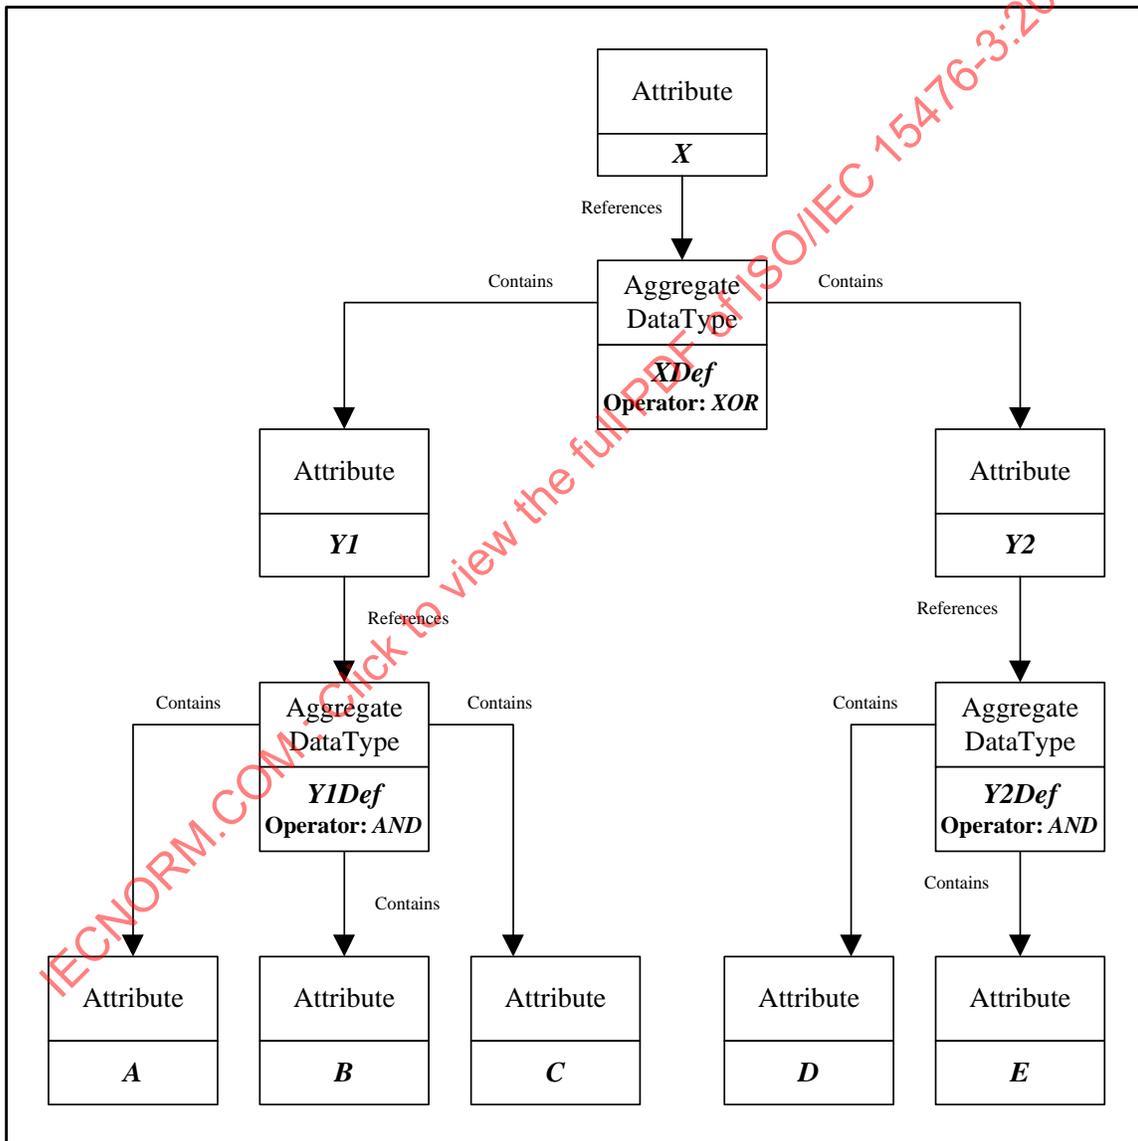


Figure 6 – Instance diagram of alternate Data Structures

The concepts of attributes, shared definitions and underlying types are illustrated in Figure 7.

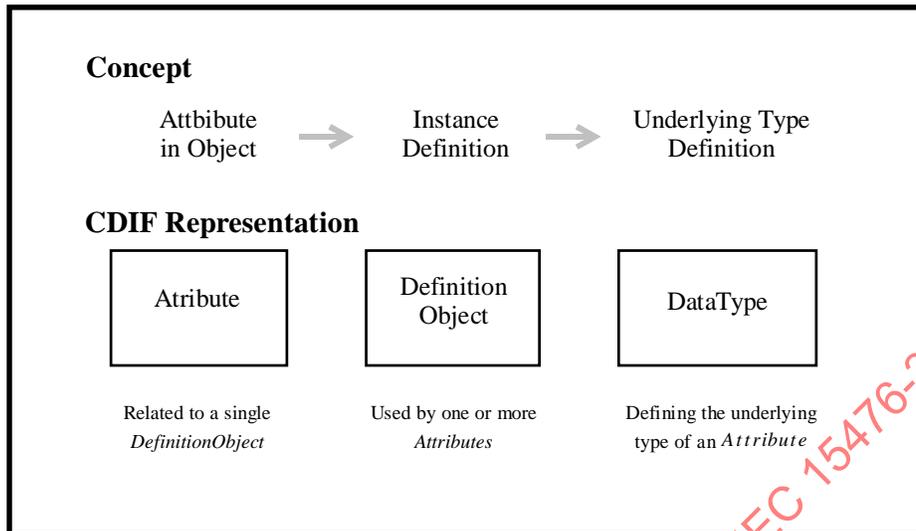


Figure 7 – Concepts of shared attribute values and definitions

6.5 Pointers and Arrays

A *DataType* can be qualified to indicate that, instead of a single occurrence of the data type itself, there is either an array of the data type or a pointer to the data type, or indeed any combination of these qualifiers. This is expressed using the meta-entities *QualifiedDataType* and *Qualifier* and its subtypes and the meta-relationship *QualifiedDataType.IsQualifiedBy.Qualifier* and *QualifiedDataType.IsQualificationOf.DataType*.

When a pointer is required, the *PointerQualifier* subtype is used. Likewise, when an array is required, the *ArrayQualifier* subtype is used. Arrays may be further specified as unbounded (via *UnboundedArrayQualifier*) or bounded (via *BoundedArrayQualifier*). The type of the *ArrayQualifier* may be expressed using the meta-relationship *ArrayQualifier.HasType.DataType*. Normally the data types will be *EnumerationType* or *IntegerType*.

More than one *Qualifier* can be defined for a single *DataType*. The meta-attribute *PrecedenceNumber* on the meta-entity *Qualifier* is used to determine the order of evaluation of the *Qualifiers*. For example a bounded two-dimensional array would have two instances of *BoundedArrayQualifier*, with the *BoundedArrayQualifier* instance expressing the first dimension having a *PrecedenceNumber* of **1**, and the second *BoundedArrayQualifier* instance having a value of **2**. In the case of unbounded one dimension array of pointers, it have **UnboundedArrayQualifier** with a *PrecedenceNumber* of **1** and a *PointerQualifier* with a *PrecedenceNumber* of **2**.

6.6 Data Types

Simple data types are represented by *BasicDataType*. Since many data types are in common use, a number of predefined data types are provided as subtypes of *BasicDataType*. These pre-defined data types are shown in Figure 9 through Figure 14. They may be used directly or subtyped further, using extensibility.

6.7 Constraining Data Type and Attribute Values

ValueDomains and *ValueDomainGroups* are used to constrain the values a data type can take; the domain is the valid set of values for a data type. A *ValueDomain* can specify a single value or set of values (via *ValueDomainEnumeration*), a range of values (via *ValueDomainRange*), a procedure used to generate the valid values (via *ValueDomainProcedure*), or the format for the value (via *ValueDomainRule*).

Examples of:

A set of values for *DaysOfTheWeek* is (**Sunday, Monday, Tuesday** ...).

A range is (**0..100**).

A procedure is: **do I=1 to 30, if I modulo 3 equals 1 then return I, end.**

A format rule is **AANNN**.

The domain of a *Data Type* should be described precisely by one of the subtypes of *ValueDomain*. However, when only a textual description of the domain is required, the meta-entity *ValueDomain* itself should be used.

The domain of an *AggregateData Type* describes the interaction of the individual *ValueDomains* of the *Data Types* in the structure. Thus, the domain of an *AggregateData Type* should be described by a *ValueDomainGroup* containing only *ValueDomainProcedures* or *ValueDomain* meta-entities.

When the domain of a data type cannot be expressed by a single domain, the *ValueDomainGroup* is used to compose complex domain expressions. *ValueDomainGroups* can connect using the *Operator* meta-attribute values **AND**, **OR**, **NOT**, or **XOR**, *ValueDomains* and *ValueDomainGroups* to form complex domain expressions.

An example of the use of *ValueDomainGroup* to build up a complex domain specification is shown on Figure 8.

The values defined by a domain must be congruent with the only one underlying data type.

For refining the domain of an *Attribute*, the instance of meta-relationship *Data Type.TakesValuesFrom.ValueDomain* should be declared to the *Data Type* instance for the *Attribute*. In this case, the restricted domain takes precedence over the domain that related to its *Data Type*.

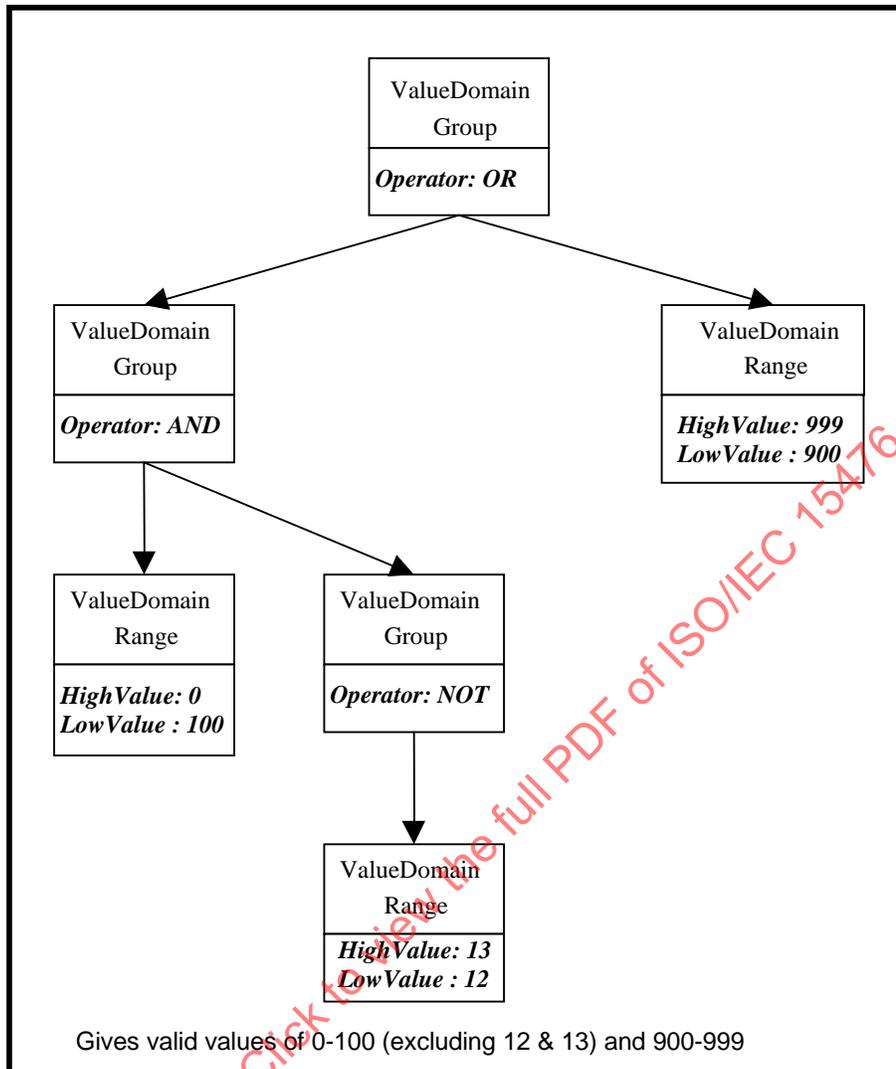


Figure 8 – Usage of ValueDomainGroup and ValueDomain

6.8 Units for Numeric DataTypes

The units of measurement for numeric data types can be expressed using the meta-entity *Unit*, related to the *NumericType* using the meta-relationship *NumericType.IsMeasuredIn.Unit*. The unit is expressed by defining the exponent for each of the SI concepts defined as a positive or negative integer.

NOTE: SI units are International System of Units defined in ISO 31-1:1992 *Quantities and units*. SI base units are meter, kilogram, second, ampere, kelvin, mole and candela.

If the unit is not actually expressed using the SI units, then the meta-attribute *IsSI* should be set to **'FALSE'** to indicate this; nevertheless the other meta-attributes should be set to indicate the concepts expressed by the unit. For example, acceleration with units of ms^{-2} ($\text{Meter}^{+1} * \text{Second}^{-2}$) should be expressed with the meta-attribute *ExponentForMeter* which express a meter unit and the meta-attribute *ExponentForSecond* which express a second unit set as follows for SI Units:

| | |
|--------------------------|-------------|
| <i>ExponentForMeter</i> | 1 |
| <i>ExponentForSecond</i> | -2 |
| <i>IsSI</i> | TRUE |

If the acceleration is not expressed in SI units, then the meta-attribute *IsSI* sets to **'FALSE'** and the corresponding meta-attributes sets to the same values which expressed in SI units. For example ft per second per second, then the meta-attribute *IsSI* sets to **'FALSE'**, the meta-attribute *ExponentForMeter* sets to 1, the meta-attribute *ExponentForSecond* set to -2 and the meta-attributes *name* sets to feet/(second*second).

6.9 Void and Unknown Data Types

The *VoidType* is an explicit data type to be used in certain situations where the data type cannot otherwise be defined; an example of this is where the data type is a pointer to memory - the type that it points at is not defined, or may be of different types at different times, and therefore *VoidType* is used.

Where the data type of an attribute is not known, *VoidType* must not be used. Instead, no data type should be related to the attribute concerned; the cardinality of the *ComponentObject.References.DefinitionObject* has been defined to permit the absence of a data type where it is not known.

6.10 Computable Languages

The set of computable languages that can be supported is defined in Subclause 6.12 of ISO/IEC 15476-2:2002, *Information Technology - CDIF Semantic Metamodel - Part 2: Common*.

6.11 Formats for Computable Values

There are situations where it is necessary to declare a value that will serve as a default value or domain value for an attribute or data type. This subclause defines how such values are to be expressed. The value is held in a meta-attribute of type String, delimited by single quotes. The form to be used for the value depends on its type, and is defined in Table 1. The notation used for this is explained in

Table 2.

It is also permissible for values to be derived by execution of run-time functions. Where the value is derived by a function, such as the user-id of the user making the change, or Null, the value is expressed without quotes to indicate that it is a special function rather than an explicit value. Some of the possible values for such functions are listed in 3.

Table 1 – Formats for Computable Values

| DATA TYPE | Format to be used for Value | Example |
|-----------|---|---------------|
| Binary | as a hexadecimal string. If the resulting pattern results in too many binary digits for the underlying type or attribute, excess trailing digits are ignored. | 'FF' |
| Boolean | TRUE or FALSE . | 'TRUE' |

| | | |
|------------|---|--------------------------|
| Complex | as two Real Numbers, separated by a colon (:). | '1.125E3:0.5' '20:45' |
| Decimal | [-]N(x)[.N(x)]. | '12.25' |
| Enumerated | X(x). | 'Green' |
| Float | as for Real. | '123.56E11' |
| Integer | [-]N(x). | '763' |
| Money | [-]N(x)[.N(x)][AAA] where AAA is an optional 3-character Currency Symbol, as defined in ISO 4217 Currency Symbols. | '100.00USD' |
| Real | [-]N(x)[.N(x)][E[-]N(x)]. | '736.3145' |
| String | X(x). | 'Pair of Handcuffs' |
| Temporal | YYYY/MM/DD , YYYY/MM/DD-HH:MM[:SS[.N(x)]] or HH:MM[:SS[.N(x)]] where : YYYY is the year MM is the numeric representation of the month as 2 digits in the range 01..12 DD is the numeric representation of the day as 2 digits in the range 01..31 HH is the hour shown as 2 digits in the range 00..23 MM is the minutes shown as 2 digits in the range 00..59 SS is the seconds shown as 2 digits in the range 00..59 N(x) are the fractional seconds to the degree of precision required. | '1994/04/01-12:00' |

Table 2 – Notation Used for Computable Values

| Symbol | Meaning |
|--------|--|
| [] | Square brackets enclose optional elements in an expression. The portion of the expression within the brackets may be explicitly specified or may be omitted. |
| (x) | The (x) indicates that the element that it follows in a formula may be repeated any number of times (but note that optionality is covered by the square brackets convention). If it appears immediately after a closing square bracket "]", then it applies to the portion of the expression enclosed between that closing bracket and the corresponding opening bracket "[". If it appears after any other element, then it applies only to that element. |
| N | Any numeric character in the range 0..9. |
| A | Any alphabetic character. |
| X | Any printable character. (See ISO/IEC 15475-3:2002, Information Technology - CDIF Transfer Format - Part 3: Encoding: ENCODING.1) |

Table 3 – Function Values for Computable Values

| Value | Meaning |
|-------------------|-----------------------------------|
| NULL | Null value. |
| USER | The identity of the current user. |
| CURRENT_DATE | The current date. |
| CURRENT_TIME | The current time. |
| CURRENT_TIMESTAMP | The current timestamp. |

6.12 Diagrams

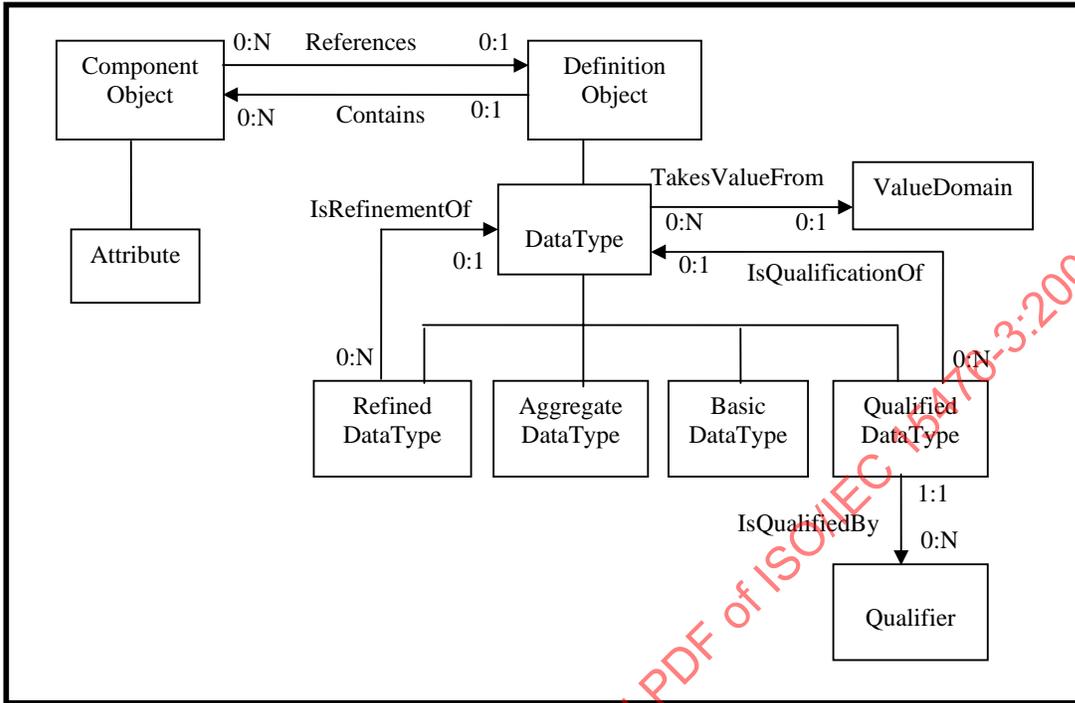


Figure 9 – Data Definition Subject Area - Main Diagram

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

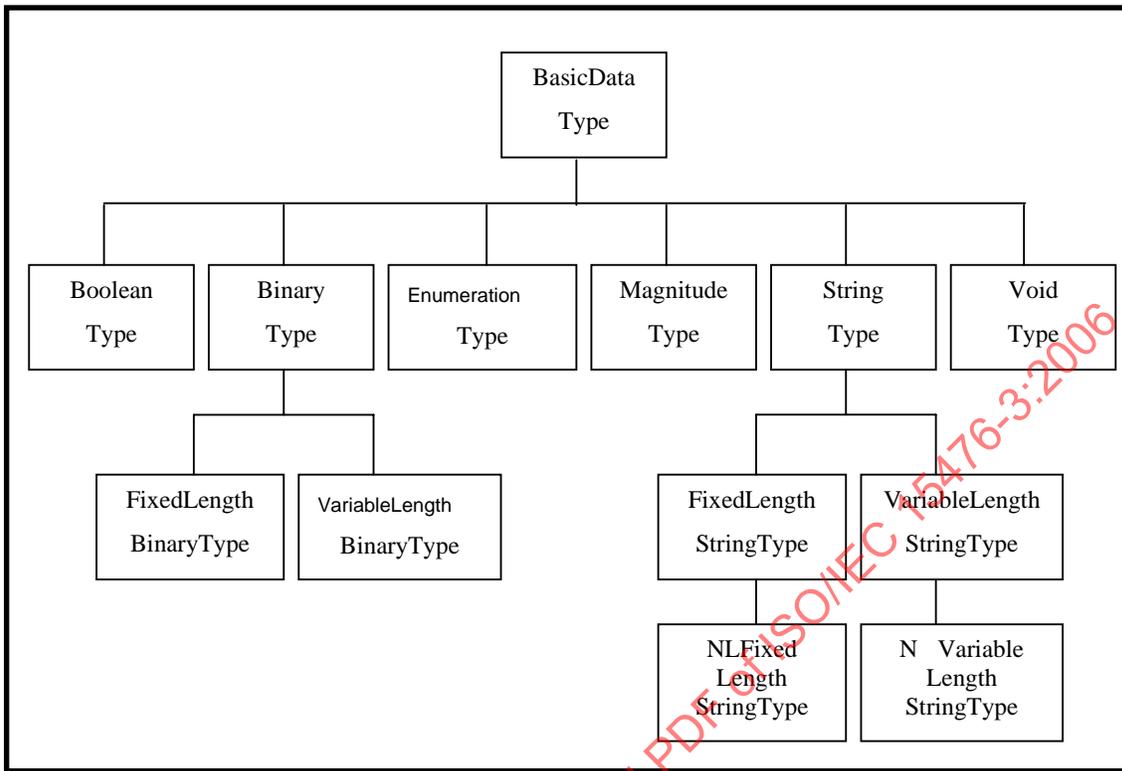


Figure 10 – BasicDataType Subtypes

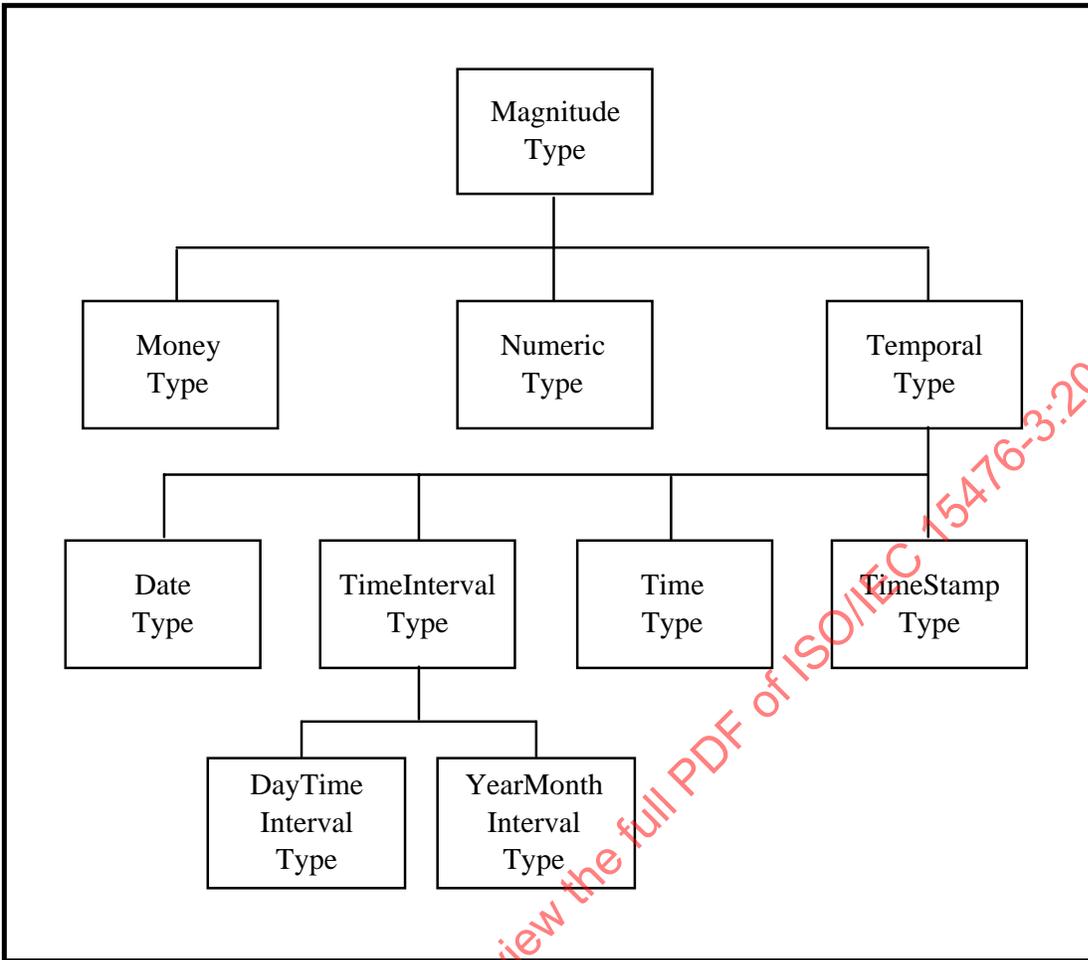


Figure 11 – MagnitudeType Subtypes

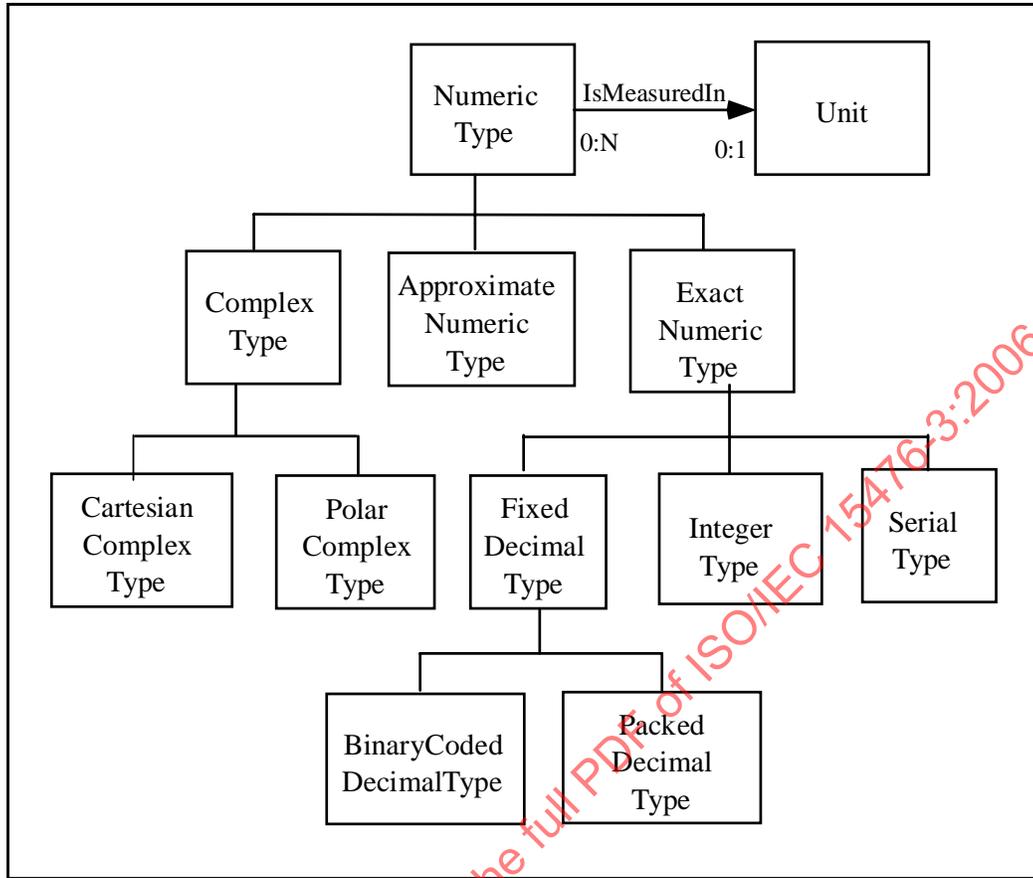


Figure 12 – NumericType Subtypes

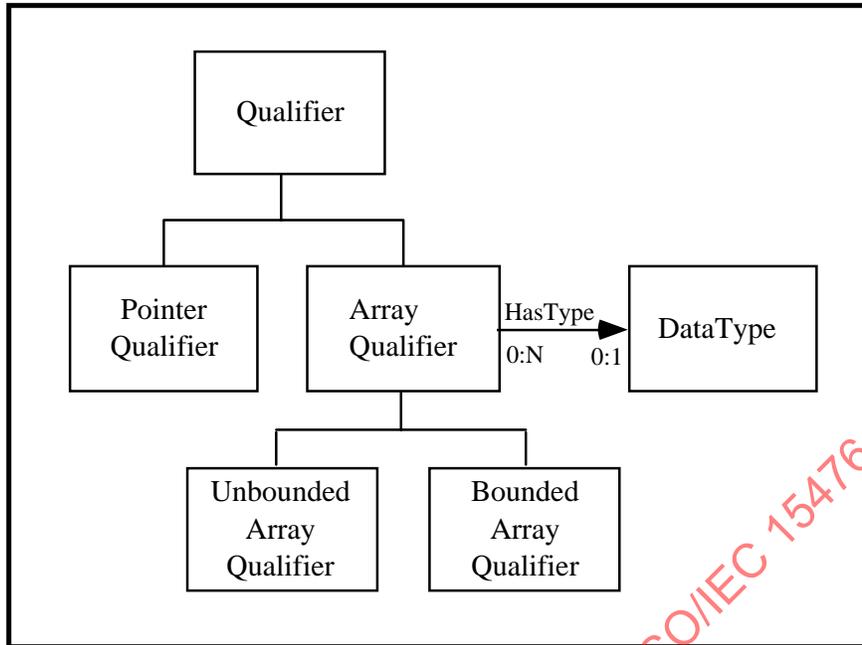


Figure 13 – Subtypes and meta-relationships for Qualifier

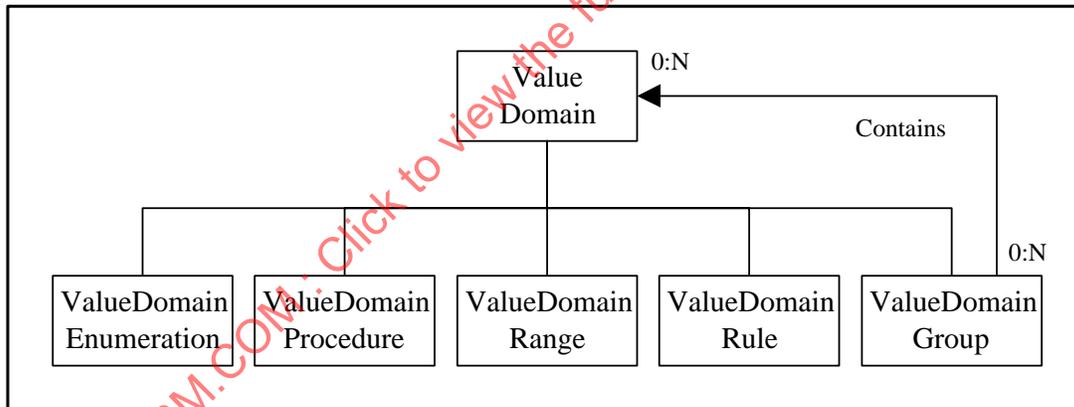


Figure 14 – ValueDomainGroup and related meta-entities

7 Data definitions subject area summary

7.1 AttributableMetaObject classification hierarchy

| metaobject name | subjectarea name |
|----------------------------|-------------------------|
| RootEntity | Foundation |
| SemanticInformationObject | Common |
| ComponentObject | Common |
| Attribute | Data models |
| DefinitionObject | Common |
| DataType | Data definitions |
| AggregateDataType | Data definitions |
| BasicDataType | Data definitions |
| BinaryType | Data definitions |
| FixedLengthBinaryType | Data definitions |
| VariableLengthBinaryType | Data definitions |
| BooleanType | Data definitions |
| EnumerationType | Data definitions |
| MagnitudeType | Data definitions |
| MoneyType | Data definitions |
| NumericType | Data definitions |
| ApproximateNumericType | Data definitions |
| ComplexType | Data definitions |
| CartesianComplexType | Data definitions |
| PolarComplexType | Data definitions |
| ExactNumericType | Data definitions |
| IntegerType | Data definitions |
| FixedDecimalType | Data definitions |
| BinaryCodedDecimalType | Data definitions |
| PackedDecimalType | Data definitions |
| SerialType | Data definitions |
| TemporalType | Data definitions |
| DateType | Data definitions |
| TimeIntervalType | Data definitions |
| DayTimeIntervalType | Data definitions |
| YearMonthIntervalType | Data definitions |
| TimeStampType | Data definitions |
| TimeType | Data definitions |
| StringType | Data definitions |
| FixedLengthStringType | Data definitions |
| NLFixedLengthStringType | Data definitions |
| VariableLengthStringType | Data definitions |
| NLVariableLengthStringType | Data definitions |
| VoidType | Data definitions |

| metaobject name | subject area name |
|--|-------------------|
| RootEntity | Foundation |
| SemanticInformationObject | Common |
| DefinitionObject | Common |
| DataType | Data definitions |
| QualifiedDataType | Data definitions |
| RefinedDataType | Data definitions |
| Qualifier | Data definitions |
| ArrayQualifier | Data definitions |
| BoundedArrayQualifier | Data definitions |
| UnboundedArrayQualifier | Data definitions |
| PointerQualifier | Data definitions |
| Unit | Data definitions |
| ValueDomain | Data definitions |
| ValueDomainEnumeration | Data definitions |
| ValueDomainGroup | Data definitions |
| ValueDomainProcedure | Data definitions |
| ValueDomainRange | Data definitions |
| ValueDomainRule | Data definitions |
| RootEntity.IsRelatedTo.RootEntity | Foundation |
| ArrayQualifier.HasType.DataType | Data definitions |
| DataType.TakesValueFrom.ValueDomain | Data definitions |
| NumericType.IsMeasuredIn.Unit | Data definitions |
| QualifiedDataType.IsQualificationOf.DataType | Data definitions |
| QualifiedDataType.IsQualifiedBy.Qualifier | Data definitions |
| RefinedDataType.IsRefinementOf.DataType | Data definitions |
| ValueDomainGroup.Contains.ValueDomain | Data definitions |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

7.2 MetaEntity summary

The inherited meta-attributes: CDIFIdentifier, DateCreated, DateUpdated, TimeCreated, TimeUpdated, which defined in RootEntity are not described at the following EetaEntity summary.

AggregateDataType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

ApproximateNumericType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>Precision</i> | <i>Optional</i> |
| <i>Scale</i> | <i>Optional</i> |

ArrayQualifier

| | |
|-------------------------|------------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>PrecedenceNumber</i> | <i>Mandatory</i> |

BasicDataType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

BinaryCodedDecimalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>Precision</i> | <i>Optional</i> |
| <i>Scale</i> | <i>Optional</i> |
| <i>SignedFlag</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

BinaryType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

BooleanType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

BoundedArrayQualifier

| | |
|-------------------------|------------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>PrecedenceNumber</i> | <i>Mandatory</i> |
| | |
| <i>MaxSubscript</i> | <i>Optional</i> |
| <i>MinSubscript</i> | <i>Mandatory</i> |

CartesianComplexType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>Precision</i> | <i>Optional</i> |
| <i>Scale</i> | <i>Optional</i> |

ComplexType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

DataType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| | |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

DateType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

DayTimeIntervalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

EnumerationType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

ExactNumericType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| SignedFlag | Optional |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

FixedDecimalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SignedFlag</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| Precision | Optional |
| Scale | Optional |

FixedLengthBinaryType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| Length | Optional |
| LengthMultiplier | Optional |

FixedLengthStringType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>CharacterSet</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>StringEncoding</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| Length | Optional |
| LengthMultiplier | Optional |

IntegerType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SignedFlag</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

MagnitudeType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

MoneyType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>Currency</i> | <i>Optional</i> |
| <i>Precision</i> | <i>Optional</i> |
| <i>Scale</i> | <i>Optional</i> |

NLFixedLengthStringType

| | |
|-----------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>CharacterSet</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Length</i> | <i>Optional</i> |

| | |
|------------------------------|-----------------|
| <i>LengthMultiplier</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>StringEncoding</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>BitsPerCharacter</i> | <i>Optional</i> |

NLVariableLengthStringType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>CharacterSet</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>LengthMultiplier</i> | <i>Optional</i> |
| <i>MaxLength</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>StringEncoding</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>BitsPerCharacter</i> | <i>Optional</i> |

NumericType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

PackedDecimalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>Precision</i> | <i>Optional</i> |
| <i>Scale</i> | <i>Optional</i> |
| <i>SignedFlag</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

PointerQualifier

| | |
|-------------------------|------------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>PrecedenceNumber</i> | <i>Mandatory</i> |

PolarComplexType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| <i>DistancePrecision</i> | <i>Optional</i> |
| <i>DistanceScale</i> | <i>Optional</i> |
| <i>GradientPrecision</i> | <i>Optional</i> |
| <i>GradientScale</i> | <i>Optional</i> |

QualifiedDataType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

Qualifier

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| PrecedenceNumber | Mandatory |

RefinedDataType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | <i>Optional</i> |
| Operator | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| Usage | <i>Optional</i> |

SerialType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | <i>Optional</i> |
| Operator | <i>Optional</i> |
| <i>SignedFlag</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| Usage | <i>Optional</i> |
| Cycle | <i>Optional</i> |
| Interval | <i>Optional</i> |
| StartingValue | <i>Optional</i> |

StringType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>CharacterSet</i> | <i>Optional</i> |
| <i>StringEncoding</i> | <i>Optional</i> |

TemporalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

TimeIntervalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

TimeStampType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>IsLocal</i> | <i>Optional</i> |
| <i>TimeZoneHours</i> | <i>Optional</i> |
| <i>TimeZoneMinutes</i> | <i>Optional</i> |

TimeType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>IsLocal</i> | <i>Optional</i> |
| <i>TimeZoneHours</i> | <i>Optional</i> |
| <i>TimeZoneMinutes</i> | <i>Optional</i> |

UnboundedArrayQualifier

| | |
|-------------------------|------------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>PrecedenceNumber</i> | <i>Mandatory</i> |

Unit

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| ExponentForAmpere | Optional |
| ExponentForCandela | Optional |
| ExponentForKelvin | Optional |
| ExponentForKilogram | Optional |
| ExponentForMeter | Optional |
| ExponentForMole | Optional |
| ExponentForSecond | Optional |
| IsSI | Optional |
| Name | Optional |

ValueDomain

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | Optional |

ValueDomainEnumeration

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | <i>Optional</i> |
| Value | Mandatory |

ValueDomainGroup

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | <i>Optional</i> |
| Operator | Mandatory |

ValueDomainProcedure

| | |
|-------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| Name | <i>Optional</i> |
| ProcedureName | Optional |
| SpecificationLanguage | Optional |
| SpecificationText | Optional |

ValueDomainRange

| | |
|--------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>HighValue</i> | <i>Optional</i> |
| <i>HighValueIncluded</i> | <i>Optional</i> |
| <i>LowValue</i> | <i>Optional</i> |
| <i>LowValueIncluded</i> | <i>Optional</i> |

ValueDomainRule

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationString</i> | <i>Optional</i> |

VariableLengthBinaryType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| <i>LengthMultiplier</i> | <i>Optional</i> |
| <i>MaxLength</i> | <i>Optional</i> |

VariableLengthStringType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>CharacterSet</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>StringEncoding</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |
| | |
| <i>LengthMultiplier</i> | <i>Optional</i> |
| <i>MaxLength</i> | <i>Optional</i> |

VoidType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

YearMonthIntervalType

| | |
|------------------------------|-----------------|
| <i>BriefDescription</i> | <i>Optional</i> |
| <i>FormatStringLanguage</i> | <i>Optional</i> |
| <i>FormatStringValue</i> | <i>Optional</i> |
| <i>FullDescription</i> | <i>Optional</i> |
| <i>Name</i> | <i>Optional</i> |
| <i>Operator</i> | <i>Optional</i> |
| <i>SpecificationLanguage</i> | <i>Optional</i> |
| <i>SpecificationText</i> | <i>Optional</i> |
| <i>Usage</i> | <i>Optional</i> |

7.3 MetaRelationship summary

ArrayQualifier.HasType.DataType

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

DataType.TakesValueFrom.ValueDomainGroup

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

NumericType.IsMeasuredIn.Unit

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

QualifiedDataType.IsQualificationOf.DataType

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

QualifiedDataType.IsQualifiedBy.Qualifier

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

RefinedDataType.IsRefinementOf.DataType

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

ValueDomainGroup.Contains.ValueDomain

| | |
|-----------------------|------------------|
| <i>CDIFIdentifier</i> | <i>Mandatory</i> |
| <i>DateCreated</i> | <i>Optional</i> |
| <i>DateUpdated</i> | <i>Optional</i> |
| <i>TimeCreated</i> | <i>Optional</i> |
| <i>TimeUpdated</i> | <i>Optional</i> |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

8 Data definitions subject area specification

8.1 Introduction

This clause provides the full definition of each object used in the Data definitions subject area of the CDIF semantic metamodel.

8.1.1 Subject area definition

| SUBJECT AREA DEFINITION | |
|--------------------------|--|
| NAME..... | Data Definitions |
| VERSIONNUMBER | 15476-3:2003 |
| CDIFMETAI DENTIFIER..... | 763000 |
| DESCRIPTION..... | The Data definitions subject area is intended to cover aspects that are basic data type and structuring data to many CASE tools. |
| USAGE | It provides the objects that are used as to allow the definition of data structures and elements that are used to define the data content of objects defined in other subject areas. |
| ALIASES | |
| CONSTRAINTS..... | |

8.2 Meta-entity definitions

8.2.1 AggregateDataType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | AggregateDataType |
| CDIFMETAI DENTIFIER..... | 763001 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This is a data type thst is either structured or decomposed. <i>AggregateDataTypes</i> contain component <i>Attributes</i> . |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | |

8.2.2 ApproximateNumericType

| META-ENTITY DEFINITION | |
|-------------------------------|--|
| NAME..... | ApproximateNumericType |
| CDIFMETAIDENTIFIER..... | 763002 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype defines numeric types whose values are inexact, or approximate. |
| USAGE | |
| ALIASES | Real |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | Precision Scale |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF ApproximateNumericType |
|---------------------------|---|
| NAME..... | Precision |
| CDIFMETAIDENTIFIER..... | 763003 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the type, indicating the precision to which it can be specified. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF ApproximateNumericType |
|---------------------------|--|
| NAME..... | Scale |
| CDIFMETAIDENTIFIER..... | 763004 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of Scale would be -3; therefore a value of 7 would be interpreted as 7000. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.3 ArrayQualifier

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | ArrayQualifier |
| CDIFMETAIDENTIFIER..... | 763005 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This provides a mechanism to describe the dimensions of an array. |
| USAGE..... | This object should not be instantiated unless it is not known whether a dimension is bounded or unbounded; where this is known, the appropriate subtype should be used. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Characteristic |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | UnboundedArrayQualifier BoundedArrayQualifier |
| LOCAL METARELATIONSHIPS..... | ArrayQualifier.HasType.DataType |
| LOCAL METAATTRIBUTES..... | |

8.2.4 Attribute

| META-ENTITY REFERENCE | |
|-------------------------------|--------------|
| NAME..... | Attribute |
| CDIFMETAIDENTIFIER..... | 17 |
| SUBJECTAREANAME | Data models |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | |

NOTE: The meta-attributes of the meta-entity Attribute, DefaultValue and IsOptional, are not defined in this subject area. They are defined in *Data models*.

8.2.5 BasicDataType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | BasicDataType |
| CDIFMETAIDENTIFIER..... | 763006 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-4:2003 |
| DESCRIPTION..... | This exists to define an elemental (primitive) type. This is a type that cannot be decomposed into further structural components. |
| USAGE | |
| ALIASES | PrimitiveType AtomicDataType |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | BinaryType BooleanType EnumerationType MagnitudeType StringType VoidType |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | |

8.2.6 BinaryCodedDecimalType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | BinaryCodedDecimalType |
| CDIFMETAIDENTIFIER..... | 763007 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This is the base data type for binary coded decimal data types. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.7 BinaryType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | BinaryType |
| CDIFMETAIDENTIFIER..... | 763011 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a binary data type |
| USAGE..... | This type should not be instantiated; one of the subtypes should be used where possible. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | FixedLengthBinaryType VariableLengthBinaryType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.8 BooleanType

| META-ENTITY DEFINITION | |
|------------------------------|-----------------------------------|
| NAME..... | BooleanType |
| CDIFMETAIDENTIFIER..... | 763008 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines a Boolean data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.9 BoundedArrayQualifier

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | BoundedArrayQualifier |
| CDIFMETAIDENTIFIER..... | 763009 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype of <i>ArrayQualifier</i> is used where a dimension of an array is bounded. |
| USAGE..... | This subtype is used where it is known that the dimension of the array is bounded, even if the actual values of the bounds are not known. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Characteristic |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | ArrayQualifier.HasType.DataType |
| LOCAL METAATTRIBUTES..... | MaxSubscript MinSubscript |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF BoundedArrayQualifier |
|---------------------------|--|
| NAME..... | MaxSubscript |
| CDIFMETAIDENTIFIER..... | 763010 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the maximum subscript of an array. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | The value should be equal or greater than the value of the meta-attribute <i>MinSubscript</i> , if both are present. |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF BoundedArrayQualifier |
|---------------------------|--|
| NAME | MinSubscript |
| CDIFMETAIDENTIFIER..... | 763011 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the minimum subscript of an array. |
| USAGE..... | An array of anything in C would cause this value to be 0. In languages like Pascal, the minimum and maximum bounds can be specified. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | FALSE |

8.2.10 CartesianComplexType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME | CartesianComplexType |
| CDIFMETAIDENTIFIER..... | 763012 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype defines a type for expressing complex numbers in Cartesian form. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | Precision Scale |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF CartesianComplexType |
|---------------------------|--|
| NAME | Precision |
| CDIFMETAIDENTIFIER..... | 763013 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the type, indicating the precision to which each part can be specified. The value of <i>Precision</i> applies to both the real and the imaginary parts. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF CartesianComplexType |
|---------------------------|---|
| NAME..... | Scale |
| CDIFMETAIDENTIFIER..... | 763014 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of <i>Scale</i> would be -3; therefore a value of 7 would be interpreted as 7000. It applies to each of the real and the imaginary parts. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.11 ComplexType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | ComplexType |
| CDIFMETAIDENTIFIER..... | 763015 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype defines a type for representing complex numbers. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | This subtype shall only be used when the form of expression of a complex type is not known. Where the type is known to be either polar or cartesian, the appropriate subtype shall be used. |
| TYPE..... | Kernel |
| ISABSTRACT | TRUE |
| LOCAL SUBTYPES | CartesianComplexType PolarComplexType |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | |

8.2.12 Data Type

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | Data Type |
| CDIFMETAIDENTIFIER..... | 763016 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This holds the definition, structure, or decomposition of an <i>Attribute</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | AggregateDataType BasicDataType QualifiedDataType RefinedDataType |
| LOCAL METARELATIONSHIPS..... | ArrayQualifier.HasType.DataType DataType.TakesValueFrom.ValueDomainGroup QualifiedDataType.IsQualificationOf.DataType RefinedDataType.IsRefinementOf.DataType |
| LOCAL METAATTRIBUTES..... | FormatStringLanguage FormatStringValue Usage |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF DataType |
|---------------------------|--|
| NAME..... | FormatStringLanguage |
| CDIFMETAIDENTIFIER..... | 763017 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the language used for the meta-attribute <i>FormatStringValue</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | This shall be supplied when a value is supplied for the meta-attribute <i>FormatStringValue</i> . |
| DATA TYPE..... | Enumerated |
| DOMAIN..... | As specified in Subclause 6.12 of ISO/IEC 15476-2:2002, <i>Information Technology - CDIF Semantic Metamodel - Part 2: Common</i> . |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF DataType |
|---------------------------|--|
| NAME..... | FormatStringValue |
| CDIFMETAIDENTIFIER..... | 763018 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This is a string giving format information for the data type. |
| USAGE..... | For example, using COBOL, Z,ZZN would indicate a 1-4 digit number, with leading zeros suppressed, and a comma separator for the thousands. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | String |
| DOMAIN..... | |
| LENGTH..... | 1024 |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF DataType |
|---------------------------|---|
| NAME..... | Usage |
| CDIFMETAIDENTIFIER..... | 763019 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes how the <i>DataType</i> is used. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Text |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.13 DateType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | DateType |
| CDIFMETAIDENTIFIER..... | 763020 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines a type used to represent a date. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.14 DayTimeIntervalType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | DayTimeIntervalType |
| CDIFMETAIDENTIFIER..... | 763021 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines a type representing a time interval measuring days and time within days. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.15 DefinitionObject

| META-ENTITY REFERENCE | |
|------------------------------|------------------|
| NAME..... | DefinitionObject |
| CDIFMETAIDENTIFIER..... | 8002 |
| SUBJECTAREANAME..... | Common |
| SUBJECTAREAVERSION..... | 15476-2:2002 |
| LOCAL SUBTYPES..... | DataType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.16 EnumerationType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | EnumerationType |
| CDIFMETAIDENTIFIER..... | 763022 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This data type has a fixed set of distinct logical values. |
| USAGE..... | This type is used for such sets as Days of the Week or Colors of the Rainbow . |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.17 ExactNumericType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | ExactNumericType |
| CDIFMETAIDENTIFIER..... | 763023 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype defines numeric types that are exact. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | FixedDecimalType IntegerType SerialType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | SingedFlag |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF IntegerType |
|---------------------------|--|
| NAME..... | SingedFlag |
| CDIFMETAIDENTIFIER..... | 763024 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This indicates whether the <i>IntegerType</i> can hold negative values. If it is false, then only positive values can be held by the data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Boolean |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

IECNORM.COM : Click to view the full PDF of ISO/IEC 15476-3:2006

8.2.18 FixedDecimalType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | FixedDecimalType |
| CDIFMETAIDENTIFIER..... | 763025 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a data type with a fixed position decimal, with the number of digits of precision on both sides of the decimal point specified. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | BinaryCodedDecimalType PackedDecimalType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | Precision Scale |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedDecimalType |
|---------------------------|---|
| NAME..... | Precision |
| CDIFMETAIDENTIFIER..... | 763026 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the type, indicating the precision to which it can be specified. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | Positive |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedDecimalType |
|---------------------------|---|
| NAME..... | Scale |
| CDIFMETAIDENTIFIER..... | 763027 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of <i>Scale</i> would be -3; therefore a value of 7 would be interpreted as 7000. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.19 FixedLengthBinaryType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | FixedLengthBinaryType |
| CDIFMETAIDENTIFIER..... | 763028 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a data type of fixed length binary, of the length specified. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | Length LengthMultiplier |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedLengthBinaryType |
|---------------------------|---|
| NAME | Length |
| CDIFMETAIDENTIFIER | 763029 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION | This defines the length of the <i>FixedLengthBinaryType</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | If a value is specified for <i>Length</i> , the multiplier used shall be contained in <i>LengthMultiplier</i> . |
| DATA TYPE | Integer |
| DOMAIN | Positive Integer |
| LENGTH | |
| ISOPTIONAL | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedLengthBinaryType |
|---------------------------|---|
| NAME..... | LengthMultiplier |
| CDIFMETAIDENTIFIER..... | 763030 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the multiplier units used for the length defined in <i>Length</i> . |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | A value shall only be supplied for <i>LengthMultiplier</i> when a value is supplied for <i>Length</i> . |
| DATA TYPE..... | Enumerated |
| DOMAIN..... | Bit Byte (8-bit) Kilobyte (1,024 bytes) Megabyte (1,048,576 bytes) Gigabyte (1,073,741,824 bytes) |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.20 FixedLengthStringType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | FixedLengthStringType |
| CDIFMETAIDENTIFIER..... | 763031 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a string data type with a fixed storage capacity specified by the meta-attribute <i>Length</i> . This differs from <i>VariableLengthStringType</i> in that the string must contain exactly the number of characters required to fill the allocated storage space. |
| USAGE..... | In a DBMS, this may map to the type 'char'; in C, it could map to a character array; in Pascal, it could map to an array of 'char'. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | NLFixedLengthStringType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | Length LengthMultiplier |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedLengthStringType |
|---------------------------|---|
| NAME..... | Length |
| CDIFMETAIDENTIFIER..... | 763032 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the length in characters of the <i>FixedLengthStringType</i> , in units defined by <i>LengthMultiplier</i> . |
| USAGE..... | |
| ALIASES..... | StringSize, StringCapacity |
| CONSTRAINTS..... | If specified, the multiplier used shall be contained in <i>LengthMultiplier</i> . |
| DATA TYPE..... | Integer |
| DOMAIN..... | Positive Integer |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF FixedLengthStringType |
|---------------------------|---|
| NAME..... | LengthMultiplier |
| CDIFMETAIDENTIFIER..... | 763033 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the multiplier used for the length defined in <i>Length</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | A value shall only be supplied for <i>LengthMultiplier</i> when a value is supplied for <i>Length</i> . |
| DATA TYPE..... | Enumerated |
| DOMAIN..... | Char KiloChar (1,024) MegaChar (1,048,576) GigaChar (1,073,741,824) |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.21 IntegerType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | IntegerType |
| CDIFMETAIDENTIFIER..... | 763034 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes an integral number data type that may be signed or unsigned. It may also have a maximum and minimum value specified through use of a domain. |
| USAGE..... | An instance of this data type equates to char, short, int or long in the C language. The domain can be used to determine which C type is intended to be represented. |
| ALIASES..... | Integer, Long, Short, Char. |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.22 MagnitudeType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | MagnitudeType |
| CDIFMETAIDENTIFIER..... | 763035 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a type that is used to define quantitative information, such as size, extent or significance. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | MoneyType NumericType TemporalType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.23 MoneyType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | MoneyType |
| CDIFMETAIDENTIFIER..... | 763036 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This data type is used to store monetary values. The currency can be specified. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | Currency Precision Scale |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF MoneyType |
|---------------------------|---|
| NAME..... | Currency |
| CDIFMETAIDENTIFIER..... | 763037 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the currency for the <i>MoneyType</i> . |
| USAGE | The value could be "USD" or "GBP" |
| ALIASES | |
| CONSTRAINTS..... | The allowable values are the 3-character codes defined in ISO 4217. |
| DATA TYPE..... | String |
| DOMAIN..... | as defined by the constraint. |
| LENGTH..... | 3 |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF MoneyType |
|---------------------------|---|
| NAME..... | Precision |
| CDIFMETAIDENTIFIER..... | 763038 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the type, indicating the precision to which it can be specified. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF MoneyType |
|---------------------------|---|
| NAME..... | Scale |
| CDIFMETAIDENTIFIER..... | 763039 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of <i>Scale</i> would be -3; therefore a value of 7 would be interpreted as 7000. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.24 NLFixedLengthStringType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | NLFixedLengthStringType |
| CDIFMETAIDENTIFIER..... | 763040 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a string data type, capable of storing National Language character sets, with a fixed storage capacity specified by the inherited meta-attribute <i>Length</i> . This differs from <i>NLVariableLengthStringType</i> in that the string must contain exactly the number of characters required to fill the allocated storage space. |
| USAGE..... | This is used for strings using character sets where each character in the national character set used can take more than one 8-bit byte to represent it. The number of bits required for each character may be held in the meta-attribute <i>BitsPerCharacter</i> . |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | BitsPerCharacter |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF <i>NLFixedLengthStringType</i> |
|---------------------------|---|
| NAME..... | BitsPerCharacter |
| CDIFMETAIDENTIFIER..... | 763041 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the number of bits required for each character of the <i>NLFixedLengthStringType</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | Positive Integer |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.25 *NLVariableLengthStringType*

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | <i>NLVariableLengthStringType</i> |
| CDIFMETAIDENTIFIER..... | 763042 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a string data type, capable of storing National Language character sets, with a variable capacity up to a maximum specified by the inherited meta-attribute <i>MaxLength</i> . |
| USAGE..... | This is used for strings using multi-byte character sets, where each character in the national character set used can take more than one 8-bit byte to represent it. The number of bits required for each character may be held in the meta-attribute <i>BitsPerCharacter</i> . |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | BitsPerCharacter |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF <i>NLVariableLengthStringType</i> |
|---------------------------|--|
| NAME..... | BitsPerCharacter |
| CDIFMETAIDENTIFIER..... | 763043 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the number of bits required for each character of the <i>NLVariableLengthStringType</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | Positive Integer |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.26 NumericType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | NumericType |
| CDIFMETAIDENTIFIER..... | 763044 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a type that is used to hold a number, the units of which may be specified through association to an instance of the meta-entity <i>Unit</i> . |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | ApproximateNumericType ComplexType ExactNumericType |
| LOCAL METARELATIONSHIPS..... | NumericType.IsMeasuredIn.Unit |
| LOCAL METAATTRIBUTES..... | |

8.2.27 PackedDecimalType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | PackedDecimalType |
| CDIFMETAIDENTIFIER..... | 763045 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the data type for packed decimal data. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.28 PointerQualifier

| META-ENTITY DEFINITION | |
|-------------------------------|--|
| NAME..... | PointerQualifier |
| CDIFMETAI DENTIFIER..... | 763046 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This provides a mechanism to describe the occurrence of a pointer. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| TYPE..... | Characteristic |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | |

8.2.29 PolarComplexType

| META-ENTITY DEFINITION | |
|-------------------------------|---|
| NAME..... | PolarComplexType |
| CDIFMETAI DENTIFIER..... | 763047 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype defines a type for expressing complex numbers in polar form. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT | FALSE |
| LOCAL SUBTYPES | |
| LOCAL METARELATIONSHIPS | |
| LOCAL METAATTRIBUTES | DistancePrecision DistanceScale GradientPrecision GradientScale |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF PolarComplexType |
|---------------------------|---|
| NAME..... | DistancePrecision |
| CDIFMETAI DENTIFIER..... | 763048 |
| SUBJECTAREANAME | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the distance component of the type, indicating the precision to which it can be specified. |
| USAGE | |
| ALIASES | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF PolarComplexType |
|---------------------------|---|
| NAME..... | DistanceScale |
| CDIFMETAIDENTIFIER..... | 763049 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point in the distance component of the type. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of <i>Scale</i> would be -3; therefore a value of 7 would be interpreted as 7000. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF PolarComplexType |
|---------------------------|---|
| NAME..... | GradientPrecision |
| CDIFMETAIDENTIFIER..... | 763050 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the maximum number of digits that can be supplied for the gradient component of the type, indicating the precision to which it can be specified. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF PolarComplexType |
|---------------------------|---|
| NAME..... | GradientScale |
| CDIFMETAIDENTIFIER..... | 763051 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the implicit position of the decimal point in the gradient component of the type. This may be negative to indicate that the decimal point is implicitly to the right of the last digit, for example where the values stored are all thousands, the value of <i>Scale</i> would be -3; therefore a value of 7 would be interpreted as 7000. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.30 QualifiedDataType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | QualifiedDataType |
| CDIFMETAIDENTIFIER..... | 763052 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This is a pointer or array data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Associative |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | QualifiedDataType.IsQualificationOf.DataType |
| LOCAL METAATTRIBUTES..... | |

8.2.31 Qualifier

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | Qualifier |
| CDIFMETAIDENTIFIER..... | 763053 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This provides a mechanism to describe common characteristics between <i>PointerQualifier</i> and <i>ArrayQualifier</i> . |
| USAGE..... | This meta-entity shall not be instantiated. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Characteristic |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | ArrayQualifier PointerQualifier |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | PrecedenceNumber |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF Qualifier |
|---------------------------|---|
| NAME..... | PrecedenceNumber |
| CDIFMETAIDENTIFIER..... | 763054 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the precedence of the <i>Qualifier</i> within the set of qualifiers associated with the data type to which it is related. Since many languages and methods allow complex array and pointer groupings, this allows precedence to be specified in a syntax-free fashion. |
| USAGE..... | An array of pointers to integers would cause an instance of <i>ArrayQualifier</i> to have a precedence of 1 and an instance of <i>PointerQualifier</i> to have a precedence of 2. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | Positive Integer |
| LENGTH..... | |
| ISOPTIONAL..... | FALSE |

8.2.32 RefinedDataType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | RefinedDataType |
| CDIFMETAIDENTIFIER..... | 763055 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This is a data type that is a subtype of another data type or in some way a refinement of the another data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.33 SerialType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | SerialType |
| CDIFMETAIDENTIFIER..... | 763056 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines a data type that is initialized to a given value and is then incremented (or optionally decremented) for every instance of the parent container created. The minimum and maximum values are defined using a domain. |
| USAGE..... | The data type Serial in SQL is an example of this data type. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | Cycle Interval StartingValue |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF SerialType |
|---------------------------|---|
| NAME..... | Cycle |
| CDIFMETAIDENTIFIER..... | 763057 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | For ascending sequences, this specifies that the sequence will return to the minimum value after reaching the maximum value. For descending sequences, the sequence will return to the maximum value after reaching the minimum value. If set to FALSE , this indicates that the value does not cycle. |
| USAGE..... | This is used where a bounding of the range of the sequence is desired, such as a product batch where the maximum number of objects in the process is known and each object is identified within the context of the batch. Each new batch would start the sequence anew. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Boolean |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF SerialType |
|---------------------------|--|
| NAME..... | Interval |
| CDIFMETAIDENTIFIER..... | 763058 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the interval between the values of the type. If the value is negative, then the value is decremented. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF SerialType |
|---------------------------|---|
| NAME..... | StartingValue |
| CDIFMETAIDENTIFIER..... | 763059 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the initial number to be used for the serial data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | The value specified shall fall within the range defined by the domain for the type, if this is present. |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.34 StringType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | StringType |
| CDIFMETAIDENTIFIER..... | 763060 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a string data type. |
| USAGE..... | This type should not be instantiated; one of the subtypes should be used where possible. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | FixedLengthStringType VariableLengthStringType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | CharacterSet |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF StringType |
|---------------------------|---|
| NAME..... | CharacterSet |
| CDIFMETAIDENTIFIER..... | 763061 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the encoding used to represent the characters of the string. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | This meta-attribute is used to define what character encoding is used to represent the string. The values are described by reference to the relevant standard. The strings of character encoding name are found in the IANA site (http://www.iana.org/assignments/character-sets). |
| DATA TYPE..... | String |
| DOMAIN..... | |
| LENGTH..... | 256 |
| ISOPTIONAL..... | TRUE |

8.2.35 TemporalType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | TemporalType |
| CDIFMETAIDENTIFIER..... | 763062 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a type that is used to define a temporal value. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | DateType TimeIntervalType TimeStampType TimeType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.36 TimeIntervalType

| META-ENTITY DEFINITION | |
|------------------------------|--|
| NAME..... | TimeIntervalType |
| CDIFMETAIDENTIFIER..... | 763063 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes a time interval. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | TRUE |
| LOCAL SUBTYPES..... | DayTimeIntervalType YearMonthIntervalType |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.37 TimeStampType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | TimeStampType |
| CDIFMETAIDENTIFIER..... | 763064 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This defines the timestamp data type. |
| USAGE..... | This is used to give a timestamp to an object for some operation, such as creation or updating. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | IsLocal TimeZoneHours TimeZoneMinutes |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeStampType |
|---------------------------|--|
| NAME..... | IsLocal |
| CDIFMETAIDENTIFIER..... | 763065 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies that the time is expressed in local time, with no time zone specified. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | If this meta-attribute is set to TRUE , neither <i>TimeZoneHours</i> nor <i>TimeZoneMinutes</i> shall have values supplied. |
| DATA TYPE..... | Boolean |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeStampType |
|---------------------------|--|
| NAME..... | TimeZoneHours |
| CDIFMETAIDENTIFIER..... | 763066 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies the offset in hours from UTC, as defined in ISO 9945-1. If negative, the time zone shall be to the east of the Prime Meridian; otherwise it shall be to the west. |
| USAGE..... | For example, Toronto is UTC minus five hours. |
| ALIASES..... | |
| CONSTRAINTS..... | No value shall be supplied if <i>IsLocal</i> is set to TRUE . A value shall be supplied if <i>TimeZoneMinutes</i> is supplied. |
| DATA TYPE..... | Integer |
| DOMAIN..... | -23..+23 |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

NOTE: UTC stands for Universal Coordinated Time (English translation of French term) as defined in ISO 9945-1.

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeStampType |
|---------------------------|---|
| NAME..... | TimeZoneMinutes |
| CDIFMETAIDENTIFIER..... | 763067 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies the offset in minutes from UTC. |
| USAGE..... | For example, Pakistan is UTC plus 5 hours and 45 minutes. |
| ALIASES..... | |
| CONSTRAINTS..... | No value shall be supplied if <i>IsLocal</i> is set to TRUE . A value shall be supplied if <i>TimeZoneHours</i> is supplied. |
| DATA TYPE..... | Integer |
| DOMAIN..... | 0..59 |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.38 TimeType

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | TimeType |
| CDIFMETAIDENTIFIER..... | 763068 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the time data type. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | IsLocal TimeZoneHours TimeZoneMinutes |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeType |
|---------------------------|--|
| NAME..... | IsLocal |
| CDIFMETAIDENTIFIER..... | 763069 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies that the time is expressed in local time, with no time zone specified. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | If this meta-attribute is set to TRUE , neither <i>TimeZoneHours</i> nor <i>TimeZoneMinutes</i> shall have values supplied. |
| DATA TYPE..... | Boolean |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeType |
|---------------------------|--|
| NAME..... | TimeZoneHours |
| CDIFMETAIDENTIFIER..... | 763070 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies the offset in hours from UTC, as defined in ISO 9945-1. If negative, the time zone shall be to the east of the Prime Meridian; otherwise it shall be to the west. |
| USAGE..... | For example, Toronto is UTC plus five hours. |
| ALIASES..... | |
| CONSTRAINTS..... | No value shall be supplied if <i>IsLocal</i> is set to TRUE . A value shall be supplied if <i>TimeZoneMinutes</i> is supplied. |
| DATA TYPE..... | Integer |
| DOMAIN..... | -23..+23 |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF TimeType |
|---------------------------|---|
| NAME..... | TimeZoneMinutes |
| CDIFMETAIDENTIFIER..... | 763071 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This specifies the offset in minutes from UTC. |
| USAGE..... | For example, Pakistan is UTC minus 5 hours and 45 minutes. |
| ALIASES..... | |
| CONSTRAINTS..... | No value shall be supplied if <i>IsLocal</i> is set to TRUE . A value shall be supplied if <i>TimeZoneHours</i> is supplied. |
| DATA TYPE..... | Integer |
| DOMAIN..... | 0..59 |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |

8.2.39 UnboundedArrayQualifier

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | UnboundedArrayQualifier |
| CDIFMETAIDENTIFIER..... | 763072 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This subtype of <i>ArrayQualifier</i> is used where a dimension of an array is unbounded. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Characteristic |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | |

8.2.40 Unit

| META-ENTITY DEFINITION | |
|------------------------------|---|
| NAME..... | Unit |
| CDIFMETAIDENTIFIER..... | 763073 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This describes the unit that applies to any related numeric type. It is defined in terms of coefficients of the SI basic units, and a flag to indicate if actual SI units are used. If SI units are not used, then the exponents indicate that the unit represents the concept that the SI unit represents; for example a temperature in Fahrenheit would have a coefficient for <i>ExponentForKelvin</i> of 1 . The name of the unit can also be conveyed. |
| USAGE..... | For example, a pressure measured in kilograms per square meter would have an exponent for Kilogram of 1 and one of -2 for Meter. |
| ALIASES..... | |
| CONSTRAINTS..... | |
| TYPE..... | Kernel |
| ISABSTRACT..... | FALSE |
| LOCAL SUBTYPES..... | |
| LOCAL METARELATIONSHIPS..... | |
| LOCAL METAATTRIBUTES..... | ExponentForAmpere ExponentForCandela ExponentForKelvin ExponentForKilogram ExponentForMeter ExponentForMole ExponentForSecond IsSI Name |

| META-ATTRIBUTE DEFINITION | META-ATTRIBUTE OF Unit |
|---------------------------|---|
| NAME..... | ExponentForAmpere |
| CDIFMETAIDENTIFIER..... | 763074 |
| SUBJECTAREANAME..... | Data definitions |
| SUBJECTAREAVERSION..... | 15476-3:2003 |
| DESCRIPTION..... | This contains the exponent for Amperes, which is a measure of current, if used to form the unit of measurement. |
| USAGE..... | |
| ALIASES..... | |
| CONSTRAINTS..... | |
| DATA TYPE..... | Integer |
| DOMAIN..... | |
| LENGTH..... | |
| ISOPTIONAL..... | TRUE |