



**INTERNATIONAL STANDARD ISO/IEC 9594-9:1998**  
**TECHNICAL CORRIGENDUM 2**

Published 2002-08-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION  
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**Information technology — Open Systems Interconnection —  
The Directory: Replication**

**TECHNICAL CORRIGENDUM 2**

*Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — L'annuaire: Duplication*

*RECTIFICATIF TECHNIQUE 2*

Technical Corrigendum 2 to ISO/IEC 9594-9:1998 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

IECNORM.COM : Click to view the full PDF of ISO/IEC 9594-9:1998/Cor 2:2002

INTERNATIONAL STANDARD  
ITU-T RECOMMENDATION

Information technology – Open Systems Interconnection – The Directory:  
Replication

TECHNICAL CORRIGENDUM 2

NOTE – This Technical Corrigendum covers the result of the ballot resolutions of Draft Technical Corrigenda 2, 3, and 4.

1) Defect reports covered by Draft Technical Corrigendum 2

(Covering resolutions to defect report 187, 208 and 243)

1.1) This corrects the defects reported in defect report 9594/187

In 7.2.1.1, add **root** to the list of SDSE types.

In 11.3.1.1, delete **root** from the list of SDSE types.

1.2) This corrects the defects reported in defect report 9594/208

Insert the following text into 7.2.2.3, at the end of both the second paragraph and the first sentence of the third paragraph (after "appropriate knowledge"):


and access control information.

Insert a new third paragraph into 7.2.2.3 as follows:

If subordinate knowledge is supplied, and the supplying DSE (of type **subr**) is also of type **admPoint**, then the SDSE shall additionally be of type **admPoint** and the **administrativeRole** attribute shall be supplied. If such a DSE has any immediately subordinate subentries containing **PrescriptiveACI** relating to the administrative point, then they shall also be supplied as SDSEs in the shadowed information.

NOTE – A DSE can be of type **subr** and **admPoint** in a superior DSA, when the naming context in the subordinate DSA is the start of a new administrative area.

Update Figure 3 as follows to show a subentry immediately below a subordinate reference. The subentry contains **prescriptiveACI** and is part of the shadowed information.

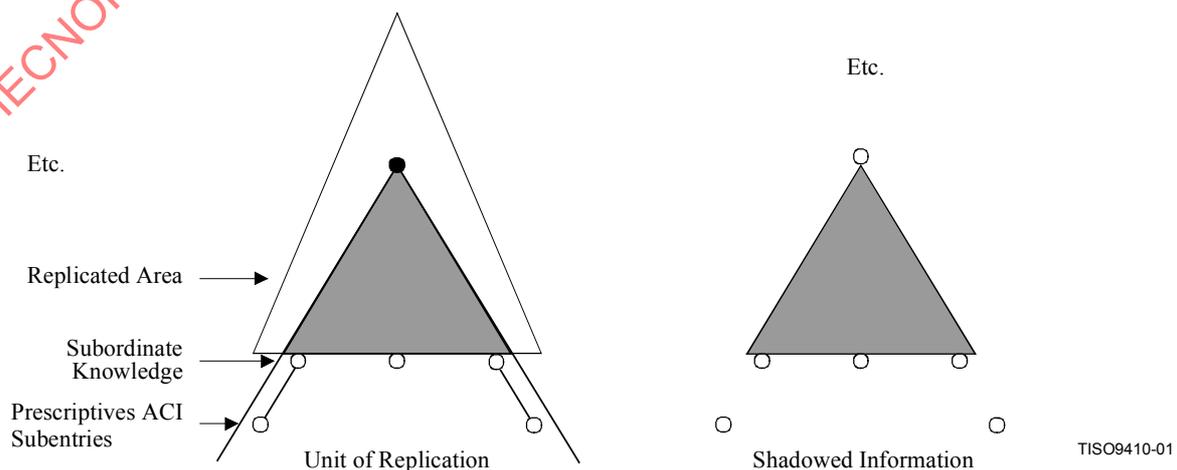

Add supporting text to 7.2 in the paragraph after Figure 3. Insert the following sentences after the sentence "Subordinate knowledge may also be replicated":

Implicit in the subordinate knowledge is the access control information which governs access to the RDN of the subordinate knowledge. When the subordinate entry is an administrative point in another DSA, then part of this access control information may be held in **prescriptiveACI** subentries beneath the subordinate knowledge.

Add the following new point d) to 9.2.4.1:

- d) if subordinate knowledge (not extended knowledge) is shadowed then any **prescriptiveACI** in subordinate subentries shall also be copied.

### 1.3) This corrects the defects reported in defect report 9594/243

In 2.1, change all references ISO/IEC 9594-x:1997 to ISO/IEC 9594-x:1998.

In clause 6, change ITU-T Rec. X.518 | ISO/IEC 9594-5 to ITU-T Rec. X.519 | ISO/IEC 9594-5.

In 9.2 in the **UnitOfReplication** type, change **ContextType** to **CONTEXT.&id**.

In 11.1:

Change **CoordinateShadowUpdate** to **coordinateShadowUpdate**.

Remove the last right curly parenthesis in the **CoordinateShadowUpdateArgument**.

Replace the ASN.1 in Annex A with:

**DirectoryShadowAbstractService**

{joint-iso-itu-t ds(5) module(1) directoryShadowAbstractService(15) 3}

DEFINITIONS IMPLICIT TAGS ::=

BEGIN

-- EXPORTS ALL --

-- The types and values defined in this module are exported for use in the other ASN.1 modules contained  
-- within the Directory Specifications, and for the use of other applications which will use them to access  
-- directory services. Other applications may use them for their own purposes, but this will not constrain  
-- extensions and modifications needed to maintain or improve the directory service.

IMPORTS

-- from ITU-T Rec. X.501 | ISO/IEC 9594-2

**directoryAbstractService, directoryOperationalBindingTypes, informationFramework,  
disp, distributedOperations, dsaOperationalAttributeTypes, enhancedSecurity,  
opBindingManagement**

FROM UsefulDefinitions {joint-iso-itu-t ds(5) module(1) usefulDefinitions(0) 3}

**Attribute, AttributeType, CONTEXT, DistinguishedName, RelativeDistinguishedName,  
SubtreeSpecification**

FROM InformationFramework informationFramework

**OPERATIONAL-BINDING, OperationalBindingID**

FROM OperationalBindingManagement opBindingManagement

**DSEType, SupplierAndConsumers**

FROM DSAOperationalAttributeTypes dsaOperationalAttributeTypes

**OPTIONALLY-PROTECTED, OPTIONALLY-PROTECTED-SEQ**

FROM EnhancedSecurity enhancedSecurity

-- from ITU-T Rec. X.511 | ISO/IEC 9594-3

**CommonResultsSeq, ContextSelection, directoryBind, directoryUnbind, EntryModification,  
SecurityParameters**

FROM DirectoryAbstractService directoryAbstractService

-- from ITU-T Rec. X.518 | ISO/IEC 9594-4

**AccessPoint**  
FROM DistributedOperations distributedOperations

-- from ITU-T Rec. X.519 | ISO/IEC 9594-5

**id-op-binding-shadow**  
FROM DirectoryOperationalBindingTypes directoryOperationalBindingTypes

**id-errcode-shadowError, id-opcode-coordinateShadowUpdate, id-opcode-requestShadowUpdate, id-opcode-updateShadow, reliableShadowSupplierInitiatedAC, reliableShadowConsumerInitiatedAC, shadowConsumerInitiatedAC, shadowSupplierInitiatedAC**  
FROM DirectoryInformationShadowProtocol disp

-- from ITU-T Rec. X.880 | ISO/IEC 13712-1

**ERROR, OPERATION**  
FROM Remote-Operations-Information-Objects  
{joint-iso-itu-t remote-operations(4) informationObjects(5) version1(0)} ;

-- bind and unbind operations --

**dSAShadowBind OPERATION ::= directoryBind**  
**dSAShadowUnbind OPERATION ::= directoryUnbind**

-- shadow operational binding --

**shadowOperationalBinding OPERATIONAL-BINDING ::= {**  
**AGREEMENT** ShadowingAgreementInfo  
**APPLICATION CONTEXTS {**  
  { shadowSupplierInitiatedAC  
    **APPLIES TO** { All-operations-supplier-initiated } } |  
  { shadowConsumerInitiatedAC  
    **APPLIES TO** { All-operations-consumer-initiated } } |  
  { reliableShadowSupplierInitiatedAC  
    **APPLIES TO** { All-operations-supplier-initiated } } |  
  { reliableShadowConsumerInitiatedAC  
    **APPLIES TO** { All-operations-consumer-initiated } } }  
**ASYMMETRIC**  
  **ROLE-A** { -- shadow supplier role  
    **ESTABLISHMENT-INITIATOR** TRUE  
    **ESTABLISHMENT-PARAMETER** NULL  
    **MODIFICATION-INITIATOR** TRUE  
    **TERMINATION-INITIATOR** TRUE }  
  **ROLE-B** { -- shadow consumer role  
    **ESTABLISHMENT-INITIATOR** TRUE  
    **ESTABLISHMENT-PARAMETER** NULL  
    **MODIFICATION-INITIATOR** TRUE  
    **MODIFICATION-PARAMETER** ModificationParameter  
    **TERMINATION-INITIATOR** TRUE }  
**ID** id-op-binding-shadow }

-- types --

**ModificationParameter** ::= SEQUENCE {  
  **secondaryShadows** SET OF SupplierAndConsumers }

**AgreementID** ::= OperationalBindingID

**ShadowingAgreementInfo** ::= SEQUENCE {  
  **shadowSubject** UnitOfReplication,  
  **updateMode** UpdateMode DEFAULT supplierInitiated : onChange : TRUE,  
  **master** AccessPoint OPTIONAL,  
  **secondaryShadows** [2] BOOLEAN DEFAULT FALSE }

UnitOfReplication ::= SEQUENCE {  
 area AreaSpecification,  
 attributes AttributeSelection,  
 knowledge Knowledge OPTIONAL,  
 subordinates BOOLEAN DEFAULT FALSE,  
 contextSelection ContextSelection OPTIONAL,  
 supplyContexts [0] CHOICE {  
     allContexts NULL,  
     selectedContexts SET SIZE (1..MAX) OF CONTEXT.&id } OPTIONAL }

AreaSpecification ::= SEQUENCE {  
 contextPrefix DistinguishedName,  
 replicationArea SubtreeSpecification }

Knowledge ::= SEQUENCE {  
 knowledgeType ENUMERATED {  
     master (0),  
     shadow (1),  
     both (2) },  
 extendedKnowledge BOOLEAN DEFAULT FALSE }

AttributeSelection ::= SET OF ClassAttributeSelection

ClassAttributeSelection ::= SEQUENCE {  
 class OBJECT IDENTIFIER OPTIONAL,  
 classAttributes ClassAttributes DEFAULT allAttributes : NULL }

ClassAttributes ::= CHOICE {  
 allAttributes NULL,  
 [0] AttributeTypes,  
 [1] AttributeTypes }

AttributeTypes ::= SET OF AttributeType

UpdateMode ::= CHOICE {  
 supplierInitiated [0] SupplierUpdateMode,  
 consumerInitiated [1] ConsumerUpdateMode }

SupplierUpdateMode ::= CHOICE {  
 onChange BOOLEAN,  
 scheduled SchedulingParameters }

ConsumerUpdateMode ::= SchedulingParameters

SchedulingParameters ::= SEQUENCE {  
 periodic PeriodicStrategy OPTIONAL, -- must be present if othertimes is set to FALSE --  
 othertimes BOOLEAN DEFAULT FALSE }

PeriodicStrategy ::= SEQUENCE {  
 beginTime Time OPTIONAL,  
 windowSize INTEGER,  
 updateInterval INTEGER }

Time ::= GeneralizedTime  
 -- as per 41.3 b) and c) of ITU-T Rec. X.680 | ISO/IEC 8824-1  
 -- shadow operations, arguments, and results --

All-operations-consumer-initiated OPERATION ::= {  
 requestShadowUpdate | updateShadow }

All-operations-supplier-initiated OPERATION ::= {  
 coordinateShadowUpdate | updateShadow }

coordinateShadowUpdate OPERATION ::= {  
 ARGUMENT CoordinateShadowUpdateArgument  
 RESULT CoordinateShadowUpdateResult  
 ERRORS { shadowError }  
 CODE id-opcode-coordinateShadowUpdate }

**CoordinateShadowUpdateArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {**  
**agreementID** AgreementID,  
**lastUpdate** Time OPTIONAL,  
**updateStrategy** CHOICE {  
    **standard** ENUMERATED {  
        noChanges (0),  
        incremental (1),  
        total (2) },  
    **other** EXTERNAL },  
**securityParameters** SecurityParameters OPTIONAL } }

**CoordinateShadowUpdateResult ::= CHOICE {**  
**null** NULL,  
**information** OPTIONALLY-PROTECTED { [0] SEQUENCE {  
    **agreementID** AgreementID,  
    **lastUpdate** Time OPTIONAL,  
    **COMPONENTS OF** CommonResultsSeq } } }

**requestShadowUpdate OPERATION ::= {**  
**ARGUMENT** RequestShadowUpdateArgument  
**RESULT** RequestShadowUpdateResult  
**ERRORS** { shadowError }  
**CODE** id-opcode-requestShadowUpdate }

**RequestShadowUpdateArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {**  
**agreementID** AgreementID,  
**lastUpdate** Time OPTIONAL,  
**requestedStrategy** CHOICE {  
    **standard** ENUMERATED {  
        incremental (1),  
        total (2) },  
    **other** EXTERNAL },  
**securityParameters** SecurityParameters OPTIONAL } }

**RequestShadowUpdateResult ::= CHOICE {**  
**null** NULL,  
**information** OPTIONALLY-PROTECTED { [0] SEQUENCE {  
    **agreementID** AgreementID,  
    **lastUpdate** Time OPTIONAL,  
    **COMPONENTS OF** CommonResultsSeq } } }

**updateShadow OPERATION ::= {**  
**ARGUMENT** UpdateShadowArgument  
**RESULT** UpdateShadowResult  
**ERRORS** { shadowError }  
**CODE** id-opcode-updateShadow }

**UpdateShadowArgument ::= OPTIONALLY-PROTECTED { [0] SEQUENCE {**  
**agreementID** AgreementID,  
**updateTime** Time,  
**updateWindow** UpdateWindow OPTIONAL,  
**updatedInfo** RefreshInformation,  
**securityParameters** SecurityParameters OPTIONAL } }

**UpdateShadowResult ::= CHOICE {**  
**null** NULL,  
**information** OPTIONALLY-PROTECTED { [0] SEQUENCE {  
    **agreementID** AgreementID,  
    **lastUpdate** Time OPTIONAL,  
    **COMPONENTS OF** CommonResultsSeq } } }

**UpdateWindow ::= SEQUENCE {**  
**start** Time,  
**stop** Time }

**RefreshInformation ::= CHOICE {**  
**noRefresh** NULL,  
**total** [0] TotalRefresh,  
**incremental** [1] IncrementalRefresh,  
**otherStrategy** EXTERNAL }