
**Industrial automation systems and
integration — Open systems application
integration framework —**

Part 1:
Generic reference description

AMENDMENT 1

*Systèmes d'automatisation industrielle et intégration — Cadres
d'intégration d'application pour les systèmes ouverts —*

Partie 1: Description générale de référence

AMENDEMENT 1



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 1 to ISO 15745-1:2003 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 5, *Architecture, communication and integration frameworks*.

STANDARDSISO.COM : Click to view the full PDF of ISO 15745-1:2003/Amd 1:2007

Industrial automation systems and integration — Open systems application integration framework —

Part 1: Generic reference description

AMENDMENT 1

Page 1, Clause 2

Add the following normative reference:

“REC-xmldsig-core-20020212, XML-Signature – W3C Recommendation 12 February 2002”

Page 5, Clause 3

Add the following term and definition:

“3.37

integrity

property that data has not been changed, destroyed, or lost in an unauthorized or accidental manner [W3C]”

Page 12, Subclause 7.2.1 and Figure 5

Replace the entire subclause and figure with the following:

“The master profile template consists of a header section, a body section, and an optional integrity signature (see Figure 5).”

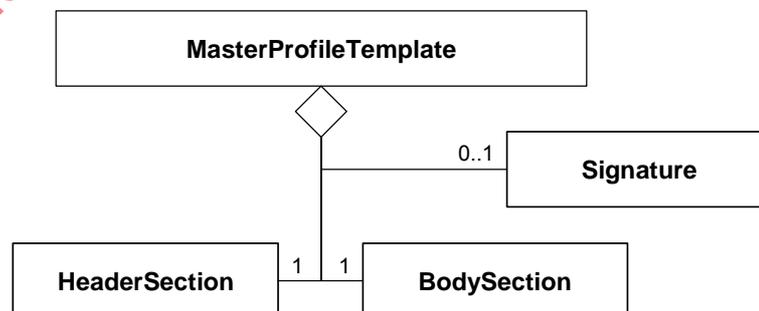


Figure 5 – Master profile template class diagram”

Pages 13 and 14, Table 1

Replace "ProfileClassID", "ISO15745Reference", "ISO15745Edition", and "IASInterfaceType" entries with the following:

Attribute	Description
ProfileClassID	<p>Identification of the profile class.</p> <p>XML data type : ProfileClassID_DataType (based on "string") – see Figure 6.</p> <p>Valid profiles classes are:</p> <ul style="list-style-type: none"> AIP Process InformationExchange Resource Device CommunicationNetwork Equipment Human Material <p>EXAMPLE : AIP</p>
ISO15745Reference	<p>Identifies the part of ISO 15745 (see ISO15745Part), together with its edition (see ISO15745Edition) and the profile technology (see ProfileTechnology).</p> <p>XML data type : ISO15745Reference_DataType – see Figure 6.</p> <p>Multiple references are allowed e.g. for a device with more than one communication interface.</p>
ISO15745Edition	<p>Edition of the referenced part of ISO 15745.</p> <p>XML data type : positiveInteger</p> <p>The first digit shall reference the edition, and the second digit shall reference the amendment (if any).</p> <p>EXAMPLE 1 : 1 (indicating 1st edition, no amendment)</p> <p>EXAMPLE 2 : 11 (indicating 1st edition, 1st amendment)</p> <p>EXAMPLE 3 : 42 (indicating 4th edition, 2nd amendment)</p>
IASInterfaceType	<p>The IAS interface type.</p> <p>XML data type : IASInterfaceType_DataType (based on "string") – see Figure 6.</p> <p>This field is optional.</p> <p>Valid IAS interface types are listed below and described in Annex B.</p> <p>Any combination of the following is permitted:</p> <ul style="list-style-type: none"> a) IAS interface types defined in ISO/IEC TR 14252 (see B.1): <ul style="list-style-type: none"> CSI Communication Services Interface HCI Human/Computer Interface ISI Information Services Interface API Application Program Interface b) IAS interface types defined in ISO 15745 (see B.2): <ul style="list-style-type: none"> CMI Configuration Management Interface ESI Engineering Support Interface FSI Facility Services Interface MTI Material Transport Interface SEI Safety And Environmental Interface USI Utility Services Interface c) User defined IAS interface types (see B.3). <p>EXAMPLE 1 : ISI ESI</p> <p>EXAMPLE 2 : CMI 37X6</p>

Page 14, Subclause 7.2.4

Replace the entire subclause with the following:

7.2.4 Integrity signature (Signature element)

A profile may include an optional dedicated element (Signature) that enables checking of the integrity of all the other elements (e.g. header and body) in the corresponding XML file.

NOTE 1 Profiles are editable text files using XML notation. Integration tools may use profiles from different sources and the integrity signature (Signature element) enables the user to determine if unauthorized or accidental changes have occurred. This is the only purpose of the integrity check.

NOTE 2 The integrity check applies only to the XML profile documents, not to the schemas that were used to generate these XML profile documents.

The Signature element (see Figure 6):

- shall follow the requirements given in the XML Digital Signature Recommendation of the World Wide Web Consortium (see REC-xmlsig-core-20020212);
- shall be of the same data type as the Signature Type of W3C;
- shall be the last XML child element of the root element (ISO15745Profile);
- shall reside in a schema which imports the "xmlsig-core-schema.xsd" schema using the namespace "http://www.w3.org/2000/09/xmlsig#".

NOTE 3 The use of the integrity signature (Signature element) with a profile container is described in 7.4.2.

Pages 15 and 16, Figure 6

Replace the entire figure with the following:

```
<?xml version="1.0" encoding="UTF-8" ?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ds="http://www.w3.org/2000/09/xmlsig#"
  <xsd:import namespace="http://www.w3.org/2000/09/xmlsig#"
    schemaLocation="xmlsig-core-schema.xsd" />

<!-- Target namespaces are not specified in this master template -->

<xsd:element name="ISO15745Profile">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="ProfileHeader" type="ProfileHeader_DataType"/>
      <xsd:choice>
        <xsd:element name="ProfileBody" type="ProfileBody_DataType" />
        <!-- This "abstract type" definition format is mandatory if a profile container is used (see 7.4).
        If desired, this definition format can also be used without a profile container. -->
        <xsd:element ref="ProfileBody" />
        <!-- This "legacy" definition format shall not be used if a profile container is used (see 7.4) -->
      </xsd:choice>
      <xsd:element name="Signature" type="ds:SignatureType" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
```

```

</xsd:complexType>
</xsd:element>

<xsd:annotation>
  <xsd:documentation>* HEADER SECTION *</xsd:documentation>
</xsd:annotation>

<xsd:complexType name="ProfileHeader_DataType">
  <xsd:sequence>
    <xsd:element name="ProfileIdentification" type="xsd:string" />
    <xsd:element name="ProfileRevision" type="xsd:string" />
    <xsd:element name="ProfileName" type="xsd:string" />
    <xsd:element name="ProfileSource" type="xsd:string" />
    <xsd:element name="ProfileClassID" type="ProfileClassID_DataType" />
    <xsd:element name="ProfileDate" type="xsd:date" minOccurs="0" maxOccurs="1" />
    <xsd:element name="AdditionalInformation" type="xsd:anyURI" minOccurs="0" maxOccurs="1" />
    <xsd:element name="ISO15745Reference" type="ISO15745Reference_DataType" />
    <xsd:element name="IASInterfaceType" type="IASInterface_DataType" minOccurs="0"
      maxOccurs="unbounded" />
  </xsd:sequence>
</xsd:complexType>

<xsd:annotation>
  <xsd:documentation>* BODY SECTION *</xsd:documentation>
</xsd:annotation>

<xsd:complexType name="ProfileBody_DataType" abstract="true" />
<!-- If the "abstract type" definition format is used, the profile body details shall be specified in the actual
  profile body data types that will be mapped to this abstract type. -->

<xsd:element name="ProfileBody">
  <!-- Profile body details are not specified in this master profile template. They only need to be specified here
    if the "legacy" definition format is used. -->
</xsd:element>

<xsd:annotation>
  <xsd:documentation>* HEADER AUXILIARY DATA TYPES *</xsd:documentation>
</xsd:annotation>

<xsd:simpleType name="ProfileClassID_DataType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="AIP" />
    <xsd:enumeration value="Process" />
    <xsd:enumeration value="InformationExchange" />
    <xsd:enumeration value="Resource" />
    <xsd:enumeration value="Device" />
    <xsd:enumeration value="CommunicationNetwork" />
    <xsd:enumeration value="Equipment" />
    <xsd:enumeration value="Human" />
    <xsd:enumeration value="Material" />
  </xsd:restriction>
</xsd:simpleType>

<xsd:complexType name="ISO15745Reference_DataType">
  <xsd:sequence>
    <xsd:element name="ISO15745Part" type="xsd:positiveInteger" />
    <xsd:element name="ISO15745Edition" type="xsd:positiveInteger" />
    <xsd:element name="ProfileTechnology" type="xsd:string" />
  </xsd:sequence>
</xsd:complexType>

```

```

<xsd:simpleType name="IASInterface_DataType">
  <xsd:union>
    <xsd:simpleType>
      <xsd:restriction base="xsd:string">
        <xsd:enumeration value="CSI" />
        <xsd:enumeration value="HCI" />
        <xsd:enumeration value="ISI" />
        <xsd:enumeration value="API" />
        <xsd:enumeration value="CMI" />
        <xsd:enumeration value="ESI" />
        <xsd:enumeration value="FSI" />
        <xsd:enumeration value="MTI" />
        <xsd:enumeration value="SEI" />
        <xsd:enumeration value="USI" />
      </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType>
      <xsd:restriction base="xsd:string">
        <xsd:length value="4" />
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:union>
</xsd:simpleType>

<xsd:annotation>
  <xsd:documentation>* ISO 15745 DEFINED DATA TYPES *</xsd:documentation>
</xsd:annotation>

<xsd:complexType name="ProfileHandle_DataType">
  <xsd:sequence>
    <xsd:element name="ProfileIdentification" type="xsd:string" />
    <xsd:element name="ProfileRevision" type="xsd:string" />
    <xsd:element name="ProfileLocation" type="xsd:anyURI" minOccurs="0" maxOccurs="1" />
  </xsd:sequence>
</xsd:complexType>

</xsd:schema>

```

NOTE 1 The definition of the profile body using an abstract type has been added for reasons of flexibility – in particular, to allow the use of a profile container (see 7.4). An example of how to use this option is given in Figure 18.

NOTE 2 Use of the "abstract type" definition format of ProfileBody (ProfileBody_DataType) will be indicated in the XML file by using the expression <ProfileBody xsi:type="xxx">. Use of the "legacy" definition format of ProfileBody (ProfileBody element) will be indicated in the XML file by using the expression <ProfileBody>.

Figure 6 – Master profile template XML schema

Page 16, Subclause 7.2.6

Add the following NOTE after Figure 6:

NOTE XML files compliant with ISO 15745-1:2003 are also compliant with the schema given in Figure 6.

Insert the following new subclause 7.4 after subclause 7.3.4.6 and before Clause 8:

7.4 Profile container

7.4.1 Structure

To facilitate the handling of profiles by software tools, it may sometimes be useful to combine several profiles within a single XML file. If such an XML file is used, it shall be constructed as shown in Figure 16:

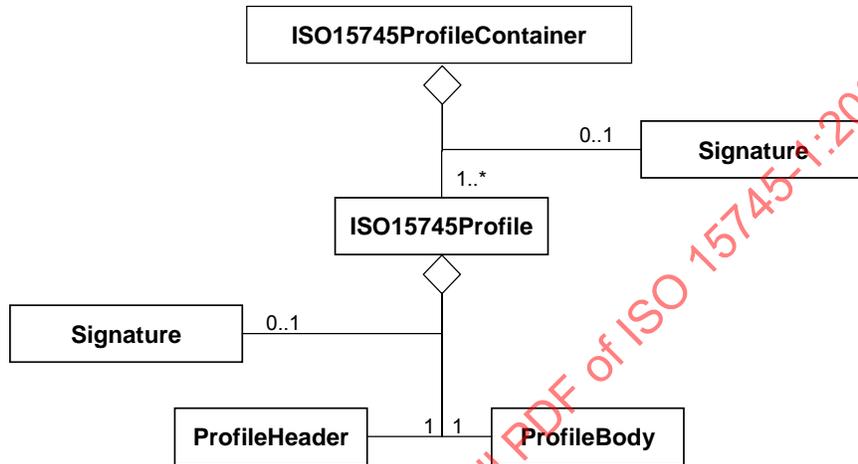


Figure 16 – ISO15745ProfileContainer class diagram

NOTE Combining several profiles within a single XML file has no impact on the related profile schemas, which are defined as separate entities.

7.4.2 Integrity signature (Signature element)

The Signature element described in 7.2.4 can also be used with a profile container.

The relevant Signature element shall be the last XML child element of the root element (ISO15745ProfileContainer) - see Figure 17.

If the ISO15745ProfileContainer is built from individual ISO15745Profile based profiles that already include Signature elements, then the contents of these individual Signature elements shall be treated as any other elements by the overall integrity checking process.

7.4.3 XML representation

The element ISO15745ProfileContainer shall be used as a container for the ISO15745Profile profile elements. The skeleton XML schema for the profile container template (see Figure 17) is derived from the master profile template XML schema shown in Figure 6.

```

<?xml version="1.0" encoding="UTF-8" ?>

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:ds="http://www.w3.org/2000/09/xmldsig#">
  <xsd:import namespace="http://www.w3.org/2000/09/xmldsig#"
    schemaLocation="xmldsig-core-schema.xsd" />
  
```

```

<!-- Target namespaces are not specified in this master template -->

<xsd:element name="ISO15745ProfileContainer">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="ISO15745Profile" minOccurs="1" maxOccurs="unbounded"/>
      <xsd:element name="Signature" type="ds:SignatureType" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

</xsd:schema>

```

Figure 17 – Profile container template XML schema

Profile templates based on the profile container template XML schema (see Figure 17) shall define a complex type derived from the abstract type ProfileBody_DataType, to be used as a template for the profile body. An example of such a definition and its use in an XML file are shown in Figure 18.

Example schema definition for a device profile body element:

```

<xsd:complexType name="ProfileBody_Device_MyFieldbus">
  <xsd:complexContent>
    <xsd:extension base="ProfileBody_DataType">
      <xsd:sequence>
        <xsd:element ref="DeviceIdentity" minOccurs="0" maxOccurs="1" />
        <xsd:element ref="DeviceManager" minOccurs="0" maxOccurs="1" />
        <xsd:element ref="DeviceFunction" minOccurs="1" maxOccurs="unbounded" />
        <xsd:element ref="ApplicationProcess" minOccurs="0" maxOccurs="unbounded" />
        <xsd:element name="ExternalProfileHandle" type="ProfileHandle_DataType"
          minOccurs="0" maxOccurs="unbounded" />
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>

```

Corresponding example XML profile contents:

```

<ProfileBody xsi:type="ProfileBody_Device_MyFieldbus">
  <DeviceIdentity/>
  <DeviceManager/>
  <DeviceFunction/>
  <ApplicationProcess/>
  <ApplicationProcess/>
</ProfileBody>

```

Figure 18 – Example of a profile body type definition

7.4.4 Naming scheme for profile body types

Names for profile body types shall be of the form (name items are separated by “_” underscores):

ProfileBody_ProfileClassID_[ProfileTechnology][_FurtherDescription]

where:

— ProfileBody is the string “ProfileBody”;