

---

---

**Space data and information transfer  
systems — Data entity dictionary  
specification language (DEDSL) —  
XML/DTD Syntax**

*Systèmes de transfert des informations et données spatiales —  
Langage de spécification pour le dictionnaire d'entités de données —  
Syntaxe XML/DTD*

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

© ISO 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 22643 was prepared by the Consultative Committee for Space Data Systems (CCSDS) (as CCSDS 647.3-B-1, January 2002) and was adopted (without modifications except those stated in Clause 2 of this International Standard) by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 13, *Space data and information transfer systems*.



# Space data and information transfer systems — Data entity dictionary specification language (DEDSL) — XML/DTD Syntax

## 1 Scope

This International Standard specifies the requirements for an extensible-markup-language (XML)/document-type-declaration (DTD) syntax for a data entity dictionary specification language (DEDSL).

The scope and field of application are furthermore detailed in subclauses 1.1 and 1.2 of the enclosed CCSDS publication.

## 2 Requirements

Requirements are the technical recommendations made in the following publication (reproduced on the following pages), which is adopted as an International Standard:

CCSDS 647.3-B-1, January 2002, *Space data and information transfer systems — Data entity dictionary specification language (DEDSL) — XML/DTD Syntax*.

For the purposes of international standardization, the modifications outlined below shall apply to the specific clauses and paragraphs of publication CCSDS 647.3-B-1.

*Pages i to v*

This part is information which is relevant to the CCSDS publication only.

*Page 1-6*

Add the following information to the reference indicated:

[1] Document CCSDS 647.1-B-1, June 2001, is equivalent to ISO 21961:2003.

*Page B-1*

Update and add the following information to the reference indicated:

[B6] Document CCSDS 301.0-B-3, January 2002, is equivalent to ISO 11104:—<sup>1)</sup>.

## 3 Revision of publication CCSDS 647.3-B-1

It has been agreed with the Consultative Committee for Space Data Systems that Subcommittee ISO/TC 20/SC 13 will be consulted in the event of any revision or amendment of publication CCSDS 647.3-B-1. To this end, NASA will act as a liaison body between CCSDS and ISO.

---

1) To be published. (Revision of ISO 11104:1991)

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

# ***Consultative Committee for Space Data Systems***


RECOMMENDATION FOR SPACE  
DATA SYSTEM STANDARDS

DATA ENTITY DICTIONARY  
SPECIFICATION LANGUAGE (DEDSL)—  
**XML/DTD SYNTAX**  
(CCSD0013)

CCSDS 647.3-B-1

**BLUE BOOK**

January 2002

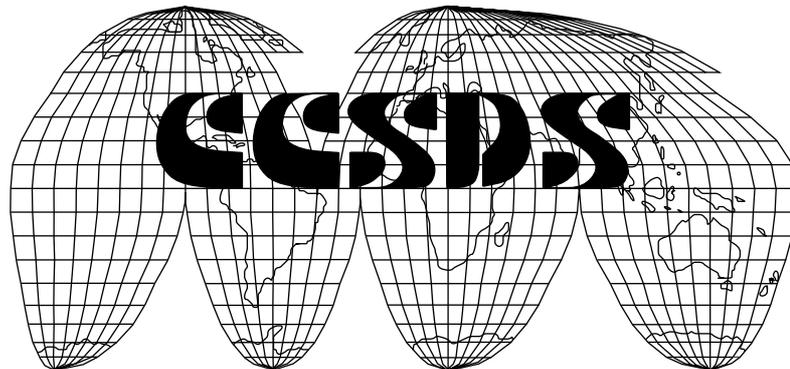

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**AUTHORITY**

|           |                    |
|-----------|--------------------|
| Issue:    | Blue Book, Issue 1 |
| Date:     | January 2002       |
| Location: | Not Applicable     |

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS Recommendations is detailed in *Procedures Manual for the Consultative Committee for Space Data Systems* (reference [B1]) and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This Recommendation is published and maintained by:

CCSDS Secretariat  
Program Integration Division (Code M-3)  
National Aeronautics and Space Administration  
Washington, DC 20546, USA

## STATEMENT OF INTENT

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of member space Agencies. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommendations** and are not considered binding on any Agency.

This **Recommendation** is issued by, and represents the consensus of, the CCSDS Plenary body. Agency endorsement of this **Recommendation** is entirely voluntary. Endorsement, however, indicates the following understandings:

- o Whenever an Agency establishes a CCSDS-related **standard**, this **standard** will be in accord with the relevant **Recommendation**. Establishing such a **standard** does not preclude other provisions which an Agency may develop.
- o Whenever an Agency establishes a CCSDS-related standard, the Agency will provide other CCSDS member Agencies with the following information:
  - The **standard** itself.
  - The anticipated date of initial operational capability.
  - The anticipated duration of operational service.
- o Specific service arrangements shall be made via memoranda of agreement. Neither this **Recommendation** nor any ensuing **standard** is a substitute for a memorandum of agreement.

No later than five years from its date of issuance, this **Recommendation** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or, (3) be retired or canceled.

In those instances when a new version of a **Recommendation** is issued, existing CCSDS-related Agency standards and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each Agency to determine when such standards or implementations are to be modified. Each Agency is, however, strongly encouraged to direct planning for its new standards and implementations towards the later version of the Recommendation.

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**FOREWORD**

This Recommendation provides a standard method to represent attributes and their values, as has been defined by the Abstract Syntax of the Data Entity Dictionary Specification Language (DEDSL) (reference [1]), using the Extensible Markup Language (XML) 1.0 Document Type Declaration (DTD) for the construction and interchange of data entity dictionaries.

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommendation is therefore subject to CCSDS document management and change control procedures which are defined in *Procedures Manual for the Consultative Committee for Space Data Systems*. Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be addressed to the CCSDS Secretariat at the address indicated on page i.

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

At time of publication, the active Member and Observer Agencies of the CCSDS were

Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- British National Space Centre (BNSC)/United Kingdom.
- Canadian Space Agency (CSA)/Canada.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- Centre National d'Etudes Spatiales (CNES)/France.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- National Aeronautics and Space Administration (NASA HQ)/USA.
- National Space Development Agency of Japan (NASDA)/Japan.

Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- Centro Tecnico Aeroespacial (CTA)/Brazil.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- Communications Research Laboratory (CRL)/Japan.
- Danish Space Research Institute (DSRI)/Denmark.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Federal Service of Scientific, Technical & Cultural Affairs (FSST&CA)/Belgium.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Industry Canada/Communications Research Centre (CRC)/Canada.
- Institute of Space and Astronautical Science (ISAS)/Japan.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- MIKOMTEK - CSIR (CSIR)/Republic of South Africa.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Oceanic & Atmospheric Administration (NOAA)/USA.
- National Space Program Office (NSPO)/Taipei.
- Swedish Space Corporation (SSC)/Sweden.
- United States Geological Survey (USGS)/USA.

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**DOCUMENT CONTROL**

| <b>Document</b>    | <b>Title and Issue</b>  | <b>Date</b>     | <b>Status</b>  |
|--------------------|---|-----------------|----------------|
| CCSDS<br>647.3-B-1 | Data Entity Dictionary Specification<br>Language (DEDSL)—XML/DTD<br>Syntax (CCSD0013) | January<br>2002 | Original Issue |

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

**CONTENTS**

| <u>Section</u>   | <u>Page</u> |
|--|-------------|
| <b>1 INTRODUCTION.....</b>                                     | <b>1-1</b>  |
| 1.1 PURPOSE AND SCOPE .....                                    | 1-1         |
| 1.2 APPLICABILITY .....  | 1-1         |
| 1.3 RATIONALE .....  | 1-2         |
| 1.4 DOCUMENT STRUCTURE.....                                    | 1-2         |
| 1.5 DEFINITIONS .....  | 1-3         |
| 1.6 REFERENCES.....  | 1-6         |
| <b>2 DEDSL IMPLEMENTATION USING XML/DTD.....</b>               | <b>2-1</b>  |
| 2.1 OVERVIEW .....   | 2-1         |
| 2.2 GENERAL DEDSL ABSTRACT SYNTAX TO XML/DTD MAPPINGS.....     | 2-1         |
| 2.3 COMPLETE DEDSL DEFINITION OF A DATA ENTITY DICTIONARY..... | 2-3         |
| <b>3 DICTIONARY_IDENTIFICATION .....</b>                       | <b>3-1</b>  |
| 3.1 OVERVIEW .....   | 3-1         |
| 3.2 DICTIONARY_NAME, CASE_SENSITIVITY.....                     | 3-3         |
| 3.3 DICTIONARY_DEFINITION.....                                 | 3-4         |
| 3.4 EXTERNAL_DICTIONARY_REFERENCE.....                         | 3-5         |
| 3.5 TEXT_FIELD_CHARACTER_SET .....                             | 3-6         |
| 3.6 DICTIONARY_LANGUAGE.....                                   | 3-7         |
| 3.7 DICTIONARY_VERSION.....                                    | 3-8         |
| 3.8 DICTIONARY_IDENTIFIER .....                                | 3-9         |
| 3.9 DEDSL_VERSION.....   | 3-10        |
| 3.10 DICTIONARY_USER_DEFINED_ATTRIBUTES.....                   | 3-11        |
| <b>4 DATA_ENTITY_DEFINITION.....</b>                           | <b>4-1</b>  |
| 4.1 OVERVIEW .....   | 4-1         |
| 4.2 IDENTIFYING ATTRIBUTES .....                               | 4-5         |
| 4.3 DEFINITIONAL ATTRIBUTES.....                               | 4-8         |
| 4.4 RELATIONAL ATTRIBUTES .....                                | 4-13        |
| 4.5 REPRESENTATIONAL ATTRIBUTES .....                          | 4-16        |
| 4.6 USER_DEFINED_ATTRIBUTES_PART .....                         | 4-25        |

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**CONTENTS (continued)**

| <u>Section</u>   | <u>Page</u> |
|--|-------------|
| <b>5 USER_DEFINED_ATTRIBUTE_DEFINITION .....</b>                     | <b>5-1</b>  |
| 5.1 OVERVIEW .....   | 5-1         |
| 5.2 ATTRIBUTE_NAME, OBLIGATION, SCOPE .....                          | 5-3         |
| 5.3 ATTRIBUTE_DEFINITION .....                                       | 5-5         |
| 5.4 ATTRIBUTE_CONDITION .....  | 5-6         |
| 5.5 ATTRIBUTE_MAXIMUM_OCCURRENCE .....                               | 5-7         |
| 5.6 ATTRIBUTE_INTEGER_TYPE .....                                     | 5-8         |
| 5.7 ATTRIBUTE_REAL_TYPE .....  | 5-9         |
| 5.8 ATTRIBUTE_IDENTIFIER_TYPE .....                                  | 5-10        |
| 5.9 ATTRIBUTE_TEXT_TYPE .....  | 5-11        |
| 5.10 ATTRIBUTE_ENUMERATED_TYPE,<br>ATTRIBUTE_ENUMERATION_VALUE ..... | 5-12        |
| 5.11 ATTRIBUTE_ENTITY_TYPE .....                                     | 5-13        |
| 5.12 ATTRIBUTE_COMMENT .....   | 5-14        |
| 5.13 ATTRIBUTE_INHERITANCE .....                                     | 5-15        |
| 5.14 ATTRIBUTE_DEFAULT_VALUE .....                                   | 5-16        |
| 5.15 ATTRIBUTE_VALUE_EXAMPLE .....                                   | 5-17        |
| <b>6 DEDSL CONFORMANCE .....</b>                                     | <b>6-1</b>  |
| 6.1 CONFORMANCE LEVEL 1: NOTATION COMPLIANCE .....                   | 6-1         |
| 6.2 CONFORMANCE LEVEL 2: INTEROPERABILITY COMPLIANCE .....           | 6-1         |
| <b>7 RESERVED KEYWORDS .....</b>                                     | <b>7-1</b>  |
| <b>8 DTD .....</b>   | <b>8-1</b>  |
| <b>ANNEX A EXAMPLES.....</b>   | <b>A-1</b>  |
| <b>ANNEX B INFORMATIVE REFERENCES.....</b>                           | <b>B-1</b>  |
| <u>Table</u>   |             |
| 2-1 DEDSL Types/XML/DTD Types Mapping .....                          | 2-2         |

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

## 1 INTRODUCTION

### 1.1 PURPOSE AND SCOPE

The purpose of this Recommendation is to provide a standard method to represent the attributes and their values, as has been defined by the Abstract Syntax of the Data Entity Dictionary Specification Language (DEDSL) (reference [1]), using the Extensible Markup Language (XML) 1.0 Document Type Declaration (DTD) (reference [2]) for the construction and interchange of data entity dictionaries.

This Recommendation is registered under the Consultative Committee for Space Data Systems (CCSDS) Authority and Description Identifier (ADID): CCSD0013.

This Recommendation does not exclude other implementation recommendations as described in reference [1].

### 1.2 APPLICABILITY

This Recommendation is intended to be used by:

- Data producers, to construct dictionaries that describe, in a more formal manner, data entities within their data products.
- Data users, to understand data received from data producers who have used this Recommendation to construct their dictionaries.
- An organization that mandates the attributes used to define each entity description in dictionaries used within that organization.
- A particular community, such as Earth observation, space physics, archives, etc., to establish a degree of standardization for the contents of any data dictionary associated or not with a data product. This would be done by using this Recommendation to define a community-wide data dictionary.
- Organizations and communities, to exchange the contents of a data dictionary in a standardized manner, i.e., to facilitate interoperability.

### 1.3 RATIONALE

A given data entity may take on a range of values that are represented differently within different formats or in native formats. However, there is information about that data entity, such as its definition and other semantic attributes, which is independent of the values and their representation in any given format. This information includes:

- the exchange of data entity dictionaries among disciplines and organizations which typically use differing standard formats;
- the exchange of data entity dictionary information with registration authorities such as the CCSDS/International Organization for Standardization (ISO) Control Authority (see references [5] and [B4]); and
- the exchange of data entity dictionary information using general data packaging techniques such as the CCSDS/ISO Standard Formatted Data Unit (SFDU) (see references [1] and [B2]).

### 1.4 DOCUMENT STRUCTURE

This document presents the XML/DTD implementation of the DEDSL Abstract Syntax in a layered manner. The reader should be familiar with both the DEDSL Abstract Syntax (reference [1]) and the XML/DTD Recommendation (reference [2]) in order to fully understand this document.

In summary, the document is structured as follows:

- Section 2 introduces the use of XML/DTD as implementation language of the DEDSL.
- Section 3 specifies the exact XML/DTD syntax for each DEDSL dictionary attribute and how to define a data entity dictionary in XML/DTD.
- Section 4 specifies the exact XML/DTD syntax for each DEDSL data entity attribute and how to define a data entity in XML/DTD.
- Section 5 specifies the exact XML/DTD syntax for each DEDSL descriptor and how to define user-defined attribute in XML/DTD.
- Section 6 discusses the levels of conformance to the DEDSL Recommendation, in relation to the abstract specification and the XML/DTD implementation, and the CCSDS Control Authority registration of this Recommendation.
- Section 7 lists the keywords associated with the XML/DTD implementation.
- Section 8 provides the complete XML/DTD implementation.
- Annex A provides an XML implementation example.
- Annex B provides a list of references that may be valuable to the user of this Recommendation as background material, or as implementation guidelines for using this Recommendation.

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**1.5 DEFINITIONS****1.5.1 ACRONYMS AND ABBREVIATIONS**

The following acronyms and abbreviations are used throughout this Recommendation:

|       |  |
|-------|--|
| ADID  | Authority and Description Identifier               |
| ASCII | American Standard Code for Information Interchange |
| CCSDS | Consultative Committee for Space Data Systems      |
| DED   | Data Entity Dictionary                             |
| DEDSL | Data Entity Dictionary Specification Language      |
| DTD   | Document Type Declaration                          |
| ID    | Identifier   |
| ISO   | International Organization for Standardization     |
| LVO   | Label Value Object                                 |
| SFDU  | Standard Formatted Data Unit                       |
| XML   | Extensible Markup Language                         |

**1.5.2 GLOSSARY OF TERMS**

For the purposes of this document, the following definitions apply:

**Attribute** A piece of information that describes a Data Entity or Dictionary Entity. This information characterizes or enhances the understanding of the data that is described. Attributes are used to define the semantics of data entities.

**Attribute Descriptor** A piece of information that describes an attribute. This document specifies a set of descriptors for attribute description.

**Attribute Value** A value associated with an attribute instance.

**Composite Data Entity** A data entity which consists of a combination of various other elementary and composite entities.

**Constant** A named constant value that is used within a dictionary but is not part of the data themselves. Use of constants enables data entity dictionaries to specify values which will be used by several projects or within a domain (e.g., astronomy constants, image size, etc.).

|                               |  |
|-------------------------------|--|
| <b>Data Entity</b>            | A concept that can, or does, take on one or more values. The concept, and optionally constraints on the representation of its value, are defined by attributes and their values.   |
| <b>Data Entity Dictionary</b> | A collection of semantic definitions of various data entities, together with a few mandatory and optional attributes about the collection as a whole. Data entity dictionaries may be just for a single product, i.e., all the data entities within a single product are described in a corresponding single dictionary, or the data entity dictionary may be a discipline-oriented dictionary that holds a number of previously defined data entity definitions which may be used by data designers and users as references. Some parts of a dictionary are optional. In practical terms the dictionary could be a file or a Standard Formatted Data Unit (SFDU) Label-Value Object (LVO) value field (see references [3] and [B2]). Within this Recommendation, the expression ‘data entity dictionary’ can refer either to the notion of data entity dictionaries, or to a data entity dictionary instance. A data entity dictionary is also an entity, called Dictionary Entity. |
| <b>Data Product</b>           | A collection of one or more data items that are packaged for or by a specific application.   |
| <b>Defaulted</b>              | Indication of an attribute or descriptor value that is understood when the attribute or descriptor is not explicitly included in the containing definition.  |
| <b>Descriptor Name</b>        | An Identifier that is the name of the descriptor.  |
| <b>Descriptor Type</b>        | The characterization of the descriptor value; e.g., text, identifier, integer.   |
| <b>Elementary Data Entity</b> | A data entity whose data type is elementary, that is Integer, Real, Text or Enumerated.  |
| <b>Enumerated</b>             | A set containing a restricted number of discrete values, where each discrete value is named and unique within the set.   |
| <b>Identifier</b>             | An XML CDATA, that designates something.   |
| <b>Integer</b>                | The set of integer values. It can optionally be defined more precisely by specifying a range (minimum and maximum bounds).   |
| <b>Model</b>                  | A data entity described independently from any instance in a data product and corresponding to a reusable data entity definition, from which other data entities may inherit the attributes and apply some specialization rules.   |

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

|                               |   |
|-------------------------------|---|
| <b>Real</b>                   | The set of real values. It can optionally be defined more precisely by specifying a range (minimum and maximum bounds).   |
| <b>Semantics</b>              | Information that defines the meaning rather than the physical representation of data. Semantics potentially cover a very large domain, from the simple domain, such as the units of one data entity, to a more complex one, such as the relationship between a data entity and another. |
| <b>Standard Attribute</b>     | One of the attributes defined within the DEDSL Abstract Syntax Recommendation (reference [1]).  |
| <b>Syntax</b>                 | Information defining the physical representation of data. It includes the structural arrangement of the fields within the data on the exchanged media.  |
| <b>Text</b>                   | A sequence of characters. The set of allowed characters is defined in the Data Entity Dictionary.   |
| <b>User Defined Attribute</b> | An attribute that is defined by a particular user or project and after definition is then used in the same manner as a Standard Attribute within that data entity dictionary.   |

### 1.5.3 NOMENCLATURE

The following conventions apply throughout this Recommendation:

- a) the words 'shall' and 'must' imply binding and verifiable specification;
- b) The word 'should' implies an optional, but desirable, specification;
- c) The word 'may' implies an optional specification;
- d) The words 'is', 'are' and 'will' imply statements of fact.

### 1.6 REFERENCES

The following documents contain provisions (through references within this text) which constitute provisions of this Recommendation. At the time of publication the indicated editions were valid. All documents are subject to revision, and users of this Recommendation are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently available CCSDS Recommendations.

- [1] *Data Entity Dictionary Specification Language (DEDSL)—Abstract Syntax (CCSD0011)*. Recommendation for Space Data System Standards, CCSDS 647.1-B-1. Blue Book. Issue 1. Washington, D.C.: CCSDS, June 2001.
- [2] *Extensible Markup Language (XML) 1.0 (Second Edition)—W3C Recommendation 6, October 2000*. <http://www.w3.org/TR/2000/REC-xml-20001006>
- [3] *Standard Formatted Data Units—Structure and Construction Rules*. Recommendation for Space Data System Standards, CCSDS 620.0-B-2. Blue Book. Issue 2. Washington, D.C.: CCSDS, May 1992. (ISO 12175)
- [4] *ASCII Encoded English (CCSD0002)*. Recommendation for Space Data System Standards, CCSDS 643.0-B-1. Blue Book. Issue 1. Washington, D.C.: CCSDS, November 1992. (ISO 14962)
- [5] *Standard Formatted Data Units—Control Authority Procedures*. Recommendation for Space Data System Standards, CCSDS 630.0-B-1. Blue Book. Issue 1. Washington, D.C.: CCSDS, June 1993. (ISO 13764)
- [6] *Code for the Representation of Names of Languages*. International Standard, ISO 639-2-1998. Geneva: ISO, 1998.

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**2 DEDSL IMPLEMENTATION USING XML/DTD****2.1 OVERVIEW**

Data Entity Dictionary Specification Language (DEDSL)—Abstract Syntax (CCSD0011) (reference [1]) defines an abstract standard.

One recommended method of constructing and conveying a Data Entity Dictionary is by using the XML 1.0 (reference [2]).

XML is designed to support the conveyance of named values, and is therefore suitable for implementation of the abstract standard. This Recommendation bases its implementation on XML with DTDs, but specifies additional semantic rules: new keywords and new semantic constructs (see section 7 for the complete list of keywords).

The following subsections specify the XML implementation of the abstract standard in the following order:

- Subsection 2.1 defines the general mapping of DEDSL Abstract Syntax concepts and elements to XML constructs, and it includes restrictions related to the XML implementation.
- Subsection 2.2 provides the structure of a complete data entity dictionary using XML. It is implemented as a single XML file compliant with a DTD and, is therefore separate from any data which it describes.

**2.2 GENERAL DEDSL ABSTRACT SYNTAX TO XML/DTD MAPPINGS**

The following mapping rules apply.

**a) Descriptor names and attribute names**

The descriptor names and attribute names are implemented as XML/DTD elements and attributes and are normally case-sensitive. Therefore, these names consist of a sequence of XML/DTD unrestricted Characters. See section 5 of reference [1] for further restrictions.

**b) Descriptor values and attribute values**

The descriptor values and attribute values are implemented as DTD elements(!ELEMENT) or Attributes (!ATTLIST). Due to DTD limitations, descriptor values that have defaults or are enumerated must be expressed as XML Attributes.

In the DTD, the optional character following the name of an element, or a list of elements, governs whether the element may occur one or more (+), zero or more (\*), or zero or one

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

times (?) (optional and conditional descriptors). The absence of such an operator means that the element must appear exactly once (Mandatory descriptors).

When the descriptor is implemented as an XML attribute, #REQUIRED means that the attribute must always be provided (Mandatory descriptor) and, #IMPLIED means that no default value is provided.

The Identifier type is implemented as PCDATA or CDATA (reference [2]) restricted by the interoperability constraints. The Enumerated type is implemented as XML Enumeration; LIST as XML seq; and CHOICE as XML choice (reference [2]).

Multiple DEDSL constructs may be implemented in a single XML construct. For example, 'name, class and definition' are all a part of the XML element DATA\_ENTITY\_DEFINITION.

The mappings from the DEDSL Abstract Syntax types to XML/DTD representations are provided in table 2-1:

**Table 2-1: DEDSL Types/XML/DTD Types Mapping**

| DEDSL Types   | XML/DTD Types  |
|---|--|
| INTEGER   | PCDATA or CDATA  |
| REAL  | PCDATA or CDATA  |
| IDENTIFIER  | PCDATA or CDATA (see note 1)   |
| TEXT  | PCDATA or CDATA (see note 2)   |
| ENUMERATED  | XML Enumeration  |
| ENTITY_TYPE   | ENTITY_TYPE (see note 3)   |
| LIST consisting of only mandatory elements                                | XML sequence: a DTD Element with multiple contained elements not including optional elements |
| LIST consisting of a variable number of elements due to optional elements | DTD Element containing mandatory and optional elements with a concluding star                |
| CHOICE  | XML choice: a DTD element containing choice of subelements                                   |
| CHOICE appearing in attribute values                                      | DTD !Attlist Attribute   |

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

## NOTES

- 1 The interoperability constraints on Identifiers specified in the DEDSL Abstract Syntax (reference [1]) should be applied (see section 6).
- 2 Values of type Text are expressed as XML PCDATA or CDATA. It is recommended that they be included inside XML CDATA sections. They are used to escape blocks of text containing characters which would otherwise be recognized as XML markup. CDATA sections begin with the string <![CDATA[ and end with the string ]]>.
- 3 There is no XML Type equivalent to Entity\_Type, which refers to the data type of the entity. Therefore, the keyword Entity\_Type is defined.

## 2.3 COMPLETE DEDSL DEFINITION OF A DATA ENTITY DICTIONARY

### 2.3.1 OVERVIEW

The structure of a complete Data Entity Dictionary using XML is bounded by an aggregation ELEMENT called 'DATA\_ENTITY\_DICTIONARY'. The goal of this element is only to structure the definition of the dictionary. The Data Entity Dictionary is composed of three elements. The obligation column indicates whether an element is mandatory (M) or optional (O).

| Name of element                   | Obligation | Occurrence |
|-----------------------------------|------------|------------|
| DICTIONARY_IDENTIFICATION         | M          | 1          |
| DATA_ENTITY_DEFINITION            | M          | 'n'        |
| USER_DEFINED_ATTRIBUTE_DEFINITION | O          | 'n'        |

### 2.3.2 DTD DEFINITION

```
<!ELEMENT DATA_ENTITY_DICTIONARY (
  DICTIONARY_IDENTIFICATION,
  DATA_ENTITY_DEFINITION+,
  USER_DEFINED_ATTRIBUTE_DEFINITION*
)>
```

### 2.3.3 XML EXAMPLE

```
<DATA_ENTITY_DICTIONARY>
  <DICTIONARY_IDENTIFICATION>
    see section 3
  </DICTIONARY_IDENTIFICATION>
  <DATA_ENTITY_DEFINITION>
    see section 4
  </DATA_ENTITY_DEFINITION>
  <DATA_ENTITY_DEFINITION>
    see section 4
  </DATA_ENTITY_DEFINITION>
  <USER_DEFINED_ATTRIBUTE_DEFINITION>
```

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

see section 5  
</USER\_DEFINED\_ATTRIBUTE\_DEFINITION>  
</DATA\_ENTITY\_DICTIONARY>

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

### 3 DICTIONARY\_IDENTIFICATION

#### 3.1 OVERVIEW

The following table provides for each category the standard attributes that are defined by this Recommendation for data entities. The obligation column indicates whether an attribute is mandatory (M), conditional (C), optional (O) or defaulted (D) in the definition of each data entity appearing in a conforming DED.

| Attribute Category      | Name of data entity attribute            | Obligation | Occurrence |
|-------------------------|--|------------|------------|
| Identifying             | DICTIONARY_NAME                          | M          | 1          |
| Definitional            | DICTIONARY_DEFINITION                    | O          | 1          |
| Relational              | EXTERNAL_DICTIONARY_REFERENCE            | C          | 'n'        |
| Representational        | TEXT_FIELD_CHARACTER_SET<br>(see note 1) | M          | 1          |
|                         | CASE_SENSITIVITY                         | D          | 1          |
|                         | DICTIONARY_LANGUAGE                      | M          | 1          |
| Administrative          | DICTIONARY_VERSION                       | O          | 1          |
|                         | DICTIONARY_IDENTIFIER                    | O          | 1          |
|                         | DEDSL_VERSION                            | M          | 1          |
| User defined attributes | DICTIONARY_USER_DEFINED_ATTRIBUTES       | O          | 1          |

Note The TEXT\_FIELD\_CHARACTER\_SET attribute is already defined in the header of an XML file by the ENCODING attribute. Therefore, it does not appear in the DTD below.

#### DTD DEFINITION

```
<!ELEMENT DICTIONARY_IDENTIFICATION (
  DICTIONARY_NAME,
  DICTIONARY_DEFINITION?,
  EXTERNAL_DICTIONARY_REFERENCE*,
  DICTIONARY_LANGUAGE,
  DICTIONARY_VERSION?,
  DICTIONARY_IDENTIFIER?,
  DEDSL_VERSION,
  DICTIONARY_USER_DEFINED_ATTRIBUTES?
)>
```

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

```
< !ATTLIST DICTIONARY_NAME CASE_SENSITIVITY  
(CASE_SENSITIVE|NOT_CASE_SENSITIVE) "NOT_CASE_SENSITIVE" >
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**3.2 DICTIONARY\_NAME, CASE\_SENSITIVITY****3.2.1 OVERVIEW**

Attribute\_Definition : Human-readable name for the Data Entity Dictionary

Attribute\_Obligation : Mandatory

Attribute\_Maximum\_Occurrence : 1

Attribute\_name : CASE\_SENSITIVITY

Attribute\_Definition : Specifies the case sensitivity for the Identifiers used as values for the attributes of the data entities contained in the dictionary

Attribute\_Obligation : Defaulted

Attribute\_Maximum\_Occurrence 1

**3.2.2 DTD DEFINITION**

```
<!ELEMENT DICTIONARY_NAME (#PCDATA) >
<!ATTLIST DICTIONARY_NAME CASE_SENSITIVITY (CASE_SENSITIVE |
NOT_CASE_SENSITIVE) "NOT_CASE_SENSITIVE">
```

**3.2.3 XML EXAMPLE**

```
<DICTIONARY_NAME CASE_SENSITIVITY="NOT_CASE_SENSITIVE">
Planetary_Science_Data_Dictionary</DICTIONARY_NAME>
```

### 3.3 DICTIONARY\_DEFINITION

#### 3.3.1 OVERVIEW

Attribute\_Definition : Human readable definition for the Data Entity Dictionary

Attribute\_Obligation : Optional

Attribute\_Maximum\_Occurrence : 1

#### 3.3.2 DTD DEFINITION

```
<!ELEMENT DICTIONARY_DEFINITION (#PCDATA) >
```

#### 3.3.3 XML EXAMPLE

```
<DICTIONARY_DEFINITION>This dictionary contains data entity definitions relative to planetary science and they may be re-used for defining data products. </DICTIONARY_DEFINITION>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**3.4 EXTERNAL\_DICTIONARY\_REFERENCE****3.4.1 OVERVIEW**

Attribute\_Definition : Reference to another Data Entity Dictionary whose models are re-used in the current one, defined as the local name of the Data Entity Dictionary, followed by its identifier and its associated registration authority

Attribute\_Obligation : Conditional

Attribute\_Maximum\_Occurrence : 'n'

**3.4.2 DTD DEFINITION**

```
<!ELEMENT EXTERNAL_DICTIONARY_REFERENCE (
  LOCAL_NAME,
  DICTIONARY_ID,
  REGISTRATION_AUTHORITY
)>

<!ELEMENT LOCAL_NAME (#PCDATA) >
<!ELEMENT DICTIONARY_ID (#PCDATA) >
<!ELEMENT REGISTRATION_AUTHORITY (#PCDATA) >
```

**3.4.3 XML EXAMPLE**

```
<EXTERNAL_DICTIONARY_REFERENCE>
  <LOCAL_NAME>CDPP_Plasma_Dictionary</LOCAL_NAME>
  <DICTIONARY_ID>FCST0172</DICTIONARY_ID>
  <REGISTRATION_AUTHORITY>CCSDS_Control_Authority
</REGISTRATION_AUTHORITY>
</EXTERNAL_DICTIONARY_REFERENCE>
```

### 3.5 TEXT\_FIELD\_CHARACTER\_SET

Attribute\_Definition : Name of the Character Set that is valid for TEXT value type within the dictionary

Attribute\_Obligation : Mandatory

Attribute\_Maximum\_Occurrence : 1

Already defined in the ENCODING attribute of the XML file header.

An example of XML would be:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**3.6 DICTIONARY\_LANGUAGE****3.6.1 OVERVIEW**

Attribute\_Definition : Main natural language that is valid for any value of type TEXT given to the attributes of the current entity. When used in a data entity, the value of the attribute overrides the value specified for the dictionary entity. It is defined as the English name of the language and its associated 2- or 3-letter code as specified in ISO 639-2 (reference [6]).

Attribute\_Obligation : Mandatory

Attribute\_Maximum\_Occurrence : '1'

NOTE – This is the XML implementation of the LANGUAGE attribute reference [1].

**3.6.2 DTD DEFINITION**

```
<!ELEMENT DICTIONARY_LANGUAGE EMPTY>
<!ATTLIST DICTIONARY_LANGUAGE ISO_CODE CDATA #REQUIRED>
<!ATTLIST DICTIONARY_LANGUAGE IN_ENGLISH CDATA #REQUIRED>
```

**3.6.3 XML EXAMPLE**

```
<DICTIONARY_LANGUAGE ISO_CODE="fr" IN_ENGLISH="FRENCH"/>
```

### 3.7 DICTIONARY\_VERSION

#### 3.7.1 OVERVIEW

Attribute\_Definition : Version of the Data Entity Dictionary

Attribute\_Obligation : Optional

Attribute\_Maximum\_Occurrence : 1

#### 3.7.2 DTD DEFINITION

```
<!ELEMENT DICTIONARY_VERSION (#PCDATA) >
```

#### 3.7.3 XML EXAMPLE

```
<DICTIONARY_VERSION>1.0</DICTIONARY_VERSION>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

### 3.8 DICTIONARY\_IDENTIFIER

#### 3.8.1 OVERVIEW

Attribute\_Definition : The Identifier under which the Data Entity Dictionary has been registered at a registration Authority

Attribute\_Obligation : Optional

Attribute\_Maximum\_Occurrence : 1

#### 3.8.2 DTD DEFINITION

```
<!ELEMENT DICTIONARY_IDENTIFIER (#PCDATA) >
```

#### 3.8.3 XML EXAMPLE

```
<DICTIONARY_IDENTIFIER>FCST0185</DICTIONARY_IDENTIFIER>
```

### 3.9 DEDSL\_VERSION

#### 3.9.1 OVERVIEW

Attribute\_Definition : CCSDS document number of the document  
: corresponding to the XML implementation of the  
Abstract Syntax. Note that this reference contains the  
version.

Attribute\_Obligation : Mandatory

Attribute\_Maximum\_Occurrence : 1

#### 3.9.2 DTD DEFINITION

```
<!ELEMENT DEDSL_VERSION (#PCDATA) >
```

#### 3.9.3 XML EXAMPLE

```
<DEDSL_VERSION>CCSDS 647.3-B-1</DEDSL_VERSION>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**3.10 DICTIONARY\_USER\_DEFINED\_ATTRIBUTES**

NOTE – The users can freely add new attributes for the dictionary description part. All the user's defined attributes relative to the dictionary must be grouped under the `DICTIONARY_USER_DEFINED_ATTRIBUTES` element. In all cases, the original DEDSL DTD must be modified to add the new attributes, and each new attribute must have a definition in the `USER_DEFINED_ATTRIBUTE_DEFINITION` part of the `DATA_ENTITY_DICTIONARY` with the `ATTRIBUTE_SCOPE` set to `DICTIONARY` or `ALL` (see section 5 for details).

**3.10.1 DTD DEFINITION**

This line in the default DTD :

```
<!ELEMENT DICTIONARY_USER_DEFINED_ATTRIBUTES EMPTY>
```

must be replaced by the following ones in order to have a validating DTD

```
<!ELEMENT DICTIONARY_USER_DEFINED_ATTRIBUTES (DICTIONARY_AUTHOR)>
<!ELEMENT DICTIONARY_AUTHOR (#PCDATA)>
```

**3.10.2 XML EXAMPLE**

```
<DICTIONARY_USER_DEFINED_ATTRIBUTES>
  <DICTIONARY_AUTHOR>PHIL COLLINS</DICTIONARY_AUTHOR>
</DICTIONARY_USER_DEFINED_ATTRIBUTES>
```

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

## 4 DATA\_ENTITY\_DEFINITION

### 4.1 OVERVIEW

The following table provides for each category the standard attributes that are defined by this Recommendation for data entities. The obligation column indicates whether an attribute is mandatory (M), conditional (C), optional (O) or defaulted (D) in the definition of each data entity appearing in a conforming DED.

| Attribute Category | Name of data entity attribute  | Obligation | Occurrence |
|--------------------|--|------------|------------|
| Identifying        | NAME   | M          | 1          |
|                    | ALIAS  | O          | 'n'        |
|                    | CLASS  | D          | 1          |
| Definitional       | DEFINITION   | M          | 1          |
|                    | SHORT_DEFINITION   | O          | 1          |
|                    | COMMENT  | O          | 'n'        |
|                    | UNITS (see note 1)   | C          | 1          |
|                    | SPECIFIC_INSTANCE  | O          | 'n'        |
| Relational         | INHERITS_FROM  | O          | 1          |
|                    | KEYWORD  | O          | 'n'        |
|                    | RELATION   | O          | 'n'        |
| Representational   | INTEGER_TYPE,<br>REAL_TYPE,<br>TEXT_TYPE,<br>ENUMERATED_TYPE,<br>COMPOSITE_TYPE<br>(see notes 2 and 3) | C          | 1          |
|                    | ENUMERATION_VALUES   | C          | 'n'        |
|                    | ENUMERATION_MEANING  | O          | 'n'        |
|                    | ENUMERATION_CONVENTION   | O          | 'n'        |
|                    | RANGE  | O          | 1          |
|                    | TEXT_SIZE  | C          | 1          |
|                    | CASE_SENSITIVITY   | O          | 1          |
|                    | LANGUAGE   | O          | 1          |
|                    | CONSTANT_VALUE   | O          | 1          |

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

|                         |                              |   |   |
|-------------------------|------------------------------|---|---|
| User defined attributes | USER_DEFINED_ATTRIBUTES_PART | O | 1 |
|-------------------------|------------------------------|---|---|

NOTES

- 1 If the data entity is non-scalar, then the attribute shall not be specified.
- 2 This attribute must be present for a product data field definition and for a constant definition (CLASS attribute set to DATA\_FIELD or CONSTANT), and is optional for a model definition (CLASS attribute set to MODEL).
- 3 Several data type-dependent attributes have been moved to REPRESENTATIONAL to allow their Conditionality to be expressed in the DTD with minimum new constructs.

DTD DEFINITION

```
<!ELEMENT DATA_ENTITY_DEFINITION (
  ALIAS*,
  DEFINITIONAL_PART,
  RELATIONAL_PART?,
  REPRESENTATIONAL_PART?,
  USER_DEFINED_ATTRIBUTES_PART?
)>
<!ATTLIST DATA_ENTITY_DEFINITION NAME CDATA #REQUIRED>
<!ATTLIST DATA_ENTITY_DEFINITION CLASS (MODEL|DATA_FIELD|CONSTANT)
"DATA_FIELD">
```

```
<!ELEMENT ALIAS (#PCDATA)>
<!ATTLIST ALIAS NAME CDATA #REQUIRED>
```

```
<!-- *** DEFINITIONAL PART *** -->
```

```
<!ELEMENT DEFINITIONAL_PART (
  DEFINITION,
  SHORT_DEFINITION?,
  COMMENT*,
  UNITS*,
  SPECIFIC_INSTANCE*
)>
```

```
<!ELEMENT DEFINITION (#PCDATA)>
```

```
<!ELEMENT SHORT_DEFINITION (#PCDATA)>
```

```
<!ELEMENT COMMENT (#PCDATA)>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

```

<!ELEMENT UNITS (#PCDATA)>

<!ELEMENT SPECIFIC_INSTANCE (#PCDATA)>
<!ATTLIST SPECIFIC_INSTANCE VALUE CDATA #REQUIRED>

<!-- *** RELATIONAL PART *** -->

<!ELEMENT RELATIONAL_PART (
    INHERITS_FROM?,
    RELATION*,
    KEYWORD*
)>

<!ELEMENT INHERITS_FROM (#PCDATA)>
<!ATTLIST INHERITS_FROM EXTERNAL_DICTIONARY CDATA #IMPLIED>

<!ELEMENT RELATION (#PCDATA)>
<!ATTLIST RELATION WITH CDATA #REQUIRED>
<!ATTLIST RELATION EXTERNAL_DICTIONARY CDATA #IMPLIED>

<!ELEMENT KEYWORD (#PCDATA)>

<!-- *** REPRESENTATIONAL PART *** -->

<!ELEMENT REPRESENTATIONAL_PART (
    INTEGER_TYPE | REAL_TYPE | TEXT_TYPE | ENUMERATED_TYPE | COMPOSITE_TYPE
)>

<!-- *** INTEGER TYPE *** -->

<!ELEMENT INTEGER_TYPE (
    (INTEGER_RANGE)?,
    (INTEGER_CONSTANT_VALUE)?
)>

<!ELEMENT INTEGER_RANGE EMPTY>
<!ATTLIST INTEGER_RANGE MIN CDATA #REQUIRED>
<!ATTLIST INTEGER_RANGE MAX CDATA #REQUIRED>

<!ELEMENT INTEGER_CONSTANT_VALUE (#PCDATA)>

<!-- *** REAL TYPE *** -->

<!ELEMENT REAL_TYPE (
    (REAL_RANGE)?,
    (REAL_CONSTANT_VALUE)?
)>

```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

```

<!ELEMENT REAL_RANGE EMPTY>
<!ATTLIST REAL_RANGE MIN CDATA #REQUIRED>
<!ATTLIST REAL_RANGE MAX CDATA #REQUIRED>

<!ELEMENT REAL_CONSTANT_VALUE (#PCDATA)>

<!-- *** COMPOSITE TYPE *** -->

<!ELEMENT COMPOSITE_TYPE (COMPONENT+)>

<!ELEMENT COMPONENT (#PCDATA)>
<!ATTLIST COMPONENT MIN CDATA "1">
<!ATTLIST COMPONENT MAX CDATA "1">

<!-- *** TEXT TYPE *** -->

<!ELEMENT TEXT_TYPE (
    TEXT_SIZE?,
    LANGUAGE?
)>

<!ELEMENT TEXT_SIZE (#PCDATA)>
<!ATTLIST TEXT_SIZE MIN CDATA #IMPLIED>
<!ATTLIST TEXT_SIZE MAX CDATA #IMPLIED>

<!ELEMENT LANGUAGE EMPTY >
<!ATTLIST LANGUAGE IN_ENGLISH CDATA #REQUIRED>
<!ATTLIST LANGUAGE ISO_CODE CDATA #REQUIRED>

<!-- *** ENUMERATION TYPE *** -->

<!ELEMENT ENUMERATED_TYPE (
    (ENUMERATION)+
)>

<!ELEMENT ENUMERATION (
    ENUMERATION_MEANING?,
    ENUMERATION_CONVENTION?
)>

<!ATTLIST ENUMERATION VALUE CDATA #REQUIRED>

<!ELEMENT ENUMERATION_MEANING (#PCDATA)>

<!ELEMENT ENUMERATION_CONVENTION (#PCDATA)>

<!-- *** USER DEFINED ATTRIBUTES PART *** -->

<!-- User defined attributes relative to data entity -->
<!-- must be declared here (see section 4.5) !! -->
<!ELEMENT USER_DEFINED_ATTRIBUTES_PART EMPTY>

```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.2 IDENTIFYING ATTRIBUTES****4.2.1 NAME, CLASS****4.2.1.1 Overview**

The attributes **NAME** and **CLASS** are associated with the **DATA\_ENTITY\_DEFINITION** in order to sort easily the different entities.

|                              |   |
|------------------------------|---|
| Attribute_Name               | : <b>Class</b>  |
| Attribute_Definition         | : The value of this attribute makes a clear statement of what kind of entity is defined by the current entity definition. This definition can be a model definition, a data field definition, or a constant definition.   |
| Attribute_Obligation         | : Defaulted   |
| Attribute_Maximum_Occurrence | : 1   |
| Attribute_Default_Value      | : data_field  |
| Attribute_Name               | : <b>Name</b>   |
| Attribute_Definition         | : The value of this attribute may be used to link a collection of attributes with an equivalent identifier in, or associated with, the data entity.<br><br>The value of this attribute may also be used by the software developer to name corresponding variables in software code or designate a field to be searched for locating particular data entities.<br><br>The <b>name</b> shall be unique within a Data Entity Dictionary. |
| Attribute_Obligation         | : Mandatory   |
| Attribute_Maximum_Occurrence | : 1   |

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.2.1.2 DTD DEFINITION**

```
<!ELEMENT DATA_ENTITY_DEFINITION (
  ALIAS*,
  DEFINITIONAL_PART,
  RELATIONAL_PART?,
  REPRESENTATIONAL_PART?,
  USER_DEFINED_ATTRIBUTES_PART?
)>
<!ATTLIST DATA_ENTITY_DEFINITION  NAME CDATA #REQUIRED>
<!ATTLIST DATA_ENTITY_DEFINITION  CLASS (MODEL|DATA_FIELD|CONSTANT)
"DATA_FIELD">
```

**4.2.1.3 XML EXAMPLE**

```
<DATA_ENTITY_DEFINITION NAME="A_MODEL" CLASS="MODEL" >
  <DEFINITIONAL_PART>
  See section 4.2
  </DEFINITIONAL_PART>
  <RELATIONAL_PART>
  See section 4.3
  </RELATIONAL_PART>
  <REPRESENTATIONAL_PART>
  See section 4.4
  </REPRESENTATIONAL_PART>
</DATA_ENTITY_DEFINITION>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.2.2 ALIAS****4.2.2.1 Overview**

Attribute\_Definition : Single- or multi-word designation that differs from the given name, but represents the same data entity concept, followed by the context in which this name is applied

The value of this attribute provides an alternative designation of the data entity that may be required for the purpose of compatibility with historical data or data deriving from different sources. For example, different sources may produce data including the same entities, but giving them different names. Through the use of this attribute it will be possible to define the semantic information only once. Along with the alternative designation, this attribute value shall provide a description of the context of when the alternative designation is used.

The value of the alternative designation can also be searched when a designation used in a corresponding syntax description is not found within the **NAME** values.

Attribute\_Obligation : Optional

Attribute\_Maximum Occurrence : 'n'

**4.2.2.2 DTD DEFINITION**

```
<!ELEMENT ALIAS (#PCDATA) >
<!ATTLIST ALIAS NAME CDATA #REQUIRED>
```

**4.2.2.3 XML EXAMPLE**

```
<ALIAS NAME="ACQUTIME">Used in the FITS header</ALIAS>
```

### 4.3 DEFINITIONAL ATTRIBUTES

#### 4.3.1 DEFINITION

Attribute\_Definition : Statement that expresses the essential nature of a data entity and permits its differentiation from all the other data entities

This attribute is intended for human readership and, therefore, any information that will increase the understanding of the identified data entity should be included.

It is intended that the value of this attribute can be of significant length and, hence, provide a description of the data entity as completely as possible. The value of this attribute can be used as a field to be searched for locating particular data entities.

Attribute\_Obligation : Mandatory

Attribute\_Maximum\_Occurrence : 1

Attribute\_Comment : The value of this attribute may include the same semantic information in natural language as the one carried in a more formal manner by other attributes. This is neither a requirement nor illegal, but the user must make sure that inconsistencies do not arise.

#### 4.3.1.1 DTD DEFINITION

```
<!ELEMENT DEFINITION (#PCDATA)>
```

#### 4.3.1.2 XML EXAMPLE

```
<DEFINITION>The PRODUCT_ID represents a permanent unique identifier assigned to a data product by its producer</DEFINITION>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.3.2 SHORT\_DEFINITION****4.3.2.1 Overview**

Attribute\_Definition : Statement that expresses the essential nature of a data entity in a shorter and more concise manner than the statement of the mandatory attribute: **definition**.

This attribute provides a summary of the more detailed information provided by the **definition** attribute.

The value of this attribute can be used as a field to be searched for locating particular data entities. It is also intended to be used for display purposes by automated software, where the complete DEFINITION value would be too long to be presented in a convenient manner to users.

Attribute\_Obligation : Optional

Attribute\_Maximum\_Occurrence : 1

**4.3.2.2 DTD DEFINITION**

```
<!ELEMENT SHORT_DEFINITION (#PCDATA) >
```

**4.3.2.3 XML EXAMPLE**

```
<SHORT_DEFINITION Product Identification</SHORT_DEFINITION>
```

### 4.3.3 COMMENT

#### 4.3.3.1 Overview

Attribute\_Definition : Associated information about a data entity. It enables adding information which does not correspond to definition information.

Attribute\_Obligation : Optional

Attribute\_Value\_Type : **Text**

Attribute\_Maximum\_Occurrence : 'n'

#### 4.3.3.2 DTD DEFINITION

```
<!ELEMENT COMMENT (#PCDATA)>
```

#### 4.3.3.3 XML EXAMPLE

```
<COMMENT>The image is an array of W_IMAGE_SIZE items called  
DATA_2_PIXEL</COMMENT>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.3.4 UNITS****4.3.4.1 Overview**

- Attribute\_Definition : Attribute that specifies the scientific units that should be associated with the value of the data entity so as to make the value meaningful in the ‘real-world’.
- Attribute\_Obligation : Conditional
- Attribute\_Condition : If the data entity is non-scalar, then the attribute shall not be specified. If the data entity is of a scientific scalar type (Integer or Real), then this attribute is mandatory for data field entities and is optional for model entities.
- If the scalar type has no unit, e.g. a ratio, then the value of this attribute has to be «NO\_UNIT».
- Attribute\_Maximum\_Occurrence : 1 if the data entity is a DATA\_FIELD or a CONSTANT  
‘n’ if the data entity is a MODEL

**4.3.4.2 DTD DEFINITION**

```
<!ELEMENT UNITS (#PCDATA)>
```

**4.3.4.3 XML EXAMPLE**

```
<UNITS>NO_UNIT</UNITS>
```

For multiple units :

```
<UNITS>kilometers</UNITS>
```

```
<UNITS>miles</UNITS>
```

### 4.3.5 SPECIFIC\_INSTANCE

#### 4.3.5.1 Overview

- Attribute\_Definition : Attribute that provides a real-world meaning for a specific instance (a value) of the data entity being described. The reason for providing this information is so that the user can see that there is some specific meaning associated with a particular value instance that indicates something more than just the abstract value. For example, the fact that zero degree latitude is the equator could be defined. This means that the value of this attribute must provide both an instance of the entity value and a definition of its specific meaning.
- Attribute\_Obligation : Optional
- Attribute\_Maximum\_Occurrence : 'n'
- Attribute\_Comment : The values of the attribute can be used to enhance user interfaces and, therefore, user understanding. For example, instead of displaying to the user the abstract value of an entity, the 'system' could first check the DEDSL definition to see if there is a specific meaning for this abstract value, and if there is, display the specific meaning string instead. Likewise, a user could enter a meaning definition by name, e.g., **equator**, and the 'system' could automatically (via the DEDSL definition) translate this name to a specific instance value.

#### 4.3.5.2 DTD DEFINITION

```
<!ELEMENT SPECIFIC_INSTANCE (#PCDATA)>
<!ATTLIST SPECIFIC_INSTANCE VALUE CDATA #REQUIRED>
```

#### 4.3.5.3 XML EXAMPLE

```
<SPECIFIC_INSTANCE VALUE="+00.00">Equator</SPECIFIC_INSTANCE>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.4 RELATIONAL ATTRIBUTES****4.4.1 INHERITS\_FROM****4.4.1.1 Overview**

**Attribute\_Definition** : Gives the name of a model or data field from which the current entity description inherits attributes. This name must be the value of the **NAME** attribute found in the referred entity description. If the entity is part of an external dictionary, that dictionary is given in the **EXTERNAL\_DICTIONARY** attribute which must match **LOCAL\_NAME** in one of the **EXTERNAL\_DICTIONARY\_REFERENCE** statements.

Referencing this data entity description means that all the values of its attributes having their **attribute\_inheritance** set to **inheritable** apply to the current description.

**Attribute\_Obligation** : Optional

**Attribute\_Maximum\_Occurrence** : 1

**Attribute\_Comment** : This attribute is intended to enable reuse. Each data entity description referring to the same entity should be qualified using the same value of this attribute.

**4.4.1.2 DTD DEFINITION**

```
<!ELEMENT INHERITS_FROM (#PCDATA) >
<!ATTLIST INHERITS_FROM EXTERNAL_DICTIONARY CDATA #IMPLIED>
```

**4.4.1.3 XML EXAMPLE**

```
<INHERITS_FROM>A_DATA_TYPE</INHERITS_FROM>
```

Inherits from the **A\_ROCKET** model from the **SPACE\_VEHICLE** dictionary:

```
<INHERITS_FROM EXTERNAL_DICTIONARY="SPACE_VEHICLE">
A_ROCKET</INHERITS_FROM>
```

## 4.4.2 KEYWORD

### 4.4.2.1 Overview

Attribute\_Definition : Significant One or several significant words or phrase used for retrieving data entities

Attribute\_Obligation : Optional

Attribute\_Value\_Type : Text

Attribute\_Maximum\_Occurrence : 'n'

### 4.4.2.2 DTD DEFINITION

```
<!ELEMENT KEYWORD (#PCDATA) >
```

### 4.4.2.3 XML EXAMPLE

```
<KEYWORD>IMAGE</KEYWORD>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.4.3 RELATION****4.4.3.1 Overview**

- Attribute\_Definition : This attribute is to be used to express a relationship between two entity definitions when this relation cannot be expressed using a precise standard relational attribute. In that case the relationship is user-defined and expressed using free text. If the entity is part of an external dictionary, that dictionary is given in the EXTERNAL\_DICTIONARY attribute which must match LOCAL\_NAME in one of the EXTERNAL\_DICTIONARY REFERENCE statements.
- Attribute\_Obligation : Optional.
- Attribute\_Maximum\_Occurrence : 'n'
- Attribute\_Comment : - The first attribute value provides the reader with the kind of relation that links the two related entities.  
 - The second one is the name of the entity in relation with the one being defined.  
 - The last one is used when the previous entity is described in an external Data Entity Dictionary to give the name of this dictionary for more clarity.

**4.4.3.2 DTD DEFINITION**

```
<!ELEMENT RELATION (#PCDATA) >
<!ATTLIST RELATION WITH CDATA #REQUIRED>
<!ATTLIST RELATION EXTERNAL_DICTIONARY CDATA #IMPLIED>
```

**4.4.3.3 XML EXAMPLE**

```
<RELATION WITH="DATA_2">number of pixels of a spacecraft W2
image</RELATION>
```

```
<RELATION WITH="POIDS" EXTERNAL_DICTIONARY="FRENCH_DICTIONARY"> translation
in French of WEIGHT</RELATION>
```

**4.5 REPRESENTATIONAL ATTRIBUTES**

**4.5.1 INTEGER\_TYPE, INTEGER\_RANGE, CONSTANT\_VALUE**

**4.5.1.1 Overview**

Attribute\_Name : **INTEGER\_TYPE**  
 Attribute\_Definition : Specifies the type of the data\_entity values as INTEGER

Attribute\_Obligation : Conditional

Attribute\_Maximum\_Occurrence : 1

Attribute\_Name : **INTEGER\_RANGE**

Attribute\_Definition : The minimum bound and the maximum bound of an INTEGER data entity

Attribute\_Obligation : Optional

Attribute\_Maximum\_Occurrence : 1

NOTE – This is the XML implementation of the RANGE attribute in reference [1].

Attribute\_Name : **CONSTANT\_VALUE**

Attribute\_Definition : The value of this attribute is the value given to a constant

Attribute\_Obligation : Conditional

Attribute\_Maximum\_Occurrence : 1

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.5.1.2 DTD DEFINITION**

```
<!ELEMENT INTEGER_TYPE (
    INTEGER_RANGE?
)>

<!ELEMENT INTEGER_RANGE EMPTY>
<!ATTLIST INTEGER_RANGE MIN CDATA #REQUIRED>
<!ATTLIST INTEGER_RANGE MAX CDATA #REQUIRED>

<!ATTLIST INTEGER_TYPE CONSTANT_VALUE (#PCDATA)>
```

**4.5.1.3 XML EXAMPLE**

```
<INTEGER_TYPE>
<INTEGER_RANGE MIN="0" MAX="10"/>
</INTEGER_TYPE>

<INTEGER_TYPE CONSTANT_VALUE="12"/>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## 4.5.2 REAL\_TYPE, REAL\_RANGE, CONSTANT\_VALUE

### 4.5.2.1 Overview

|                              |  |
|------------------------------|--|
| Attribute_Name               | : REAL_TYPE  |
| Attribute_Definition         | : Specifies the type of the data_entity values as REAL           |
| Attribute_Obligation         | : Conditional  |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : REAL_RANGE   |
| Attribute_Definition         | : The minimum bound and the maximum bound of an REAL data entity |
| Attribute_Obligation         | : Optional   |
| Attribute_Maximum_Occurrence | : 1  |

NOTE – Note: This is the XML implementation of the RANGE attribute in reference [1]

|                              |   |
|------------------------------|---|
| Attribute_Name               | : CONSTANT_VALUE  |
| Attribute_Definition         | : The value of this attribute is the value given to a constant. |
| Attribute_Obligation         | : Conditional   |
| Attribute_Maximum_Occurrence | : 1   |

### 4.5.2.2 DTD DEFINITION

```

<!ELEMENT REAL_TYPE (
    REAL_RANGE?
)>

<!ELEMENT REAL_RANGE EMPTY>
<!ATTLIST REAL_RANGE MIN CDATA #REQUIRED>
<!ATTLIST REAL_RANGE MAX CDATA #REQUIRED>

<!ATTLIST REAL_TYPE CONSTANT_VALUE (#PCDATA)>
    
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.5.2.3 XML EXAMPLE**

```
<REAL_TYPE>  
<REAL_RANGE MIN="0.0" MAX="10.2"/>  
</REAL_TYPE>  
  
<REAL_TYPE CONSTANT_VALUE="3.14"/>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

### 4.5.3 TEXT\_TYPE,TEXT\_SIZE,LANGUAGE

#### 4.5.3.1 Overview

|                              |  |
|------------------------------|--|
| Attribute_Name               | : <b>TEXT_TYPE</b>   |
| Attribute_Definition         | : Specifies the type of the data_entity values as TEXT           |
| Attribute_Obligation         | : Conditional  |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : <b>TEXT_SIZE</b>   |
| Attribute_Definition         | : The limitation on the size of the values of a TEXT data entity |
| Attribute_Obligation         | : Mandatory  |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : <b>LANGUAGE</b>  |
| Attribute_Definition         | : Language used by the current data entity                       |
| Attribute_Obligation         | : Optional   |
| Attribute_Maximum_Occurrence | : 1  |

#### 4.5.3.2 DTD DEFINITION

```

<!ELEMENT TEXT_TYPE (
    TEXT_SIZE,
    LANGUAGE?
)>

<!ELEMENT TEXT_SIZE (#PCDATA)>
<!ATTLIST TEXT_SIZE MIN CDATA #IMPLIED>
<!ATTLIST TEXT_SIZE MAX CDATA #IMPLIED>

<!ELEMENT LANGUAGE EMPTY >
<!ATTLIST LANGUAGE IN_ENGLISH CDATA #REQUIRED>
<!ATTLIST LANGUAGE ISO_CODE CDATA #REQUIRED>
    
```

#### 4.5.3.3 XML EXAMPLE

```

<TEXT_TYPE>
<TEXT_SIZE MIN="0" MAX="10"/>
<LANGUAGE ISO_CODE="fr" IN_ENGLISH="French"/>
    
```

CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

</TEXT\_TYPE>

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

**4.5.4 ENUMERATED\_TYPE, ENUMERATION\_VALUE,  
ENUMERATION\_MEANING, ENUMERATION\_CONVENTION**

**4.5.4.1 Overview**

|                              |  |
|------------------------------|--|
| Attribute_Name               | : <b>ENUMERATED_TYPE</b>   |
| Attribute_Definition         | : Specifies the type of the data_entity values as ENUMERATED   |
| Attribute_Obligation         | : Conditional  |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : <b>ENUMERATION_VALUE</b>   |
| Attribute_Definition         | : The set of permitted values of the enumerated data entity  |
| Attribute_Obligation         | : Mandatory  |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : <b>ENUMERATION_MEANING</b>   |
| Attribute_Definition         | : Enable to give a meaning to the enumeration VALUE  |
| Attribute_Obligation         | : Optional   |
| Attribute_Maximum_Occurrence | : 1  |
| Attribute_Name               | : <b>ENUMERATION_CONVENTION</b>  |
| Attribute_Definition         | : Gives guidance on the correspondence between the enumeration VALUE and the numeric or textual values found within products |
| Attribute_Obligation         | : Optional   |
| Attribute_Maximum_Occurrence | : 1  |

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.5.4.2 DTD DEFINITION**

```

<!ELEMENT ENUMERATED_TYPE (ENUMERATION)+ >
<!ELEMENT ENUMERATION (
    ENUMERATION_MEANING?,
    ENUMERATION_CONVENTION?
)>
<!ATTLIST ENUMERATION VALUE CDATA #REQUIRED>
<!ELEMENT ENUMERATION_MEANING (#PCDATA)>
<!ELEMENT ENUMERATION_CONVENTION (#PCDATA)>

```

**4.5.4.3 XML EXAMPLE**

```

<ENUMERATED_TYPE>
<ENUMERATION VALUE="BLUE">
  <ENUMERATION_MEANING>The BLUE color</ENUMERATION_MEANING>
  <ENUMERATION_CONVENTION>#0000CC</ENUMERATION_CONVENTION>
</ENUMERATION>
<ENUMERATION VALUE="RED">
  <ENUMERATION_MEANING>The RED color</ENUMERATION_MEANING>
  <ENUMERATION_CONVENTION>#FF3333</ENUMERATION_CONVENTION></ENUMERATION>
</ENUMERATED_TYPE>

```

## 4.5.5 COMPOSITE\_TYPE, COMPONENT

### 4.5.5.1 Overview

|                              |   |
|------------------------------|---|
| Attribute_Name               | : <b>COMPOSITE_TYPE</b>   |
| Attribute_Definition         | : Specifies the type of the data_entity values as COMPOSITE   |
| Attribute_Obligation         | : Conditional   |
| Attribute_Maximum_Occurrence | : 1   |
| Attribute_Name               | : <b>COMPONENT</b>  |
| Attribute_Definition         | : Name of a component, followed by the number of times it occurs in the composite data entity. The number of times is specified by a range. |
| Attribute_Obligation         | : Optional  |
| Attribute_Maximum_Occurrence | : 'n'   |

### 4.5.5.2 DTD DEFINITION

```
<!ELEMENT COMPOSITE_TYPE (COMPONENT?) >
<!ELEMENT COMPONENT (#PCDATA) >
<!ATTLIST COMPONENT MIN CDATA "1">
<!ATTLIST COMPONENT MAX CDATA "1">
```

### 4.5.5.3 XML EXAMPLE

```
<COMPOSITE_TYPE>
<COMPONENT>HEADER</COMPONENT>
<COMPONENT>BODY</COMPONENT>
</COMPOSITE_TYPE>
```

An array of W\_IMAGE\_SIZE DATA\_2\_PIXELs:

```
<COMPOSITE_TYPE>
<COMPONENT MAX="W_IMAGE_SIZE">DATA_2_PIXEL</COMPONENT>
</COMPOSITE_TYPE>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**4.6 USER\_DEFINED\_ATTRIBUTES\_PART**

NOTE – The user can freely add new attributes for the data entity description part. All of the user's defined attributes relative to the data entity must be grouped under the USER\_DEFINED\_ATTRIBUTES\_PART element. In all cases, the original DEDSL DTD must be modified to add the new attributes, and each new attribute must have a definition in the USER\_DEFINED\_ATTRIBUTE\_DEFINITION part of the DATA\_ENTITY\_DICTIONARY with the ATTRIBUTE\_SCOPE set to DATA or ALL (see section 5 for details).

**4.6.1 DTD DEFINITION**

This line in the default DTD:

```
<!ELEMENT USER_DEFINED_ATTRIBUTES_PART EMPTY>
```

must be replaced by the following ones in order to have a validating DTD

```
<!ELEMENT USER_DEFINED_ATTRIBUTES_PART (DATA_FORTRAN_FORMAT)>
<!ELEMENT DATA_FORTRAN_FORMAT (#PCDATA)>
```

**4.6.2 XML EXAMPLE**

```
<USER_DEFINED_ATTRIBUTES_PART>
  <DATA_FORTRAN_FORMAT>I3</DATA_FORTRAN_FORMAT>
</USER_DEFINED_ATTRIBUTES_PART>
```

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5 USER\_DEFINED\_ATTRIBUTE\_DEFINITION****5.1 OVERVIEW**

The following table provides the set of general descriptors that are defined by this Recommendation. The obligation column indicates whether a descriptor is mandatory (M), conditional (C), optional (O) or defaulted (D).

| Descriptor of Attribute      | Obligation | Occurrence |
|------------------------------|------------|------------|
| ATTRIBUTE_NAME               | M          | 1          |
| ATTRIBUTE_DEFINITION         | M          | 1          |
| ATTRIBUTE_OBLIGATION         | M          | 1          |
| ATTRIBUTE_CONDITION          | C          | 1          |
| ATTRIBUTE_MAXIMUM_OCCURRENCE | M          | 1          |
| ATTRIBUTE_VALUE_TYPE         | M          | 1          |
| ATTRIBUTE_MAXIMUM_SIZE       | O          | 1          |
| ATTRIBUTE_ENUMERATION_VALUES | C          | 'n'        |
| ATTRIBUTE_COMMENT            | O          | 'n'        |
| ATTRIBUTE_INHERITANCE        | D          | 1          |
| ATTRIBUTE_DEFAULT_VALUE      | C          | 1          |
| ATTRIBUTE_VALUE_EXAMPLE      | O          | 1          |
| ATTRIBUTE_SCOPE              | D          | 1          |

**DTD DEFINITION**

```

<!ELEMENT USER_DEFINED_ATTRIBUTE_DEFINITION (
  ATTRIBUTE_NAME,
  ATTRIBUTE_DEFINITION,
  ATTRIBUTE_CONDITION?,
  ATTRIBUTE_MAXIMUM_OCCURRENCE,

  (ATTRIBUTE_INTEGER_TYPE | ATTRIBUTE_REAL_TYPE |
  ATTRIBUTE_ENUMERATED_TYPE | ATTRIBUTE_IDENTIFIER_TYPE | ATTRIBUTE_TEXT_TYPE
  | ATTRIBUTE_ENTITY_TYPE),

  ATTRIBUTE_COMMENT?,
  ATTRIBUTE_INHERITANCE?,
  ATTRIBUTE_DEFAULT_VALUE?,
  ATTRIBUTE_VALUE_EXAMPLE?
)>

<!ELEMENT ATTRIBUTE_NAME (#PCDATA)>

```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

```

<!ATTLIST ATTRIBUTE_NAME OBLIGATION
(MANDATORY|CONDITIONAL|OPTIONAL|DEFAULTED) #REQUIRED>
<!ATTLIST ATTRIBUTE_NAME SCOPE (DATA|DICTIONARY|ALL) "DATA">

<!ELEMENT ATTRIBUTE_DEFINITION (#PCDATA)>
<!ELEMENT ATTRIBUTE_CONDITION (#PCDATA)>
<!ELEMENT ATTRIBUTE_MAXIMUM_OCCURRENCE (#PCDATA)>

<!ELEMENT ATTRIBUTE_INTEGER_TYPE EMPTY>
<!ELEMENT ATTRIBUTE_REAL_TYPE EMPTY>
<!ELEMENT ATTRIBUTE_IDENTIFIER_TYPE EMPTY>
<!ATTLIST ATTRIBUTE_IDENTIFIER_TYPE MAXIMUM_SIZE CDATA>

<!ELEMENT ATTRIBUTE_ENTITY_TYPE EMPTY>

<!ELEMENT ATTRIBUTE_TEXT_TYPE EMPTY>
<!ATTLIST ATTRIBUTE_TEXT_TYPE MAXIMUM_SIZE CDATA>

<!ELEMENT ATTRIBUTE_ENUMERATED_TYPE (ATTRIBUTE_ENUMERATION_VALUE+)>
<!ELEMENT ATTRIBUTE_ENUMERATION_VALUE (#PCDATA)>

<!ELEMENT ATTRIBUTE_COMMENT (#PCDATA)>

<!ELEMENT ATTRIBUTE_INHERITANCE EMPTY>
<!ATTLIST ATTRIBUTE_INHERITANCE OPTION (INHERITABLE|NOT_INHERITABLE)
"INHERITABLE">

<!ELEMENT ATTRIBUTE_DEFAULT_VALUE (#PCDATA)>

<!ELEMENT ATTRIBUTE_VALUE_EXAMPLE (#PCDATA)>
)>

```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.2 ATTRIBUTE\_NAME, OBLIGATION, SCOPE****5.2.1 OVERVIEW****ATTRIBUTE\_NAME**

**Purpose** Label assigned to a data entity attribute

**Obligation** This descriptor is mandatory.

**Descriptor Type** The value of this descriptor is of type **Identifier**.

The **attribute\_name** shall be unique within a Data Entity Dictionary.

**OBLIGATION**

**Purpose** Descriptor indicating whether a data entity attribute shall always, or only sometimes, be present according to specified conditions

**Obligation** This descriptor is mandatory.

**Descriptor Type** This descriptor is of type **Enumerated** with four discrete values corresponding to the following cases:

- **Mandatory:** The data entity attribute shall always be present.
- **Conditional:** The data entity attribute shall be present if conditions specified by the descriptor **attribute\_condition** occur for the same data entity attribute.
- **Optional:** The data entity attribute may be present or not.
- **Defaulted:** A data entity attribute that assumes a specified default value if it is omitted from a data entity description. The specified default value is provided by the **attribute\_default\_value** descriptor.

**SCOPE**

**Purpose** Descriptor specifying the category of entities in which the attribute may appear

**Obligation** This descriptor is defaulted.

**Descriptor Type** The value of this descriptor is of type **Enumerated** with three discrete values: **data**, **dictionary** and **all**.

- **Data:** means that the attribute may appear only as a data entity attribute.
- **Dictionary:** means that the attribute may appear only as a data entity dictionary attribute and is applicable to the entire collection of data entities in the dictionary.
- **All:** means that the attribute may appear as a data entity attribute as well as a data entity dictionary attribute, in which case the value in the data entity definition takes precedence.

### 5.2.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_NAME (#PCDATA) >
<!ATTLIST ATTRIBUTE_NAME OBLIGATION
(MANDATORY|CONDITIONAL|OPTIONAL|DEFAULTED) #REQUIRED>
<!ATTLIST ATTRIBUTE_NAME SCOPE (DATA|DICTIONARY|ALL) "DATA">
```

### 5.2.3 XML EXAMPLE

Define the dictionary attribute TREE optional:

```
<ATTRIBUTE_NAME OBLIGATION="OPTIONAL" SCOPE="DICTIONARY">
TREE</ATTRIBUTE_NAME>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

### 5.3 ATTRIBUTE\_DEFINITION

#### 5.3.1 OVERVIEW

**Purpose** The definition is required to give the description of the data entity attribute. This definition is intended for human readership and, therefore, any information that increases the understanding of the identified attribute should be included.

**Obligation** This descriptor is mandatory.

#### 5.3.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_DEFINITION (#PCDATA) >
```

#### 5.3.3 XML EXAMPLE

```
<ATTRIBUTE_DEFINITION>This is the picture of the TREE of the DATA  
</ATTRIBUTE_DEFINITION>
```

## 5.4 ATTRIBUTE\_CONDITION

### 5.4.1 OVERVIEW

*Purpose* Descriptor indicating the circumstances under which a data entity attribute shall be present

*Obligation* This descriptor is conditional.

It shall be present if the **attribute\_obligation** descriptor of the same data entity attribute has the value '**conditional**'.

### 5.4.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_CONDITION (#PCDATA) >
```

### 5.4.3 XML EXAMPLE

```
<ATTRIBUTE_CONDITION>Attribute ORIGIN appears only for extra-terrestrial data</ATTRIBUTE_CONDITION>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

## 5.5 ATTRIBUTE\_MAXIMUM\_OCCURRENCE

### 5.5.1 OVERVIEW

**Purpose** Descriptor specifying the maximum number of instances which the data entity attribute may have in the specification of a data entity

**Obligation** This descriptor is mandatory.

**Descriptor Type** The value of this descriptor is of type **Integer**, or of type **Character** with the value of 'n'. The character 'n' specifies that there is no upper limit on the number of times that the data entity attribute may occur.

### 5.5.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_MAXIMUM_OCCURRENCE (#PCDATA)>
```

### 5.5.3 XML EXAMPLE

```
<ATTRIBUTE_MAXIMUM_OCCURRENCE>1</ATTRIBUTE_MAXIMUM_OCCURRENCE>
```

## 5.6 ATTRIBUTE\_INTEGER\_TYPE

### 5.6.1 OVERVIEW

*Purpose* Descriptor specifying the attribute with the type INTEGER

*Obligation* This descriptor is optional.

### 5.6.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_INTEGER_TYPE EMPTY>
```

### 5.6.3 XML EXAMPLE

```
<ATTRIBUTE_INTEGER_TYPE/>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.7 ATTRIBUTE\_REAL\_TYPE****5.7.1 OVERVIEW**

**Purpose** Descriptor specifying the attribute with the type REAL

**Obligation** This descriptor is optional.

**5.7.2 DTD DEFINITION**

```
<!ELEMENT ATTRIBUTE_REAL_TYPE EMPTY>
```

**5.7.3 XML EXAMPLE**

```
<ATTRIBUTE_REAL_TYPE/>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## 5.8 ATTRIBUTE\_IDENTIFIER\_TYPE

### 5.8.1 OVERVIEW

#### ATTRIBUTE\_IDENTIFIER\_TYPE

*Purpose* Descriptor specifying the attribute with the type IDENTIFIER

*Obligation* This descriptor is optional.

#### MAX\_SIZE

*Purpose* Descriptor specifying the maximum number of characters for representing the value of the attribute

*Obligation* This descriptor is conditional.

*Descriptor Type* The value of this descriptor is of type **Integer**.

### 5.8.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_IDENTIFIER_TYPE EMPTY>  
<!ATTLIST ATTRIBUTE_IDENTIFIER_TYPE MAX_SIZE CDATA #IMPLIED>
```

### 5.8.3 XML EXAMPLE

```
<ATTRIBUTE_IDENTIFIER_TYPE MAX_SIZE="20"/>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.9 ATTRIBUTE\_TEXT\_TYPE****5.9.1 OVERVIEW****ATTRIBUTE\_TEXT\_TYPE**

**Purpose** Descriptor specifying the attribute with the type TEXT

**Obligation** This descriptor is optional.

**MAX\_SIZE**

**Purpose** Descriptor specifying the maximum number of characters for representing the value of the attribute

**Obligation** This descriptor is conditional.

**Descriptor Type** The value of this descriptor is of type **Integer**.

**5.9.2 DTD DEFINITION**

```
<!ELEMENT ATTRIBUTE_TEXT_TYPE EMPTY>
<!ATTLIST ATTRIBUTE_TEXT_TYPE MAX_SIZE CDATA #IMPLIED>
```

**5.9.3 XML EXAMPLE**

```
<ATTRIBUTE_TEXT_TYPE MAX_SIZE="256"/>
```

## 5.10 ATTRIBUTE\_ENUMERATED\_TYPE, ATTRIBUTE\_ENUMERATION\_VALUE

### 5.10.1 OVERVIEW

#### ATTRIBUTE\_ENUMERATED\_TYPE

**Purpose** Descriptor specifying the attribute with the type ENUMERATED

**Obligation** This descriptor is optional.

#### ATTRIBUTE\_ENUMERATION\_VALUE

**Purpose** Descriptor specifying the distinct and discrete values of the attribute

**Obligation** This descriptor is conditional.

**Descriptor Type** The value of this descriptor is of type **Identifier**.

### 5.10.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_ENUMERATED_TYPE (ATTRIBUTE_ENUMERATION_VALUE+) >
<!ELEMENT ATTRIBUTE_ENUMERATION_VALUE (#PCDATA) >
```

### 5.10.3 XML EXAMPLE

For the declaration of an attribute BOOLEAN, there are 2 values:

```
<ATTRIBUTE_ENUMERATED_TYPE>
<ATTRIBUTE_ENUMERATION_VALUE>TRUE</ATTRIBUTE_ENUMERATION_VALUE>
<ATTRIBUTE_ENUMERATION_VALUE>FALSE</ATTRIBUTE_ENUMERATION_VALUE>
</ATTRIBUTE_ENUMERATED_TYPE>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.11 ATTRIBUTE\_ENTITY\_TYPE****5.11.1 OVERVIEW**

**Purpose** Descriptor specifying the attribute has the type of the entity being defined.

**Obligation** This descriptor is optional.

**5.11.2 DTD DEFINITION**

```
<!ELEMENT ATTRIBUTE_ENTITY_TYPE EMPTY>
```

**5.11.3 XML EXAMPLE**

```
<ATTRIBUTE_ENTITY_TYPE/>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## 5.12 ATTRIBUTE\_COMMENT

### 5.12.1 OVERVIEW

**Purpose** Descriptor providing information which is not directly required to understand the meaning of the attribute, but which could still assist the user of the attribute in some manner. It may also contain examples.

**Obligation** This descriptor is optional.

### 5.12.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_COMMENT (#PCDATA) >
```

### 5.12.3 XML EXAMPLE

```
<ATTRIBUTE_COMMENT>The value is expressed as a path  
name.</ATTRIBUTE_COMMENT>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.13 ATTRIBUTE\_INHERITANCE****5.13.1 OVERVIEW**

**Purpose** Descriptor providing information about the inheritance rules for the attribute in a context of data entity modeling

**Obligation** This descriptor is defaulted.

**Descriptor Type** The value of this descriptor is of type **Enumerated** with two discrete values: **inheritable** and **not\_inheritable**.

The context is as follows: a data entity description A inherits from another data entity description B. The following cases describe what may happen for the values of the attributes of A for the different possible values of attribute\_inheritance for the attributes of B.

- When the value of an attribute of B cannot be inherited, the attribute may be defined locally in the description of A.
- When the value of an attribute of B can be inherited, the value of this attribute is the value of the corresponding attribute of A, to which specialization rules have been applied as mentioned in subsection 4.6.3 of reference [1].

**5.13.2 DTD DEFINITION**

```
<!ELEMENT ATTRIBUTE_INHERITANCE EMPTY>
<!ATTLIST ATTRIBUTE_INHERITANCE OPTION (INHERITABLE|NOT_INHERITABLE)
"INHERITABLE">
```

**5.13.3 XML EXAMPLE**

```
<ATTRIBUTE_INHERITANCE OPTION="INHERITABLE" />
```

## 5.14 ATTRIBUTE\_DEFAULT\_VALUE

### 5.14.1 OVERVIEW

**Purpose** Descriptor providing a default value for the attribute

**Obligation** This descriptor is conditional.

This descriptor must be present if and only if the current described data attribute has its **attribute\_obligation** descriptor equal to ‘defaulted’.

**Descriptor Type** The format of this descriptor must conform to the type of the attribute that it illustrates.

### 5.14.2 DTD DEFINITION

```
<!ELEMENT ATTRIBUTE_DEFAULT_VALUE (#PCDATA) >
```

### 5.14.3 XML EXAMPLE

```
<ATTRIBUTE_DEFAULT_VALUE>FALSE</ATTRIBUTE_DEFAULT_VALUE>
```

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

**5.15 ATTRIBUTE\_VALUE\_EXAMPLE****5.15.1 OVERVIEW**

**Purpose** Descriptor providing examples for the value of the attribute.

**Obligation** This descriptor is optional.

**5.15.2 DTD DEFINITION**

```
<!ELEMENT ATTRIBUTE_VALUE_EXAMPLE (#PCDATA) >
```

**5.15.3 XML EXAMPLE**

```
<ATTRIBUTE_VALUE_EXAMPLE>examples for the ORIGIN attribute:  
MARS,JUPITER,MOON... </ATTRIBUTE_VALUE_EXAMPLE>
```

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

(Blank page)

STANDARDSISO.COM : Click to view the full PDF of ISO 22643:2003

## CCSDS RECOMMENDATION FOR DEDSL—XML/DTD SYNTAX

## 6 DEDSL CONFORMANCE

NOTE – This DEDSL—XML/DTD Syntax specification is version 1.0 of the Recommendation and provides an XML/DTD implementation for the DEDSL—Abstract Syntax Recommendation (reference [1]). Note that this part of the specification does not specify how the attribute names and values are to be linked to any given physical occurrence of a data entity within a data product. This allows a variety of formatting approaches to be used for this linking.

### 6.1 CONFORMANCE LEVEL 1: NOTATION COMPLIANCE

Implementations which conform to all of sections 2, 3, 4 and 5 will be notation-compliant with this Recommendation.

### 6.2 CONFORMANCE LEVEL 2: INTEROPERABILITY COMPLIANCE

Implementations which conform to all of sections 2, 3, 4 and 5 and the interoperability constraints from the Abstract Specification will be interoperable-compliant with this Recommendation.