
**Information technology — Business
Operational View —**

Part 10:
**IT-enabled coded domains as semantic
components in business transactions**

Technologies de l'information — Vue opérationnelle d'affaires —

*Partie 10: Domaines codés activés comme composantes sémantiques
dans les transactions d'affaires*

STANDARDSISO.COM : Click to view the PDF of ISO/IEC 15944-10:2013

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15944-10:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	vi
0 Introduction.....	vii
0.1 Overview of purpose and nature of coded domains	vii
0.2 Benefits of the use of coded domains	viii
0.3 Identification, mapping and IT-enablement of existing standards for widely-used Code sets.....	ix
0.4 Link to fundamental components in Business Transaction Model (BTM)	xi
0.5 IT-enabled and content predefined Semantic Components	xii
0.6 Coded domains as reusable business objects	xiii
0.7 Use of "Person", "organization" and "party" in the context of business transaction and commitment exchange.....	xiv
0.8 Importance and role of terms and definitions	xv
0.9 Use of "identifier" as "identifier (in business transaction)" to prevent ambiguity.....	xvi
0.10 Organization and description of document.....	xvii
1 Scope.....	1
1.1 Statement of Scope	1
1.2 Exclusions.....	2
1.3 Aspects currently not yet addressed	2
1.3.1 Addressing "Quadrant B, C & D" in Figure 5.....	2
1.3.2 Use of coded domains in support of the "Process" component in the Business transaction model.....	2
1.3.3 Use of coded domains with respect to Persons and in particular "individuals" and associated privacy protection requirements.....	2
1.3.4 Use of coded domains in support of "public policy" requirements and in particular individual accessibility	2
1.3.5 Detailed levels of rules pertaining to change management aspects of coded domains	3
1.3.6 Differentiation of categories and levels of Source Authorities (SA) for coded domains	3
1.4 IT-systems environment neutrality.....	3
2 Normative references.....	3
3 Terms and definitions	4
4 Symbols and abbreviation.....	38
5 Fundamental principles governing coded domains	38
5.1 Introduction.....	38
5.2 Need to be able to use coded domains in support of commitment exchange	40
5.3 Coded domains based on clear, predefined rules, i.e., "rule-based"	41
5.3.1 Requirements of rule-based coded domains as a whole.....	41
5.3.2 Rule-base for IT enablement of a coded domain	43
5.3.3 Rule-base for structuring a coded domain.....	43
5.4 Separation of the IT interface from human interface requirements.....	44
5.5 Specification and representation of coded domains in an IT-platform neutral manner	45
6 Business operational view identification and description of coded domains.....	46
6.1 Construct of coded domain.....	46
6.1.1 Identification of coded domains	47
6.1.2 Levels of Semantic unambiguity	48
6.1.3 Rule-base of a coded domain	49
6.1.4 Table of ID codes and HIEs	49
6.2 Characteristics of coded domains.....	49
6.2.1 "for free" or "for a fee" coded domains.....	49
6.2.2 Exhaustiveness of coded domains	50

6.2.3	Semantic granularity	51
6.2.4	Openness of coded domains.....	51
7	Rules governing rule-base of coded domains.....	52
7.1	Introduction	52
7.2	Specification of a boundary of a coded domain and inclusion of its members	53
7.3	Specification of exclusionary rules for a coded domain.....	54
7.4	Source(s) of rule-base governing a coded domain.....	54
8	Rules for management of ID codes in coded domains.....	55
8.1	Introduction	55
8.2	Generic rules for the management of a coded domain	55
8.3	Rules governing assignment of ID codes	55
8.4	Rules governing the change management of entries in the coded domain.....	56
8.4.1	Change management of ID codes	56
8.4.2	Change management of HIEs	57
8.5	Registration of user extensions	57
9	Rules for specifying Human Interface Equivalents (HIEs) to an ID Code in a coded domain	57
9.1	Multiple Human Interface Equivalents (HIEs) for an ID code in a coded domain	57
9.2	Standard structure for semantics of a Human Interface Equivalent (HIE).....	58
9.3	Rules governing linguistic (written) representations as Human Interface Equivalents (HIEs) of ID codes as required values in coded domains	59
9.4	Individual accessibility of HIEs of coded domains	59
9.5	Rules governing composite semantics	60
10	Coded domain and controlled vocabularies.....	60
10.1	Introduction	60
10.2	Rules common to controlled vocabularies and coded domains	61
10.3	Rules governing a controlled vocabulary	61
10.4	Rules governing a coded domain	62
11	Rules governing the registration of coded domains as re-usable business objects.....	63
11.1	Principles of registration	63
11.2	Process of registration.....	65
11.3	Coded Domain Registration scheme	65
12	IT-enablement of coded domains.....	66
12.1	Introduction	66
12.2	Templates for IT-enabled coded domains – Attributes for Scoping an Open-edi scenario (OeS)	66
12.2.1	Purpose.....	66
12.2.2	Template structure and content.....	66
12.3	Template for Scoping Open-edi scenarios	66
12.4	Specification and consolidated template of attributes of Open-edi scenarios, roles, information bundles (IBs) and semantic components (SCs).....	70
Annex A	(normative) Coded domain registration administration attributes.....	74
Annex B	(normative) Use of IT-enabled coded domains to ensure semantic interoperability in support of the “UN Convention on the Rights of Persons with Disabilities”	79
Annex C	(informative) Concept and definition of “coded domain”	81
Annex D	(informative) Case Study: Example of “e-potato”	87
Annex E	(informative) Case study: Example of a coded domain with two writing systems for Human Interface Equivalents (HIEs) of a set of ID codes - in Russian use of the Cyrillic alphabet and the romanized form	89
Annex F	(informative) Case study: Example of coded domain in Matrix form and XML format as found in Table 2 in ISO/IEC 5218 “Codes representing the human sexes”.....	92
Annex G	(informative) Determining whether the membership in a coded domain is exhaustive or non-exhaustive.....	99

Annex H (informative) Examples of identification of different object classes within a coded domain through the use of semantic qualifiers	104
Bibliography.....	112

Index of Figures

Figure 1 — Need for standard and methodologies for coded domains	x
Figure 2 — Business Transaction Model — Fundamental components (Graphic Illustration).....	xi
Figure 3 — Relation of “recorded information”, “data” and “computer system” in electronic business transactions / Open-edi.....	xii
Figure 4 — Relations “data” and “data elements” in electronic business transactions / Open-edi	xii
Figure 5 — Purpose of coded domain as IT-enabled and content predefined semantic components	xiii
Figure 6 — Illustration of Elements of a Data Structure for Human Linguistic Equivalents of an ID Code – Written form	58

Index of Tables

Table 1 — Construct of a coded domain.....	46
Table 2 — Level of Semantic Unambiguity based on the UN Convention of rights of persons with disabilities (in support of a collaboration space pertaining to commitment exchange).....	48
Table 3 — Template for specifying the scope of an Open-edi scenario.....	67
Table 4 — Consolidated template of attributes of Open-edi scenarios (OeS), roles, information bundles (IBs) and semantic components (SCs).....	71
Table A.1 — A.Administrative attributes for registration of a coded domain as a business object.....	76
Table B.1 — Codes representing levels of semantic unambiguity in support of semantic interoperability equivalency requirements	80
Table D.1 — Illustrating IT Interfaces and different HIEs using the WCO HS code for “potato”	88
Table E.3 — Use of Columns in Table E.4.....	89
Table E.4 — eBusiness vocabulary terms in Russian Cyrillic Alphabetic order.....	90
Table E.5 — Use of Columns in Table E.6.....	90
Table E.6 — eBusiness vocabulary terms in Russian Romanized Alphabetic order.....	91
Table G.1 — ISO/IEC 15944-10 Compliant representation of Canada entry in ISO 3166-2 as a coded domain	100
Table H.1 — Identification of Essential Data Elements in an ISO 3166-1 entry	106
Table H.2 — Use of semantic qualifier codes for ISO 3166-1 in an Open-edi and eBusiness context.....	107
Table H.3 — Identification of essential data elements in an ISO 4217 entry.....	110
Table H.4 — Use of semantic qualifier codes for ISO 4217 in an Open-edi and eBusiness context.....	111

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 15944-10 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 32, *Data management and interchange*.

ISO/IEC 15944 consists of the following parts, under the general title *Information technology — Business Operational View*:

- *Part 1: Operational aspects of Open-edi for implementation*
- *Part 2: Registration of scenarios and their components as business objects*
- *Part 4: Business transaction scenarios — Accounting and economic ontology*
- *Part 5: Identification and referencing of requirements of jurisdictional domains as sources of external constraints*
- *Part 6: Technical introduction to eBusiness modelling [Technical Report]*
- *Part 7: eBusiness vocabulary*
- *Part 8: Identification of privacy protection requirements as external constraints on business transactions*
- *Part 9: Traceability framework**
- *Part 10: IT-enabled coded domains as semantic components in business transactions*

* Indicates parts of ISO/IEC 15944 under development at the time of publication of this part of ISO/IEC 15944.

0 Introduction

0.1 Overview of purpose and nature of coded domains

The primary purpose of this Part 10 is to provide an integrated approach in a single consolidated document the key concepts and their definitions as well as rules pertaining to “coded domains” as they already exist in the multipart ISO/IEC 15944 eBusiness standards, especially Parts 1, 2, 5 and 8.

Within an Open-edi context (based on the ISO/IEC 14662 “Open-edi reference model”), business transactions are viewed from both a Business Operational View (BOV) and the Functional Services View (FSV). ISO/IEC 15944 focuses on the many requirements of the business operational view aspects of Open-edi in support of electronic business transactions. The primary aspect which distinguishes and differentiates “Open-edi” (and ISO/IEC 14662 Open-edi Reference Model compliant standards) is that they are developed to be able to support the making of commitments among autonomous parties. This requires that the set(s) of recorded (SRIs) information interchanged in the form of Information Bundles (IBs) as well as Semantic Components (SCs), which form part of an IB, are not only IT-enabled and IT-platform neutral. It is especially important that where these semantics are captured, recorded, referenced and used via a specified coded domain, that these are communicated in a very precise and in an “unambiguous” manner, i.e. at the “level of certainty and explicitness required” to support the goal of the commitment exchange forming the goal of the business transaction.

In addition, the following Open-edi requirements need to be supported:

- a) need for unambiguity in commitment exchange applies especially to semantics of the data interchanged among the parties concerned;
- b) ensure as high a degree of data integrity of the semantics of the data interchanged;
- c) maximize an IT-enabled approach;
- d) maximize granularity and flexibility

Given the fact that in Open-edi there are many differing internal and external constraints as well as the wide variety of applications and sectors, it is important that the recorded information interchanged among the parties concerned be as “granular” and precise as possible. Here “coded domains” serve as flexible “lego blocks” from which data values can be retrieved and used as unambiguous semantic components.

The concept of “coded domain” is unique in the context of an Open-edi approach and has been defined in an ISO/IEC 15944 context. This concept and its definition represents an approach, methodology and tool which is needed to support appropriate level of unambiguity of (electronic) data interchange needed to support. The concept of “coded domain” covers several perspectives¹;

- 1) business and information (modelling) perspective, i.e., those of users and the BOVs;
- 2) IT modelling perspectives such as:
 - a) entity-relationship modelling where a coded domain is viewed as an entity type functioning as a “domain”; and,
 - b) object-oriented modelling where a coded domain is viewed as an “object class”.
- 3) an information science (information management, library, records management, etc.) perspective where coded domains are viewed as “schedules”, “authority files”, “tables” (which one at times “attaches” to a concept/term thesauri (or indexing/classification schemes of “instance relationships”;

¹ For the definition, see entry “D033” and Clause 5.3.2 in ISO/IEC 15944-7:2007.

- 4) an electronic data interchange perspective where coded domains are known as “code sets” i.e., a set of codes representing “xyz”. (pop-ups choices in a data entry module); and,
- 5) application and implementation perspective (and physical data model) where coded domains are commonly known as (edi) tables (or reference tables).

The term “coded domain” is introduced to differentiate Open-edi, BOV and e-Business requirements from various other concepts and associated terms such as generic (encodable) value domains, “enumerated domains”, code sets, which appear to be similar in nature similar in nature in ISO standards. {See Annex C for more detailed information}.

In addition, a key purpose of Part 10 is to ensure that at the granular level as much information is made available about a semantic component, at whatever level of granularity as is required to ensure unambiguity in a commitment exchange.

Another key purpose of this Part 10 is to maximize the level of “intelligence” at the highest most precise level, i.e., that of the actual data values being interchanged. Here use of coded domains presents a simple and pragmatic approach. No “expert system”, intelligent interface, use of heuristics, etc., can metamorphose “dumb” fuzzy data into unambiguous data values which are precise enough to be able to serve as EDI IBs or SCs in support of the making of commitments as actualized in a instantiated business transaction. On the other hand “smart data” within an intelligent structure, i.e., as part of a coded domain, can not only stand on its own but also be much simpler, precise, easier to reference and use.

This approach at the data element level focuses on the development of intelligently coded data elements as part of coded domains. This involves rule-based, structured and pre-defined values whose purpose and use has been stated clearly and unambiguously (hereby facilitating an IT-enabled approach).²

0.2 Benefits of the use of coded domains

The benefits of using the construct, methodology and implementation of “coded domains”, in compliance with this Part 10, presented below include (in no order of importance):

- 1) Maximizing if not ensuring unambiguity in semantics among parties to a commitment exchange instantiated as a business transaction;
- 2) Ensuring ability to support Human Interface Equivalencies (HIEs) in support of multilingual and individual accessibility requirements;
- 3) Maximize a Total Quality Management (TQM) approach for data integrity control and trustworthiness and quality assurance;
- 4) Maximize exchange ability of data among Persons and their applications through computer-to-computer electronic data interchange (EDI) among the IT-systems of the parties involved;
- 5) Serve as a methodology and tool which it IT-neutral, i.e., Part 10 conformant “coded domains” are completely independent of application software and IT-platforms used;
- 6) Minimization of data entry costs and simplification data entry processes;
- 7) Enables more efficient and effective search, retrieval and use of recorded information (in multiple languages);
- 8) Significant minimization in costs and duplication of effort due to the inherent shareable nature of coded domains;

² See further SC32/WG1 N0520 “Amended 15944-1:2010 Figure 22 Focus of BOV Open-edi Standardization Work ”for use in development of Part 10”.

- 9) Increased efficiencies and cost reductions in both the internal operations of organizations and public administrations as well as among them via EDI;
- 10) Promotes modularity, re-usability of shared solutions supporting both paperless environments;
- 11) Increased productivity, through reduction of common (non-competitive) costs at organizations and public administrations as well as at the jurisdictional domain level; and,
- 12) Serve as a methodology in support of the development of consensus building with respect to the development of permitted values of a data element in support of the use of a semantic component in (electronic) data interchange (based on the Pareto principle³).

0.3 Identification, mapping and IT-enablement of existing standards for widely-used code sets

A coded domain consists of entries of “entities” which the responsible Source Authority (SA) has decided to include into its “Set of codes representing X” for the specified and particular purpose for which this SA has decided to establish and maintain the resulting “set of codes representing X” to be used by its members. However, it is recognized that many “Persons” of whatever nature, i.e., either as an “organization” and/or “public administration”, and at times, “individuals” as well use a “Set of codes representing X” for a purpose and in a context which is quite different from that of the purpose and use of the Source Authority which created and maintains that “Set of Codes representing X”.

Two primary examples here are ISO 3166-1 & -2 and ISO 4217 which from an “object class” methodology perspective contain several distinct object classes {see the ISO/IEC definition for “object class” from ISO/IEC 11179-1:2004 (as referenced as entry “D147” in ISO/IEC 15944-7 and so used in all Parts of ISO/IEC 15944 where applicable including in this Part 10 as found in Clause 3.98 below). Annex H below provides further information on these two examples via the use of a “semantic qualifier”.

In this document there is frequent use of the phrase “set of codes representing X”. This is because there are many existing and widely used sets of codes which need to be converted into “coded domains” from an Open-edi, eBusiness, commitment exchange, etc. user perspective.

In an Open-edi and/or eBusiness context of the use of an actual values of SRIs, i.e. as instantiations, that are intended to be used as “coded domains”, are already widely used in existing ISO, IEC, and ITU standards in the form of a “codes representing X” nature, as well as those found in specifications of differing industry sectors. These standards are managed and maintained by recognized authorities and implemented in business practices. From an Open-edi and generic commitment exchange perspective in general as well as that of eBusiness requirements in particular, Open-edi standards support their use and implementation in an IT-enabled form.

As illustrated in Figure 1 below, the standard for the IT-enablement of the widely used “codes representing X” standards is needed to provide guidance for the transformation and achieve consistency among applications of different standards. Requirements need to be specified for the coded domain, including identification, mapping to existing codes, as well as cultural adaptability features⁴. In this part of the ISO/IEC 15944, these specifications are based on explicitly stated rules and scope of coded domains, rules and guidelines for the construct and characteristics of coded domain and its member codes, especially from the semantic perspectives, to support commitment exchanges of Open-edi.

³ This 1st edition of Part 10, which focuses on the more primitive aspects of “coded domain”, also applies the “Pareto Principle” Also know as the “80-20 rule”, or the “law of the vital few”, it states that in many cases 80% of the effects come from 20% of the causes. In this context, the concepts and definitions as well as the rules and guidelines presented in this 1st edition can be viewed to be the 20% which covers 80% of the common user requirements.

⁴ See further the “*Recommendations of the ISO/IEC JTC1 Business Team on Electronic Commerce (BT-EC)*”. [Ref: ISO/IEC JTC1 N5296]

It is a general rule and practice in ISO/IEC 15944 multipart standards development that one maximizes the use of Formal Description Techniques (FDTs). The rules and guidelines along with associated definitions of concepts is an approach of using a lexical model as the formal approach to specify requirements from a business operational view (BOV) perspective. The FDTs can also be used to produce the formal models or to describe the rule-base for coded domain, which in turn become an integrated part of coded domains.

This part of the ISO/IEC 15944 also specifies that Open-edi coded domains need to be registered as such in compliance with Part 2 ISO/IEC 15944 requirement. {See further Clause 11 below}

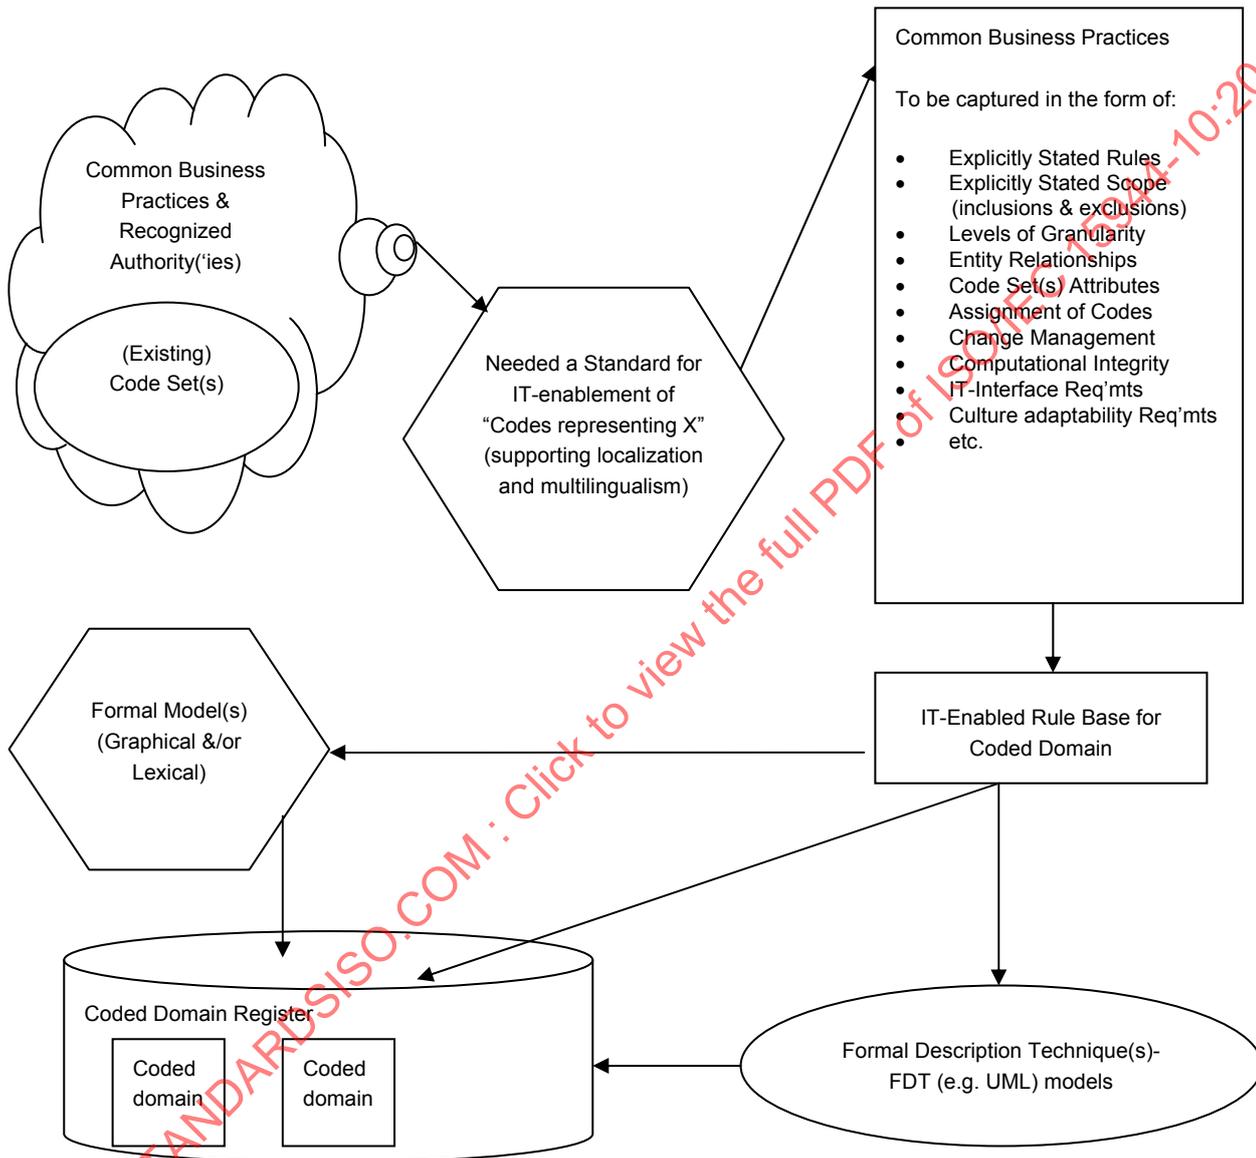


Figure 1 — Need for standard and methodologies for coded domains

Thus, this part of ISO/IEC 15944 facilitates and allows for the:

- development of Referenceable Semantic Components in Open-edi Scenarios (e.g. as “roles” & “information bundles”)
- mapping into existing standards & tools for repositories, interchange, access, encoding, syntax, (e.g. ASN.1, IRDS, SQL, 11179-based registries, HTML, XML, ANSI X.12, UN/CEFACT, ISO 9735 “EDIFACT”, etc.).

0.4 Link to fundamental components in Business Transaction Model (BTM)

As described in clause 6.1.5 in ISO/IEC 15944-1, a business transaction requires three basic components, namely “Person”, “process” and “data”.

These three fundamental elements of the Business Transaction Model (BTM) are represented graphically in Figure 2 below, which has been adapted from Figure 7 in ISO/IEC 15944-1.

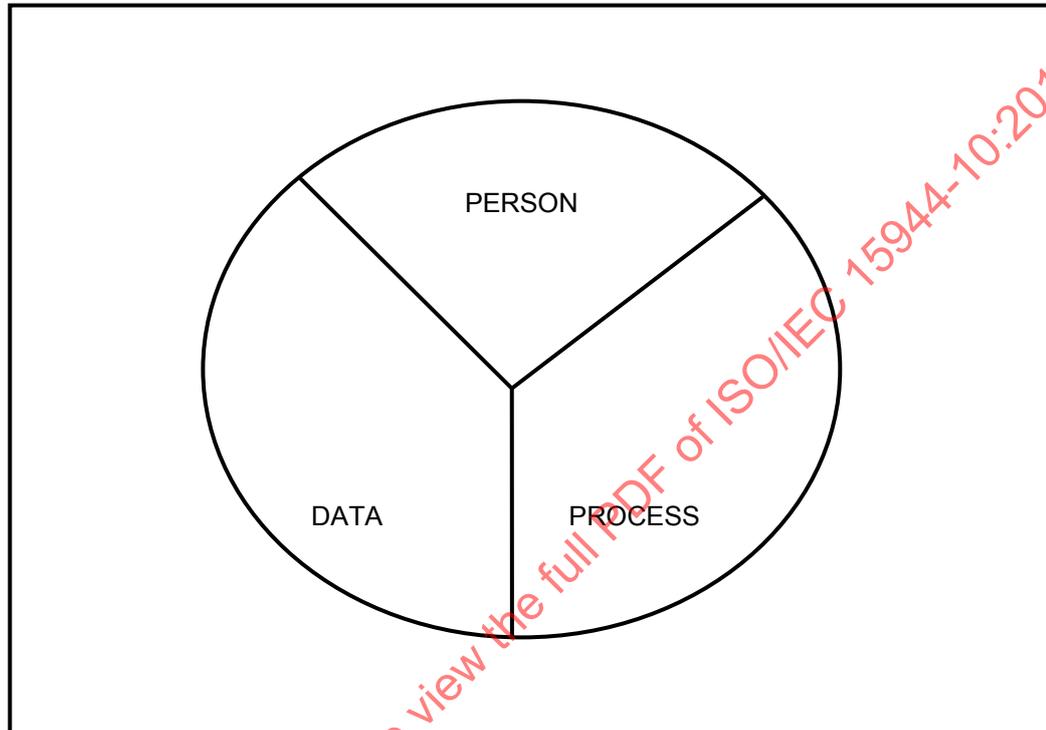


Figure 2 — Business Transaction Model — Fundamental components (Graphic Illustration)

The “coded domains” apply to all three of these fundamental components of the BTM. For example, with respect to “data” (and data element), numerous sets of codes representing XYZ” exist which are already or can be/should be transformed into IT-enabled domains. With respect to “Person”, ISO/IEC 15944-1 identified existing “coded domains” for the identification and registration of Persons in the form of ISO standards:

- ISO/IEC 6532 for organizations;
- ISO/IEC 7812 for individuals, organizations and public administrations; and
- ISO/IEC 7501 for individuals.⁵

With respect to the “process” component, ISO/IEC 15944-1 identified a set of five fundamental activities which may take place in any order. The five fundamental activities are: (a) planning; (b) identification; (c) negotiation; (d) actualization; and, (e) post-actualization.

⁵ Annex D “Existing standards for the unambiguous identification of persons in business transactions (organizations and individuals) and some common policy and implementation considerations” in ISO/IEC 15944-1 provides further information on these identification schemas are constructed.

— On the whole, a coded domain consists of predefined and structured data elements. Clause 6.4.2 in ISO/IEC 15944-1 described the relations between concepts of “recorded information” and “data”. Data is one type of recorded information that can be processed by computer systems. Data is data-element based or non-data element based, as described by Figure 3 and Figure 4 below, which are adapted from ISO/IEC 15944-1 Clause 6.4.2.

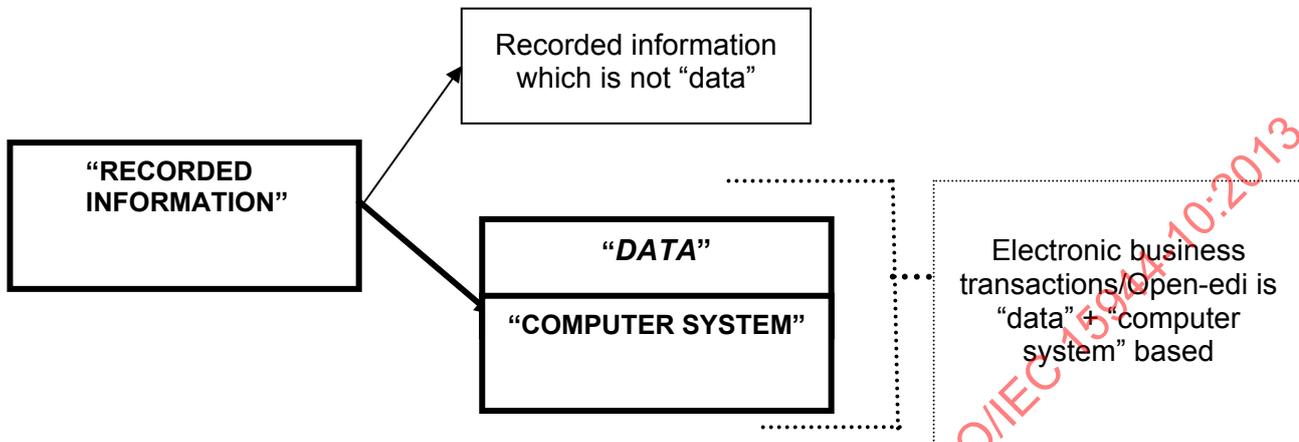


Figure 3 — Relation of “recorded information”, “data” and “computer system” in electronic business transactions / Open-edi

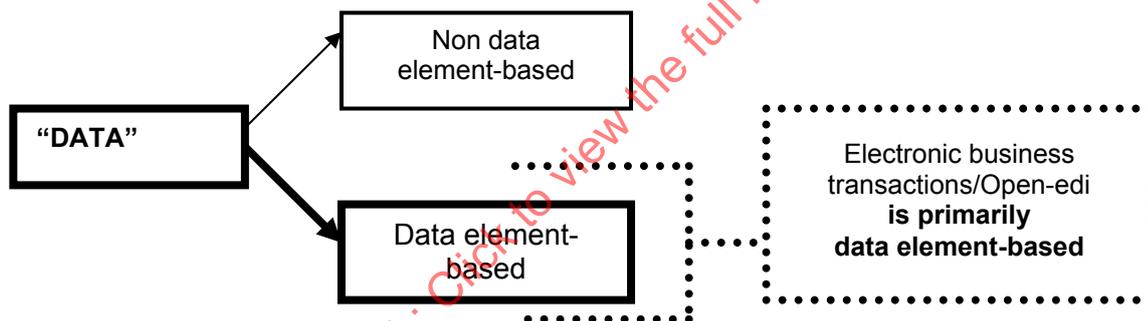


Figure 4 — Relations “data” and “data elements” in electronic business transactions / Open-edi

0.5 IT-enabled and content predefined Semantic Components

As specified by ISO/IEC 14662, Open-edi scenarios include components of roles, information bundles, and scenario attributes. The coded domain is related to information bundles, which consist of Semantic Components (SC). A Semantic Component is a unit of recorded information unambiguously defined in the context of business goal of the business transaction.

Since not specifically required by the ISO/IEC 14662, the Semantic Components for “Person”, “Process” and “Data” can be either structured or unstructured, and they can also have predefined contents or undefined contents. It is an ISO/IEC JTC1 requirement that a standard shall support IT-enablement and computational integrity when possible⁶. Therefore it is the purpose of this Part 10 of ISO/IEC 15944 to maximize the IT-enablement, interoperability, computational integrity approach through the use of coded domains whose context provided predefined and structured data values for use as Semantic Component, as shown in Figure 5 below.

⁶ See further the “Recommendations of the ISO/IEC JTC1 Business Team on Electronic Commerce (BT-EC)”. [Ref: ISO/IEC JTC1 N5296].

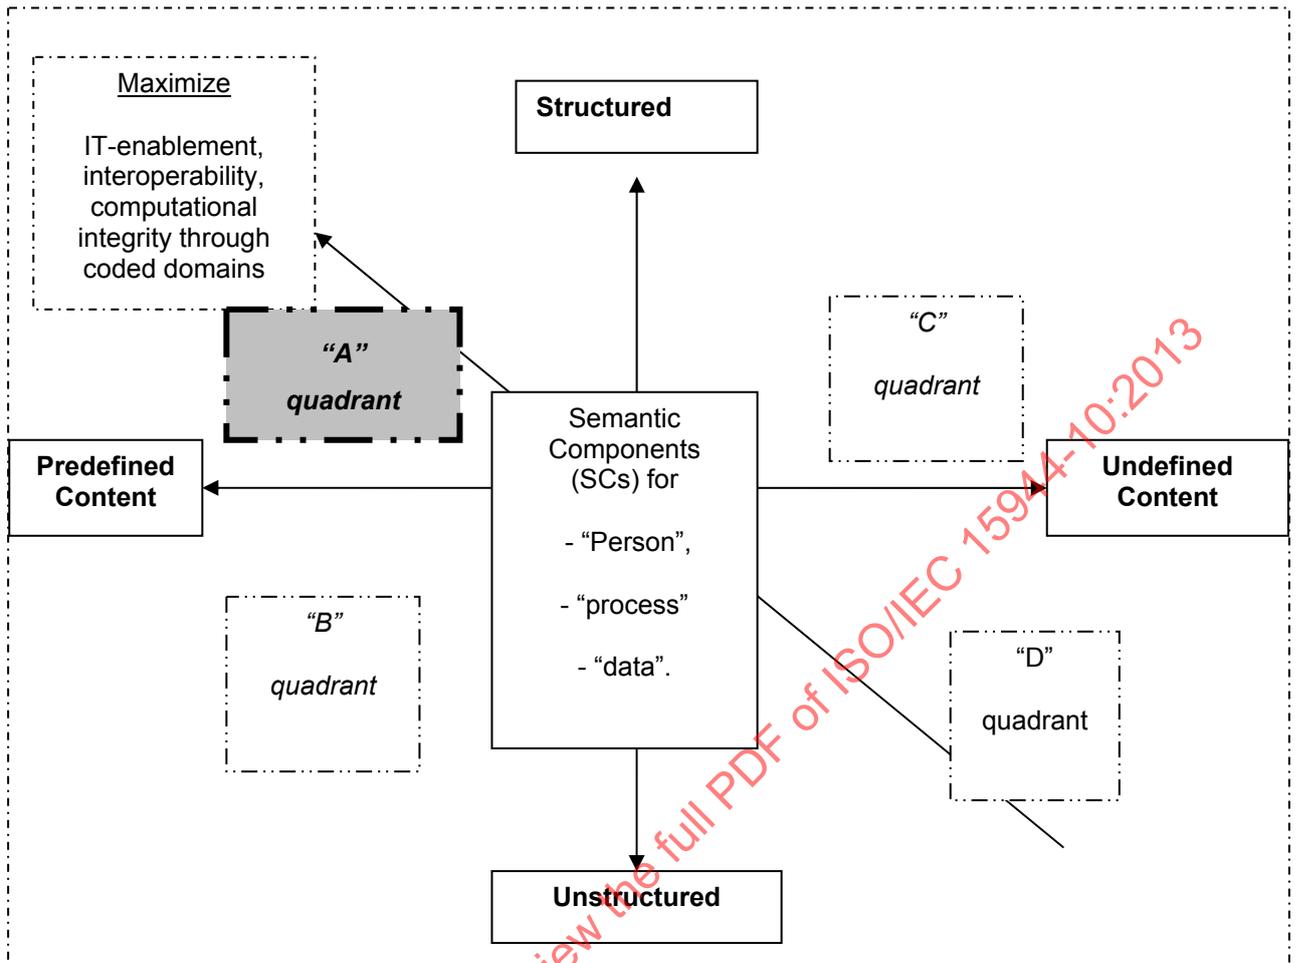


Figure 5 — Purpose of coded domain as IT-enabled and content predefined semantic components

The focus of Part 10 of ISO/IEC 15944 is to support “Quadrant A” requirements in the development and use of “coded domains”. This means that the rules governing the allowable contents, i.e., values, in a set of recorded information which (1) support and enable a structured approach; and (2) all the permitted values for the semantic component are predefined (and if not there is a very systematic and rule-based to deal with “Others” in an IT-enabled manner).”

0.6 Coded domains as reusable business objects

In existing business transactions, whether conducted on a for-profit or not-for-profit basis, business information documents as well as implementable (executable) computer programs consist of reusable components unambiguously understood among participating parties. Coded domains can be used in support of any type of scenario component, i.e., “roles”, “Information Bundles (IBs)”, and “semantic components” (SCs). Coded domains can also be used in support of a scenario attribute registered through procedures specified by ISO/IEC 15944-2.

Registration of coded domains offers several benefits to the e-Business community, including the following

- a) supports wider use of registered coded domains both by providing international recognition to the fact that such coded domains conform to an International Standard and by making them publicly available to potential users.
- b) provides both immediate recognition to extensions of an International Standard and a source for updates to that International Standard during the regular maintenance cycle.

- c) may provide a single mechanism to access information concerning coded domains that are specified in different standards.
- d) provides a mechanism for managing temporal change. Coded domains specified in a standard or in a register may change over time either due to changes in technology or for other reasons. Published standards do not clearly document what changes may have occurred, and do not include information about earlier versions of specified code sets. Such information can be maintained in a register.
- e) may be used to make sets of standardized tags available for encoding of registered coded domains in data sets.
- f) supports cultural and linguistic adaptability by providing both a means for recording equivalent HIES of coded domains used in different languages, cultures, application areas, and professions and a means for making those equivalent names publicly available.

0.7 Use of "Person", "organization" and "party" in the context of business transaction and commitment exchange

In electronic business transactions, whether undertaken on a for profit or not-for-profit basis, the key element of any type of business transaction is commitment exchange among Persons made among their Decision Making Applications (DMAs) of the Information Technology Systems (IT Systems)⁷ acting on behalf of "Persons". "Persons" are the only entities able to make commitments⁸. Quoting from ISO/IEC 15944-1:2011, 0.4:

"When the ISO/IEC 14662 Open-edi Reference Model standard was being developed, the "Internet" and "WWW" were an embryonic stage and their impact on private and public sector organizations was not fully understood. The Business Operational View (BOV) was therefore initially defined as:

"a perspective of business transactions limited to those aspects regarding the making of business decisions and commitments among organizations which are needed for the description of a business transaction".

The existing and widely-used ISO/IEC 6523 definition of "organization" was used in the 1st edition of ISO/IEC 14662. The fact that today Open-edi through the Internet and WWW also involves "individuals" has now been taken into account in the current editions of both ISO/IEC 14662 and all parts of ISO/IEC 15944. [The 1st edition of ISO/IEC 14662:1997 did not define "commitment", nor the discrete properties and behaviours an entity must have to be capable of making a "commitment" as well as bridging legal and IT perspectives in the dematerialized world of the Internet]

During the development of ISO/IEC 15944-1, the term "commitment" was defined. At the same time it was recognized that in order to be able to make a commitment, the term "Open-edi Party" was not specific enough to satisfy scenario specifications when the legal aspects of commitment were considered. In many instances commitments were noted as being actually among IT systems acting under the direction of those legally capable of making commitment, rather than the individuals in their own capacities. It was also recognized that in some jurisdictions a commitment could be made by "artificial" persons such as corporate bodies. Finally, it was recognized that there are occasions where agents act, either under the instruction of a principal, or as a result of requirement(s) laid down by a jurisdiction, or where an individual is prevented by a relevant jurisdiction from being able to make a commitment.

To address these extended requirements, the additional concept and term of "Person" was defined. The construct of Person has been defined in such a way that it is capable of having the potential legal and regulatory constraints applied to it".

⁷ For the applicable normative elements here, see further in ISO/IEC 14662:2010, Clause 5.2 "Functional Services View".

⁸ The text in this section is based on existing text in 0.3 in ISO/IEC 15944-1:2011 and ISO/IEC 14662:2010.

There are three categories, i.e. sub-types, of Persons as players in Open-edi, namely (1) the Person as "individual", (2) the Person as "organization", and (3) the Person as "public administration". There are also three basic (or primitive) roles of Persons in business transactions, namely "buyer", "seller", and "regulator".

In modelling business transactions, jurisdictional domains prescribe their external constraints in the role of "regulator" and execute them as "public administration". {See Clause 5.4 in ISO/IEC 15944-1}

Very often the requirements of jurisdictional domains are specified through the use of sets of "Codes representing X...". These sets of codes are created and maintained by Source Authorities via a rulebase with a resulting coded domain(s) in the form of a data element(s) whose permitted values represent predefined semantics and in a structured form, i.e. as a type of semantic component. As such, jurisdictional domains serve as Source Authorities for coded domains.

These three sub-types of Persons are also the possible Source Authorities for coded domains. On the whole, Source Authorities for coded domains are either "organizations" or "public administrations".

In this part of ISO/IEC 15944:

- the use of Person with a capital "P" represents Person as a defined term, i.e. as the entity within an Open-edi Party that carries the legal responsibility for making commitment(s);
- "individual", "organization", and "public administration" are defined terms representing the three common sub-types of "Person"; and,
- the words "person(s)" and/or "party(ies)" are used in their generic contexts independent of roles of "Person" as defined in ISO/IEC 14662:2010 and ISO/IEC 15944-1. A "party" to a business transaction has the properties and behaviours of a "Person".

0.8 Importance and role of terms and definitions

An essential element of any standard is that of having clearly and explicitly stated definitions for the concepts which it uses or introduces. Definitions capture the key concepts of a standard and form the essential foundation for any standard. As such, it is important that definitions be explicit, unambiguous and precise with respect to the semantics conveyed. At times, in order to ensure that the concept being defined is not confused with other related concepts (or words that have common or possible different meanings), International Standards introduce, i.e. "invent", new terms as labels for these concepts. This is also because the use of "synonyms" is not allowed in definitions in International Standards. The same approach has been taken in ISO/IEC 15944. {See further Clauses 5.3.2, 5.4, as well as Clause 6 and Clause 7}

The ISO/IEC Directives, Part 2 provide for "Terms and definitions" as a "Technical normative element", necessary for the understanding of certain terms used in the document. A primary reason for having "Terms and definitions" in a standard is because one cannot assume that there exists a common understanding, worldwide, for a specific concept. And even if one assumes that such an understanding exists, then having such a common definition in Clause 3 serves to formally and explicitly affirm (re-affirm) such a common understanding, i.e. ensure that all parties concerned share this common understanding as stated through the text of the definitions of these concepts in Clause 3.

A primary objective of ISO/IEC 15944 is to ensure that there is a common understanding of the Business Operational View (BOV) from commercial, legal, ITC, public policy and cross-sectoral perspectives. It is therefore very important to ascertain and confirm that which may be considered a "common understanding" in one of these domains is also unambiguously understood and accepted in the others.

One concludes this introductory clause by:

- 1) noting that the "definition" of the concept "definition" is "*representation of a concept by a descriptive statement which serves to differentiate it from related concepts*" [ISO 2087-1:2000 (3.3.1)]
- 2) noting that an essential characteristic of eBusiness standards is that they involve and support the making of (legally recognized) "commitments" among two or more autonomous Persons. This requires

not only a “common understanding” among all the parties involved but also is one which is as unambiguous as possible, especially where such business transactions are executed via Open-edi based IT systems; and,

- 3) stating that a very effective and practical approach to supporting the requirements noted in 1) and 2) above, is to develop and provide bilingual/multilingual equivalencies of the definition of a concept (and its associated label or “term”) in two or more languages. A primary reason here is that establishing an equivalency of the definition of a concept in another language from the “source language” uncovers “hidden ambiguities” in the source language. Often, it is in the preparation of an HIE for the definition (and its associated term) that ambiguities, i.e. in the semantics, from one language into one or more other languages are discovered. At times, this results in the need to improve the text of the definition of the concept in the source language. Alternatively, such development of one or more HIEs of the definition of a concept can result in the addition of a clarifying “Note(s)” or “Example(s)” in both the source language and its HIEs⁹.

0.9 Use of "identifier" as "identifier (in business transaction)" to prevent ambiguity

ISO/IEC 15944-1, 6.1.4 focuses on the requirement for the unambiguous identification of entities in business transactions. "Unambiguous" is a key issue in business transaction because states of ambiguity and uncertainty are not desired from commercial, legal, consumer and information technology perspectives. Issues of unambiguousness apply to all aspects of a business transaction and even more so to those which are EDI-based.

A key objective of ISO/IEC 15944 is to serve as a methodology and tool for the specification and unambiguous identification of Open-edi scenarios, scenario attributes and scenario components as re-useable elements, i.e. as re-useable business objects, in support of common business transactions. These and related objectives of interoperability and re-usability of Open-edi scenarios and scenario components for business transaction require their unambiguous identification.

ISO/IEC 15944-1:2011 defined "unambiguous" as:

unambiguous: *the level of certainty and explicitness required in the completeness of the semantics of the **recorded information** interchanged appropriate to the goal of a **business transaction**. [ISO/IEC 15944-1:2011 (3.66)]*

and "identifier (in business transaction)" as:

identifier (in business transaction): *an **unambiguous**, unique and a linguistically neutral value, resulting from the application of a **rule-based identification process**. **identifiers** must be unique within the identification scheme of the issuing authority. [ISO/IEC 15944-1:2011 (3.27)]*

Thus users of this part of ISO/IEC 15944 should understand that the "identifier" in this part of ISO/IEC 15944 is used as a defined term as "identifier (in a business transaction)".¹⁰

As specified in Clause 5.5 and Clause 8 of this part of the ISO/IEC 15944, each entry within a coded domain contains a identifier and HIE(s), the HIE provides human readable semantics, while the identifier unambiguously identifies the semantics.

⁹ For the normative elements, see further in ISO/IEC 15944-7 "... *eBusiness Consolidated Vocabulary*" Clause "5.3 *Essential elements of an entry in the eBusiness Vocabulary*"; and, in particular, 5.3.1 *Rules governing the development of a definition for a concept*".

¹⁰ Identifiers in business transactions can be simple or composite identifiers. This is dependent on (1) the rules governing "identifiers" as a rule-based process; (2) the "registration schema" used (as well as any permitted combinations of the same).

0.10 Organization and description of document

This part of ISO/IEC 15944 identifies requirements for the IT-enablement, semantics unambiguity, as well as other requirements of coded domains, which originates from the existing standards about codes representing X nature, through the specification of their principle, identification and description, composition, management and registration, and templates as a tool for implementation.

Clause 0 provides the detailed description of the need for a standard about coded domains, from various view points, i.e. the need for coded domain on general perspectives and its relationship with reusability, unique identification, and other important aspects of Open-edi.

Clause 1 provides the scope of the current version of this part of ISO/IEC 15944. Some of the aspects that are not currently addressed may be specified in future versions.

Following Clause 2, Clause 3 and Clause 4, Clause 5 describes the overall principles of coded domains that govern all other clauses of this part of ISO/IEC 15944.

Clause 6 specifies the identification and business operational description of coded domains. By the specification of the construct of coded domain, a number of components of coded domains are specified and will be specified in detail in the following Clauses 7, 8 and 9.

Clause 10, Clause 11 and Clause 12 specify more formal presentations of coded domains. Clause 10 specifies rules for the registration of coded domains, Clause 11 describes the description of coded domains using OeDT, and Clause 12 provides templates for IT-enabled coded domains.

This standard contains several annexes with Annexes A and B being normative and the following Annexes C, D, E, F, G, and H presented for information purposes.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15944-10:2013

Information technology — Business Operational View —

Part 10:

IT-enabled coded domains as semantic components in business transactions

1 Scope

1.1 Statement of Scope

This part of ISO/IEC 15944 serves as a methodology and tool for the use of widely used standards, specifications, authority files, etc., of a “codes representing X” nature in business transactions involving the making of (legally-binding) commitments, based on common business practices, and doing so in an IT-enabled manner. The key characteristics of coded domains include:

- a) they are rule-based;
- b) they have a Source Authority;
- c) they are used in support of commitment exchange among Persons engaged in Open-edi business transactions through their IT systems;
- d) they support requirements for unambiguousness in the semantics of the electronic data interchange (EDI) among autonomous parties while also supporting localization and multilingual human interface equivalency (HIE) requirements; and,
- e) they are IT-enabled as per the rules, criteria and specifications of this part of ISO/IEC 15944.

This part of ISO/IEC 15944 supports all three strategic directions for standards development of ISO/IEC JTC1: namely “portability”, “interoperability”, and “cultural adaptability”.

A key objective of this part of ISO/IEC 15944 is to ensure that existing standards of a “codes representing X” nature can be used in electronic business transactions among parties engaged in Open-edi. Open-edi pertains to flows of information using information bundles which cause pre-defined (or pre-definable) changes in the states of the IT systems of the parties to such electronic data interchanges. Parties using Open-edi make the commitment that they will adhere to the predefined rules associated with the registered associated scenario attributes, roles and information bundles (including registered semantic components). The semantics here are identified and referenced via an identifier. With such ID codes can be associated multiple human interface equivalents in many forms and languages. Use of this part of ISO/IEC 15944 therefore facilitates semantic interoperability requirements in support of “cultural adaptability”.

Another purpose of this part of ISO/IEC 15944 is to specify the key elements of an IT-enabled coded domain, whose membership is determined by a Source Authority, for use in support of electronic data interchange (EDI) among autonomous parties engaged in commitment exchange. The approach taken is that of the separation of the IT interface requirements of semantic interoperability from their (multiple) human interface linguistic equivalents. This will also ensure that the level of certainty and explicitness required in the completeness of the semantics of the recorded information interchange is appropriate to the goal of the business transaction, i.e. the unambiguous requirement.

1.2 Exclusions

Excluded from the scope of this part of ISO/IEC 15944 is that of the development of the scope, attributes, content values (as HIEs) of coded domains, etc., as required elements for other coded domain Registration Authorities (RAs), i.e. other than those developed by ISO/IEC JTC 1/SC 32 itself as the Source Authority (SA).

However, the application of this part of ISO/IEC 15944 as a methodology and tool to turn an existing set of “codes representing X...” into an IT-enabled coded domain, conforming to this part of ISO/IEC 15944, is not excluded.¹¹

1.3 Aspects currently not yet addressed

The first edition of this part of ISO/IEC 15944 focuses on the essential, most basic aspects, i.e. primitive aspects. It is anticipated that some or all of these requirements will be addressed in future editions of this part of ISO/IEC 15944, or in companion standards or technical reports (including possible new parts of the multipart ISO/IEC 15944 standard). The development of new parts of ISO/IEC 15944 on Open-edi descriptive techniques is expected to provide a more detailed specification about IT-enabled presentations of coded domains.

1.3.1 Addressing “Quadrant B, C & D” in Figure 5

It is noted in Clause 0.7, and illustrated in Figure 5 above, that the focus of the first edition of this part of ISO/IEC 15944 focuses “Quadrant A”. It may well be aspects of “coded domains” which will be identified in the use of the first edition which need to be addressed but are of a “Quadrant B, C or D” in nature.

1.3.2 Use of coded domains in support of the “Process” component in the Business transaction model

The business transaction model (See Clause 0.3 above) has three fundamental components, i.e. “Person”, “data” and “process”. This first edition does not yet address the application of coded domains for identifying or referencing “processes” (e.g. as a set of pre-defined steps in a process each with their own ID code in a coded domain).

1.3.3 Use of coded domains with respect to Persons and in particular “individuals” and associated privacy protection requirements

ISO/IEC 15944-1 contains an Annex C (informative) titled “Unambiguous identification of entities in (electronic) business transactions”. In addition, it also provides, in an Annex D (informative), examples of coded domains for the unambiguous identification of Persons in business transaction.

1.3.4 Use of coded domains in support of “public policy” requirements and in particular individual accessibility

Public policy requirements as a type of external constraints are introduced in 6.3 of ISO/IEC 15944-5. While this part of ISO/IEC 15944 is structured to support individual accessibility requirements, including those of the UN Convention of rights of persons with disabilities, this first edition addresses the more primitive aspects only¹².

¹¹ It is assumed that the party undertaking the IT-enablement of an existing set of “codes representing X...” will make an appropriate working arrangement with the party which is the Source Authority (SA) for that code set (whether already in the public domain or not, whether on a for profit basis or not, etc.).

¹² For more details, see Annex H. See also ISO/IEC 20016-1, *Information technology for learning, education and training — Language accessibility and human interface equivalencies (HIEs) in e-learning applications — Part 1: Framework and reference model for semantic interoperability*.

1.3.5 Detailed levels of rules pertaining to change management aspects of coded domains

6.6.4 in ISO/IEC 15944-5 and 11.3 and 11.4 in ISO/IEC 15944-8 already address key aspects pertaining to change management such as state changes, records retention, and data deletion. This part of ISO/IEC 15944 incorporates these relevant aspects at the primitive level only.

1.3.6 Differentiation of categories and levels of Source Authorities (SA) for coded domains

Some coded domains are more recognized and more widely used than others. Some coded domains are maintained as international and/or national standards. Some are intended for use in one industry sector only (but are often used outside that sector as well). “Sets of codes representing X” are also maintained by international bodies or owe their origin and use to the implementation of an international treaty, convention, protocol, etc. These have their own categories and levels.¹³

1.4 IT-systems environment neutrality

This part of ISO/IEC 15944 does not assume nor endorse any specific system environment, database management system, database design paradigm, system development methodology, data definition language, command language, system interface, user interface, syntax, computing platform, or any technology required for implementation, i.e. it is information technology neutral. At the same time, this part of ISO/IEC 15944 maximizes an IT-enabled approach to its implementation and maximizes semantic interoperability.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced documents (including any amendments) applies.

ISO 639-2:1998 (E/F), *Codes for the representations of names of languages — Part 2: Alpha-3 code/Codes pour la représentation des noms de langue — Partie 2: Code alpha-3*

ISO/IEC 2382:1976-2000 (E/F), *Information technology — Vocabulary, Parts 1-34/Technologies de l'information — Vocabulaire, Parties 1-34*

ISO 3166-1:1997 (E/F), *Codes for the representation of names of countries and their subdivisions — Part 1: Country codes/Codes pour la représentations des noms de pays et de leur subdivisions — Partie 1: Codes pays*

ISO 8601:2004 (E), *Data elements and interchange formats — Information interchange — Representation of dates and times*

ISO/IEC 11179-3:1994 (E), *Information technology — Specification and standardization of data elements — Part 3: Basic attributes of data elements*

ISO/IEC 11179-3:2003 (E), *Information technology — Metadata registries (MDR) — Part 3: Registry metamodel and basic attributes*

ISO/IEC 14662:2010 (E/F), *Information technology — Open-edi reference model/Technologies de l'information — Modèle de référence de l'EDI-ouvert*

ISO/IEC 15944-1:2011 (E), *Information technology — Business Operational View — Part 1: Operational aspects of Open-edi for implementation*

¹³ For example, see Annex H (informative) “Levels of international regulatory regimes” in ISO/IEC 15944-5.

ISO/IEC 15944-2:2006 (E), *Information technology — Business Operational View — Part 2: Registration of scenarios and their components as business objects*

ISO/IEC 15944-5:2008 (E), *Information technology — Business Operational View — Part 5: Identification and referencing of requirements of jurisdictional domains as sources of external constraints*

ISO/IEC 15944-7:2009 (E), *Information technology — Business Operational View — Part 7: eBusiness vocabulary*

ISO 19115:2003 (E), *Geographic information — Metadata*

ISO/IEC 19501:2005 (E/F) *Information technology — Open Distributed Processing — Unified Modeling Language (UML) Version 1.4.2*

UN Convention on the Rights of Persons with Disabilities (2006)

3 Terms and definitions¹⁴

For the purposes of this document, the following terms and definitions apply.

3.1

abbreviation

designation formed by omitting words or letters from a longer form and designating the same **concept**

[ISO 1087-1:2000, 3.4.9]

3.2

acronym

abbreviation made up of the initial letters of the components of the full form of the **designation** or from syllables of the full form and pronounced syllabically

EXAMPLE Examples of acronyms are: laser, DOS, GATT, UNESCO, and UNICEF.

[ISO 1087-1:2000, 3.4.10]

3.3

address

set of **data elements** that specifies a **location** to which a **recorded information** item(s), a **business object**(s), a material **object**(s) and/or a person(s) can be sent or from which it can be received

NOTE 1 An address can be specified as either a physical address and/or electronic address.

NOTE 2 In the identification, referencing and retrieving of registered business objects, it is necessary to state whether the pertinent recorded information is available in both physical and virtual forms.

NOTE 3 In the context of Open-edi, a “recorded information item” is modelled and registered as an Open-edi scenario (OeS), Information Bundle (IB) or Semantic Component (SC).

[ISO/IEC 15944-2:2011, 3.1]

¹⁴ The HIEs ISO French, ISO, Russian and ISO Chinese are found in normative Annex D, E and F respectively in ISO/IEC 15944-7 “Information technology — Business Operation View — Part 7: eBusiness consolidated vocabulary”. This is also an “ISO freely available standard”.

3.4**administrative note**

general note about the **OeRI**

[ISO/IEC 15944-2:2006, 3.2]

3.5**applicant (for an OeRI)**

Person who requests the assignment of an **OeRI** and an associated **entry label**

NOTE An applicant can be an individual, organization, or public administration.

[ISO/IEC 15944-2:2011, 3.3]

3.6**attribute**

characteristic of an **object** or **entity**

[ISO/IEC 11179-3:2003, 3.1.3]

3.7**authentication**

provision of assurance of the claimed identity of an **entity**

[ISO/IEC 10181-2:1996, 3.3]

3.8**business**

series of **processes**, each having a clearly understood purpose, involving more than one **Person**, realized through the exchange of **recorded information** and directed towards some mutually agreed upon goal, extending over a period of time

[ISO/IEC 14662:2010, 3.2]

3.9**business object**

unambiguously identified, specified, referenceable, registered and re-useable **Open-edi scenario** or **scenario component** of a **business transaction**

NOTE As an "object", a "business object" exists only in the context of a business transaction.

[ISO/IEC 15944-2:2006, 3.6]

3.10**business object identifier**

unique **identifier** of a **business object** in an **OeRI** within an **Open-edi Registration Organization(OeRO)**

[ISO/IEC 15944-2:2006, 3.7]

3.11**Business Operational View (BOV)**

perspective of **business transactions** limited to those aspects regarding the making of **business** decisions and **commitments** among **Persons**, which are needed for the description of a **business transaction**

[ISO/IEC 14662:2010, 3.3]

3.12

business transaction

predefined set of activities and/or **processes** of **Persons** which is initiated by a **Person** to accomplish an explicitly shared **business** goal and terminated upon recognition of one of the agreed conclusions by all the involved **Persons** although some of the recognition may be implicit

[ISO/IEC 14662:2010, 3.4]

3.13

business transaction entity

computable representation of any real world **entity** that **participates**, occurs, or is **materialized** during a **business transaction**

[ISO/IEC 15944-4:2007, 3.9]

3.14

business transaction identifier (BTI)

identifier assigned by a **seller** or a **regulator** to an instantiated **business transaction** among the **Persons** involved

NOTE 1 The identifier assigned by the seller or regulator shall have the properties and behaviours of an “identifier (in a business transaction)”.

NOTE 2 As an identifier (in a business transaction), a BTI serves as the unique common identifier for all Persons involved for the identification, referencing, retrieval of recorded information, etc., pertaining to the commitments made and the resulting actualization (and post-actualization) of the business transaction agreed to.

NOTE 3 A business transaction identifier can be assigned at any time during the planning, identification or negotiation phases but shall be assigned at least prior to the start or during the actualization phase.

NOTE 4 As and where required by the applicable jurisdictional domain(s), the recorded information associated with the business transaction identifier (BTI) may well require the seller to include other identifiers, (e.g., from a value-added good or service tax, etc., perspective) as assigned by the applicable jurisdictional domain(s).

[ISO/IEC 15944-5:2008, 3.12]

3.15

buyer

Person who aims to get possession of a good, service and/or right through providing an acceptable equivalent value, usually in money, to the **Person** providing such a good, service and/or right

[ISO/IEC 15944-1:2011, 3.8]

3.16

change description

description of why and how the **OeRI** has been modified since the prior version of the **OeRI**

NOTE It is advised that such a change description be accompanied by the “original “ template values used and a “change template” indicating which “Decision Code(s)” has been changed as well as the date the change will take effect.

[ISO/IEC 15944-2:2006, 3.12]

3.17

character

member of a **set** of elements that is used for the representation, organization or control of **data**

Characters may be categorized as follows:

TYPES AND EXAMPLES

graphic character: (e.g., digit, letter, ideogram, special character)

control character: (e.g., transmission control, character, format effector, code extension character, device control character).

[ISO/IEC 2382-4:1999, 04.01.01]

3.18

characteristic

abstraction of a **property** of an **object** or of a set of **objects**

NOTE Characteristics are used for describing concepts.

[ISO 1087-1:2000, 3.2.4]

3.19

character set

finite set of different **characters** that is complete for a given purpose

EXAMPLE The international reference version of the character set of ISO 10642.

[ISO/IEC 2382-4:1999, 04.01.02]

3.20

classification system

systematic **identification** and arrangement of **business** activities and/or **scenario components** into categories according to logically structured conventions, methods and procedural **rules** as specified in a classification schema

NOTE 1 The classification code or number often serves as a semantic identifier (SI) for which one or more human interface equivalents exist.

NOTE 2 The rules of a classification schema governing the operation of a classification system at times lead to the use of ID codes which have an intelligence built into them, (e.g., in the structure of the ID, the manner in which it can be parsed, etc. Here the use of block-numeric numbering schemas is an often used convention.

[ISO/IEC 15944-5:2008, 3.17]

3.21

code

data representation in different forms according to a pre-established set of **rules**

NOTE In this part of ISO/IEC 15944 the "pre-established set of rules" are determined and enacted by a Source Authority and must be explicitly stated.

[ISO 639-2:1998, 3.1]

3.22

coded domain

value domain for which

(1) the boundaries are defined and explicitly stated as a **rulebase** of a **coded domain Source Authority**; and,

(2) each **entity** which qualifies as a member of that domain is identified through the assignment of a unique **ID code** in accordance with the applicable **Registration Schema** of that **Source Authority**

NOTE 1 The rules governing the assignment of an ID code to members of a coded domain reside with its Source Authority and form part of the Coded Domain Registration Schema of the Source Authority.

NOTE 2 Source Authorities which are jurisdictional domains are the primary source of coded domains.

NOTE 3 A coded domain is a data set for which the contents of the data element values are predetermined and defined according to the rulebase of its Source Authority and as such have predefined semantics.

NOTE 4 Associated with a code in a coded domain can be: (a) one and/or more equivalent codes; and/or, (b) one and/or more equivalent representations especially those in the form of Human Interface Equivalent (HIE) (linguistic) expressions.

NOTE 5 In a coded domain the rules for assignment and structuring of the ID codes must be specified.

NOTE 6 Where an entity as member of a coded domain is allowed to have, i.e., assigned, more than one ID code, i.e., as equivalent ID codes (possibly including names), one of these must be specified as the pivot ID code.

NOTE 7 A coded domain in turn can consist of two or more coded domains, i.e., through the application of the inheritance principle of object classes.

NOTE 8 A coded domain may contain an ID code which pertains to predefined conditions other than qualification of membership of entities in the coded domain. Further, the rules governing a coded domain may or may not provide for user extensions.

EXAMPLE Common examples include: (1) the use of ID Code "0" (or "00", etc.) for "Others", (2) the use of ID Code "9" (or "99", etc.) for "Not Applicable"; (3) the use of "8" (or "98") for "Not Known"; and/or, if required, (4) the pre-reservation of a series of ID codes for use of "user extensions".

NOTE 9 In object methodology, entities which are members of a coded domain are referred to as instances of a class.

EXAMPLE In UML modelling notation, an ID code is viewed as an instance of an object class.

NOTE 10 In the context of metadata registries, a "value domain" is defined as a "set of permissible values" (See further ISO/IEC 11179-3:2012, 3rd edition)

[adapted from ISO/IEC 15944-2:2006, 3.13]

3.23

coded Domain Registration Schema (cdRS)

formal **definition** of both (1) the **data** fields contained in the **identification** and specification of an **entity** forming part of the members a **coded domain** including the allowable contents of those fields; and, (2) the **rules** for the assignment of **identifiers**

[ISO/IEC 15944-5:2008, 3.21]

3.24

coded domain Source Authority (cdSA)

Person, usually an **organization**, as a **Source Authority** which sets the **rules** governing a **coded domain**

NOTE 1 Source Authority is a role of a Person and for widely used coded domains the coded domain Source Authority is often a jurisdictional domain.

NOTE 2 Specific sectors, (e.g., banking, transport, geomatics, agriculture, etc.), may have particular coded domain Source Authority(ies) whose coded domains are used in many other sectors.

NOTE 3 A coded domain Source Authority usually also functions as a Registration Authority but can use an agent, i.e., another Person, to execute the registration function on its behalf.

[ISO/IEC 15944-2:2006, 3.14]

3.25

code (in coded domain)

identifier, i.e., an ID **code**, assigned to an **entity** as member of a **coded domain** according to the pre-established set of **rules** governing that **coded domain**

[ISO/IEC 15944-5:2008, 3:19]

3.26**coined term**

neologism especially created in a target language to express a **concept** which is denoted by an existing and recognized **term** in a source language, but which has not previously been expressed in the target language

[ISO 5964:1985, 3.1]

3.27**collaboration space**

business activity space where an **economic exchange** of valued resources is viewed independently and not from the perspective of any **business partner**

NOTE In collaboration space, an individual partner's view of economic phenomena is de-emphasized. Thus, the common use business and accounting terms like purchase, sale, cash receipt, cash disbursement, raw materials, and finished goods is not allowed because they view resource flows from a participant's perspective.

[ISO/IEC 15944-4:2007, 3.12]

3.28**commitment**

making or accepting of a right, obligation, liability or **responsibility** by a **Person** that is capable of enforcement in the **jurisdictional domain** in which the **commitment** is made

[ISO/IEC 14662:2010, 3.5]

3.29**composite identifier**

identifier (in a **business transaction**) functioning as a single unique **identifier** consisting of one or more other **identifiers**, and/or one or more other **data elements**, whose interworkings are **rule-based**

NOTE 1 Identifiers (in business transactions) are for the most part composite identifiers.

NOTE 2 The rules governing the structure and working of a composite identifier should be specified.

NOTE 3 Most widely used composite identifiers consist of the combinations of:

- (1) the ID of the overall identification/numbering schema, (e.g., ISO/IEC 6532, ISO/IEC 7812, ISO/IEC 7506, UPC/EAN, ITU-T E.164, etc.), which is often assumed;
- (2) the ID of the issuing organization (often based on a block numeric numbering schema); and,
- (3) the ID of the entities forming part of members of the coded domain of each issuing organization.

[ISO/IEC 15944-2:2006, 3.16]

3.30**composite type**

data type that has a **data** structure composed of the **data** structures of one or more **data** types and that has its own set of permissible operations

EXAMPLE A data type "complex number" may be composed of two "real number" data types

NOTE The operations of a composite type may manipulate its occurrences as a unit or may manipulate portions of these occurrences.

[ISO/IEC 2382-17:1999, 17.05.10]

3.31**computational integrity**

expression of a **standard** in a form that ensures precise description of behaviour and semantics in a manner that allows for automated processing to occur, and the managed evolution of such **standards** in a way that enables dynamic introduction by the next generation of information systems

NOTE Open-edi standards have been designed to be able to support computational integrity requirements especially from a registration and re-use of business objects perspectives.

[ISO/IEC 15944-2:2006, 3.18]

3.32

concept

unit of knowledge created by a unique combination of **characteristics**

NOTE Concepts are not necessarily bound to particular languages. They are, however, influenced by the social or cultural background which often leads to different categorizations.

[ISO 1087-1:2000, 3.2.1]

3.33

constraint

rule, explicitly stated, that prescribes, limits, governs or specifies any aspect of a **business transaction**

NOTE 1 Constraints are specified as rules forming part of components of Open-edi scenarios, i.e., as scenario attributes, roles, and/or information bundles.

NOTE 2 For constraints to be registered for implementation in Open-edi, they must have unique and unambiguous identifiers.

NOTE 3 A constraint may be agreed to among parties (condition of contract) and is therefore considered an "internal constraint". Or a constraint may be imposed on parties, (e.g., laws, regulations, etc.), and is therefore considered an "external constraint".

[ISO/IEC 15944-1:2011, 3.11]

3.34

Contact

instance of a **role** of a **Person** to whom a **recorded information** item(s), a material **object(s)**, a **business object(s)**, can be sent to or received from in a specified context

NOTE 1 A Person here as a Contact can be an individual, an organization (or organization part or organization Person).

NOTE 2 Contact is capitalized to distinguish it from the many ordinary uses of the term.

NOTE 3 Harmonized with ISO/IEC 11179 but from an eBusiness perspective.

[ISO/IEC 11179-3:2003, 3.3.26]

3.35

Contact Information

information to enable a **Contact** to be located or communicated with

[ISO/IEC 11179-3:2003, 3.3.27]

3.36

Contact name

persona by which a **Person** wishes to be designated as a **Contact**

NOTE 1 Where an organization is the OeRi applicant, it may designate an organization Person, an agent, a third party as its Contact name in applying to register a scenario or scenario component as a business object.

NOTE 2 Harmonized with ISO/IEC 11179 but from an eBusiness perspective.

[ISO/IEC 15944-2:2006, 3.21]

3.37**Contact position title**

name of title of the position held by an **organization Person** as a **Contact**

[ISO/IEC 15944-2:2006, 3.22]

3.38**control body**

group of technical experts that makes decisions regarding the content of a **register**

[ISO 19135:2005, 4.1.2]

3.39**controlled vocabulary (CV)**

vocabulary for which the entries, i.e., **definition/term** pairs, are controlled by a **Source Authority** based on a **rulebase** and **process** for addition/deletion of entries

NOTE 1 In a controlled vocabulary, there is a one-to-one relationship of definition and term.

EXAMPLE The contents of "Clause 3 Definitions" in ISO/IEC standards are examples of controlled vocabularies with the entities being identified and referenced through their ID code, i.e., via their clause numbers.

NOTE 2 In a multilingual controlled vocabulary, the definition/term pairs in the languages used are deemed to be equivalent with respect to their semantics.

NOTE 3 The rule base governing a controlled vocabulary may include a predefined concept system.

[ISO/IEC 15944-5:2008, 3.34]

3.40**creation date**

date the **OeRI** for a **business object** was created

[ISO/IEC 15944-2:2006, 3.24]

3.41**data**

reinterpretable representation of **information** in a formalized manner suitable for communication, interpretation, or processing

NOTE Data can be processed by humans or by automatic means.

[ISO/IEC 2382-1:1993, 01.01.02]

3.42**data (in a business transaction)**

representations of **recorded information** that are being prepared or have been prepared in a form suitable for use in a **computer system**

[ISO/IEC 15944-1:2011, 3.14]

3.43**data element**

unit of **data** for which the **definition**, **identification**, representation and permissible values are specified by means of a set of **attributes**

[ISO/IEC 11179-1:2004, 3.3.8]

3.44

data element (in organization of data)

unit of **data** that is considered in context to be indivisible

EXAMPLE The data element "age of a person" with values consisting of all combinations of 3 decimal digits.

NOTE Differs from the entry 17.06.02 in ISO/IEC 2382-17.

[ISO/IEC 2382-4:1999, 04.07.01]

3.45

dataset

identifiable collection of **data**

NOTE A dataset may be a smaller grouping of data which, though limited by some constraint such as spatial extent or feature type, is located physically within a larger dataset. Theoretically, a dataset may be as small as a single feature or feature attribute contained within a larger dataset. A hardcopy map or chart may be considered a dataset.

[ISO 19115:2003, 4.2]

3.46

dataset series

collection of **datasets** sharing the same product specification

[ISO 19115:2003, 4.3]

3.47

date

ISO 8601 compliant representation of a date in a YYYY-MM-DD format using the Gregorian calendar

[ISO/IEC 15944-2:2006, 3.26]

3.48

Decision Making Application (DMA)

model of that part of an **Open-edi system** that makes decisions corresponding to the **role(s)** that the **Open-edi Party** plays as well as the originating, receiving and managing **data** values contained in the instantiated **information bundles** which is not required to be visible to the other **Open-edi Party(ies)** (OeP)

[ISO/IEC 14662:2010, 3.6]

3.49

de facto language

natural language used in a **jurisdictional domain** which has the properties and behaviours of an **official language** in that **jurisdictional domain** without having formally been declared as such by that **jurisdictional domain**

NOTE 1 A de facto language of a jurisdictional domain is often established through long term use and custom.

NOTE 2 Unless explicitly stated otherwise and for the purposes of modelling a business transaction through scenario(s), scenario attributes and/or scenario components, a de facto language of a jurisdictional domain is assumed to have the same properties and behaviours of an official language.

[ISO/IEC 15944-5:2008, 3.42]

3.50

defined market model

trade **model** where the **buyer** and **seller** accept the entry terms of a specified market in advance and where that market has an accepted and recognized source for **business rules** and conventions

NOTE In a defined market, the phases of a business transaction –planning, identification, negotiation, actualization, and post-actualization – are governed by the rules and conventions of the particular defined market.

[ISO/IEC 15944-4:2007, 3.17]

3.51

definition

representation of a **concept** by a descriptive statement which serves to differentiate it from related **concepts**

[ISO 1087-1:2000, 3.3.1]

3.52

designation

representation of a **concept** by a sign which denotes it

NOTE In terminology work three types of designations are distinguished: symbols, appellations, (a.k.a. names), and terms.

[ISO 1087-1:2000, 3.4.1]

3.53

distinguishing identifier

data that unambiguously distinguishes an **entity** in the **authentication process**

[ISO/IEC 10181-2:1996, 3.11]

3.54

eBusiness

business transaction, involving the making of **commitments**, in a defined **collaboration space**, among **Persons** using their **IT systems**, according to **Open-edi standards**

NOTE 1 eBusiness can be conducted on both a for-profit and not-for-profit basis.

NOTE 2 A key distinguishing aspect of eBusiness is that it involves the making of commitment(s) of any kind among the Persons in support of a mutually agreed upon goal, involving their IT systems, and doing so through the use of EDI (using a variety of communication networks including the Internet).

NOTE 3 eBusiness includes various application areas such as “e-commerce”, “e-administration”, “e-logistics”, “e-government”, “e-medicine”, “e-learning”, etc.

NOTE 4 The equivalent French language term for “eBusiness” is always presented in its plural form.

[ISO/IEC 15944-7:2009, 3.06]

3.55

effective date

date an **OeRI** became/becomes available to **registry users**

[ISO/IEC 15944-2:2007, 3.31]

3.56

electronic address

address used in a recognized electronic addressing scheme, (e.g., telephone, telex, IP, etc.), to which **recorded information** item(s) and/or **business object**(s) can be sent to or received from a **Contact**

[ISO/IEC 15944-2:2006, 3.32]

3.57

Electronic Data Interchange (EDI)

automated exchange of any predefined and structured **data** for **business** purposes among information systems of two or more **Persons**

NOTE This definition includes all categories of electronic business transactions.

[ISO/IEC 14662:2004, 3.8]

3.58

entity

any concrete or abstract thing that exists, did exist, or might exist, including associations among these things

EXAMPLE A person, object, event, idea, process, etc.

NOTE An entity exists whether data about it are available or not.

[ISO/IEC 2382-17:1999, 17.02.05]

3.59

entry label

name information uniquely associated with the **identification** and resulting **International Registration Business Object Identifier** of a **business object** as a registered **Open-edi scenario** or **scenario component**

NOTE More than one entry label may be associated with an IRBOI depending on the applicable language(s) used as Human Interface Equivalents (HIEs).

[ISO/IEC 15944-2:2006, 3.33]

3.60

exchange code set

set of **ID codes** identified in a **coded domain** as being suitable for information exchange as shareable **data**

EXAMPLE The 3 numeric, 2-alpha and 3-alpha code sets in ISO 3166-1.

[ISO/IEC 15944-5:2008, 3.49]

3.61

external constraint

constraint which takes precedence over **internal constraints** in a **business transaction**, i.e., is external to those agreed upon by the parties to a **business transaction**

NOTE 1 Normally external constraints are created by law, regulation, orders, treaties, conventions or similar instruments.

NOTE 2 Other sources of external constraints are those of a sectorial nature, those which pertain to a particular jurisdictional domain or a mutually agreed to common business conventions, (e.g., INCOTERMS, exchanges, etc.).

NOTE 3 External constraints can apply to the nature of the good, service and/or right provided in a business transaction.

NOTE 4 External constraints can demand that a party to a business transaction meet specific requirements of a particular role.

EXAMPLE 1 Only a qualified medical doctor may issue a prescription for a controlled drug.

EXAMPLE 2 Only an accredited share dealer may place transactions on the New York Stock Exchange.

EXAMPLE 3 Hazardous wastes may only be conveyed by a licensed enterprise.

NOTE 5 Where the information bundles (IBs), including their Semantic Components (SCs) of a business transaction are also to form the whole of a business transaction, (e.g., for legal or audit purposes), all constraints must be recorded.

EXAMPLE There may be a legal or audit requirement to maintain the complete set of recorded information pertaining to a business transaction, i.e., as the information bundles exchanged, as a "record".

NOTE 6 A minimum external constraint applicable to a business transaction often requires one to differentiate whether the Person, i.e., that is a party to a business transaction, is an "individual", "organization", or "public administration". For example, privacy rights apply only to a Person as an "individual".

[ISO/IEC 15944-1:2011, 3.23]

3.62

Formal Description Technique (FDT)

specification method based on a description **language** using rigorous and **unambiguous rules** both with respect to developing expressions in the **language** (formal syntax) and interpreting the meaning of these expressions (formal semantics)

[ISO/IEC 14662:2010, 3.9]

3.63

Functional Service View (FSV)

perspective of **business transactions** limited to those information technology interoperability aspects of **IT Systems** needed to support the execution of **Open-edi transactions**

[ISO/IEC 14662:2010, 3.10]

3.64

glyph

recognizable abstract graphic **symbol** which is independent of any specific design

[ISO/IEC TR 15285:1998, 3.5]

3.65

grammatical gender

grammatical category that indicates grammatical relationships between words in sentences

NOTE The concept of gender varies from language to language and is not a universal feature of all languages.

EXAMPLE In French, *vie* (life) is feminine and is used with feminine articles such as *la*, the feminine pronoun *elle*, and feminine adjective endings, (e.g., *une vie longue*).

PERMISSIBLE INSTANCES Types of grammatical gender commonly documented in terminology databases include: (a) masculine, (b) feminine; (c) neuter; (d) other.

[ISO 12620:1999, E, A.2.2.2]

3.66

homonymy

relation between **designations** and **concepts** in a given **language** in which one **designation** represents two or more unrelated **concepts**

EXAMPLE An example of homonymy is: bark (1) "sound made by a dog"; (2) "outside covering of the stem of woody plants"; (3) "sailing vessel".

NOTE The designations in the relation of homonymy are called homonyms.

[ISO 1087-1:2000, 3.4.25]

3.67

Human Interface Equivalent (HIE)

representation of the **unambiguous** and IT-enabled semantics of an **IT interface equivalent** (in a **business transaction**), often the **ID code** of a **coded domain** (or a **composite identifier**), in a formalized manner suitable for communication to and understanding by humans

NOTE 1 Human interface equivalents can be linguistic or non-linguistic in nature but their semantics remains the same although their representations may vary.

NOTE 2 In most cases there will be multiple Human Interface Equivalent representations as required to meet localization requirements, i.e. those of a linguistic nature, jurisdictional nature, and/or sectoral nature.

NOTE 3 Human Interface Equivalents include representations in various forms or formats, (e.g., in addition to written text those of an audio, symbol (and icon) nature, glyphs, image, etc.).

[ISO/IEC 15944-2:2006, 3.35]

3.68

IB Identifier

unique, linguistically neutral, **unambiguous** referenceable **identifier** for an **Information Bundle**

[ISO/IEC 15944-2:2006, 3.36]

3.69

ID Code

identifier assigned by the **coded domain Source Authority (cdSA)** to a member of a **coded domain ID**

NOTE 1 ID codes must be unique within the Registration Schema of that coded domain.

NOTE 2 Associated with an ID code in a coded domain can be (a) one or more equivalent codes; or, (b) one or more equivalent representations, especially those in the form of human equivalent (linguistic) expressions.

NOTE 3 Where an entity as a member of a coded domain is allowed to have more than one ID code, i.e., as equivalent codes (possibly including names), one of these must be specified as the pivot ID code.

NOTE 4 A coded domain may contain ID codes pertaining to entities which are not members as peer entities, i.e., have the same properties and behaviours, such as ID codes which pertain to predefined conditions other than member entities. If this is the case, the rules governing such exceptions must be predefined and explicitly stated.

EXAMPLE Common examples include: (1) the use of an ID code "0" (or "00", etc.), for "Other"; (2) the use of an ID code "9" (or "99") for "Not Applicable"; (3) the use of "8" (or "98") for "Not Known"; if required, (4) the pre-reservation of a series or set of ID codes for use for "user extensions".

NOTE 5 In UML modeling notation, an ID code is viewed as an instance of an object class.

[ISO/IEC 15944-2:2006, 3.37]

3.70

identification

rule-based process, explicitly stated, involving the use of one or more **attributes**, i.e., **data elements**, whose value (or combination of values) are used to identify uniquely the occurrence or existence of a specified **entity**

[ISO/IEC 15944-1:2011, 3.26]

3.71

indexing language

artificial language established to characterize the content or form of a document

[ISO/IEC 2382-1:1993, 01.05.10]

3.72**individual**

Person who is a human being, i.e., a natural person, who acts as a distinct indivisible **entity** or is considered as such

[ISO/IEC 15944-1:2011, 3.28]

3.73**individual accessibility**

set of **external constraints** of a **jurisdictional domain** as rights of an **individual** with disabilities to be able to use **IT systems** at the human, i.e., user, interface and the concomitant obligation of a **seller** to provide such adaptive technologies

NOTE Although “accessibility” typically addresses users who have a disability, the concept is not limited to disability issues.

EXAMPLE Examples of disabilities in the form of functional and cognitive limitations include:

- (a) people who are blind;
- (b) people with low vision;
- (c) people with colour blindness;
- (d) people who are hard of hearing or deaf, i.e., are hearing impaired;
- (e) people with physical disabilities; and,
- (f) people with language or cognitive disabilities.

[ISO/IEC 15944-5:2008, 3.60]

3.74**Information Bundle (IB)**

formal description of the semantics of the **recorded information** to be exchanged by **Open-edi Parties** playing **roles** in an **Open-edi scenario**

[ISO/IEC 14662:2011, 3.11]

3.75**Information Processing Domain (IPD)**

Information Technology System which includes at least either a **Decision Making Application (DMA)** and/or one of the components of an **Open-edi Support Infrastructure** (or both), and acts/executes on behalf of an **Open-edi Party** (either directly or under a delegated authority)

[ISO/IEC 14662:2010, 3.12]

3.76**Information Technology System (IT System)**

set of one or more **computers**, associated software, peripherals, terminals, human operations, physical **processes**, information transfer means, that form an autonomous whole, capable of performing information processing and/or information transfer

[ISO/IEC 14662:2010, 3.13]

3.77**internal constraint**

constraint which forms part of the **commitment(s)** mutually agreed to among the parties to a **business transaction**

NOTE Internal constraints are self-imposed. They provide a simplified view for modelling and re-use of scenario components of a business transaction for which there are no external constraints or restrictions to the nature of the conduct of a business transaction other than those mutually agreed to by the buyer and seller.

[ISO/IEC 15944-1:2011, 3.33]

3.78
International Registration Business Object Identifier (IRBOI)
internationally unique **identifier** for an **OeRI**

NOTE IRBOIs are of the nature of a composite identifier.

[ISO/IEC 15944-2:2006, 3.42]

3.79
International Standard Identifier
identifier of the version of this part of ISO/IEC 15944 upon which **attributes** are based

[ISO/IEC 15944-2:2006, 3.43]

3.80
IT-enablement
transformation of a current **standard** used in **business transactions**, (e.g., **coded domains**), from a manual to computational perspective so as to be able to support **commitment** exchange and **computational integrity**

[ISO/IEC 15944-5:2008, 3.65]

3.81
IT interface equivalent
computer processable **identification** of the **unambiguous** semantics of a scenario, **scenario attribute** and/or **scenario component(s)** pertaining to a **commitment** exchange in a **business transaction** which supports **computational integrity**

NOTE 1 IT interface equivalents have the properties of identifiers (in business transaction) and are used to support semantic interoperability in commitment exchange.

NOTE 2 The value of an IT interface equivalent at times is a composite identifier.

NOTE 3 An IT interface equivalent as a composite identifier can consist of the identifier of a coded domain plus an ID code of that coded domain.

NOTE 4 An IT interface equivalent is at times used as a semantic identifier.

NOTE 5 An IT interface equivalent may have associated with it one or more Human Interface Equivalents (HIEs).

NOTE 6 The value of an IT Interface is independent of its encoding in programming languages or APIs.

[ISO/IEC 15944-2:2006, 3.48]

3.82
jurisdictional domain
jurisdiction, recognized in law as a distinct legal and/or regulatory framework, which is a source of **external constraints** on **Persons**, their behaviour and the making of **commitments** among **Persons** including any aspect of a **business transaction**

NOTE 1 The pivot jurisdictional domain is a United Nations (UN) recognized member state. From a legal and sovereignty perspective they are considered "peer" entities. Each UN member state, (a.k.a. country) may have sub-administrative divisions as recognized jurisdictional domains, (e.g., provinces, territories, cantons, länder, etc.), as decided by that UN member state.

NOTE 2 Jurisdictional domains can combine to form new jurisdictional domains, (e.g., through bilateral, multilateral and/or international treaties).

EXAMPLES The European Union (EU), NAFTA, WTO, WCO, ICAO, WHO, Red Cross, the ISO, the IEC, the ITU, etc.

NOTE 3 Several levels and categories of jurisdictional domains may exist within a jurisdictional domain.

NOTE 4 A jurisdictional domain may impact aspects of the commitment(s) made as part of a business transaction including those pertaining to the making, selling, transfer of goods, services and/or rights (and resulting liabilities) and associated information. This is independent of whether such interchange of commitments is conducted on a for-profit or not-for-profit basis and/or include monetary values.

NOTE 5 Laws, regulations, directives, etc., issued by a jurisdictional domain are considered as parts of that jurisdictional domain and are the primary sources of external constraints on business transactions.

[ISO/IEC 15944-5:2008, 3.67]

3.83

jurisdictional domain identifier

ID code of a **jurisdictional domain** as recognized for use by peer **jurisdictional domains** within a system of mutual recognition

[ISO/IEC 15944-2:2006, 3.47]

3.84

language

system of signs for communication, usually consisting of a **vocabulary** and **rules**

NOTE In this standard language refers to natural languages or special languages, but not "programming languages" or "artificial languages".

[ISO 5127-1:2001, 1.1.2.01]

3.85

language code

combination of **characters** used to represent a **language** or **languages**

NOTE In multipart ISO/IEC 15944 standard, the ISO 639-2/T (terminology) three alpha-code set, shall be used.

[ISO 639-2:1998, 3.2]

3.86

legally recognized language (LRL)

natural language which has status (other than an **official language** or **de facto language**) in a **jurisdictional domain** as stated in an act, regulation, or other legal instrument, which grants a community of people (or its **individuals**) the right to use that **natural language** in the context stipulated by the legal instrument(s)

NOTE The LRL can be specified through either: (a) the identification of a language by the name used; or, (b) the identification of a people and thus their language(s).

EXAMPLE In addition to acts and regulations, legal instruments include self-government agreements, land claim settlements, court decisions, jurisprudence, etc.

[ISO/IEC 15944-5:2008, 3.71]

3.87

legally recognized name (LRN)

persona associated with a **role** of a **Person** recognized as having legal status and so recognized in a **jurisdictional domain** as accepted or assigned in compliance with the **rules** applicable of that **jurisdictional domain**, i.e. as governing the **coded domain** of which the **LRN** is a member

NOTE 1 A LRN may be of a general nature and thus be available for general use in commitment exchange or may arise from the application of a particular law, regulation, program or service of a jurisdictional domain and thus will have a specified use in commitment exchange.

NOTE 2 The process of establishment of a LRN is usually accompanied by the assignment of a unique identifier.

NOTE 3 A LRN is usually a registry entry in a register established by the jurisdictional domain (usually by a specified public administration within that jurisdictional domain) for the purpose of applying the applicable rules and registering and recording LRNs (and possible accompanying unique identifiers accordingly).

NOTE 4 A Person may have more than one LRN (and associated LRN identifier).

[ISO/IEC 15944-5:2008, 3.72]

3.88

list

ordered **set** of **data elements**

[ISO/IEC 2382-4:1999, 04.08.01]

3.89

localization

pertaining to or concerned with anything that is not global and is bound through specified **sets** of **constraints** of:

- (a) a linguistic nature including **natural** and **special languages** and associated multilingual requirements;
- (b) jurisdictional nature, i.e., legal, regulatory, geopolitical, etc.;
- (c) a sectorial nature, i.e., industry sector, scientific, professional, etc.;
- (d) a human rights nature, i.e., privacy, disabled/handicapped persons, etc.;
- (e) **consumer** behaviour requirements; and/or
- (f) safety or health requirements.

Within and among "locales", interoperability and harmonization objectives also apply

[ISO/IEC 15944-5:2008, 3.75]

3.90

location

place, either physical or electronic, that can be defined as an **address**

[ISO/IEC 15944-2:2006, 3.50]

3.91

metadata

data about **data elements**, including their **data** descriptions, and **data** about **data** ownership, access paths, access rights and **data** volatility

[ISO/IEC 2382-17:1999, 17.06.05]

3.92

model

abstraction of some aspect of reality

[ISO 19115:2003, 4.9]

3.93

multilateral treaty

treaty (or convention) that has the ambition to become universal (or near universal) and thus bind most of the international community by declaring general **rules** of law

EXAMPLE Law of the Sea, Law on Genocide.

NOTE 1 A multilateral treaty may have the goal of creating a regulatory regime of law for a particular area or major multilateral institution (e.g., Agreement Establishing the WTO, Kyoto Protocol, Safety of Life at Sea Convention).

NOTE 2 A multilateral treaty may allow for reservations or the treaty may be subject to many amendments which do not bind all parties or require all parties to undertake the same legal obligations, (e.g., the Berne and Paris conventions).

[ISO/IEC 15944-5:2008, 3.81]

3.94

multilingualism

ability to support not only **character sets** specific to a **(natural) language** (or family of **languages**) and associated **rules** but also **localization** requirements, i.e., use of a **language** from **jurisdictional domain**, sectoral and/or **consumer** marketplace perspectives

[ISO/IEC 15944-5:2008, 3.82]

3.95

name

designation of an **object** by a linguistic expression

[ISO 5217:2000, 1.1.2.13]

3.96

natural language

language which is or was in active use in a community of people, and the **rules** of which are mainly deduced from the usage

[ISO 5217:2000, 1.1.2.02]

3.97

object

anything perceivable or conceivable

NOTE Objects may be material, (e.g., engine, a sheet of paper, a diamond), or immaterial, (e.g., conversion ratio, a project play) or imagined, (e.g., a unicorn).

[ISO 1087-1:2000, 3.1.1]

3.98

object class

set of ideas, abstractions, or things in the real world that can be identified with explicit boundaries and meaning and whose properties and behavior follow the same **rules**

[ISO/IEC 11179-1:2004, 3.3.22]

3.99

OeRI addition

insertion into a **register** of an **OeRI** that describes a **concept** not described by an **OeRI** already in the **register**

[ISO/IEC 15944-2:2006, 3.54]

3.100

OeRI clarification

non-substantive change to an **OeRI**

NOTE 1 A non-substantive change does not change the semantics or technical meaning of the OeRI.

NOTE 2 A clarification does not result in a change to the registration status of the OeRI.

[ISO/IEC 15944-2:2006, 3.55]

3.101

OeRI harmonization

resolution of any potential duplicate or overlapping of **OeRIs**, accounting for justifiable differences that may exist among the harmonized **OeRIs**

[ISO/IEC 15944-2:2006, 3.56]

3.102

OeRI language code

language code of the **language** used for the **OeRI** by the **submitting organization**

[ISO/IEC 15944-2:2006, 3.57]

3.103

OeRI retirement

declaration that an **OeRI** is no longer suitable for use in the production of new **data**

NOTE The status of the retired OeRI changes from 'valid' to 'retired'. A retired OeRI is kept in the register to support the interpretation of data produced before its retirement.

[ISO/IEC 15944-2:2006, 3.58]

3.104

OeRI supersession

replacement of an **OeRI** by one or more new **OeRIs**

NOTE The status of the replaced item changes from "valid" to "superseded".

[ISO/IEC 15944-2:2006, 3.59]

3.105

official language

external constraint in the form of a **natural language** specified by a **jurisdictional domain** for official use by **Persons** forming part of and/or subject to that **jurisdictional domain** for use in communication(s) either: (1) within that **jurisdictional domain**; and/or (2) among such **Persons**, where such communications are **recorded information** involving **commitment(s)**

NOTE 1 Unless official language requirements state otherwise, Persons are free to choose their mutually acceptable natural language and/or special language for communications as well as exchange of commitments.

NOTE 2 A jurisdictional domain decides whether or not it has an official language. If not, it will have a de facto language.

NOTE 3 An official language(s) can be mandated for formal communications as well as provision of goods and services to Persons subject to that jurisdictional domain and for use in the legal and other conflict resolution system(s) of that jurisdictional domain, etc.

NOTE 4 Where applicable, use of an official language may be required in the exercise of rights and obligations of individuals in that jurisdictional domain.

NOTE 5 Where an official language of a jurisdictional domain has a controlled vocabulary of the nature of a terminology, it may well have the characteristics of a special language. In such cases, the terminology to be used must be specified.

NOTE 6 For an official language, the writing system(s) to be used shall be specified, where the spoken use of a natural language has more than one writing system.

EXAMPLE 1 The spoken language of use of an official language may at times have more than one writing system. For example, three writing systems exist for the Inuktitut language. Canada uses two of these writing systems, namely, a Latin-1 based (Roman), the other is syllabic-based. The third is used in Russia and is Cyrillic based.

EXAMPLE 2 Another example is that of Norway which has two official writing systems, both Latin-1 based, namely, Bokmål (Dano-Norwegian) and Nynorsk (New Norwegian).

NOTE 7 A jurisdictional domain may have more than one official language but these may or may not have equal status.

EXAMPLE 3 Canada has two official languages, Switzerland has three, while the Union of South Africa has eleven official languages.

NOTE 8 The BOV requirement of the use of a specified language will place that requirement on any FSV supporting service.

EXAMPLE 4 A BOV requirement of Arabic, Chinese, Russian, Japanese, Korean, etc., as an official language requires the FSV support service to be able to handle the associated character sets.

[ISO/IEC 15944-5:2008, 3.87]

3.106

Open-edi

electronic data interchange among multiple autonomous **Persons** to accomplish an explicitly shared **business** goal according to **Open-edi standards**

[ISO/IEC 14662:2010, 3.14]

3.107

Open-edi Description Technique (OeDT)

specification method such as a **Formal Description Technique**, another methodology having the **characteristics** of a **Formal Description Technique**, or a combination of such techniques as needed to formally specify **BOV** concepts, in a computer processable form

[ISO/IEC 14662:2010, 3.16]

3.108

Open-edi Party (OeP)

Person that participates in **Open-edi**

NOTE Often referred to generically, in this, and other eBusiness standards, (e.g., parts of the ISO/IEC 15944 multipart "eBusiness" standard) as "party" or "parties" for any entity modelled as a Person as playing a role in Open-edi scenarios.

[ISO/IEC 14662:2010, 3.17]

3.109

Open-edi Record Retention (OeRR)

specification of a period of time that a **set of recorded information** must be kept by a **Person** in order to meet operational, legal, regulatory, fiscal or other requirements as specified in the **external constraints** (or **internal constraints**) applicable to a **Person** who is a party to a **business transaction**

[ISO/IEC 15944-5:2008, 3.92]

3.110

Open-edi register

information store or database maintained by an **Open-edi Registry**

[ISO/IEC 15944-2:2006, 3.62]

3.111

Open-edi registration administration attribute

member of a set of **attributes** to uniquely identify an **Open-edi scenario**, **Information Bundle**, or **Semantic Component** and the relevant **Person** responsible for its maintenance

[ISO/IEC 15944-2:2006, 3.63]

3.112

Open-edi Registration Authority (OeRA)

Person responsible for maintaining the **register** of **OeROs** and for the issuance of **OeRO identifiers**

[ISO/IEC 15944-2:2006, 3.64]

3.113

Open-edi Registration Organization (OeRO)

Person qualified by the **OeRA** to assume the responsibility for the **registration** of **scenario** and **scenario components**

[ISO/IEC 15944-2:2006, 3.65]

3.114

Open-edi Registration Organization address

physical and/or **electronic address** of the **Open-edi Registration Organization (OeRO)**

NOTE A physical address includes a "pick-up" address such as a mailbox or such other location one can deliver to.

[ISO/IEC 15944-2:2006, 3.66]

3.115

Open-edi Registration Organization Identifier (OeROI)

identifier assigned to an **Open-edi Registration Organization**

[ISO/IEC 15944-2:2006, 3.67]

3.116

Open-edi Registration Organization name

designation for the **Open-edi Registration Organization (OeRO)**

[ISO/IEC 15944-2:2006, 3.68]

3.117

Open-edi Registry (OeR)

information technology system for the **registration** of **scenarios** and **scenario components**

[ISO/IEC 15944-2:2006, 3.69]

3.118

Open-edi Registry Item (OeRI)

recorded information within a **registry** relating to a specific **Open-edi scenario** or **scenario components** of **scenario** including linkage information to a **scenario** content

[ISO/IEC 15944-2:2006, 3.70]

3.119

Open-edi registry record

collection of **recorded information** for an **OeRI**

[ISO/IEC 15944-2:2006, 3.71]

3.120

Open-edi scenario (OeS)

formal specification of a class of **business transactions** having the same **business goal**

[ISO/IEC 14662:2010, 3.18]

3.121**Open-edi sponsoring authority**

Person recognized in accordance with the requirements of this part of ISO/IEC 15944, to receive **Open-edi Registration Organization** applications for **submission** to an **Open-edi Registration Authority**

NOTE Adapted from ISO/IEC 7812-2:2007, "Identification cards — Identification of issuers — Part 2: Application and registration procedures". ISO/IEC JTC1/SC32 serves as the "Open-edi Sponsoring Authority" for ISO/IEC 15944 / Adapté du ISO/CEI 7812-2:2007, «Cartes d'identification — Identification des émetteurs — Partie 2: Procédures de demande d'enregistrement». ISO/CEI JTC1/SC32 servant à titre d'«autorité de commandite d'EDI ouvert» pour ISO/CEI 19544.

[ISO/IEC 15944-2:2006, 3.73]

3.122**Open-edi system**

information technology system (IT system) which enables an **Open-edi Party** to participate in **Open-edi transactions**

[ISO/IEC 14662:2010, 3.22]

3.123**Open-edi transaction**

business transaction that is in compliance with an **Open-edi scenario**

[ISO/IEC 14662:2010, 3.23]

3.124**organization**

unique framework of authority within which a person or persons act, or are designated to act, towards some purpose

NOTE The kinds of organizations covered by this International Standard include the following examples:

EXAMPLE 1 An organization incorporated under law.

EXAMPLE 2 An unincorporated organization or activity providing goods and/or services including:

- 1) partnerships;
- 2) social or other non-profit organizations or similar bodies in which ownership or control is vested in a group of individuals;
- 3) sole proprietorships;
- 4) governmental bodies.

EXAMPLE 3 Groupings of the above types of organizations where there is a need to identify these in information interchange.

[ISO/IEC 6523-1:1998, 3.1]

3.125**organization address**

physical and/or electronic address of an **organization**

NOTE A physical address includes a "pick-up" address such as a mailbox or such other location one can deliver to.

[ISO/IEC 15944-2:2006, 3.75]

3.126**organization name**

designation for the **organization**

NOTE The name by which the organization is known to the registration authority.

[ISO/IEC 11179-3:2003, 3.3.94]

3.127

organization part

any department, service or other **entity** within an **organization**, which needs to be identified for information interchange

[ISO/IEC 6523-1:1998, 3.2]

3.128

organization Person

organization part which has the properties of a **Person** and thus is able to make **commitments** on behalf of that **organization**

NOTE 1 An organization can have one or more organization Persons.

NOTE 2 An organization Person is deemed to represent and act on behalf of the organization and to do so in a specified capacity.

NOTE 3 An organization Person can be a "natural person" such as an employee or officer of the organization.

NOTE 4 An organization Person can be a legal person, i.e., another organization.

[ISO/IEC 15944-1:2011, 3.46]

3.129

origin

source (document, project, discipline or **model**) for the **OeRI**

[ISO/IEC 15944-2:2006, 3.77]

3.130

Person

entity, i.e., a natural or legal person, recognized by law as having legal rights and duties, able to make **commitment(s)**, assume and fulfil resulting obligation(s), and able of being held accountable for its action(s)

NOTE 1 Synonyms for "legal person" include "artificial person", "body corporate", etc., depending on the terminology used in competent jurisdictions.

NOTE 2 "Person" is capitalized to indicate that it is being used as formally defined in the standards and to differentiate it from its day-to-day use.

NOTE 3 Minimum and common external constraints applicable to a business transaction often require one to differentiate among three common subtypes of Person, namely "individual", "organization", and "public administration".

[ISO/IEC 14662:2010, 3.24]

3.131

persona

set of **data elements** and their values by which a **Person** wishes to be known and thus identified in a **business transaction**

[ISO/IEC 15944-1:2011, 3.51]

3.132

personal information

any information about an identifiable **individual** that is recorded in any form, including electronically or on paper

EXAMPLE Recorded information about an individual's religion, age, financial transactions, medical history, address, or blood type.

[ISO/IEC 15944-5:2008, 3.103]

3.133

persona Registration Schema (pRS)

formal **definition** of the **data** fields contained in the specification of a **persona** of a **Person** and the allowable contents of those fields, including the **rules** for the assignment of **identifiers**

NOTE This may also be referred to as a persona profile of a Person.

[ISO/IEC 15944-1:2011, 3.52]

3.134

Person identity (Pi)

combination of **persona information** and **identifier** used by a **Person** in a **business transaction**

[ISO/IEC 15944-1:2011, 3.49]

3.135

Person signature

signature, i.e., a **name** representation, distinguishing mark or usual mark, which is created by and pertains to a **Person**

[ISO/IEC 15944-1:2011, 3.50]

3.136

physical address

address that is used/recognized by a postal authority and/or courier service to deliver information item(s), material **object**(s), or **business object**(s) to a **Contact** at either an actual **address** or a pick-up point **address**, (e.g., P.O. Box, rural route, etc.)

[ISO/IEC 15944-2:2006, 3.80]

3.137

pivot code set

set of **ID codes** in a **coded domain** which is made publicly known and available, the most stable, representing the defined semantics (most often it is the same as the **ID code**)

NOTE 1 The use of the pivot code set (as per Part 5) as distinguished from the ID code supports the requirement of a Source Authority to maintain internally and on a confidential basis the ID code of its members.

NOTE 2 At times a coded domain has more than one valid code set, (e.g., ISO 639, ISO 3166, etc.)

EXAMPLE In ISO 3166-1 the 3-digit numeric code set is the pivot. The 2-alpha and 3-alpha code sets can change when the name of the entity referenced is changed by that entity.

[ISO/IEC 15944-5:2008, 3.104]

3.138

pivot ID code

most stable **ID code** assigned to identify a member of a **coded domain** where more than one **ID code** may be assigned and/or associated with a member of that **coded domain**

EXAMPLE ISO 3166-1:1997 (E/F) "Codes for the representation of names of countries and their subdivisions — Part 1: Country codes/Codes pour la représentations des noms de pays et de leur subdivisions — Partie 1: Codes pays" contains three code sets: (a) a three digit numeric code; (b) a two alpha code; and (3) a three alpha code.

The three-digit numeric code serves as the pivot code. It is the most stable, remains the same even though the two alpha and/or three alpha codes may and do change.

[ISO/IEC 15944-5:2008, 3.105]

3.139

plurilateral treaty

treaty among a defined set of **jurisdictional domains**

NOTE A plurilateral treaty restricts the jurisdictional domains which may become signatories generally on either: (a) a geo-political basis, (e.g., NAFTA, Mercosur, European Union, etc.); or, (b) some other set of criteria which candidate members must meet and then their membership approved by the existing membership, (e.g., WTO).

[ISO/IEC 15944-5:2008, 3.106]

3.140

polysemy

relation between **designations** and **concepts** in a given **language** in which one **designation** represents two or more **concepts** sharing certain **characteristics**

EXAMPLE An example of polysemy is: bridge (1) "structure to carry traffic over a gap"; (2) "part of a string instrument"; (3) "dental plate".

NOTE The designations in the relation of polysemy are called polysemes.

[ISO 1087-1:2000, 3.4.24]

3.141

preferred term

term recommended by an authoritative body

[ISO 1087-1:2000, 5.6.1]

3.142

principle

fundamental, primary assumption and quality which constitutes a source of action determining particular objectives or results

NOTE 1 A principle is usually enforced by rules that affect its boundaries.

NOTE 2 A principle is usually supported through one or more rules.

NOTE 3 A principle is usually part of a set of principles which together form a unified whole.

EXAMPLE Within a jurisdictional domain, examples of a set of principles include a charter, a constitution, etc.

[ISO/IEC 15944-2:2006, 3.81]

3.143

privacy protection

set of **external constraints** of a **jurisdictional domain** pertaining to **recorded information** on or about an identifiable **individual**, i.e., **personal information**, with respect to the creation, collection, management, retention, access and use and/or distribution of such **recorded information** about that **individual** including its accuracy, timeliness, and relevancy

NOTE 1 Recorded information collected or created for a specific purpose on an identifiable individual, i.e., the explicitly shared goal of the business transaction involving an individual shall not be used for another purpose without the explicit and informed consent of the individual to whom the recorded information pertains.

NOTE 2 Privacy requirements include the right of an individual to be able to view the recorded information about him/her and to request corrections to the same in order to ensure that such recorded information is accurate and up-to-date.

NOTE 3 Where jurisdictional domains have legal requirements which override privacy protection requirements these must be specified, (e.g., national security, investigations by law enforcement agencies, etc.).

[ISO/IEC 15944-5:2008, 3.109]

**3.144
process**

series of actions or events taking place in a defined manner leading to the accomplishment of an expected result

[ISO/IEC 15944-1:2011, 3.53]

**3.145
property**

peculiarity common to all members of an **object class**

[ISO/IEC 11179-1:2004, 3.3.29]

**3.146
public administration**

entity, i.e., a **Person**, which is an **organization** and has the added **attribute** of being authorized to act on behalf of a **regulator**

[ISO/IEC 15944-1:2011, 3.54]

**3.147
public policy**

category of **external constraints** of a **jurisdictional domain** specified in the form of a right of an **individual** or a requirement of an **organization** and/or **public administration** with respect to an **individual** pertaining to any exchange of **commitments** among the parties concerned involving a good, service and/or right including information management and interchange requirements

NOTE 1 Public policy requirements may apply to any one, all or combinations of the fundamental activities comprising a business transaction, i.e., planning, identification, negotiation, actualization and post-actualization. {See further Clause 6.3 "Rules governing the process component" in ISO/IEC 15944-1:2011}

NOTE 2 It is up to each jurisdictional domain to determine whether or not the age of an individual qualifies a public policy requirement, (e.g., those which specifically apply to an individual under the age of thirteen (13) as a "child", those which require an individual to have attained the age of adulthood, (e.g., 18 years or 21 years of age) of an individual to be able to make commitments of a certain nature.

NOTE 3 Jurisdictional domains may have consumer protection or privacy requirements which apply specifically to individuals who are considered to be "children", "minors", etc., i.e. those who have not reached their 18th or 21st birthday according to the rules of the applicable jurisdictional domain.

[ISO/IEC 15944-5:2008, 3.113]

**3.148
recorded information**

any **information** that is recorded on or in a **medium** irrespective of form, recording **medium** or technology used, and in a manner allowing for storage and retrieval

NOTE 1 This is a generic definition and is independent of any ontology, (e.g., those of "facts" versus "data" versus "information" versus "intelligence" versus "knowledge", etc.).

NOTE 2 Through the use of the term "information," all attributes of this term are inherited in this definition.

NOTE 3 This definition covers: (a) any form of recorded information, means of recording, and any medium on which information can be recorded; and, (b) all types of recorded information including all data types, instructions or software, databases, etc.

[ISO/IEC 15944-1:2011, 3.56]

3.149

reference document

external document(s) containing relevant **recorded information** about the **scenario** or **scenario component**

NOTE Adapted from ISO/IEC 11179-3:2003, 3.3.111.

[ISO/IEC 15944-2:2006, 3.84]

3.150

reference document identifier

identifier assigned to a **reference document** by the **OeRO**

NOTE Adapted from ISO/IEC 11179-3:2003, 3.3.112.

[ISO/IEC 15944-2:2006, 3.85 (adapted from ISO/IEC 11179-3:2003, 3.3.112)]

3.151

reference document language code

ISO 639-2/T (terminology) based **language code** set identifying the **language(s)** used in the **reference document**

[ISO/IEC 15944-2:2006, 3.86]

3.152

register

set of files containing **identifiers** assigned to items with descriptions of the associated items

[ISO 19135:2005, 4.1.9]

3.153

register manager

organization to which management of a **register** has been delegated by the **register owner**

NOTE In the case of an ISO register, the register manager performs the functions of the registration authority specified in the ISO/IEC Directives.

[ISO 19135:2005, 4.1.10]

3.154

register owner

organization that establishes a **register**

[ISO 19135:2005, 4.1.11]

3.155

registrar

representative of an **Open-edi Registration Organization (OeRO)**

[ISO/IEC 15944-2:2006, 3.93]

3.156**registrar Contact**

Contact information associated with a **registrar** of an **Open-edi registration organization (OeRO)**

[ISO/IEC 15944-2:2006, 3.94]

3.157**registration**

rule-based process, explicitly stated, involving the use of one or more **data elements**, whose value (or combination of values) are used to identify uniquely the results of assigning an **OeRI**

[ISO/IEC 15944-2:2006, 3.95]

3.158**Registration Authority (RA)**

Person responsible for the maintenance of one or more **Registration Schemas (RS)** including the assignment of a unique **identifier** for each recognized **entity** in a **Registration Schema (RS)**

[ISO/IEC 15944-1:2011, 3.57]

3.159**Registration Authority Identifier (RAI)**

identifier assigned to a **Registration Authority (RA)**

[ISO/IEC 11179-1:2004, 3.3.32]

3.160**Registration Schema (RS)**

formal **definition** of a set of **rules** governing the **data** fields for the description of an **entity** and the allowable contents of those fields, including the **rules** for the assignment of **identifiers**

[ISO/IEC 15944-1:2011, 3.58]

3.161**registration status**

designation of the status in the **registration** administration of an **OeRI**

[ISO/IEC 15944-2:2006, 3.98]

3.162**registry**

information system on which a **register** is maintained

[ISO/IEC 15944-2:2006, 3.99]

3.163**regulator**

Person who has authority to prescribe **external constraints** which serve as **principles**, policies or **rules** governing or prescribing the behaviour of **Persons** involved in a **business transaction** as well as the provisioning of goods, services, and/or rights interchanged

[ISO/IEC 15944-1:2011, 3.59]

3.164**regulatory business transaction (RBT)**

class of **business transactions** for which the explicitly shared goal has been established and specified by a **jurisdictional domain**, as a **Person** in the **role** of a **regulator**

NOTE 1 A regulatory business transaction (RBT) can itself be modelled as a stand-alone business transaction and associated scenario(s). For example, the filing of a tax return, the making of a customs declaration, the request for and issuance of a license, the provision of a specified service of a public administration, a mandatory filing of any kind with a regulator, etc.

NOTE 2 A regulatory business transaction (modelled as a scenario) can form part of another business transaction.

NOTE 3 A RBT may apply to a seller only, a buyer only or both, as well as any combination of parties to a business transaction.

NOTE 4 A RBT may require or prohibit the use of an agent or third party.

NOTE 5 A regulatory business transaction (RBT) may be specific to the nature of the good, services and/or right forming part of a business transaction.

[ISO/IEC 15944-5:2008, 3.124]

3.165

repertoire

specified set of **characters** that are represented in a coded **character set**

[ISO/IEC TR 15285:1998, 3.16]

3.166

retention period

length of time for which **data** on a **data medium** is to be preserved

[ISO/IEC 2382-12:1988, 12.04.01]

3.167

role

specification which models an external intended behaviour (as allowed within a **scenario**) of an **Open-edited Party**

[ISO/IEC 14662:2010, 3.25]

3.168

romanization

representation of non-Latin writing systems in the Latin alphabet by means of transliteration transcription or both

[ISO 5127:2001, 1.1.2.24]

3.169

romanized form

form of a **term** resulting from an operation whereby non-Latin writing systems are converted to the Latin alphabet

NOTE Romanization is a specific form of transcription.

EXAMPLE See example in A.2.1.10 and A.2.1.11 in ISO 12620:1999.

[ISO 12620:1999 (E) , A.2.1.12]

3.170

rule

statement governing conduct, procedure, conditions and relations

NOTE 1 Rules specify conditions that must be complied with. These may include relations among objects and their attributes.

NOTE 2 Rules are of a mandatory or conditional nature.

NOTE 3 In Open-edi, rules formally specify the commitment(s) and role(s) of the parties involved, and the expected behaviour(s) of the parties involved as seen by other parties involved in (electronic) business transactions. Such rules are applied to: (a) content of the information flows in the form of precise and computer-processable meaning, i.e. the semantics of data; and, (b) the order and behaviour of the information flows themselves.

NOTE 4 Rules must be clear and explicit enough to be understood by all parties to a business transaction. Rules also must be capable of being able to be specified using a using a Formal Description Technique(s) (FDTs).

EXAMPLE A current and widely used FDT is "Unified Modelling Language (UML)".

[ISO/IEC 15944-2:2006, 3.101]

3.171

rulebase

pre-established set of **rules** which interwork and which together form an autonomous whole

NOTE One considers a rulebase to be to rules as database is to data.

[ISO/IEC 15944-2:2006, 3.102]

3.172

scenario attribute

formal specification of **information**, relevant to an **Open-edi scenario** as a whole, which is neither specific to **roles** nor to **Information Bundles**

[ISO/IEC 14662:2010, 3.26]

3.173

scenario component

one of the three fundamental elements of a scenario, namely **role**, **information bundle**, and **semantic component**

[ISO/IEC 15944-2:2006, 3.104]

3.174

scenario content

set of recorded information containing **registry** entry **identifiers**, labels and their associated **definitions** and related **recorded information** posted (or reposted) in any **registry** for **business objects**

[ISO/IEC 15944-2:2006, 3.105]

3.175

scenario specification attribute

any **attribute** of a scenario, **role**, **information bundle**, and/or **semantic component**

[ISO/IEC 15944-2:2006, 3.106]

3.176

SC identifier

unique, linguistically neutral, **unambiguous**, referencable **identifier** of a **Semantic Component**

[ISO/IEC 15944-2:2006, 3.107]

3.177

seller

Person who aims to hand over voluntarily or in response to a demand, a good, service and/or right to another **Person** and in return receives an acceptable equivalent value, usually in money, for the good, service and/or right provided

[ISO/IEC 15944-1:2011, 3.62]

3.178

Semantic Component (SC)

unit of **recorded information unambiguously** defined in the context of the **business** goal of the **business transaction**

NOTE A SC may be atomic or composed of other SCs.

[ISO/IEC 14662:2010, 3.27]

3.179

semantic identifier (SI)

IT-interface **identifier** for a **semantic component** or other semantic for which (1) the associated context, applicable **rules** and/or possible uses as a semantic are predefined and structured and the **Source Authority** for the applicable **rulebase** is identified (as per Part 5); and (2) for which more than one or more **Human Interface Equivalents (HIEs)** exist

NOTE The identifier for a Semantic Component (SC), an Information Bundle (IB) and/or an ID Code for which one or more Human Interface Equivalents (HIEs) exist are considered to have the properties or behaviours of semantic identifiers.

[ISO/IEC 15944-5:2008, 3.136]

3.180

set

assembly of **objects** or **concepts** considered as a whole

[ISO 5127:2001, 1.1.1.03]

3.181

set of recorded information

SRI

recorded information of an **organization** or **public administration**, which is under the control of the same and which is treated as a unit in its information life cycle

NOTE 1 A SRI can be a physical or digital document, a record, a file, etc., that can be read, perceived or heard by a person or computer system or similar device.

NOTE 2 A SRI is a unit of recorded information that is unambiguously defined in the context of the business goals of the organization, i.e. a semantic component.

NOTE 3 A SRI can be self-standing (atomic), or a SRI can consist of a bundling of two or more SRIs into another "new" SRI. Both types can exist simultaneously within the information management systems of an organization.

[ISO/IEC 15944-5:2008, 3.137]

3.182

Source Authority (SA)

Person recognized by other **Persons** as the authoritative source for a set of **constraints**

NOTE 1 A Person as a Source Authority for internal constraints may be an individual, organization, or public administration.

NOTE 2 A Person as Source Authority for external constraints may be an organization or public administration.

EXAMPLE In the field of air travel and transportation, IATA as a Source Authority, is an "organization," while ICAO as a Source Authority, is a "public administration".

NOTE 3 A Person as an individual shall not be a Source Authority for external constraints.

NOTE 4 Source Authorities are often the issuing authority for identifiers (or composite identifiers) for use in business transactions.

NOTE 5 A Source Authority can undertake the role of Registration Authority or have this role undertaken on its behalf by another Person.

NOTE 6 Where the sets of constraints of a Source Authority control a coded domain, the SA has the role of a coded domain Source Authority.

[ISO/IEC 15944-2:2006, 3.109]

3.183

special language

language for special purposes (LSP), **language** used in a subject field and characterized by the use of specific linguistic means of expression

NOTE The specific linguistic means of expression always include subject-specific terminology and phraseology and also may cover stylistic or syntactic features.

[ISO 1087-1:2000, 3.1.3]

3.184

standard

documented agreement containing technical specifications or other precise criteria to be used consistently as **rules**, guidelines, or **definitions** of **characteristics**, to ensure that materials, products, **processes** and services are fit for their purpose

NOTE This is the generic definition of "standard" of the ISO and IEC (and found in the ISO/IEC JTC1 Directives, Part 1, Section 2.5:1998). {See also ISO/IEC Guide 2: 1996 (1.7)}

[ISO/IEC 15944-1:2011, 3.64]

3.185

stewardship (of an OeRI)

relationship of an **OeRI**, a **Contact**, and an **organization** involved in the **stewardship** of an **OeRI**

[ISO/IEC 15944-2:2006, 3.111]

3.186

stewardship organization

unique framework of authority within which a **Person** or **Persons** act, or are designated to act in the **stewardship** of an **OeRI**

[ISO/IEC 15944-2:2006, 3.107]

3.187

submission (of an OeRI)

relationship of an **OeRI**, a **Contact**, and an **organization** involved in the **submission** of an **OeRI**

[ISO/IEC 15944-2:2006, 3.108]

3.188

submitting organization

organization authorized by a **register owner** to propose changes to the content of a **register**

[ISO 19135:2005, 4.1.16]

3.189

symbol

designation by means of letters, numerals, pictograms or any combination thereof

[ISO 5127:2001, 1.1.2.11]

3.190

term

designation of a defined **concept** in a **special language** by a linguistic expression

NOTE A term may consist of one or more words (simple term or complex term) or even contain symbols.

[ISO 1087:2000, 5.3.1.2]

3.191

text

data in the form of **characters**, **symbols**, words, phrases, paragraphs, sentences, tables, or other **character** arrangements, intended to convey a meaning and whose interpretation is essentially based upon the reader's knowledge of some **natural language** or **artificial language**

EXAMPLE A business letter printed on paper or displayed on a screen.

[ISO/IEC 2382-23:1994, 23.01.01]

3.192

third party

Person besides the two primarily concerned in a **business transaction** who is **agent** of neither and who fulfils a specified **role** or function as mutually agreed to by the two primary **Persons** or as a result of **external constraints**

NOTE It is understood that more than two Persons can at times be primary parties in a business transaction.

[ISO/IEC 15944-1:2011, 3.65]

3.193

treaty

international agreement concluded between **jurisdictional domains** in written form and governed by international law

NOTE 1 On the whole a treaty is concluded among UN member states.

NOTE 2 Treaties among UN member States when coming into force are required to be transmitted to the Secretariat of the United Nations for registration or filing or recording as the case may be and for publication. {See further Article 80 or the Charter of the UN}

NOTE 3 Treaties can also be entered into by jurisdictional domains other than UN member states, i.e., non-members such as international organizations and the rare sub-national units of federations which are constitutionally empowered to do so.

NOTE 4 A treaty can be embodied in a single instrument or in two or more related instruments and whatever its particular designations. However, each treaty is a single entity.

NOTE 5 Jurisdictional domains can make agreements which they do not mean to be legally binding for reasons of administrative convenience or expressions of political intent only, (e.g., as a Memorandum of Understanding (MOU)).

NOTE 6 Adapted from the Vienna Convention on the Law of Treaties, 1(a).

[ISO/IEC 15944-5:2008, 3.144]

3.194

truncated name

short form of a **name** or **persona** of a **Person** resulting from the application of a **rule-based truncation process**

[ISO/IEC 15944-5:2008 (3.145)]

3.195

truncated recognized name (TRN)

truncated name, i.e., **persona**, of a **Person** which has the properties of a **legally recognized name (LRN)**

NOTE 1 Truncated recognized name(s) may be required for use in machine-readable travel documents, (e.g., passports or visas), identity tokens, drivers' licenses, medicare cards, etc.).

NOTE 2 The source of a truncated recognized name may be a legally recognized name.

[ISO/IEC 15944-5:2008, 3.146]

3.196

truncation

rule-base process, explicitly stated, for shortening an existing **name** of an **entity** to fit within a predefined maximum length (of **characters**)

NOTE Truncation may be required for the use of names in IT systems, electronic data interchange (EDI), the use of labels in packaging, in the formation of a Person identity (Pi), etc.

[ISO/IEC 15944-5:2008, 3.147]

3.197

unambiguous

level of certainty and explicitness required in the completeness of the semantics of the **recorded information** interchanged appropriate to the goal of a **business transaction**

[ISO/IEC 15944-1:2011, 3.66]

3.198

until date

date at which an **OeRI** is no longer effective in the **registry**

[ISO/IEC 15944-2:2006, 3.116]

3.199

vendor

seller on whom **consumer protection** requirements are applied as a set of **external constraints** on a **business transaction**

NOTE 1 Consumer protection is a set of explicitly defined rights and obligations applicable as external constraints on a business transaction.

NOTE 2 It is recognized that external constraints on a seller of the nature of consumer protection may be peculiar to a specified jurisdictional domain.

[ISO/IEC 15944-1:2011, 3.67]

3.200

version identifier

unique number assigned to identify a version of an **OeRI**

NOTE The default value = 1.0.

[ISO/IEC 15944-2:2006, 3.117]

3.201

vocabulary

terminological **dictionary** which contains **designations** and **definitions** for one or more specific subject fields

NOTE The vocabulary may be monolingual, bilingual or multilingual.

[ISO 1087-1:2000, 13.7.2]

4 Symbols and abbreviation

Abbreviation	Description
BOV	Business Operational View
BTI	Business transaction identifier
cdRS	coded domain Registration Schema
cdSA	coded domain Source Authority
CV	controlled vocabulary
DMA	Decision Making Application
EDI	Electronic Data Interchange
FSV	Functional Service View
HIE	Human Interface Equivalent
IB	Information Bundle
IPD	Information Processing Domain
IRBOI	International Registration Business Object Identifier
LRL	legally recognized language
LRN	legally recognized name
FDT	Formal Description Technique
OeDT	Open-edi Description Technique
OeP	Open-edi Party
OeRR	Open-edi Record Retention
OeRA	Open-edi Registration Authority
OeRO	Open-edi Registration Organization
OeROI	Open-edi Registration Organization Identifier
OeR	Open-edi Registry
OeRI	Open-edi Registry Item
OeS	Open-edi scenario
pRS	persona Registration Schema
Pi	Person identity
RA	Registration Authority
RAI	Registration Authority Identifier
RS	Registration Schema
RBT	regulatory business transaction
SC	Semantic Component
SI	semantic identifier
SA	Source Authority
TRN	truncated recognized name

5 Fundamental principles governing coded domains

5.1 Introduction

Rule 01:¹⁵

¹⁵ This part of ISO/IEC 15944 is based on rules and guidelines, which are explained in ISO/IEC 15944-1, 6.1.2. The common rules are sequentially enumerated and presented in bold font. Where guidelines are provided for a rule they are numbered sequentially after that rule and are shown in an italic font. Choice of words in the rules, the guidelines and the terms and definitions are governed by maximizing the ability to map, on the one hand, to commercial and legal frameworks of the day-to-day world of business, and on the other, to information and technology frameworks, service providers, and standardizers, etc.

For a coded domain to be considered as having the properties and behaviours of IT-enabled, it must be able to support the Open-edi reference model and the characteristics of Open-edi.

As specified in Clause 4 in its ISO/IEC 14662, the Open-edi Reference Model provides a reference framework for the identification, development, and coordination of Open-edi standards. This framework addresses two perspectives of a business transaction. One, the BOV, captures the business user aspects; and, the other, the FSV, captures the information technology aspects. A class of standards is associated with each view. They are respectively called BOV related standards and the FSV related standards.

There are a number of characteristics by which Open-edi is recognized and defined¹⁶. These are:

- a) actions based on following predefined and agreed upon rules
- b) exchanges of information among parties involve the making of commitments
- c) communications among the parties are automated
- d) parties control and maintain their states
- e) parties act autonomously
- f) multiple simultaneous transactions can be supported.

In order to support the above characteristics of Open-edi, the following four principles are fundamental to this Part 10 standard. They are:

- a) a rule-based approach
- b) support commitment interchange
- c) IT-platform neutral; and,
- d) separation of IT and human interface equivalencies for entries (members) of a coded domain.

The Clauses which follow support these four key principles.

As stated in the ISO/IEC 14662 Open-edi reference model and re-affirmed in Part 1 of ISO/IEC 15944, Clause 5 "Characteristic of Open-edi", Open-edi business transactions shall be rule-based, with actions based on predefined rules. Both "rule" and "rulebase" are defined concepts. The definition and use of these two concepts is directly related to use of coded domains in an IT-enabled manner in the IT-systems of the parties to a business transaction, including¹⁷

Sets of predefined rulebases are of different types and exist at different levels in Part 10. Further, a whole set of rules as a rulebase can be used and referenced as a single (business) object. Examples of rulebases and associated guidelines include:

- a) those for the specification of a coded domain;
- b) those supporting IT-enablement of a coded domain;
- c) those for the assignment of ID codes;
- d) those for each entry in a coded domain for the IT-interface and HIEs;

¹⁶ See further Clause 4 in ISO/IEC 15944-1.

¹⁷ See above Clause 3 for the definitions of the concepts "rule", "rulebase", "IT-system", etc.

- e) those for the assignment of unique and unambiguous identifiers for both (1) a coded domain; and, (2) each entry or member of a coded domain; and,
- f) those for mandatory and conditional data elements, (e.g., “columns”) for each member, i.e., “row”, as an entry in a coded domain.

5.2 Need to be able to use coded domains in support of commitment exchange

Open-edi is a class of electronic information flows which involves the interworking of predefined types and states of commitments of the parties concerned. These involve tasks or functions to be carried out, obligations to be entered into, etc. In Open-edi, all commitments must be stated clearly and unambiguously and be understood by all parties concerned. Commitments are of several types and exist at several levels. The obligations arising from commitments can be fulfilled either directly by the Persons making the commitments or through agents acting on their behalf.

Use one or more coded domains with respect to identification of ID codes and their human interface equivalents can be any combination of:

- a) qualified Persons as parties to that business transaction;
- b) role(s) of each of the parties;
- c) referenced scenario component or attribute (especially semantic components); and/or,
- d) any scenario component or scenario attribute.

In this context, a coded domain in the form of a catalogue, a credit card holder¹⁸, country code, an IATA code, etc., contains a finite number of timely, accurate and up-to-date entries, each of which is identified by a unique ID code within that coded domain(which in turn has its own coded domain identifier).

These unambiguous ID codes also serve as unambiguous “short hand” from a human interface perspective for the commitments made among the participating parties and are also used among their IT systems. It is therefore vital that for any standard of a “codes representing X” nature used in support of commitment exchange that the semantics of the values stated in a coded domain be unambiguous from both IT-interoperability and semantic interoperability perspectives.

Rule 02:

To support commitment exchange, coded domains must be recognized (within a business transaction) and their use agreed upon by Person(s) making the commitment(s) and Person(s) receiving the commitment

Rule 03:

A coded domain used in commitment exchange shall be explicitly identified, by its unique and unambiguous international identifier or an identifier recognized by Persons involved in commitment exchange.

Guideline 03G1:

The identifier that contains the version ID of the coded domain, usually in the form of a standard, means only that version of the coded domain is accepted by participating parties, while the identifier that has no version ID means that all the future versions of the coded domain will also accepted by participating parties, except where other business agreements do not allow so.

¹⁸ For example, the issuance of credit card, debit cards, etc., is based on the ISO 7812 standard. In the context of this standard is a coded domain which is being maintained in a very dynamic matter with the ID codes for each member being issued in accordance with the registration schema of ISO 7812. Further, due to the limited “physical” space on an identification card, the names of the members (e.g., individuals, organizations, etc)), truncation is often applies with the name on the issued card being a “truncated name”, often with the added attribute of a qualified “truncated recognized name (TRN).

Rule 04:

The unambiguous international identifier for a coded domain (or one that is mutually recognized by the parties involved in commitment exchange) shall be publicly available along with information on its Source Authority (SA) and the coded domain Registration Schema (cdRS).

Guideline 04G1:

ISO/IEC 15944-10 conformant coded domains should be registered in accordance with ISO/IEC 15944-2.

Rule 05:

Each member of a coded domain shall have a unique ID code with each ID code having at the minimum one (or more) Human Interface Equivalents (HIEs).

Rule 06:

Persons shall use the level of semantic unambiguity contained in coded domain Table B.1 to make decision on whether or not to use the coded domain in support of commitment exchange in their business transactions.

Semantic unambiguity is achieved in two ways; namely,

- a) through the specification of the rules and attributes of the coded domain at the coded domain level; and,
- b) through additional specification, if required, at the entry level, i.e., for a member (or a set of members) of a coded domain as a “sub-object class”, as so identified via a “semantic qualifier”¹⁹.

Rule 07:

Individual accessibility shall be supported by a coded domain whenever possible²⁰.

Guideline 07G1:

It is considered good business practices of having the features of individual accessibility being capable of being supported in a coded domain.

5.3 Coded domains based on clear, predefined rules, i.e., “rule-based”

5.3.1 Requirements of rule-based coded domains as a whole

Key characteristic of Open-edl include that it involves the making of commitments among the parties involved, is based on clear, and predefined rules, i.e., is rule-based, and that parties control and maintain their states. The rules below

Rule 08:

The rules governing the establishments, operation, management and use of a coded domain shall be stated explicitly and include:

- 1) those pertaining to the nature, context, purpose and scope of the Source Authority of the “set of codes representing X”;

This includes stating explicitly whether or not the members of a coded domain are:

- a) of the nature of a simple list of members, i.e., all members of the “club” are equal;

¹⁹ See Annex J “Identification of different object classes within a coded domain through the use of semantic qualifiers”.

²⁰ See further Annex H below. See also ISO/IEC 20016-1, *Information technology for learning, education and training — Language accessibility and human interface equivalencies (HIEs) in e-learning applications — Part 1: Framework and reference model for semantic interoperability*.

- b) there are different sub-types of membership (e.g. some members having more rights or privileges than others);
 - c) the members of the code set being categorized or classified based on a taxonomy or classification schema established by the Source Authority (or reference by the Source Authority).
- 2) **those pertaining to the qualifications and process by which the Source Authority add a specified entity as a member of a coded domain;**
 - 3) **those pertaining to the assignment of a unique (permanent) ID code for each member of a coded domain, including the specification of semantics which may be incorporated in the assignment of the ID codes for members of a coded domain. These include those of the specification of a direct link between any classification schema of the Source Authority and the assignment of the ID codes for each member of the coded domain;²¹**
 - 4) **those pertaining to the specification of the status of a member of a coded domain where this is important from a semantic and commitment exchange nature;**

Where a coded domain is of this nature and intended to be used by individuals as possible parties to a business transaction public policy requirements likely apply, i.e. those of a consumer protection, privacy protection, or individual accessibility in nature.

- 5) **those pertaining to state change management of any data element in the SRI for a member of a coded domain, including changes in status of a member of a coded domain, such as cessation of a specified entity as a member of the coded domain, dynamic and/or version release control for availability, and access to the “current” coded domain; and,**
- 6) **where applicable, those pertaining to the need to add a semantic qualifier(s) (e.g., in order to convert an existing “sets of codes representing X”, into a coded domain.**

Many of the most commonly used “sets of codes representing X” for reference and use in business transactions are publicly available either in their entirety or the short form only (e.g. INCOTERMS). The reasons here include the fact that,

- 1) the source for many of these code sets is the United Nations (including its administrative units and agencies). The policy of the UN is to make its information, including code sets, publicly and freely available as well as in the official language of the UN;
- 2) of the three international standards organizations, the ITU makes all its “Recommendations” publicly available, ISO has made many of its standards freely available, including those of the nature of “sets of codes representing X”, and the IEC has also made some of its standard freely available and/or provide free access to individual entries;
- 3) many international “treaty” organizations (e.g. WCO, WIPO, ICAO, IPU, WTO, etc.) make publicly available their “sets of codes representing X”;
- 4) many private (for profit or not-for profit) internationally recognized organizations make publicly available in whole or in part their “sets of codes representing X” (e.g. IATA, ICC, IMO, etc.);
- 5) many regional and national organizations, as well as sector-specific organizations, manage and maintain “sets of codes representing X” for their members but also make them publicly available;
- 6) most jurisdictional domains, at whatever level or nature, have external constraints which include the issuance and maintenance of “sets of codes representing X” to be applied and used depending on the nature of the good, service and/or, right of the goal of the business transaction

²¹ Note: These can be in the form of the use of a block-numeric system for assignment of numeric codes (often linked to use of a classification system), the use of alpha codes, the use of a semantic qualifier, etc.

Rule 09:

Rules pertaining to access and use of a “set of codes representing X” of the Source Authority shall be specified, including those for non-members where applicable.

Guideline 09G1:

Where the original “set of codes representing X” is freely available, the conversion of such a code set into an ISO/IEC 15944-10 “coded domain” should also be made freely available.

5.3.2 Rule-base for IT enablement of a coded domain

Another key characteristic of Open-edi includes that communications of SRIs among parties, in the form of information bundles and their semantic components is automated. In addition, multiple simultaneous transactions need to be able to be supported. IT-enablement is defined (in Clause 3 above as)

“IT-enablement

*transformation of a current **standard** used in **business transactions**, (e.g., **coded domains**), from a manual to computational perspective so as to be able to support **commitment** exchange and **computational integrity***

[ISO/IEC 15944-5:2008 (3.65)]²²

Rule 10:

Rules relevant to be able to support IT-enablement of a coded domain shall be specified.

Guideline 10G1:

The use of a matrix, approach is recommended to the specification of a coded domain.

Here it is noted that the coded domains presented or referenced in this document are of the nature which supports both:

- a) an IT enabled approach; and,
- b) one which is IT-platform neutral.

5.3.3 Rule-base for structuring a coded domain

Based on the overall purpose and scope of this standard, as well as the Rules stated in Clauses 5.0 through Clause 5.4.2 above, as well as the best practices to convert existing “code sets representing X” from “non-structural” documents into IT-platform neutral accessible and referenceable “structures”, this Part 10 uses a very systematic approach for structuring coded domains.

In essence and at its most primitive level, a data base is a two-dimensional matrix consisting of rows and columns, the intersection of which is commonly known as “cells”. In addition, one recognizes that one can view the structure and rules governing a database either as one which is viewed as:

- a) a “column-based”, i.e., an entry is based on a combination of “columns” forming a “row” which is based on a financial accounting approach; or,
- b) a “row-based”, i.e., an entry is based on each entry have a unique ID for the row with the row being based on a minimum number of mandatory fields (each which can consist of one or more data elements) and a field being capable of being designated as repeatable or not based on applicable rules.

²² See also Clause 3 above for the ISO definitions of the concepts of “standard”, “business transaction”, “coded domain”, “commitment” and “computational integrity” which together serve as key base concepts for the definition of the concept of “IT-enablement”.

A primary example here of a non-repeatable field would be the set of data elements comprising the IT-interface (including the use of semantic qualifiers where required).

Similarly, a primary example of a repeatable field would be the mandatory (and conditional) data elements comprising a "Human Interface Equivalent" (HIE). This means that the inclusion and representation of HIEs of whatever nature for each unique ID code for a member in a coded domain is of the nature of a "repeatable field" consisting of one or more data elements.

The default convention and approach to the structuring of a coded domain, including the specification of applicable rules, is that it is "row-based". This is because each row represents an entity as a qualified member of the coded domain which is identified via its unique ID code as a member of that coded domain as assigned by its Source Authority.

Rule 11:

The basic structure for a coded domain is that of a matrix (at its most primitive level²³) which is "row-based", consisting of specified fields which:

- 1) may contain one or more data elements;
- 2) may have a data element which may be of the nature of a "field" (or data element group) consisting of two or more data elements;
- 3) for which the data element field itself may be repeatable, and/or, one or more of the data elements in the field may be repeatable.

Rule 12:

Each "row" in a coded domain shall represent a member of that coded domain and shall be assigned its own unique ID code within that coded domain²⁴.

Rule 13:

The properties and behaviours of each member of a coded domain shall be specified and explicitly stated, i.e. from an object class methodology perspective (including the use of a semantic qualifier needed to be introduced to convert a "set of codes representing X" into an ISO/IEC 15944-10 compliant coded domain)

5.4 Separation of the IT interface from human interface requirements

It is recognized that a key aspects to the specification of rules and associated data element pertaining to a member of a coded domain is the separation of their IT interface from human interface requirements. From (a) an object class methodology perspective, and; b) an Open-edi and commitment exchange requirements perspective in support of business transactions, it is recognized that:

- a) each member of a coded domain must have a unique ID code, i.e., most often in the form of a composite identifier, in the form of an IT-interface equivalent. This may require including the use of a semantic qualifier, as required; and,
- b) that for each unique IT-interface equivalent, i.e., as a unique unambiguous composite identifier, there will be one or more HIEs

Rule 14:

²³ Use of "database" here and elsewhere is that in its generic and primitive use. It is independent of various programming languages which may be used to build and maintain a "coded domain". Examples include SQL, XML, MS Excel, etc.

²⁴ This can also include reserving the use of particular ID codes for specific uses (or meanings). Examples include the use of "000 – Other", "099 – Not applicable", a range 900-999 for private use, etc.

A coded domain shall have both: (1) an single IT-interface component, which supports unambiguous identification, referencng, re-useability and computational integrity; and, (2) one or more Human Interface Equivalences (HIEs) component(s) which support semantic unambiguity as well as culture adaptability characteristics.

Rule 15:

In structuring a coded domain, the IT interface in a coded domain needs to be separated from Human Interface Equivalences.

Guideline 15G1:

*More than one Human Interface Equivalence (HIE) may possibly exist in a coded domain for each entry, and these HIEs are presented using semantics which are understandable by humans. By their nature, HIEs do not support computational integrity as required by electronic business transactions. They support semantic interoperability.*²⁵

Guideline 15G2:

*More than one IT interface code could possibly exist in a coded domain for a single entry, and where this is so the pivot ID code among them serves as the most stable IT interface*²⁶.

As specified by ISO 14662, Open-edi business transactions are viewed from both business aspects (BOV) and Information technology aspects (FSV). A coded domain that supports Open-edi business transactions needs to support both BOV and FSV aspects of Open-edi.

From an Open-edi FSV requirements perspective, including IT-enabled versions of sets of “codes representing X” nature, it is important that a standard be able to support computational integrity if it is to be used in electronic business transactions where the use of such standards form an essential component of commitment exchange. The IT-interface of a coded domain provides computational integrity capabilities of business transactions.

From an Open-edi BOV requirements perspective, Human Interface Equivalences are needed to support cultural adaptability, which is the special characteristics of natural languages and the commonly accepted rules for their use (especially in written form) which are particular to a society or geographic area. Often these are requirements of the nature of external constraints of jurisdictional domains. Examples are: national characters and associated elements (such as hyphens, dashes, and punctuation marks), correct transformation of characters, dates and measures, sorting and searching rules, coding of national entities (such as country and currency codes), presentation of telephone numbers, and keyboard layouts.²⁷

5.5 Specification and representation of coded domains in an IT-platform neutral²⁸ manner

The primary reason that this document (as well as other Parts of ISO/IEC 15944) take an IT-neutral approach is that business operational view (BOV) requirements are rather stable when compared to (rapid) changes in IT functional support view (FSV) based services. It is therefore important that this BOV based standard for the identification of coded domains is also done in an IT-neutral manner.

²⁵ An example is the ISO 3166-1 standard which for each entry has three different IT-interface codes. The United Nations 3 digit numeric code is deemed to be the pivot code ID as it does not change. The 2-alpha and the 3-alpha codes do change when a jurisdictional domain decided to change its names and thus the associated alpha codes change also. {See further Annex E in ISO/IEC 15944-5}

²⁶ Multiple ID codes for a single entity as member of coded domain can form one single IT interface component for that member. In such cases, the pivot ID code shall be identified.

²⁷ See further JTC1 N5296 Work on Electronic Commerce standardization to be initiated.

²⁸ By “IT- neutral”, here and elsewhere, means that the “tables” or matrices are not dependent on a particular IT platform for their implementation.

On the whole, coded domains are specified, represented and maintained as tables in matrix form. Here the purpose and use of each column in the table is specified and rows are created for each permitted member of the coded domain. The basic set of columns is of two types; namely:

- a) those columns pertaining to the “IT-interface” which basically include the ID of the coded domain and the ID code for each entry. As such, this IT-interface, being composed of ID codes, is language neutral and IT-enabled.
- b) those columns which contain the human interface equivalents of a linguistic nature of the semantics. For a multilingual example here of a coded domain and one which supports both cultural adaptability and individual accessibility, see Annex B (informative) titled “Codes for the representation of human sexes support (linguistic) cultural adaptability” in ISO/IEC 5218 (E/F) titled “*Information technology – Codes for the representation of human sexes/ Technologies de l’information – Codes de representation des sexes humains*”.²⁹

In conclusion, it is noted that any coded domain, which is captured as tables in matrix form can easily be rendered into specific syntax formats, be this a database (SQL), a document mark-up language (e.g., XML³⁰), etc.

Rule 16:

Each entry of an instance of an entity as a member in a coded domain, i.e., as a row in a coded domain, shall (a) be assigned a unique ID code, i.e., in the form of a composite identifier in an IT-neutral manner; and, (b) separate the IT-interface and human interface equivalent(s) HIE(s) in that row.

6 Business operational view identification and description of coded domains

6.1 Construct of coded domain

An ISO/IEC 15944-10 compliant coded domain is composed of rules governing the coded domain as a whole {see Clause 5.3+ above) which in summary state that a coded domain should be viewed as an “object class” with all of its members identified with explicit boundaries and meaning whose properties and behaviours follow the same set of rules.

This means that each coded domain shall have:

- a) a unique identifier for that coded domain, a unique and composite identifier, for each member of a coded domain, description, a rule-base, and a table of unique ID-codes; and,
- b) each entry in an ISO/IEC 15944-10 compliant coded domain should be able to support one or more HIEs.

This is illustrated in Table 1 below.

Table 1 — Construct of a coded domain

Identification of coded domain
Registration Scheme of coded domain
Type of Semantic Unambiguity
Rule base of code domain

²⁹ An extract of this ISO standard is presented below as Annex ((informative) “*Case study: Example of coded domain in Matrix form and XML format*”.

³⁰ For an example of a multilingual coded domain in matrix form having an XML equivalent representation, see Annex A.6 Representation of Table ID “ISO/IEC 05218:02” using XML. This example uses the ISO/IEC 19757-2:2003 standard “Relax-XML”.

Rule 1							
Rule 2							
.....							
Rule n							
Table of ID codes and HIEs							
ID	ID	ID n	HIE 1	HIE 2	HIE n

6.1.1 Identification of coded domains

Rule 17:

Computational integrity combined with Open-edi based electronic business transactions, from a global/world-wide requirements perspective, requires the use of unique, linguistically neutral and (globally) unique identifiers for both the identifier of a coded domain as well as for each of the codes representing permitted values/instance of members within a coded domain, i.e., each ID code.

Use of unique, linguistically neutral and unambiguous identifiers for both the coded domain and the codes representing entities as members of a coded domain facilitates electronic data interchange and reference-ability among information systems as well as re-useability of the data. It also: (1) facilitates data integrity and data quality at the human interface; and, (2) ensures that the human interface equivalent can be tailored to the linguistic needs of human users and/or that of applicable jurisdictional domains.

Rule 18:

The identification of coded domain shall include the identification of the code domain Source Authority, as well as the coded domain itself.

The coded domain Source Authority is a Person from an Open-edi perspective. The identification of Person is specified in ISO/IEC 15944-1 (Clause 6.2, Annex E).

Rule 19:

The identification of the entries in a coded domain itself, i.e. the ID code assigned to each row, is subject to the identification scheme specified by the coded domain Source Authority (cdSA).

The identifier for a coded domain and that for the associated cdSA is most often of the nature of composite identifier, including at the minimum (1) the identifier for the cdSA itself; and, (2) a separate unique identifier for each coded domain of that cdSA.

Coded domains vary by different jurisdictions and business environments. It is not possible to specify one unique identification scheme for all coded domains. Most of the coded domains are standards of "codes representing X" nature. The Person responsible for the standards of a jurisdiction will specify the official identification scheme of the standards in that jurisdiction, i.e. standard numbering system.

Rule 20:

The coded domain Source Authority Identification Scheme shall include the identification of sub-coded domains.

Quite often a "set of codes representing x" has a coded domain which in turn consists of several distinct sub-coded domains as object classes. That is not all the members listed in the "set of codes representing x" share the same properties and/or behaviours. This means that in order to ensure IT-interoperability and computational integrity one needs to identify and add qualifying codes.

For some practical examples, see further below Annex H (informative) "Examples of identification of different object classes within a coded domain through the use of semantic identifiers".

Rule 21:

The coded domain Source Authority Identification Scheme shall include the identification of versions of coded domain or sub-coded domains.

The use of a coded domain is changing by business requirements and external constraints of the jurisdictional domain(s). It is the general practice of the Source Authority that the coded domain is under continuous maintenance and a versioning scheme specified.

Guideline 21G1:

Each code shall have its own unique ID. It may already have this or be assigned when it is registered as a business object using ISO/IEC 15944-2.

6.1.2 Levels of Semantic unambiguity

Semantic unambiguity is very important in the context of making commitments. The levels of semantic unambiguity required to be supported in a ISO/IEC 15944-10 compliant code domain are directly related to:

- a) those which are prescribed by the external constraints of the jurisdictional domain applicable to the goal of the business transaction, i.e. the nature of the good, service, and/or, right which is the goal of the business transaction; and/or,
- b) those which are prescribed by public policy requirements which are prescribed by the jurisdictional domain where an individual is the buyer in a business transaction.

Based on the *UN Convention of the Rights of Persons with Disabilities* there are currently four primitive levels of semantic unambiguity. {See further Annex H (normative) below}

The current version of the standard mainly focuses on “What” but not “How”. Thus Table 2 provides levels of semantics unambiguity that are required to support commitment exchange directly. However, further requirements do exist, that how to achieve level 1, to 3, in creation of coded domains or transform existing “codes representing X” nature standard.

One possible way to obtain the ability of deciding on the levels of semantic unambiguity for coded domain when creating, or transforming, is to have one semantic qualifier to coded domain or to entries in it, or both(through inheriting). The semantic qualifier shall contain any semantic information necessary to support commitment exchange³¹.

Table 2 below captures the above requirements in matrix form³².

Table 2 — Level of Semantic Unambiguity based on the UN Convention of rights of persons with disabilities (in support of a collaboration space pertaining to commitment exchange)

Semantic Collaboration Space (SCS)		
Levels of Semantic Unambiguity	Internal Constraints	External Constraints
Level 0 – Not applicable	X	---
Level 1 – Informational	---	X
Level 2 – Decision-taking	---	X
Level 3 – Commitment-making	---	X

³¹ This table is based on Clause 7, “Semantic interoperability and levels of semantic equivalence in ISO/IEC 20016-1:2012 *Information technology for learning, education and training — Language accessibility and human interface equivalencies (HIEs) in e-learning applications — Part 1: Framework and reference model for semantic interoperability*.”

³² One important part of this semantic qualifier are the levels of international regulatory regimes as specified in 15944-5 Annex H. Concepts like “levels of domestic regulatory regimes” need further research by hopefully no standardized result since the administrative systems vary world wide.

6.1.3 Rule-base of a coded domain

The rulebase of a coded domain is the set of rules governing the coded domain, those both existing and potential members of the coded domain are conformant to. The rules, while entities that are out of the scope of the coded domain are excluded.

Rule 22:

The rulebase of a coded domain shall include rules for code structure, character set and values of ID codes.

Guideline 22G1:

The rule-base of a coded domain shall be IT-enabled, i.e. described by an Open-edited descriptive technique. Upon approval of a new coded domain member, the ID codes of it may be able to be automatically generated by the rule-base.

6.1.4 Table of ID codes and HIEs

In the coded domain, the table that contains the ID codes and associated entities that are described by the multiple HIEs are the semantically rich part. The table contains all the entities of an object class that are within the scope of the coded domain. Each entity with the coded domain shall have one or more ID codes (one pivot ID code) and multiple HIEs (at least one HIE).

Rule 23:

The HIEs within a coded domain shall have an attribute of language code.

6.2 Characteristics of coded domains

6.2.1 “for free” or “for a fee” coded domains

Many sets of codes representing X are made available “for free”, either in their complete form or in their short forms by the Source Authority. For example, ISO makes some of its standards freely available³³. The ITU makes all its standards, i.e. “specification”, freely available. The UN and its agencies make their documents, including “sets of codes representing X” freely available. Other internationally recognized regulatory regimes such as the WCO, GATT, ICC, etc. also make their sets of “codes representing X..” freely available.

At the same time there are many ISO and IEC standards which are available only “for a fee”. It is a recognized practice of international (or national) organizations, whether organized on a for-profit or not-for-profit bases, to make their “sets of codes representing X..” available only for-a fee, either as part of membership services or for direct sale to the outside market.

In addition, public administrations (at whatever level of jurisdictional domain), who are the Source Authority for set(s) of Codes representing X make such information available for free or charge a fee.

The approach taken in this standard is that the application of this standard to a set of “codes representing X,” i.e., to convert it into an ISO/IEC 15944-10 conformant coded domain. It is independent of the “for free” or “for a fee”.

Rule 24:

Where the set of “Codes representing X...” is available “for-free”, then the resulting ISO/IEC 15944-10 conformant coded domain(s) shall also be made available for free.

Rule 25:

³³ See further <http://standards.iso.org/ittf/PubliclyAvailableStandards/> for ISO publicly available standards. See also http://jtc1sc32.org/free_standards.html for ISO/IEC JTC1/SC32 specific freely available standards.

Where the set of “Codes representing X..” is a available “for-a-fee”, then the Source Authority is free to decide whether or not ISO/IEC 15944-10 conformant coded domains based on that “Code set representing X...” is to be made available for free or for a fee.³⁴

6.2.2 Exhaustiveness of coded domains³⁵

Basically, a coded domain is either “exhaustive” or it is not. A coded domain which is exhaustive is one where the set of ID codes of members of that coded domain at any and all times is “complete”, irrespective of the dynamics of updating of the coded domain. (e.g., that of valid ID codes for entities as members). Three existing standards are examples of an exhaustive coded domain. They are:

- a) the multipart standard ISO/IEC 6523, Information technology — Structure for the identification of organizations and organization parts;
- b) the multipart standard ISO/IEC 7812, Identification cards — identification of issuers, (e.g. for credits, debit, affinity, etc, cards): and,
- c) the multipart standard ISO/IEC 7501, Machine-readable travel documents (e.g., for passports).

Although these standards are maintained in the form of “dynamic databases”, i.e., they are being updated and maintained on a real-time 24/7 basis which multiple changes, they are considered to be “exhaustive”.

At the same time, it is recognised that there are also code sets and thus potential coded domains for which the entries and their respective ID codes are non-exhaustive, i.e., where the Coded domain includes a ID code “00” (or “000”) for “Others”. This usually indicates that the Source Authority for the code set (or its ISO/IEC 15944-10 compliant equivalent) recognizes that users of the coded domain may have entities to be registered which do not (yet) match any of the choices provided for. {See further below Annex G (informative) “Determining whether the membership of a coded domain is exhaustive or non-exhaustive”}

Rule 26:

A Source Authority shall state whether or not the set of entities listed and registered as members of its code set and thus members of its equivalent coded domain is exhaustive or not.

It is up to a Source Authority to decide whether a coded domain is exhaustive or not. For example, ISO/IEC 5218 is deemed to be exhaustive while a coded domain that specifies the ID codes of allowing for others is non-exhaustive. {See further below Annex H1}

Basically, all the entries in a coded domain are either 1) exhaustive; or, 2) non-exhaustive.

Rule 27:

One shall specify whether or not the set of ID codes for the members of a coded domain is (1) exhaustive; or (2) non-exhaustive.

Guideline 27G1:

When (1) a “set of codes representing X” (code set X) or a coded domain allows for user extensions and (2) sets aside a range(s) of reserved ID codes in support of the same, the Source Authority (SA) for the code set should provide for the registration, or at the minimum support the posting, of the use of such ID codes as user extensions.

Rule 28:

³⁴ For example, the short form of the INCOTERM of the ICC is available for free on their website and thus the related coded domain could be made freely available also. The (very) detailed terms and conditions of the INCOTERMS are available on a for fee basis. Also, ISO makes many standards freely available. All the ITU international standards are also freely available.

³⁵ See further below Annex G (informative) “Determining whether the membership in a coded domain is exhaustive or non-exhaustive”.

When a code set X or coded domain is non-exhaustive in nature and it is recognized that additional entries and additional ID codes assigned may be added (based on established common and frequent usage), provision shall be made for the same through the use of the default code “00 Other”

6.2.3 Semantic granularity

The concept of semantic granularity pertains to the level of certainty, i.e., unambiguousness, of an entry in a coded domain to be able to support the commitments being made in the business transaction for which the coded domain is being referenced in support of a semantic component. The need for preciseness and clarity of the use of a semantic component, i.e., its semantic granularity via a referenced coded domain, in turn is dependent of the nature of:

- a) the goal of the business transaction; and,
- b) the external constraints of the applicable jurisdictional domain(s).

A key aspect of semantic interoperability among parties to a business transaction is agreement on the level of certainty and explicitness required, i.e., how "unambiguous" does one need to be. As such, a key success in the use of standards is the degree to which ambiguities in semantics of data and metadata can be removed. A major characteristic of cost-effective and efficient interchange of data among autonomous Persons with their heterogeneous information systems is paying attention to details. This need for preciseness in semantics known as "granularity" is not absolute but relates to the goals of the business transaction. The higher the degree of user requirements for granularity, the greater the need for precision in the semantics of the information bundles interchanged and thus of coded domains referenced.

Practical experience has demonstrated that users have metadata and semantic component management and interchange requirements at differing levels of granularity. Often standards development suffers when users and suppliers fail to recognize that difficulties in reaching consensus are not of the nature of common requirements but rather that of accommodations which must be made for such standards to be able to interchange data at various levels of certainty or unambiguousness, i.e., levels of granularity.

The level of semantic granularity relies in the "object class", and "objects" specified by the coded domain. In many cases of business requirements, the "object" shall be further defined as an "object class" and a set of objects shall be specified and with their associated ID codes assigned. Thus a more granulated semantics of coded domains achieved.

The level of semantic granularity shall be defined by the coded domain Source Authority. The rules for the structure of the ID-codes are contained in the rule-base of the coded domain.

6.2.4 Openness of coded domains

Rule 29:

Open or not is required by the internal business needs or external constraints of the Source Authority and the Source Authority shall state explicitly the openness of the coded domain.

ID code provides IT interface of a coded domain. It is based on the Source Authority's decision that this IT interface shall be exposed to a certain scope of Persons, based on the internal requirements or external constraints that apply to the coded domain. For example, in some manufacture corporation, classification and coding specification for machine parts is regarded as a commercial confidential issue and is protected by the IPR law. There are two types of "openness" of ID codes in a coded domain:

- a) Freely available, the ID code is freely available to public.
- b) Limited openness, the ID code is free under conditions of agreements between users and Source Authority of the coded domain, either by payment, or by the restricted participation of the business activities intended by the coded domain.

Guideline 29G1:

Exhaustiveness and openness of coded domain are closely related. Very often, a non-exhaustive coded domain provides a search service of the ID codes and entities identified, possibly in an IT enabled manner. If the search service is freely available, then the coded domain can be regarded as open.

7 Rules governing rule-base of coded domains

7.1 Introduction

A key aspect of coded domains is that they are based on rules which are pre-defined and mutually agreed to. Users of such coded domains, by referencing a mutually agreed coded domain in a business transaction, adopt/inherit the rules set of the coded domain referenced. Rules are intended to capture as unambiguously and clearly as possible the precise criteria and agreed to common business operational requirements. These rules also serve as a common set of understanding bridging the varied perspectives of the commercial framework, the legal framework, the information technology framework, standardizers, users, etc.

Coded domains are developed by Source Authorities for use by their members and/or for a particular domain of application. It is very common that a particular coded domains used by diverse sets of users having different perspectives but similar needs. Difficulties arise when a coded domain developed for a particular use by a Source Authority in a specified domain is used by other users in other domains including for purposes for which they were not intended.

A key element of IT-enabled standards of a “codes representing X” nature is that (when transformed into ISO/IEC 15944 conformant coded domains) that such coded domains are based on rules which are both clearly defined and explicitly stated. It is recognized that certain types of rules may not be able to be described or specified using Formal Descriptive Techniques (FDTs)³⁶.

Rule 30:

Rule-base for a coded domain as provided by the Coded Domain Source Authority (cdSA) shall be explicitly stated or exposed to participating parties to an Open-edi business transaction, at the stage of adoption of the coded domain.

Guideline 30G1:

Coded domains are usually “code representing X” standards. These are often international standards, national standards or standards developed by industry standard organizations. Most of these standards have a rule-base incorporated in the standards accompanying the code set.

Guideline 30G2:

It is the common practice that in business transactions, coded domain of nature of international or national standards has the rules that can be easily agreed to by participating parties to Open-edi transaction, since they are based on consensus process.

Electronic business transactions based on Open-edi standards require the use of clear and pre-defined rules, principles and guidelines. These rules formally specify the role(s) of the parties involved and the expected behaviour(s) of the parties as seen by the other parties when engaging in Open-edi based business transactions. Open-edi rules are applied to:

- a) content of information flows; and,
- b) the order and behaviour of information flows themselves.

³⁶ This 1st edition of ISO/IEC 15944-10 deals only with the start of an IT-enabled approach. The development of IT-enabled rules are foreseen for the next edition of this Part.

The combination of both of these provides a complete specification of the relationships among the parties since it requires them to achieve a common understanding of the semantic understanding of the information interchanged.

A coded domain is a domain for which the boundaries are defined and explicitly stated as a rule-base of a coded domain Source Authority (cdSA). As a semantic component in Open-edi transaction, the code domain is used for the semantic understanding of the information interchange, and the rules in the rule-base for a coded domain are referenced by or incorporated in the predefined rules, principles and guidelines of electronic business transactions.

Guideline 30G3:

Acceptance of the rule-base of a coded domain means the agreement of participating parties agrees the changing of members of the coded domain that are conformant to the rules, either changes provided by the Coded Domain Source Authority or user extensions provided by the participating parties.

This standard focuses on facilitating and ensuring required unambiguity and semantic completeness of the content of information flows where such contents is based on the use of permitted values forming part of well-formed and rule-based coded domains derived from existing standards of a "codes representing X" nature. Many of these standards maintained by a MA and their entries in the process of registration process of a RA.³⁷ New business requirements can arise in the business transactions, the members in a coded domain may not meet the requirements of the changed or new scenario. The parties can apply to the Coded Domain Source Authority about the new requirements, or make user extensions.

7.2 Specification of a boundary of a coded domain and inclusion of its members

Whether or not a real world entity is identified as an accepted/recognized member of a coded domain is determined by the rule-base of the Source Authority.

The Person(s) comprising a Source Authority are required to explicitly and formally state as precise criteria the business operational rules, including legal requirements, if any, governing the membership of its coded value domain(s). Such a rule-base of a Source Authority is deemed to be pre-defined and mutually agreed to by the Person(s) comprising the Source Authority. Included should be the agreed upon common business operational practices and related functional requirements.

Rule 31:

Rules governing the condition for inclusion of member to a coded domain are of mandatory nature and shall be specified.

Rule 32:

Rule governing the procedure(s) and role(s) of Person(s) for the maintenance of a coded domain are of mandatory nature and shall be specified.

Guideline 32G1:

Rules governing membership of a coded domain can be mandatory, conditional or optional. The "mandatory" rules are required to be fully complied with; "conditional" rules are required to be complied at a limited number of specific conditions; the "optional" rules are required to be complied according to the arbitrary decision of Persons irrespective of any conditions.

Coded domains are mostly in the form of a matrix of "codes representing X" and is consists of columns that are attributes to real world entities. Rules comprising rule-base of a coded domain are operational requirements of conducts and procedures for maintenance of the coded domain by responsible Persons, and technical specification of attributes to the members of the coded domain. These rules can be mandatory, conditional, or optional.

³⁷ ISO/IEC Directives, Part 1, Clause 2.11, and Clause 2.12.

Rule 33:

Rules governing the membership of the coded domain must be able to be specified by a Formal Description Technique (FDT).

As the boundary of a coded domain, the rule-base which contains rules for its membership forms an inseparable component of the coded domain. To support Open-edi transactions, the coded domain needs to be IT-enabled, including the rules.

The IT-enablement of a coded domain provides a form that can be processed by computer, e.g. the matrix form contains entries and columns are in a SQL database format, that using XML, MsWord Excel, and similar programming or mark-up languages.. At the same time, parties to Open-edi transactions maintain their state and act autonomous, according to their business needs and external constraints, which are ever-changing in the real business world. The coded-domain which are a coding representing real world entities is dynamically maintained by Persons to incorporate these business needs and constraints, in compliance with the rules that governs the membership of the coded domain. The rules are a mandatory part of IT-enablement of the coded domain to support real world Open-edi transactions.

7.3 Specification of exclusionary rules for a coded domain

Rule 34:

Exclusionary rules for the membership of a coded domain, if any, shall be stated explicitly to the parties participating in an Open-edi transaction.

Guideline 34G1:

It is more efficient and unambiguous to specify what is excluded than to state what the entities which may be included.

It is a usual practice for some "codes representing X" standard to state explicitly that some of the entities shall be excluded. For example, in ISO 3166-1 not all the entities listed as members are "countries" or in ISO 4217 not all the entities listed as members are "currencies" (some are "fonds". {See further Annex H below}

7.4 Source(s) of rule-base governing a coded domain

Rule 35:

Rules comprising the rule-base governing a coded domain shall be specified by the Source Authority.

Guideline 35G1:

These rules could be based on the internal business requirements or external constraints of the Source Authority.

The following requirements generally occur as specified by ISO/IEC TR 9789-1994:

- a) Identification
- b) classification
- c) key to further information

In other words, the purpose(s) for a coded domain needs to be unambiguous Identification of information or business entities for the purpose of referencing or indexing, for information service efficiency, very often in combination with a classification scheme of information, and for management or statistical purpose.

These purposes guiding the rules for a coded domain exists independent of the requirements of IT implementation of the Person (For example, library classification and coding before the e-Library). However, application of these coded domains in an IT implementation has added efficiency and quality to the FSV aspects of Open-edi.

8 Rules for management of ID codes in coded domains

8.1 Introduction

A coded domain may be adapted from an existing “set of codes representing X” nature standard and may also be created directly according to rules specified in this part of ISO/IEC 15944. In various applications, the business objects, and knowledge, which are linked to the HIEs of the coded domain, are changing due to business and technological requirements. For this reason, the IDs and HIEs need timely maintenance to capture business semantics.

In the creation and management of coded domains, the following issues shall be considered:

- a) the classification or enumeration of HIEs,
- b) the assignment of IDs,
- c) the addition of new entries, i.e. new IDs and HIEs,
- d) the state change of existing IDs and HIEs into “invalid”,
- e) a change in the HIEs with no change of IDs,
- f) a change in the ID code of a member with no change of HIEs.

8.2 Generic rules for the management of a coded domain

Rule 36:

The requirements of ISO/IEC 15944-2 apply to the management of coded domains with respect to their registration.

Rule 37:

The description of a coded domain shall include the attributes as specified in Annex B of ISO/IEC 15944-10.

It is important that the assignment of ID codes to members of a coded domain by the coded domain Source Authority (cdSA) be based on a systematic and rule-based approach. While it is recognized that it is the prerogative of a cdSA to establish the rules and procedures for the addition, deletion, overall maintenance, updates/versions, etc., for its coded domain, it is necessary for a cdSA....

8.3 Rules governing assignment of ID codes

Rule 38:

For each coded domain, the rules for the assignment of ID codes of its members shall be specified.

Existing ISO/IEC and ISO standards of a "codes representing X" nature have the most common practices of schemata for assignment of ID codes. The most common of these already identified includes:

- a) simple sequential assignment, i.e., as each member is accepted the next available ID code is assigned;
- b) block numeric, i.e., a pre-determined block numeric schema is used for the assignment of members of coded domains (often these are of a hierarchical nature and allowing for different levels of granularity);
- c) a classification system (whether or not block numeric based).

Rule 39:

The characters or symbols constituting the ID codes for entities in a coded domain can either contain the meaning or not.

Guideline 39G1:

A meaningless ID code, from a semantic perspective (as well as that in numeric), is recommended for use in the Open-edi transactions because they provide a more stable identification for entities which are members of a coded domain.

It is not an uncommon practice that the structure of a ID code in a coded domain denotes a meaning (significant code), to provide semantics for users through the ID code itself. However, this mixes the HIE and IT interface together in the ID code column, and the ID code will be regarded unstable when internal and external requirements of the Person who specifies the coded domain changes.

Guideline 39G2:

In specifying the coding scheme of the ID code in a coded domain, the Source Authority generally considers the volume and diversity of the identified entities in the coded domain.

Entities required by internal or external constraints that need to be identified in a coded domain may have a large volume and great variety, for example the individuals that are identified by a ID code in some jurisdictional domains. Some coded domains are comparatively simple. Coding scheme for the ID codes varies according to the volume and variety of the coded domain.

8.4 Rules governing the change management of entries in the coded domain

8.4.1 Change management of ID codes

Change management of ID codes in a coded domain covers several aspects; including:

- a) the addition of anew ID code representing the addition of a new member to that coded domain;
- b) the deletion of an ID code representing the deletion of that member;
- c) a change in ID code for an existing member (often because its properties and/or behaviours have been changed³⁸;
- d) the ID code for an existing member of a coded domain remaining the same but its properties and/or behaviours having been changed³⁹;
- e) the deletion of one or more ID codes and their replacement with a single new ID code⁴⁰;
- f) a change in the assignment of the ISO code for a member of the coded domain, where the properties and behaviours of the member do not change but its assigned ID code does⁴¹.

³⁸ For example, see ISO 3166-1 where Sudan as a UN member state had the ID code "736". This was changed by the UN to "729" with "728" being assigned to the new UN member state of South Sudan, i.e., a single jurisdictional domain being split into two.

³⁹ Examples form ISO 3166-1 include, the UN ID code for "643" for the "Soviet Union" being continued for use by the "Russian Federation" even though this represented quite a different geopolitical entity and jurisdictional domain than the former Soviet Union. Also, the former Yugoslavia, UN member ID "688" was continued (taken over) by Serbia even though Serbia is also quite a different geopolitical entity and jurisdictional domain than the former Yugoslavia.

⁴⁰ A good example is that of ISO 4217 when members of the European Union decided to abolish their currencies (= currency cod) and adopt the euro as their common currency of all members of the EU.

⁴¹ Examples of this nature do occur where the assignment of ID codes is based on a classification system, (e.g., such as the International Patent Classification (IPC) of the World Intellectual Property WIPO). It often happens in a classification system that a class (or its sub-level) becomes "overloaded". One common solution is to create a new

Rule 40:

Any ID code for an entry in a coded domain once assigned shall not be reassigned.

Best practices with respect to international standards and elsewhere have demonstrated that an ID code once assigned, once it has lapsed, i.e. is no longer to be used, shall not be re-assigned to another entity, i.e. (new) member, of a coded domain.

8.4.2 Change management of HIEs

Change management of HIEs pertains to those situations where the ID code for the member of a coded domain (as well as its properties (or behaviours) remain the same, but the HIE(s) changes. A not uncommon example is that of the UN member states whose 3-digit numeric ID code remains the same is that of "Burma" which changed its name to "Myanmar" (with the resulting 2-alpha and 3-alpha codes being changed also)⁴².

Rule 41:

One shall specify whether or not a change in an HIE for a member of a coded domain may result in a change in its ID code.

Guideline 41G1:

It is a best practice not to change the ID code for a member of a coded domain when its HIE(s) change. A more common practice is to assign a new ID code.

8.5 Registration of user extensions

A Source Authority for a coded domain can, if it so wishes, make provision for users of that coded domain to be able to add (and enumerate) other real world entities as members of that domain. Such additions by users are commonly known as "user extensions".

In the rules governing the assignment of ID codes for entities as members of a coded domain, a common practice is to set aside/reserve pre-determined set or block of ID codes for user extensions.

Rule 41:

In order to avoid "collisions" among user extensions, they should be registered.

User extensions which are widely used in turn become candidates for "full" membership of a coded domain.

9 Rules for specifying Human Interface Equivalents (HIEs) to an ID Code in a coded domain**9.1 Multiple Human Interface Equivalents (HIEs) for an ID code in a coded domain****Rule 42:**

One or more human interface equivalents can be associated with a single ID code in a coded domain. There shall be at least one.

Human interface equivalents provide a representation of the semantics of ID code within the context on its coded domain.

Human interface equivalents can be in the form of terms, symbols (including ostensive equivalents, icon symbols, functions, glyphs, etc.). They can also be of an audio, image, nature as well as any form or format suitable for understanding by humans.

class (or sub-class) and re-assign the existing ID codes of current members accordingly. {See further on the IPC, www.wipo.int/classifications/ipc

⁴² As stated in Clause 1.3.5 above, detailed aspect of change management are not yet addressed in this 1st edition.

For example, in the coded domain schema ISOIEC 13251 whose title is "Collection of graphical symbols for office equipment", ID code 106 has associated with it from a human interface perspective first the symbol for "loud speaker"/«haut-parleur» and then the associated terms.

However, for the majority of widely used coded domains the human interface equivalents are represented through linguistic expressions in written forms and based on a natural language.

9.2 Standard structure for semantics of a Human Interface Equivalent (HIE)

Rule 43:

Support of semantic interoperability of natural language forms of human interface equivalents is facilitated through the use of a standard data structure as part of a coded domain.

For such a data structure the following data elements have already been identified:

- a) ID code of a Source Authority which governs a natural language in a specified context (often a jurisdiction);
- b) the code of the natural language based on ISO 639-2T. This is a mandatory data element;
- c) the linguistic equivalent itself, i.e., "main word" assigned as the label for the instance of an entity as member of that coded domain;
- d) provision for a «mot lien» as a separate (associated) data element as may be applicable to a natural language, (e.g., in French, le, la, un, une, les, etc., or in Spanish, el, la, los, las, etc.). This is a conditional, subject to the gender code; (Often the gender code is used to establish the appropriate «mots liens»);
- e) a natural language gender code. {See further Annex B below}.

Note that there are different types of «mots liens», (e.g., the base type as singular articles, then of a definitive and indefinite nature, followed by articles of a plural nature within the masculine, feminine and neuter genders).

The data structure is presented in illustrative form in Figure 6 below.

The element "ID Code of Source Authority" is presented here in a very simplistic, primitive manner of a composite data element. Its further expansion benefits from development work on ISO/IEC 15944 Part 5.

	Element	Presence Type	Example
(a)	ID code of Source Authority	Conditional	124 (for Canada)
(b)	code of the natural language based on ISO 639-2/T	Mandatory	fra (for French)
(c)	the linguistic equivalent itself, i.e., "Main word"	Mandatory	poutine
(d)	the gender code for the language	Mandatory	2 (for feminine)
(e)	the associated «mot lien»	Optional	une (la)

Figure 6 — Illustration of Elements of a Data Structure for Human Linguistic Equivalents of an ID Code – Written form

9.3 Rules governing linguistic (written) representations as Human Interface Equivalents (HIEs) of ID codes as required values in coded domains

It is noted and recognized that external constraints of a jurisdictional domain do and will impact the linguistic (written) representations of human interface equivalents (HIEs) of ID codes in the use of that coded domain. At the most primitive level and from a HIE perspective they pertain to the use of official (or de facto) language(s) in that jurisdictional domain⁴³.

Rule 44:

A coded domain shall be structured to be able to support the official language(s) (or de facto language(s)) of a jurisdictional domain.

Rule 45:

A spoken official language (or de facto language) may be supported by more than one writing system to convey the semantics of the information interchanged among IT systems as well as commitment exchange among Persons.

An official language in a jurisdictional domain as spoken may be supported by more than one writing system. Examples already identified include:

- a) Serbian and Croatian which are the same spoken language but where the former in its written uses the Cyrillic alphabet in written presentations and the latter uses the Roman alphabet, a.k.a. as Latin-1 [For an example see further below Annex E].
- b) Inuktitut the official language of Nunavut, a territory in Canada, is also as spoken language which has two written forms. One is Roman Latin-1 based, the other is syllabic-based.

9.4 Individual accessibility of HIEs of coded domains

The adoption by the UN of the *UN Convention on Rights of Persons with Disabilities* (2006) has introduced a new external constraint which has become mandatory in nature where the buyer in an eBusiness transaction is an "individual" (and not an "organization" or "public administration"). Consequently, the development of this Part 10 of ISO/IEC 15944 has ensured that an ISO/IEC 15944 conformant "coded domain" is structured and specified to ensure that it can support these UN Convention requirement where a buyer in a business transaction is an "individual".

At the same time, where a buyer is an "individual" in a business transaction, other generic public policy requirements apply. As identified in Clause 6 of ISO/IEC 15944-5 these include consumer protection, privacy protection, and individual accessibility.

Rule 46:

The identification and specification of a coded domain shall include a clear statement as to whether or not:

- a) **the coded domain is qualified to be used in business transactions which involved a Person in the role of an individual as a "buyer" in a business transaction, i.e., any form of commitment exchange;**
- b) **where the coded domain is used in business transactions involving a Person in the role of an "individual", then the rules governing that coded domain shall include support public policy requirements of jurisdictional domains. These include those of the nature of consumer protection, privacy protection, and individual accessibility (as well as those of "human rights" nature).⁴⁴**

⁴³ See further Annex E in ISO/IEC 15944-5 for the official languages(s) or de facto language(s) of UN member states (= "countries").

⁴⁴ With respect to public policy requirements captured as those of:

9.5 Rules governing composite semantics

This 1st edition of ISO/IEC 15944-10 deals only with the most primitive aspect of the use of a “composite semantic”. In an ISO/IEC 159544-10 context, a HIE can consist of one or more “words” as character strings⁴⁵.

Rule 47:

With respect to the use of one or more HIE(s) in any coded domain, one shall specify whether or not such a HIE consists of a single semantic, i.e., single word, or a HIE consisting of two or more words, i.e., character strings.

10 Coded domains and controlled vocabularies

10.1 Introduction

The various existing Parts of ISO/IEC 15944 already contain key constructs pertaining to coded domains, including controlled vocabularies. ISO/IEC 15944-7 Clause 5 titled “Fundamental principles and rules” (and its subsequent more detailed Clauses 5.6 and 5.7) provide the necessary detailed rules, associated guidelines, text, examples, Annexes and footnotes which are most relevant to the application of the concept and construct of a “controlled vocabularies” in support of the rules governing the specification of a coded domain.

A key, if not the key, important data element attribute of any data element (or semantic component), is its “content value”, i.e. the actual recorded information that an instance of that data element contains. In this multipart eBusiness standard, any data element intended to be used in a business transaction must have content (even if this is of the nature of “99” = Not Applicable)

Fundamentally, the semantics, i.e., meaning, for the content value of each data element comprising a business transaction is either (1) constrained; or (2) non-constrained.

The most common examples of non-constrained content values of a data element include data elements for name of Persons, a free-text field (to provide added information for use by humans and not computers), etc.). However, most of the content values of data elements are constrained ranging from examples such as date, to those data elements for whom the information to be recorded as their content value, mandates the use of a controlled vocabulary, or in an even more structured and predefined manner, as that of a “coded domain”.

Based on existing ISO standard concept and their definitions, as identified in Clause 3 of this part of ISO/IEC 15944, it appears that basically a “controlled vocabulary” is a special type of coded domain.⁴⁶ Generally, in a

-
- a) a consumer protection nature {See further the ISO standards developed by COPOL (ISO Committee on Consumer Policy) {see further www.iso.org/iso/iso_technical_committee.html?connid=5500}.
 - b) a privacy protection nature, see further Part 8 of ISO/IEC 15944, *Information technology — Business Operational View — Part 8: Identification of privacy protection requirements as external constraints on business transactions*.
 - c) an “individual accessibility nature, see further ISO/IEC 20016-1, *Information technology for learning, education and training — Language accessibility and human interface equivalencies (HIEs) in e-learning applications — Part 1: Framework and reference model for semantic interoperability*.

⁴⁵ The approach to and development of cost-effective and efficient approaches to dealing with “composite semantics” should be addressed in a future edition of ISO/IEC 15944-10. Standards development of this nature should take into account the concepts and definitions of “simple term”, “compound term”, and “\complex term” of ISO TC37.

⁴⁶ For example of a recent ISO standard of a controlled vocabulary and one which includes English, French, Russian, and Chinese human interface equivalents, see ISO/IEC 15944-7:2009, *Information technology — Business Operational View — Part 7: e-Business Vocabulary*. This ISO/IEC standard also includes the following normative clauses pertaining to a controlled vocabulary which are particular/relevant; namely:

Clause 5.2 Principles and rules for the development of a definition for a concept and assignment an appropriate entry in a “controlled vocabulary”

Clause 5.3 Rules governing maximization and harmonization of equal or similar concepts in different standards;

Clause 6 Rules governing development of multilingual equivalents for eBusiness vocabulary entries;

coded domain, all permitted instances are members of the same object class. Members of the coded domain derive their essential meaning and use, i.e., semantics and pragmatics, from the set of rules governing the properties and behaviours of the object class, i.e. those that apply to the coded domain as a whole.

From a development, management, interoperability, multilingual, cultural adaptability, individual accessibility, etc., perspectives and objectives, there is little difference between coded domains and controlled vocabularies. The primary difference is that a controlled vocabulary represents an object class which is of the nature of a “concept domain”. This means that for **each entry in a controlled vocabulary we find most, if not all, of its semantics to be derived, not from the coded domain of which it is part, but from its definition at the individual entry (row) level** along with its associated assigned label, i.e., its “term”. The addition of an ID code to each entry in a controlled vocabulary basically makes it a coded domain (otherwise it would simple be of the nature of a list , a glossary, etc.) Here it is noted that any controlled vocabulary which is constructed to be able to be bilingual or multilingual in nature will require the use of an ID code for each entry.

10.2 Rules common to controlled vocabularies and coded domains

This Clause 10.2 specifies the rules common to both controlled vocabularies and coded domains. Those which are specific to each are stated below in Clauses 10.3 and 10.4 respectively.

Simply, viewed from an IT-system perspective, a coded domain or controlled vocabulary is colloquially referred to as (common) lists, pick lists, pull-down menus, (tables), etc., to be implemented and used in implementations. What sets coded domains and controlled vocabularies apart from any kind of “lists” is that:

- a) the set of permitted values is controlled; and,
- b) these controls are established and managed by a Source Authority.

Rule 48:

For each data element to be used as part of the execution of a business transaction, one shall state whether or not the permitted content value for that data element is constrained or is not constrained as stated in the constraint indicator, an attribute for that data element.

Rule 49:

Where the content value for a data element is subject to constraints, i.e., in addition those already covered by the other data element attributes for that data element one shall: (1) specify the set of permitted content values in the form of a controlled vocabulary or coded domain; and, (2) identify the Source Authority.

Rule 50:

The Source Authority for a controlled vocabulary or coded domain referenced in an Open-edi scenario shall be either (1) a Part of the standard itself; (2) that stated in an ISO, IEC, ISO/IEC or ITU standard; or, (3) that stated in a document forming part of a “Referenced Specification” in Clause 2.2 Normative References of a Part of 15944 or (4) or by a Source Authority as explicitly identified and specified by a jurisdictional domain.

10.3 Rules governing a controlled vocabulary

In the context of eBusiness, the key characteristics of a controlled vocabulary (CV) are:

- a) it is a vocabulary, i.e., it is not a dictionary, glossary, etc.;

Clause 7 Rules governing the structure and presentation of the eBusiness Vocabulary in a HIE context.

It is noted that ISO/IEC 15944-7 is a publicly available standard.

- b) its entries consist of definition/term pairs for each concept forming part of the controlled vocabulary. (At times, the entries in a controlled vocabulary can exist of a list of the terms only without their definitions being provided);
- c) the aspects controlled as to the inclusion of the entries rest with a Source Authority and is managed through a rule-based process for the addition/deletion of entries;
- d) on the whole, the ordering of the entries in a controlled vocabulary is deemed not to be significant, (e.g., alphabetic order, date of entry in the CV, etc.). This is because a controlled vocabulary basically states the set of permitted values as a set of textual/language based values.
- e) in essence, a controlled vocabulary (CV) is basically of the nature of a dictionary of a list of entries, i.e., definition/term pairs for which there is only one definition per entry. In addition, the order of the entries in a controlled vocabulary is usually that of the alphabetical order of the terms in the language of the controlled vocabulary.

Rule 51:

Where the Source Authority for a controlled vocabulary (and its contents) is not a publicly recognized international organization, the controlled vocabulary shall include, in its normative part, the following information:

- a) the name and address of the Source Authority (including its URL (or URI) where available);
- b) the year (and/or version number) of the controlled vocabulary;
- c) statement (agreed to by the Source Authority) whether or not the controlled vocabulary is freely available for use (and if not already “freely available”, the conditions under which the information is being made available);
- d) summary information on the (1) focus, scope and/or domain of the controlled vocabulary; and (2) rules governing the addition/deletion of entries (as well as changes to existing entries; and;
- e) information on the languages in which the controlled vocabulary is being made available by the Source Authority.

10.4 Rules governing a coded domain

On the whole a coded domain is a much more rigorous, structured, systematic, IT-enabled, linguistic and culturally adaptable, etc., approach than that of controlled vocabulary. The nature of coded domains required requires that they be developed and maintained in the form of multi-column tables, matrices or databases. On the whole, the rules for a coded domain must include those pertaining to the addition, deletion, change, etc., with respect to each of its “members” captured in as “rows” consisting of one or more data elements.

internationally recognized thesauri, classification schemas, taxonomies, etc., are also examples of coded domains.

A coded domain is a domain for which the boundaries, i.e., what’s in and what’s out, are defined and (very) explicitly stated by its Source Authority. Based on the rules governing a coded domain existing entities are qualified as being a member of that coded domain. This occurs by each of them being assigned a unique ID code in accordance with the registration schema of that Source Authority.

A coded domain most often is managed and presented in matrix form, i.e., they are essentially of a database nature. Here the content or value of each data element (or “cell” as row/column intersects) is predetermined and defined according to the rulebase of the Source Authority. As such, the semantics of its contents are predefined.

At times, the rules governing the assignment of ID codes in a coded domain are designed and structured to support a classification schema, a thesaurus, a taxonomy, etc.

Rule 52:

For any coded domain used in ISO/IEC 15944, the rules governing the coded domain shall be specified either in the ISO/IEC 15944 Part itself or by reference to a document(s) of the Source Authority which specify the same including:

- a) the rules covering the coded domain as a whole;
- b) the rules governing the structure of the coded domain;
- c) the rules governing the assignment of ID codes to each of its members;
- d) the rules qualifying the entry of new members in a coded domain (as well as the definitions), and,
- e) the rules governing the changes to data elements governing the recorded information on each member.

11 Rules governing the registration of coded domains as re-usable business objects

11.1 Principles of registration

A basic purpose of ISO/IEC 15944-10 is to be able to use a coded domain as an IT-enabled, systematic and cost-efficient, referenceable and re-useable “business object” for which the actual values representing its member entities can be used in an IT-enabled and interoperable manner with associated levels of semantic unambiguity. This is so whether the nature and purpose of a coded domain applies to a scenario, scenario attribute, or a scenario component, i.e., a role, information bundle or semantic component.

Rule 53:

For and coded domain to be used in an Open-edi context “as a re-useable business object in the context of an Open-edi scenario, scenario component, scenario attribute, a role, information bundle, and/or semantic component, it should be registered as a “business object” based on ISO/IEC 15944-2.

Key concepts governing organizations for registration of coded domains includes:

- 1) coded domain Source Authority (cdSA)

“**Person**, usually an organization, as a **Source Authority** which sets the **rules** governing a **coded domain**”

NOTE 1 Source Authority is a role of a Person and for widely used coded domains the coded domain Source Authority is often a jurisdictional domain.

NOTE 2 Specific sectors, (e.g., banking, transport, geomatics, agriculture, etc.), may have particular coded domain Source Authority(ies) whose coded domains are used in many other sectors.

NOTE 3 A coded domain Source Authority usually also functions as a Registration Authority but can use an agent, i.e., another Person, to execute the registration function on its behalf.”

- 2) coded domain Registration Schema (cdRS)

“formal **definition** of both (1) the **data** fields contained in the **identification** and specification of an **entity** forming part of the members a **coded domain** including the allowable contents of those fields; and, (2) the **rules** for the assignment of **identifiers**”

- 3) Source Authority

“**Person** recognized by other **Persons** as the authoritative source for a set of **constraints**”

- 4) coded domain

“domain for which:

(a) the boundaries are defined and explicitly stated as a **rulebase** of a **coded domain Source Authority**; and,

(b) each **entity** which qualifies as a member of that domain is identified through the assignment of a unique **ID code** in accordance with the applicable **Registration Schema** of that **Source Authority**”

5) code (in coded domain)

“**identifier**, i.e., an **ID code**, assigned to an **entity** as member of a **coded domain** according to the pre-established set of **rules** governing that **coded domain**”

Key concepts governing the organizations for Open-edi registration

1) OeRO

“**Person** qualified by the **OeRA** to assume the responsibility for the **registration** of **scenario** and **scenario components**”

2) OeRA

“**Person** responsible for maintaining the **register** of **OeROs** and for the issuance of **OeRO identifiers**”

3) OeRI

“**recorded information** within a **registry** relating to a specific **Open-edi scenario** or **scenario components** of a **scenario** including linkage information to a **scenario** content”

4) OeR

“**information system** for the **registration** of scenarios and **scenario components**”

5) Open-edi register

“Information store or database maintained by an **Open-edi Registry**”

Analysis results about the relationship of these concepts:

1) cdSA is one subtype of OeRA

2) entity in coded domain shall possibly be regarded as one subtype of OeRI (entity is an existence, while OeRI is information; in a Open-edi perspective, the management of any entity is through its information)

3) coded domain itself can either be

i) one subtype of Open-edi register (The IT-enablement of the coded domain)

ii) one subtype of OeRI (a domain shall be regarded as a group of existences, which is reflected as a group of information, as mentioned above the same as entity to information)

4) code (in coded domain) can either be

i) part of IRBOI that identified the entity(subtype of OeRI), or

ii) simply part of the coded domain, which is registered as a whole.

5) coded domain registration schema has both

- i) definition for data fields, which is one subtype of Open-edi register schema(in Part 2, concentrate on the characteristics of OeRI), and
- ii) rules for assignment of Identifiers, which is NOT included in the Open-edi register schema as specified in Clause 10 in Part 2.

The following is the possible rules that might be adapted from rules in ISO/IEC 15944-2, according to Relations between the key concepts above. Some rules in Part 2 are already reflected in rules in other clauses of this part of ISO/IEC 15944, to make adaptation from these rules will be useless and not listed below.

Rule 54:

The operation of a coded domain shall be carried out under the authority of an Open-edi Registration Organization that is accountable to a coded domain Source Authority, which is one subtype of Open-edi Registration Authority.

[Adapted from Rule 7 in ISO/IEC 15944-2.]

Rule 55:

OeROs for registration of coded domain entities shall be appointed by the cdSA in accordance with the rules specified by the cdSA, which is often jurisdictional domains, possibly in the form a law, or regulatory requirements.

11.2 Process of registration

Rule 56:

The process for registration of an ISO/IEC 15944-10 compliant coded domain shall be based on the rules governing ISO/IEC 15944-2 the registration of re-useable business objects.

11.3 Coded Domain Registration schema

The purpose of this Clause is two-fold, namely:

- a) to provide, in summary form the elements comprising the specification of a coded domain Registration Schema; and,
- b) to do so in a manner which will allow and facilitate such an Open-edi coded domain to be registered as a business object in compliance with Part 2 of ISO/IEC 15944 titled "Part 2; Registration of scenarios and their components as business objects".

The Registration scheme of a coded domain is a rule-based and IT-enabled interface of the coded domain, that enables the application of the changes to a coded domain be received, processed and returned its result by the coded domain Source Authority.

Rule 57:

The coded domain Registration Schema shall contain the following:

- a) contact and address of the Source Authority that accepts the application of the changes to a coded domain;
- b) IT-enabled interface of the Source Authority that enables the automatic acceptance of the coded domain;
- c) natural language description of the rules and procedures of the application processing; and,
- d) templates for the result of application processing

12 IT-enablement of coded domains

12.1 Introduction

The final goal of IT-enablement of coded domains shall be to support automatic IT processing in application. While to describe coded domains by various programming languages well enables the computer processing of coded domains, the coded domain shall also be expressed in a IT-neutral manner. Thus, this part of the ISO/IEC 15944 specifies the IT-enabled coded domain as matrix, which uses the traditional type of table presentation that users can easily understand, and the cells of which explicitly defined and uniquely identified by IDs. It is the purpose and scope of Part 3 of ISO/IEC 15944 to provide an Open-edi descriptive technique as a more direct link to the IT specific expression of the scenario and its components.

12.2 Templates for IT-enabled coded domains – Attributes for Scoping an Open-edi scenario (OeS)

12.2.1 Purpose

In order to maximize an IT-enabled approach, this standard makes extensive use of “templates”. In this 1st edition, only the most primitive templates ISO/IEC 15944-1 introduced the use of “templates” as a key construct and tools in support of implementing Open-edi BOV focused standards. The key purpose of the use of a “Template” (in matrix form) is two-fold; namely:

- a) to state in a very systematic, organized and IT-enabled manner the Open-edi scope attributes governing the context and possible use of a scenario attribute; and,
- b) to do so in an IT-neutral manner.

12.2.2 Template structure and content

The template structure and content, which follows in Clause 12.2.2.1 below is based on and adapted from existing Clauses in ISO/IEC 15944-1, ISO/IEC 15944-2 and ISO/IEC 15944-5.

It is summarized as follows based on these three ISO standards.

It is important to note that the use of a coded domain in support of commitment exchanges pertaining to a business transaction is directly related to the scoping of an Open-edi scenario and related scenario components, i.e. the specified context in which is to be used and applied.

Rule 58:

Where a coded domain is intended to be used as a semantic component in support of an Open-edi scenario, one shall specify the attributes for scoping a scenario.

Guideline 58G1:

It is a recommended business practice to use the Open-edi template for scenario scope attributes in conjunction with the specification of any coded domain and its intended use.

12.3 Template for Scoping Open-edi scenarios

The rules for the specification of Open-edi scenarios and their components are stated in Clause 7 of ISO/IEC 15944-1. This Clause 12.3 is based on this Clause 7 in Part 1. The use of the template of attributes for scoping a scenario requires one to enter a “Decision Code” in Column 2 for each of the attributes.

Rule 59:

When this scenario scoping attribute template is used, the Decision Code (Col.2) must be specified, i.e. it shall not have a “blank” or “null” value. The two valid Decision Codes are:

- a) attribute applies = 1 (Yes); and,
- b) attribute does not apply = 2 (No).

Table 3 — Template for specifying the scope of an Open-edi scenario

IT-Interface		Linguistic Human-Interface Equivalents			Spare
Scope Tag ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
1000		BUSINESS GOAL OF BUSINESS TRANSACTION - NO EXTERNAL CONSTRAINTS			
1010		Business goal of business transaction includes External Constraints			
1040		Persons: (no external constraint)			
1041		Persons: Individual <-> Individual			
1042		Persons: Individual <-> Organization ⁴⁷			
1043		Persons: Individual <-> Public Administration			
1044		Persons: Organization <-> Organizations ⁴⁸			
1045		Persons: Organization <-> Public Administration			
1046		Persons: Public Administration <-> Public Administration			
1060		Bilateral Business Transaction Model			
1061		Mediated Business Transaction Model			
1065		Defined Market Model			
1066		Undefined Market Model			
1070		Immediate or Settlement Model			
1071		Separate Settlement Model			
1080		EXTERNAL CONSTRAINTS AND PUBLIC POLICY			
1081		External constraints of a (general) public policy nature apply			
1082		External constraints of a consumer protection nature apply			
1083		External constraints of a privacy protection nature apply			
1084		External constraints of an "individual accessibility" nature are supported			
1085		External constraints of a human rights nature are supported			
1110		AGENTS AND THIRD PARTIES			
1110		Business Transaction allows for Agents ⁴⁹			
1111		Buyer Agent			
1112		Seller Agent			
1130		Business Transaction allows for Third ⁵⁰ Parties			

⁴⁷ Often referred to as "B2C", i.e., as in "business to consumer". Here it is understood that a "consumer" is an "individual" and not an "organization".

⁴⁸ Often referred to as "B2B" i.e., as in "business to business".

⁴⁹ It is assumed that Business Rules and Constraints pertaining to the ability of the two primary parties, i.e. the seller and buyer, to be able to delegate all or part of their role and associated commitments to and Agent(s) will be specified as part of "Role Attributes", see further Clause 8.4.2.5 in ISO/IEC 15944-1:2010.

IT-Interface		Linguistic Human-Interface Equivalents			Spare
Scope Tag ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
1131		By mutual agreement of buyer and seller (as internal constraints only)			
1132		External Constraint(s) Mandated			
1150		External Constraints and agents			
1151		External constraints require a buyer to use an agent			
1152		External constraints require a seller to use an agent			
1160		EXTERNAL CONSTRAINTS AND THIRD PARTY			
1161		External constraints require participation of a qualified third party			
1170		EXTERNAL CONSTRAINTS AND REGULATOR			
1171		External constraints require participation of a qualified third party			
1172		External constraints allow for a third party to act on behalf of a regulator, i.e. interacting with both buyer and seller			
1173		External constraints allow for an agent to act on behalf of the regulator			
1180		DATE/TIME REFERENCING ⁵¹			
1181		Applicable Calendar Specified			
1182		Applicable Clock (and level of granularity) specified			
1200		PROCESS COMPONENT: All five sets of distinct activities covered.			
1210		PLANNING			
1215		Public information on goods/services provided by a seller			
1220		Public information on goods/services needed by buyer			
1225		Predefined/referenceable Catalogue			
1230		Buyer initiated goods/service request			
1235		Seller initiated goods/service offer			
1240		Predefined Market Model			
1250		IDENTIFICATION			
1255		Identification for information exchange purposes only (e.g. an address) ⁵²			

⁵⁰ It is assumed that Business Rules and Constraints pertaining to the ability of the two primary parties, i.e. the seller and buyer, to commonly agree to delegate all or part of their role and associated commitments to a “third party(ies)” will be specified as part of “Role Attributes”, see further Clause 8.4.2.5 in ISO/IEC 15944-1:2010.

⁵¹ For applicable rules, see Clause 6.6.4.5 in ISO/IEC 15944-5:2008.

IT-Interface		Linguistic Human-Interface Equivalents			Spare
Scope Tag ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
1260		Identification of Person able to make commitment			
1265		Identification of Person as "individual"			
1270		Identification of Person as "consumer"			
1300		NEGOTIATION			
1305		Monetary Payment Involved			
1310		Immediate Settlement Model			
1315		Separate Settlement Model Payment			
1350		ACTUALIZATION			
1355		Immediate Settlement			
1360		Separate Settlement			
1400		POST-ACTUALIZATION			
1405		Includes warranties			
1410		Includes records retention			
1415		Includes staying in contact with buyer (e.g., defect and recall notification)			
1500		DATA COMPONENT			
1505		Predefined and Structured, i.e. code sets			
1520		Data integrity of any IB			
1525		Retention /latency of any IBs			
1530		SPECIFICATION OF RECORDS RETENTION RESPONSIBILITY ⁵³ (in support of internal and/or external constraints)			
1540		SPECIFICATION OF DISPOSITION OF RECORDED INFORMATION ⁵⁴			
1541		Specification of disposition of recorded information from an internal constraints perspective			
1542		Specification of disposition of recorded information from an external constraints (jurisdictional domain requirements) perspective			
1550		SPECIFICATION OF RETENTION TRIGGERS ⁵⁵			
1560		SPECIFICATION OF STATE CHANGES ⁵⁶			

⁵² A typical example here is an e-mail address or a P.O. box address.

⁵³ If applicable, i.e. as applying to the set of recorded information pertaining to the business transaction as a whole, use coded domain "ISO/IEC 15944-5:02 Codes representing Specification of Records Retention Responsibility". See also ISO/IEC 15944-5 Clause 6.6.4.2.

⁵⁴ If applicable, i.e. as applying to the set of recorded information pertaining to the business transaction as a whole, use coded domain "ISO/IEC 15944-5:03 Codes representing Disposition of Recorded Information". See also ISO/IEC 15944-5 Clause 6.6.4.2.

⁵⁵ If applicable, i.e. as applying to the set of recorded information pertaining to the business transaction as a whole, use coded domain "ISO/IEC 15944-5:04 Codes representing Retention Triggers". See also ISO/IEC 15944-5 Clause 6.6.4.2.

IT-Interface		Linguistic Human-Interface Equivalents			Spare
Scope Tag ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
1570		SPECIFICATION OF STORE CHANGE TYPE ⁵⁷			
1600		Business Requirements on FSV – No External Constraints ⁵⁸			
1610		Service: Information Bundle Integrity			
1620		Service: Confidentiality of IB contents			
1625		Service: Non-repudiation of receipt			
1630		Service: Proof of Time IB creation ⁵⁹			
1635		Service: Notarization of IBs			
1640		Service: Quality of Service (QoS)			
1700		EXTERNAL CONSTRAINTS ⁶⁰			

12.4 Specification and consolidated template of attributes of Open-edi scenarios, roles, information bundles (IBs) and semantic components (SCs)

Clause 8 in ISO/IEC 15944-1 states the rules for the specification of Open-edi scenarios themselves as well as their components which are:

- a) Open-edi scenario (OeS) attributes;
- b) Open-edi roles and role attributes;
- c) Open-edi information bundles (IBs) and IB attributes; and,
- d) Open-edi semantic components (SCs).

The use of the template of attributes of Open-edi scenarios, roles, IBs and SCs require one to enter a “Decision Code” in Column 2 for each of the attributes listed in the template below.

Rule 60:

Rule 59 applies to assignment of Decision Code values in the Table 4 templates.

Table 4 below is based on those similar in nature as found in Part 1 and Part 5 of ISO/IEC 15944. It has been focused from a coded domain perspective.⁶¹

⁵⁶ If applicable, i.e. as applying to the set of recorded information pertaining to the business transaction as a whole, use coded domain “ISO/IEC 15944-5:06 Codes store change type for Information Bundles and semantic components”. See also ISO/IEC 15944-5 Clause 6.6.4.3.

⁵⁷ If applicable, i.e. as applying to the set of recorded information pertaining to the business transaction as a whole, use coded domain “ISO/IEC 15944-5:05 Codes for specifying state changes allowed for IBs and SCs”. See also ISO/IEC 15944-5 Clause 6.6.4.3.

⁵⁸ See further Clause 6.5.2 in ISO/IEC 15944-1:2011.

⁵⁹ Often referred to as time-stamping services.

⁶⁰ See further ISO/IEC 15944-5:2008.

Table 4 — Consolidated template of attributes of Open-edi scenarios (OeS), roles, information bundles (IBs) and semantic components (SCs)

IT-Interface		Human-Interface Equivalents			Spare
Open-edi Scenario Component ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
2000		OPEN-EDI SCENARIO ATTRIBUTES			
2010		OeS Identifier			
2020		OeS Name(s)			
2030		OeS Purpose			
2040		OeS Set of Roles OeS Business Requirements, Rules and Constraints			
2050		OeS Set of Information Bundles OeS Scenario Inheritance Identifier(s) and Cross-References			
2060		OeS Set of Requirements on Open-edi Parties			
2070		OeS Set of external constraints on Business Requirements, i.e., Laws and Regulations			
2080		OeS Inheritance Identifier(s) and Cross References			
2090		OeS Security Service Requirements			
2100		OeS Communication - Quality of Service Requirements			
2120		OeS Role Requirements and Constraints			
2130		OeS Dependency among Roles in a Scenario			
2140		OeS Dependency among Information Bundles in a Scenario			
2150		OeS Dependency among Semantic Components of different Information Bundles			
2500		OeS DEMANDS ON OPEN-EDI PARTIES			
2600		OeS DEMANDS ON OPEN-EDI INFRASTRUCTURE			
3000		ROLE ATTRIBUTES			
3005		Role Identifier			
3010		Role Name(s)			
3015		Role Purpose			
3020		Role Business Goal(s)			
3025		Role Business Rules and Constraints			
3030		Role Inheritance Identifiers and Cross-References			
3035		Role external constraints on Business Requirements, i.e., Laws and Regulations			
3040		Role Security Service Requirements			
3045		Role Communications and Quality of Service Requirements			

⁶¹ It is expected that based on use and application of this Table 4, that it will be modified. This will be done either via an addendum, corrigendum, or as part of the preparation of the 2nd edition of ISO/IEC 15944-10.

IT-Interface		Human-Interface Equivalents			Spare
Open-edi Scenario Component ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
3050		ROLE DEMANDS ON OPEN-EDI PARTIES			
3060		INTEROPERABILITY DEMANDS AMONG ROLES			
3065		Role States			
3070		ROLE TRANSITIONS			
3075		ROLE EVENTS			
3080		ROLE ACTIONS			
3085		ROLE INTERNAL FUNCTION			
3090		ROLE DEMANDS ON OPEN-EDI SUPPORT INFRASTRUCTURE			
4000		INFORMATION BUNDLE ATTRIBUTES			
4010		IB Identifier			
4020		IB Name(s)			
4030		IB Purpose			
4040		Business Rules Controlling Content of IBs			
4050		IB external constraints on Business Requirements, Governing Content of an IB, i.e., Laws and Regulations			
4060		IB contents			
4070		IB recorded information retention – business rules and constraints ⁶²			
4080		IB recorded information retention – external constraints on business requirements, i.e., laws and regulations			
4081		IB specification of disposition ⁶³			
4082		IB specification of retention triggers ⁶⁴			
4083		IB specification of state changes ⁶⁵			
4084		IB time validity characteristics ⁶⁶			
4085		IB time validity characteristics ⁶⁷			
4090		Relationship of Semantic Components			

⁶² If applicable, i.e. as applying to an IB in a scenario or related to a role being modelled, use coded domain “ISO/IEC 15944-5:02 Codes Representing Specification of Records Retention Responsibility”. See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁶³ If applicable, i.e. as applying to an IB in a scenario or related to a role being modelled, use coded domain “ISO/IEC 15944-5:03 Codes Representing Disposition of Recorded Information”. See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁶⁴ If applicable, i.e. as applying to an IB in a scenario or related to a role being modelled, use coded domain “ISO/IEC 15944-5:04 Codes Representing Retention Triggers”. See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁶⁵ If applicable, i.e. as applying to an IB in a scenario or related to a role being modelled, use coded domain “ISO/IEC 15944-5:05 Codes Representing State Changes Allowed for the values of Information Bundles and Semantic Components”. See also Clause 6.6.4.3 in ISO/IEC 15944-5:2008.

⁶⁶ If applicable, i.e. as applying to an IB in a scenario or related to a role being modelled, use coded domain “ISO/IEC 15944-5:06 Codes Representing Store Change Type”. See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁶⁷ If applicable, apply rules of Clause 6.6.4.5 in ISO/IEC 15944-5:2008, “Date/Time Referencing”.

IT-Interface		Human-Interface Equivalents			Spare
Open-edi Scenario Component ID Code	Decision Code	Name (English)	Name (French)	Name (Other)	
(1)	(2)	(3)	(4)	(5)	(6)
		within an IB			
4100		IB security service requirements			
4200		IB INFORMATION FOR INTEROPERABILITY			
4300		IB DEMANDS ON OPEN-EDI SUPPORT INFRASTRUCTURE			
5000		SEMANTIC COMPONENT ATTRIBUTES			
5010		SC Identifier			
5020		SC Name(s)			
5030		SC Definition			
5040		SC Security service requirements			
5081		IB specification of disposition ⁶⁸			
5082		IB specification of retention triggers ⁶⁹			
5083		IB specification of stage changes ⁷⁰			
5084		IB specification of store change types ⁷¹			

⁶⁸ If applicable, i.e. as applying to an SC of an IB being modelled, use coded domain "ISO/IEC 15944-5:03 Codes Representing Disposition of Recorded Information". See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁶⁹ If applicable, i.e. as applying to an SC of an IB being modelled, use coded domain "ISO/IEC 15944-5:04 Codes Representing Retention Triggers". See also Clause 6.6.4.2 in ISO/IEC 15944-5:2008.

⁷⁰ If applicable, i.e. as applying to an SC of an IB being modelled, use coded domain "ISO/IEC 15944-5:05 Codes Representing State Changes Allowed for the Values of Information Bundles and Semantic Components". See also Clause 6.6.4.3 in ISO/IEC 15944-5:2008.

⁷¹ If applicable, i.e. as applying to an SC of an IB being modelled, use coded domain "ISO/IEC 15944-5:06 Codes Representing Store Change Type". See also Clause 6.6.4.3 in ISO/IEC 15944-5:2008.

Annex A (normative)

Coded domain registration administration attributes

A.1 Introduction

This Annex A presents a table that delineates the requirements for inclusion of Open-edi administration attributes for a Part 10 compliant coded domain for registration as a re-useable business object.

It is recognized that this 1st edition of Part 10 addresses the most primitive aspects only. It is likely that via amendments to this 1st edition or as part of the development of the 2nd edition for Part 10, i.e., based on usage, the minimum set of attributes presented below will be revised and augmented.

Rule A-01:

The specification of the following attributes, as stated in Table A.1 of a coded domain are mandatory as coded domain registration attributes, i.e., as ISO/IEC 15944-2 re-useable business objects.

Guideline A-01G1:

Where information is not available or not applicable, for the information of the content value requested for a specific row, one may use the following:

- a) "99" or "not applicable"; or,
- b) "98" or "not available".

Rule A-02:

Unless otherwise specified, the coded domain developer is also assumed to have the role of coded domain maintainer and distributor.

Rule A-03:

Unless otherwise specified, the coded domain developer is also the Source Authority for the contents of the coded domain.

Rule A-04:

Where the coded domain developer is not the Source Authority for all or part of the contents of a coded domain, it is assumed that such contents are either freely available, and if not, the coded domain developer is assumed to have made an appropriate arrangement for re-use of all or part of the applicable content values of coded domain with the appropriate Source Authority(ies).

It is understood that at times the columns of content values in a coded domain may themselves be an aggregation, or integration of those which have several Source Authorities⁷².

A.2 Organization of Table A.1

Table A.1 provides a summary of the administrative attributes presented in matrix form as follows.

⁷² An example is found in ISO/IEC 15944-5, Annex E.6 Table 7 coded domain whose title is "Coded Domain 15944-5:07 Codes Representing UN Member States and their Official (or de facto) Languages".

Col. ID	Col. Title	Definition/Use
01	Coded Domain Registration Attribute	<p>A composite identifier ID assigned to the coded domain registration attribute composed as follows:</p> <p>1) "CD" = coded domain attribute. The prefix CD is assigned to differentiate this Open-edi administrative attribute from general Open-edi administrative attributes as found in Part 2, as well as those identified in other (future) Parts of ISO/IEC 15944.</p> <p>2) nnn = a 3-digit number assigned in a block-numeric as follows:</p> <p>000-099 – reserved for future use (and to link to Part 2 administrative attributes)</p> <p>100-199 – information on coded domain developer, maintainer, distributor</p> <p>200-299 – information on Source Authority</p> <p>300-399 – information on scoping, purpose, and intended use provided by the coded domain developer</p> <p>400-499 – coded domain content attributes as provided by the coded domain developer</p>
02	Attribute Title	Administrative attributer title
03	Description	Description or definition of attribute
04	Obligation/Condition ('Presence Type')	<p>Specifies the obligation and conditionality for the Open-edi registration administration attribute. The codes used are based on those found in the coded domain for "Codes Representing Presence-Type Attributes" as specified in Annex B (Normative) in ISO/IEC 15944-1:2011.</p> <p>"1" = mandatory Mandatory administrative attributes are required for the OeRI, without exception.</p> <p>"2" = conditional Conditional administration attributes are used subject to provisions being met that satisfy one or more rules about the OeRI.</p> <p>"3" = mandatory subject to conditional Mandatory subject to conditional administration attributes are those that depend upon the implementation of a conditional attribute. They are required when the conditional administration attribute upon which they depend is implemented and referenced, including dependencies.</p> <p>"4" = optional Optional administration attributes are subject to no conditions and are completely discretionary.</p>
05	Maximum Occurrence	Identifies the maximum number of occurrences for the administration attribute within its composite administration attribute
06	Data Type	Specifies the datatype of the elementary administration attributes, i.e., components of a composite administration attribute such as a composite identifier or contact information.

A.3 Table A.1 – Administrative attributes for registration of a coded domain as a business object⁷³

Table A.1 — A.Administrative attributes for registration of a coded domain as a business object

Coded Domain Registration Attribute	Attribute Title	Description	Obligation / Condition	Maximum Occurrence	Datatype
(01)	(02)	(03)	(04)	(05)	(06)
CD 000	Reserved for registration of coded domain	ID codes 00-09 reserved for assignment for registration as a “business object” using ISO/IEC 15944-2 administration registration attributes, as found in its Annex B (Normative) “ <i>Open-edi registration administration attributes</i> , Table B-1.			
CD 100	Information on coded domain developer, maintainer and/or developer	A composite set of data element attributes	1	1	string
CD 101	Coded domain developer	The name of the Person who developed the ISO/IEC 15944-10 compliant coded domain if other than the Source Authority. Note: This may well happen where the original “code set representing X” is in the public domain and freely available.	1	1	string
CD 10n	Coded Domain Maintainer and distributor (source)	The name of the Person maintaining the coded domain and distributor. Note: This can be the Person already identified as the coded domain developer.	2	1	string
CD 200	Identification of Source Authority(ies)	Attributes used to identify the Source Authority. Note: The default is the coded domain developer.	1	1	
CD 201	Indicator of number of Source Authority(ies)	Indicator of number of Source Authority(ies) where content values (as rows) are integrated into the coded domain.	1	1+	digit
CD 210	Formal name(s) of Source Authority	The official or legal name(s) of the Source Authority, i.e., as HIEs.	1	1+	string

⁷³ ISO/IEC 15944-2: 2006 provides for ‘*Registration of scenarios and their components as business objects*’ with its Annex B (normative) *Open-edi registration administrative attributes*’. It contains a Table B-1 “*Open-edi administration attributes*”. In this context a coded domain registered as a re-useable business object can be considered to be use as a semantic component(SC) or an information bundle(IB).

Coded Domain Registration Attribute	Attribute Title	Description	Obligation / Condition	Maximum Occurrence	Datatype
(01)	(02)	(03)	(04)	(05)	(06)
CD 220	Common name or acronym of Source Authority	The commonly used name or acronym by which the Source Authority is known.	4	1+	string
CD 230	ID of Source Authority	Where this is an ISO, IEC or ITU standard, use the standard ID. Where an acronym is used to identify the Source Authority, this should be used.	2	1+	string
CD 240	SA coded domain ID	The coded domain ID as assigned by the Source Authority	1	1+	string
CD 250	SA coded domain official name(s)	The official name(s) as assigned by the SA, i.e., as HIEs.	1	1+	string
CD 260	Coded domain common name	The common use name(s) by which the coded domain is referenced.	2	1+	string
CD 300	Scoping, purpose, and intended use		1	1	
CD 310	Scope	The scope as provided by the coded domain developer.	1	1	string
CD 320	Purpose	The purpose as provided by the coded domain developer.	1	1	string
CD 340	Intended focus of use	Identification/specification of intended use of coded domain.	1	1	string
CD 390	Additional information	Additional information provided by the coded domain developer for intended uses of coded domain.	1	1	string
CD 400	Coded domain content attributes	Specification of attributes on the members of a coded domain.	1	1+	string
CD 410	Exhaustive or non-exhaustive	Information on whether or not the coded domain is exhaustive.	1	1+	string
CD 411	Exhaustive/non-exhaustive code	1 = exhaustive 2 = non-exhaustive	1	1	digit
CD 420	Exhaustivity specifications	Information on criteria for entity becoming a member of the coded domain.	1	1	string
CD 430	Non-Exhaustivity information	Information on how non-exhaustive aspects of coded domain are addressed	2	1	string
CD 431	Systematic approach code	Coded domain takes a systematic and rule-based approach (using the following codes):	1	1	digit

Coded Domain Registration Attribute	Attribute Title	Description	Obligation / Condition	Maximum Occurrence	Datatype
(01)	(02)	(03)	(04)	(05)	(06)
		1 = specified ID codes are reserved in the rulebase for the coded domain for categories of non-members 2 = the coded domain is of the nature of a classification system or taxonomy among which governs the assignment (reassignment) of its ID codes for its members			
CD 500+	<<Reserved for future use>>				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15944-10:2013

Annex B (normative)

Use of IT-enabled coded domains to ensure semantic interoperability in support of the “UN Convention on the Rights of Persons with Disabilities”

The *UN Convention of Rights of Persons with Disabilities* provides the highest level of source of external constraints for requirements of this nature. This UN Convention is in turn supported and implemented through legislation and regulation at the UN member state level, either individually or collectively (e.g., the EU). The *Part 1: Framework and Reference Model* of the ISO/IEC 20016⁷⁴ multipart standard requires that any individual should be provided with the semantics in the form of HIEs for any set of recorded information (SRI) provided at a level of unambiguity to be:

- 1) fully informed;
- 2) at a level of unambiguity to be able to make a decision;
- 3) at a level of unambiguity for the individual to be able to make a commitment.

The key objective of this Annex is to address the context and purpose of HIEs from a semantic interoperability perspective which:

- 1) support the implementation of the *UN Convention on the Rights of Persons with Disabilities* and its (level) requirements for semantic interoperability;
- 2) other UN level requirements of an “external constraints” nature applicable to UN members;
- 3) In addition, it does so in a manner which, maximizes use of existing international and ISO, IEC and/or ITU standards;
- 4) does so in a manner which supports an efficient, cost-effective and IT-enabled approach; and,
- 5) places these requirements in a collaboration space context of commitment exchange which is the essential element of a business transaction.

In addition, it is noted and taken into consideration that:

- 1) Many sets of recorded information (SRIs) are of a “one way” nature only. They do not require or are intended to be responded to by an individual per se, (e.g., a publication, a broadcast, a speech, etc.). It is of the nature of a “one-to-many”.
- 2) These in turn are either of an internal constraint nature or may be subject to external constraints.
- 3) A one-way communication may nevertheless be made for the purpose of a conversation, a discourse and even as the introduction to a negotiation leading to a commitment.
- 4) The next step after a one-to-many is that of identification of the parties concerned to each other either on a one-to-one basis (dialogue), a many-to-many basis (as a multiparty “multilogue”). The end purpose

⁷⁴ The Annex is based on *ISO/IEC 20016-1: ITLET- Language Accessibility and Human Interface Equivalencies (HIEs) in e-Learning Applications — Part 1: Framework and Reference Model for Semantic Interoperability* and especially its Clause 7 “*Semantic Interoperability and levels of semantic equivalency*”.

here may be a conversation, the back-and-forth between or among the parties to ensure that the semantics being conveyed are understood but **without** the need for an individual to make a decision or eventual commitment.

- 5) If the purpose of the HIE SRI is to serve in the making of a decision or even a commitment, then the next phase of establishing unambiguosness is that of “negotiation” and then the actual making of a commitment which is then actualized.
- 6) That once a commitment is actualized there may well be associated “post-actualization” requirements forming part of the commitment made by an individual with an organization or public administration, (e.g., warranties, a 5-10 year period to “cancel” the commitment, etc.). Examples here include the obligation of Persons as “organization” or “public administration” to provide a “business transaction identifier” (BTI)⁷⁵ of an actualized business transaction.

Table B.1 below captures the above requirements in matrix form.

These primitive levels of semantic unambiguity for semantic interoperability support the *UN Convention on the Rights of Persons with Disabilities*. They are presented below in Table H.1 in matrix form and applying the requirements of this standard for lexical presentation of an IT-enabled coded domain.

Table B.1 — Codes representing levels of semantic unambiguity in support of semantic interoperability equivalency requirements⁷⁵

IT interface			Semantic interoperability equivalency level (SIEL)	
Coded Domain ID	Table ID	ID Code	ISO English	Other HIEs ⁷⁶
ISO/IEC 20016-1	01	0	Not applicable	
ISO/IEC 20016-1	01	1	Informational – External constraints apply	
ISO/IEC 20016-1	01	2	Decision-taking – External constraints apply	
ISO/IEC 20016-1	01	3	Commitment-making – External constraints apply	

⁷⁵ Table B.1 is based on Table 1 in ISO/IEC 20016-1: 2012

⁷⁶ “Other” represents the facility to add HIE in languages other than ISO English.

Annex C (informative)

Concept and definition of “coded domain”

In this Annex the use of “[Dnnn]” refers to the ID code of the term/definition entry as Human Interface Equivalents (HIEs) for the concept in English, French, Russian and Chinese as found in ISO/IEC 15955-7, *Information technology — Business Operational View — Part 7: eBusiness vocabulary*. This is an ISO/IEC publicly available standard.

Note: The text below serves as draft text for an Informative Annex for Part 10. In addition, some of the text could serve as input for the “Clause 0 Introduction” which is informative and/or normative Clauses 2+.

C.1 Introduction

The concept and definition of “coded domain” was introduced as part of the development of ISO/IEC 15944-2, *Information technology — Business Operational View — Part 2: Registration of scenarios and their components as business objects*.

coded domain

domain for which

(1) the boundaries are defined and explicitly stated as a **rulebase** of a **coded domain Source Authority**; and,

(2) each **entity** which qualifies as a member of that domain is identified through the assignment of a unique **ID code** in accordance with the applicable **Registration Schema** of that **Source Authority**

NOTE 1 The rules governing the assignment of an ID code to members of a coded domain reside with its Source Authority and form part of the Coded Domain Registration Schema of the Source Authority.

NOTE 2 Source Authorities which are jurisdictional domains are the primary source of coded domains.

NOTE 3 A coded domain is a data set for which the contents of the data element values are predetermined and defined according to the rulebase of its Source Authority and as such have predefined semantics.

NOTE 4 Associated with a code in a coded domain can be:

- one and/or more equivalent codes;
- one and/or more equivalent representations especially those in the form of Human Interface Equivalent (HIE) (linguistic) expressions.

NOTE 5 In a coded domain the rules for assignment and structuring of the ID codes must be specified.

NOTE 6 Where an entity as member of a coded domain is allowed to have, i.e., assigned, more than one ID code, i.e., as equivalent ID codes (possibly including names), one of these must be specified as the pivot ID code.

NOTE 7 A coded domain in turn can consist of two or more coded domains, i.e., through the application of the inheritance principle of object classes.

NOTE 8 A coded domain may contain ID code which pertain to predefined conditions other than qualification of membership of entities in the coded domain. Further, the rules governing a coded domain may or may not provide for user extensions.

EXAMPLE Common examples include: (1) the use of ID Code "0" (or "00", etc.) for "Others, (2) the use of ID Code "9" (or "99", etc.) for "Not Applicable"; (3) the use of "8" (or "98") for "Not Known"; and/or, if required, (4) the pre-reservation of a series of ID codes for use of "user extensions".

NOTE 9 In object methodology, entities which are members of a coded domain are referred to as instances of a class.

EXAMPLE In UML modelling notation, an ID code is viewed as an instance of an object class.

[ISO/IEC 15944-2:2006 (3.13), ISO/IEC 15944-7 D033]

The concept and definition of "coded domain" incorporates and builds on other key concepts and their definitions introduced in ISO/IEC 15944-1 or ISO/IEC 15944-2. They include (in the order in which they appear in the definition):

- a) rulebase [D236]
- b) coded domain source Authority (cdSA) [D035]
- c) ID code [D109]
- d) Registration Schema (RS) [D224];
- e) Source Authority (SA) [D250].

In addition,

- 1) the definition of the concept of "rulebase" incorporates the ISO/IEC 15944-2 concept and definition of "ID code" and "rule".
- 2) the definition of coded domain incorporates the ISO/IEC 2382-17 concept and definition of "entity".

Further, the "Notes" to this ISO/IEC definition for coded domain includes terms which in turn represent ISO and ISO/IEC defined concepts. These include (in the order in which they appear in the Notes):

In Note 1:

- rule [D236]
- coded domain Registration Schema (cdRS) [D034]

In Note 2:

- jurisdictional domain [D125]

In Note 3:

- dataset [D063]
- data [D060]
- data element [D061] & D062, i.e., data element (in organization)
- rulebase [D237]

In Note 4

- code [D032]
- Human Interface Equivalent⁶ (HIE) [D107]

In Note 6:

- pivot ID code [D196]

In Note 7:

- object class [D147]

C.2 Analysis of existing ISO/IEC definition of “coded domain”⁷⁷**C.2.1 “rulebase” and “rule”**

A rulebase is a set of predefined rules which interwork and which together form an autonomous whole.⁷⁸ Sets of predefined rulebases are of different types and exist at different levels in Part 10. Further, a whole set of rules as a rulebase can be used and reference as a single (business) object. Examples of rulebases and associated guidelines include:

- those for the specification coded domain;
- those supporting IT-enablement of a coded domain;
- those for the assignment of ID codes;
- those for each entry in a coded domain for the IT-interface and HIEs;
- those for the assignment of unique and unambiguous identifiers for both (1) a coded domain; and, (2) each entry or member of a coded domain;
- those for mandatory and conditional data elements, (e.g., “columns”) for each member, i.e., “row” as an entry in a coded domain;
- etc.

C.2.2 “coded domain Source Authority (cdSA)” and “Source Authority (SA)”

A “Source Authority” is a generic concept and pertains to a Person in the role of the authoritative source for a set of “constraints” which itself is a defined concept [D041].

Constraints themselves are “explicitly stated rules that prescribe, limit, govern or specify...”. These are not only constraints of an external nature, i.e., external constraints [D098], but also internal constraints. [D119]

Source authorities are different in nature and levels of authority. A Source Authority can be:

⁷⁷ For additional information on the development work by ISO/IEC JTC1/SC32/WG1 approach to the development of this concept and its definition, see JTC1/SC32/WG1 document N0431, N0432. Their titles are listed in the Bibliography.

⁷⁸ The ISO/IEC definition of the concept of IT system [D118] also incorporates the behaviour of “autonomous whole”. Also the “autonomy” is a key principle in Open-edi.

- (1) this standard itself;
- (2) another ISO standard;
- (3) a jurisdictional domain at whatever level of authority. {See further Clause 7 in ISO/IEC 15944-5}
- (4) an international organization recognized as a “global” Source Authority, (e.g., the International Chamber of Commerce (ICC) for “INCOTERMS, WCO for “Harmonized System, ITATA, IMO.

Most of the sets of “codes representing X”, i.e., a “code set” are not IT-enabled. They contain entries as members which have a different property or behaviour than the majority of members and overall criteria for membership in that code set, i.e., that are not members of the same object class. This is not a problem for the Source Authority as its members and participants in the specific industry sector for which it was created and maintained are fully aware of such idiosyncrasies and have dealt with these in their own IT systems and related EDI.

A coded domain Source Authority (cdSA) is the entity which sets the rules governing a coded domain, i.e., applies the rules and guidelines of Part 10 to a code set so that it is transformed into an IT-enabled coded domain with unambiguous semantic components so as to be able to support computational integrity.

After a cdSA is the Source Authority itself or it can be another Person. At times, another organization functions as the Registration Authority and code set “manager”.

A cdSA is the Person which transforms the code set of a SA into an IT-enabled ISO/IEC 15944-10 “coded domain” where:

- 1) all the rules for the SA for the code set are explicitly stated,
- 2) all the entries in the code set are tagged as being a member of one or the distinct object classes forming code set, (e.g., via a qualifier data element code set such as: (a) codes representing types of currencies and funds listed in ISO 4217; or (b) coded representing types of countries and other political entities listed in ISO 3166-1.

The cdSA does so in the development and completion of the “coded domain specification template” as well as the associated development and issuance of a “matrix” containing the IT-enabled coded domain.

C.2.3 “entity” [D093]

The ISO/IEC definition of the concept “entity” is well established and widely used. From an Open-edi perspective in the context of the business transaction model the fundamental key components for:

- Person;
- process; and,
- data

ISO/IEC 15944-1 identified three sub-types of Person namely, individual, organizations and public administrations. Here Part 1 also identified existing “coded domains” for the identification and registration of Persons in the form of ISO standards:

- ISO/IEC 6532 for organization; {see Annex D.4.2.2 in Part 1}
- ISO/IEC 7812 for individuals, organizations and public administrations; and, {See Annex D.4.2.5 in Part 1}
- ISO/IEC 7501 for individuals. {see Annex D.4.2.3 in Part 1}

With respect to “process”, the links to coded domains are those of scenarios and rules.

[Note: This needs to be investigated and developed further]

With respect to “data” (and data element), numerous “sets of codes representing XYZ” exist which are already or can be/should be transformed into IT-enabled domains.

Examples already identified here and used in Open-edi standards development work as potential coded domains include: {See Annex A in ISO/IEC 15944-7 for the complete titles and reference for the examples provided here}

ISO Standards	Short Title
ISO 639-2	Language codes – 3-alpha (2T)
ISO 3166-1	Country codes
ISO 3166-2	Country sub-divisions
ISO 3166-3	Country codes formerly used
ISO 4217	Codes for currencies and funds
ISO/IEC 5218	Codes for the human sexes
ISO/IEC 6523-1 & 2	Identification and registration of organizations and organization parts
ISO/IEC 7501-1, 2 -3	Passport & visas – identification of individuals
ISO/IEC 7812-1 & 2	Identification cards (Persons as individuals, organizations or public administrations)

C.2.4 “ID code” [D109]

The concept of ID code was introduced in ISO/IEC 15944-2 where it was noted that most ID codes are of the nature of “composite identifiers [D040] uses as IT-interface equivalents [D124] with one or more Human Interface Equivalents (HIEs) [D107]. Then, in the context of ISO/IEC 15944-5 (which focused on jurisdictional domains as sources of external constraints) the concepts of IT-enablement [D123] was defined.

Key rules embedded in the definition of ID code and its Notes include:

- (1) it is a code assigned to a member of coded domain (in conformance to the rulebase governing membership in that coded domain) by the cdSA;
- (2) any ID code shall be unique within the Registration Schema (RS) of that coded domain. This implies that the RS also has an identifier which is unique and unambiguous;
- (3) associated with an ID code for a member in a coded domain can be one or more equivalent codes. Here ISO 3166 provides a widely known common example;

{See further in ISO/IEC 15944-5,

 - Annex D (normative) – Unambiguous semantic components and jurisdictional domains: Standard default codes for the identification, interworking and referencing of combinations of codes representing countries, languages and currencies
 - Annex E (informative) Codes representing UN member states and their official (or de facto languages); and,
 - Annex J (informative) Coded domain for non-UN member states listed in ISO 3166-1}
- (4) where more than one equivalent ID code exists, one of them shall be declared as the pivot ID code” {See further 3.148} This should not impact the multiple HIEs which may exist for that entry in the coded domain for that ID code.
- (5) an ID code shall have at least one Human Interface Equivalent (HIE) representation. It may have (many) more HIEs. (For example of multiple HIEs for an ID code (IT interface equivalent) see Annex A in ISO/IEC 5218 “Codes representing the human sexes”.
- (6) Quite often existing (widely) used code sets, including ISO standards include entries with accompanying ID codes which are not members as peer entities, i.e., are not members of the same object class. A prime example here is ISO 3166-1.

Another type of an example is the code set which is “non exhaustive”, i.e., it allows for “other” “user extensions” (registered or, most often non-registered) and doing so in a non-IT-enabled and unambiguous manner.

C.2.5 “registration schema” [D224]

The concept and definition of “Registration Schema” was introduced in ISO/IEC 15944-1. Basically, it involves a formal definition of the set of rules, (e.g., as explicitly stated in an ISO standard or document similar in nature) governing the entry in the data fields (or sub fields), a.k.a., data elements of the permitted content values for an entity as a member of that registration schema.

Here it is assumed that there is a minimum set of common rules and best practices for the establishment, registration, (change) management, etc., for any entry representing an entity as an (object class) member in that RS, (e.g., as an instantiation).

Here it is also assumed that a Registration Schema (RS) is managed and maintained as a table or matrix either on a simple 2-dimensional XY axis, or if repeatable fields or sub-fields, are involved, on a XYZ axis.

It is also assumed that each member in a Registration Schema is represented as a “row” in that RS with the row entry containing all the mandatory, conditional, and optional data elements for which the permitted content values are governed by rules which may include reference to code sets which in Open-edi context would be Part 10 compliant “coded domains”. Here Part 2 of ISO/IEC 15944 addresses registration aspects of business objects.

C.3 Analysis of ISO/IEC concepts and definitions used in the NOTES to the definition of “coded domain”

The definition for “coded domain” includes a number of “NOTES”. These NOTES summarize and incorporate other relevant concepts. They also encapsulate rules albeit in an implicit manner.

The added concepts found in the NOTES are:

- coded Domain Registration Schema;
- jurisdictional domain
- dataset
- data element
- Human Interface Equivalent (HIE)
- object class.

In addition, many of the NOTES contain “rules” governing key properties and/or behaviours of a coded domain. These need to be captured and stated explicitly in Part 10 (at times with its own sub-clause).

Annex D (informative)

Case Study: Example of “e-potato”

The purpose of this informative Annex⁷⁹ is two-fold; namely:

- 1) to demonstrate that there exists “sets of codes representing X” which are widely used in both a manual world of paper documents as well as in Open-edi among ID systems of parties in a business transaction. The example presented here is based on the “Harmonized System” nomenclature of the World Customs Organization (WCO)⁸⁰;
- 2) to serve as an example of a single ID code in a coded domain having multiple different Human Interface Equivalents (HIEs) not only among jurisdictional domains, but in particular:
 - a) more than one HIE in a single jurisdictional domain; and,
 - b) more than one and different (official) HIEs in the same (ISO 639-2) language codes as applied and used in that language by differing jurisdictional domains.

As a coded domain, the Harmonized System (HS) of the WCO provides a (complete) set of predefined ID codes for use by all its WCO members (as well as others).

The example presented below demonstrates that:

- 1) a jurisdictional domain, in this case a country (as a UN member state) may well have and does have two or more (official) languages of use and thus multiple HIEs for the same ID code; and,
- 2) there are differences in the use of the same natural language (identified as per ISO 639-2 3-alpha code) among jurisdictional domains who share the “same” natural language as their “official” language.

This classification system applies to the movement of all goods in and out, i.e. anything imported or exported, among its signatory member jurisdictional domains, i.e. essentially UN member states, but some other categories of jurisdictional domains as well. The HS as a classification system imbeds a coded domain with the ID codes being pre-assigned and structured in a hierarchical manner based on the rulebase of the WCO governing this coded domain.

As a coded domain, the Harmonized System (HS) of the WCO thus provides predefined ID codes for all its member entities which goods of whatever nature being imported and exported among it the jurisdictional domains who are members of the WCO.

It is noted that many classification systems, especially those which are utilized world-wide and/or have status of a jurisdictional domain nature, i.e. the role and stature of the (international) organization which is the Source Authority for the classification system and the use of the ID codes of its coded domain(s) is acknowledged by UN member states.

⁷⁹ This example was first introduced and used as Annex I (informative) in ISO/IEC 15944-5. It is presented here from a coded domain context perspective.

⁸⁰ The Harmonized System (HS) applies to the classification and coding of the movement of goods in and out (e.g., imports and exports) of jurisdictional domains which are members of the World Customs Organization (WCO). It is a coding system consisting of a high-level coded domain and sub-domains in the form of a tier-structured, block-numeric for assignment of ID codes for its entries. The rulebase for the HS and its maintenance is governed by “The International Convention on the Harmonized Commodity and Coding System” of the WCO. {See http://www.wcoomd.org/home_hsoverviewboxes_hsharmonizedsystem.htm }

For example, the IT Interface value (which likely will also serve in any actualized international business transaction as the instantiated value of a semantic component (SC) of the item referenced) utilized in this Annex is that for "potato" (fresh or chilled). Fresh or chilled potatoes have been assigned the ID code in the HS of "0701". The human interface equivalents are many and take into account the (official or de facto languages) of jurisdictional domains yielded the following example:

Table D.1 — Illustrating IT Interfaces and different HIEs using the WCO HS code for “potato”

Common IT Interface			Human Interface Equivalent	
Code ID	Country Code – UN 3-digit numeric ID code & Short Name (eng) Equivalent		Localization and Multilingual Equivalents (ISO 639-2/T 3-alpha code + HIE term in the official languages in use in that country)	
HS:0701	124 CANADA		(eng):	potato
			(fra):	pomme de terre
			(iku):	patiti ⁸¹
HS:0701	464 MEXICO		(spa):	papa
HS:0701	724 SPAIN		(spa):	patata
HS:0701	040 AUSTRIA		(deu):	erdapfel
HS:0701	276 GERMANY		(deu):	kartoffel
HS:0701	056 BELGIUM		(fra):	pomme de terre
			(nld):	aardappel
HS:0701	246 FINLAND		(fin):	peruna
			(swe):	potatis

The example presented above therefore demonstrates:

- a jurisdictional domain, in this case a country (as UN member state), having more than one (official) language of use and thus multilingual HIEs; and,
- differences in the uses of the same natural language in various countries and thus different multilingual HIEs within a natural language as used in various jurisdictional domains.

Since “potato” is a very common object which recognized world-wide. Thus Annex D therefore serves as a good analogy.

⁸¹ Inuktitut is an official language only in the “Territory of Nunavut”, an administrative sub-division in Canada. The example here uses the Latin-1 alphabet and not the syllabic one.

Annex E (informative)

Case study: Example of a coded domain with two writing systems for Human Interface Equivalents (HIEs) of a set of ID codes - in Russian use of the Cyrillic alphabet and the romanized form

This is an “informative” Annex. Its purpose is that of an example. There are a number of languages for which more than one writing system exists for the words used in that language. That is, although the words are pronounced the same and the verbal use of these words is the same, two different writing systems are used.

This has a result that in the same language the same semantic is represented in written form in the same language with two differing representation of the same. The example presented here is that of the Russian language which in its use utilized both the Russian Cyrillic alphabet and well as the romanized form. The examples provided here are in the form of an extract from Annex E of existing ISO/IEC 15944-7:2008. The two tables of interest here are:

- a) Table E.4 eBusiness Vocabulary terms in Russian Cyrillic alphabetic order; and,
- b) Table E.6 eBusiness Vocabulary terms in Russian Romanized alphabetic order.

Extract from ISO/IEC 15944-7 “Annex E.3 List of eBusiness Vocabulary in ISO Russian alphabetical order – Cyrillic alphabet.

The purpose of Annex E.3 is to present the terms of the consolidated eBusiness vocabulary in alphabetical order based on the use of the Cyrillic alphabet for the Russian language. This will facilitate the identification of terms representing the definitions of concepts in the Russian language.

The following matrix presents the eBusiness terms in Russian alphabetical order consisting of three columns where:

Table E.3 — Use of Columns in Table E.4

Column	Use
1	The internal eBusiness vocabulary ID number which is the unique ID assigned to each entry in the Consolidated eBusiness vocabulary in the format Dnnn.
2	the ISO Russian term (including the abbreviation where applicable)
3	the ISO English term (including the abbreviation where applicable)