
**Information technology — Programming
languages — COBOL**

Technologies de l'information — Langues de programmation — COBOL

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

© ISO/IEC 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

Contents	iii
Tables	xvii
Figures	xviii
Foreword	xix
Introduction	xx
1 Scope	1
2 Normative references	2
3 Conformance to this International Standard	3
3.1 A conforming implementation	3
3.1.1 Acceptance of standard language elements	3
3.1.2 Interaction with non-COBOL runtime modules	3
3.1.3 Interaction between COBOL implementations	3
3.1.4 Implementor-defined language elements	3
3.1.5 Processor-dependent language elements	4
3.1.6 Reserved words	4
3.1.7 Standard extensions	4
3.1.8 Nonstandard extensions	4
3.1.9 Substitute or additional language elements	5
3.1.10 Archaic language elements	5
3.1.11 Obsolete language elements	5
3.1.12 Externally-provided functionality	5
3.1.13 Limits	6
3.1.14 User documentation	6
3.1.15 Character substitution	6
3.2 A conforming compilation group	6
3.3 A conforming run unit	6
3.4 Relationship of a conforming compilation group to a conforming implementation	7
3.5 Relationship of a conforming run unit to a conforming implementation	7
4 Terms and Definitions	8
5 Description techniques	17
5.1 General formats	17
5.1.1 Keywords	17
5.1.2 Optional words	17
5.1.3 Operands	17

5.1.4 Level numbers	18
5.1.5 Options	18
5.1.5.1 Brackets	18
5.1.5.2 Braces	18
5.1.5.3 Choice indicators	18
5.1.6 Ellipses	18
5.1.7 Punctuation	19
5.1.8 Special characters	19
5.1.9 Meta-terms	19
5.2 Rules	19
5.2.1 Syntax rules	19
5.2.2 General rules	19
5.2.3 Argument rules	19
5.2.4 Returned value rules	19
5.3 Arithmetic expressions	20
5.3.1 Textually subscripted operands	20
5.3.2 Ellipses	20
5.4 Integer operands	20
5.5 Informal description	20
5.6 Hyphens in text	21
5.7 Verbal forms for the expression of provisions	21
6 Reference format	22
6.1 Indicators	22
6.1.1 Fixed indicators	22
6.1.2 Floating indicators	23
6.2 Fixed-form reference format	24
6.3 Free-form reference format	26
6.4 Logical conversion	28
7 Compiler directing facility	29
7.1 Text manipulation	29
7.1.1 Text manipulation elements	30
7.1.2 COPY statement	32
7.1.3 REPLACE statement	36
7.2 Compiler directives	40
7.2.4 Conditional compilation	41
7.2.5 Compile-time arithmetic expressions	41
7.2.6 Compile-time boolean expressions	41
7.2.7 Constant conditional expression	42
7.2.8 CALL-CONVENTION directive	44
7.2.9 DEFINE directive	45
7.2.10 EVALUATE directive	46
7.2.11 FLAG-85 directive	49
7.2.12 FLAG-NATIVE-ARITHMETIC directive	51
7.2.13 IF directive	52

7.2.14 LEAP-SECOND directive	53
7.2.15 LISTING directive	54
7.2.16 PAGE directive	55
7.2.17 PROPAGATE directive	56
7.2.18 SOURCE FORMAT directive	57
7.2.19 TURN directive	58
8 Language fundamentals	59
8.1 Character sets	59
8.1.1 Computer's coded character set	59
8.1.2 COBOL character repertoire	60
8.1.3 Alphabets	62
8.1.4 Collating sequences	63
8.2 Locales	64
8.2.1 Locale field names	65
8.3 Lexical elements	66
8.3.1 Character-strings	66
8.3.1.1 COBOL words	66
8.3.1.2 Literals	74
8.3.1.3 Picture character-strings	81
8.3.2 Separators	81
8.4 References	83
8.4.1 Uniqueness of reference	83
8.4.1.1 Qualification	83
8.4.1.2 Subscripts	85
8.4.2 Identifiers	87
8.4.2.1 Identifier	87
8.4.2.2 Function-identifier	89
8.4.2.3 Reference-modification	92
8.4.2.4 Inline method invocation	94
8.4.2.5 Object-view	95
8.4.2.6 EXCEPTION-OBJECT	95
8.4.2.7 NULL	96
8.4.2.8 SELF and SUPER	96
8.4.2.9 Object property	97
8.4.2.10 Predefined-address	98
8.4.2.11 Data-address-identifier	99
8.4.2.12 Program-address-identifier	99
8.4.2.13 LINAGE-COUNTER	100
8.4.2.14 Report counters	100
8.4.3 Condition-name	101
8.4.4 Explicit and implicit references	102
8.4.5 Scope of names	102
8.4.5.1 Local and global names	103
8.4.5.2 Scope of program-names	104
8.4.5.3 Scope of class-names and interface-names	105

8.4.5.4 Scope of method-names	105
8.4.5.5 Scope of function-prototype-names	105
8.4.5.6 Scope of user-function-names	105
8.4.5.7 Scope of program-prototype-names	106
8.4.5.8 Scope of compilation-variable-names	106
8.4.5.9 Scope of parameter-names	106
8.4.5.10 Scope of property-names	106
8.5 Data description and representation	107
8.5.1 Computer independent data description	107
8.5.1.1 Files and records	107
8.5.1.2 Levels	107
8.5.1.3 Limitations of character handling	108
8.5.1.4 Algebraic signs	108
8.5.1.5 Alignment of data items in storage	109
8.5.1.5.1 Alignment of alphanumeric groups and of data items of usage display	109
8.5.1.5.2 Alignment of data items of usage national	109
8.5.1.5.3 Alignment of data items of usage bit	109
8.5.1.5.4 Item alignment for increased object-code efficiency	110
8.5.2 Class and category of data items and literals	110
8.5.3 Types	113
8.5.3.1 Weakly-typed items	114
8.5.3.2 Strongly-typed group items	114
8.5.4 Zero-length items	114
8.6 Scope and life cycle of data	115
8.6.1 Global names and local names	115
8.6.2 External and internal items	115
8.6.3 Automatic, initial, and static internal items	115
8.6.4 Based entries and based data items	116
8.6.5 Common, initial, and recursive attributes	117
8.6.6 Sharing data items	117
8.7 Operators	118
8.7.1 Arithmetic operators	118
8.7.2 Boolean operators	118
8.7.3 Concatenation operator	118
8.7.4 Invocation operator	118
8.7.5 Relational operators	118
8.7.6 Logical operators	119
8.8 Expressions	120
8.8.1 Arithmetic expressions	120
8.8.2 Boolean expressions	124
8.8.3 Concatenation expressions	125
8.8.4 Conditional expressions	126
8.9 Reserved words	138
8.10 Context-sensitive words	141
8.11 Intrinsic function names	143
8.12 Compiler-directive words	144

8.13 External repository	145
9 I-O, objects, and user-defined functions	146
9.1 Files	146
9.1.1 Physical and logical files	146
9.1.2 Record area	146
9.1.3 File connector	146
9.1.4 Open mode	147
9.1.5 Sharing file connectors	147
9.1.6 Fixed file attributes	147
9.1.7 Organization	147
9.1.7.1 Sequential	147
9.1.7.2 Relative	148
9.1.7.3 Indexed	148
9.1.8 Access modes	148
9.1.8.1 Sequential access mode	149
9.1.8.2 Random access mode	149
9.1.8.3 Dynamic access mode	149
9.1.9 Reel and unit	149
9.1.10 Current volume pointer	149
9.1.11 File position indicator	149
9.1.12 I-O status	150
9.1.13 Invalid key condition	154
9.1.14 Sharing mode	155
9.1.15 Record locking	156
9.1.16 Sort file	157
9.1.17 Merge file	157
9.1.18 Dynamic file assignment	157
9.1.19 Report file	157
9.2 Screens	158
9.2.1 Terminal screen	158
9.2.2 Function keys	158
9.2.3 CRT status	158
9.2.4 Cursor	159
9.2.5 Cursor locator	159
9.2.6 Current screen item	160
9.2.7 Color number	160
9.3 Objects	161
9.3.1 Objects and classes	161
9.3.2 Object references	161
9.3.3 Predefined object references	161
9.3.4 Methods	161
9.3.5 Method invocation	161
9.3.6 Method prototypes	162
9.3.7 Conformance and interfaces	162
9.3.8 Polymorphism	165

9.3.9 Class inheritance	165
9.3.10 Interface inheritance	165
9.3.11 Interface implementation	166
9.3.12 Parameterized classes	166
9.3.13 Parameterized interfaces	166
9.3.14 Object life cycle	166
9.4 User-defined functions	167
10 Structured compilation group	168
10.1 Compilation units and runtime modules	168
10.2 Source units	168
10.3 Contained source units	168
10.4 Source elements and runtime elements	169
10.5 COBOL compilation group	169
10.5.1 General format	169
10.5.2 Syntax rules	172
10.5.3 General rules	173
10.6 End markers	174
11 Identification division	175
11.1 Identification division structure	175
11.2 CLASS-ID paragraph	176
11.3 FACTORY paragraph	178
11.4 FUNCTION-ID paragraph	179
11.5 INTERFACE-ID paragraph	180
11.6 METHOD-ID paragraph	181
11.7 OBJECT paragraph	183
11.8 OPTIONS paragraph	184
11.8.4 ARITHMETIC clause	184
11.8.5 ENTRY-CONVENTION clause	185
11.9 PROGRAM-ID paragraph	186
12 Environment division	188
12.1 Environment division structure	188
12.2 Configuration section	189
12.2.4 SOURCE-COMPUTER paragraph	190
12.2.5 OBJECT-COMPUTER paragraph	191
12.2.6 SPECIAL-NAMES paragraph	194
12.2.7 REPOSITORY paragraph	204
12.3 Input-output section	209
12.3.3 FILE-CONTROL paragraph	210
12.3.4 File control entry	210
12.3.4.4 ACCESS MODE clause	216
12.3.4.5 ALTERNATE RECORD KEY clause	217
12.3.4.6 COLLATING SEQUENCE clause	218
12.3.4.7 FILE STATUS clause	220

12.3.4.8 LOCK MODE clause	221
12.3.4.9 ORGANIZATION clause	223
12.3.4.10 PADDING CHARACTER clause	224
12.3.4.11 RECORD DELIMITER clause	225
12.3.4.12 RECORD KEY clause	226
12.3.4.13 RELATIVE KEY clause	227
12.3.4.14 RESERVE clause	228
12.3.4.15 SHARING clause	229
12.3.5 I-O-CONTROL paragraph	230
12.3.6 SAME clause	230
13 Data division	232
13.1 Data division structure	232
13.2 Explicit and implicit attributes	232
13.3 File section	233
13.3.4 File description entry	234
13.3.5 Sort-merge file description entry	237
13.4 Working-storage section	238
13.5 Local-storage section	239
13.6 Linkage section	240
13.7 Report section	242
13.7.3 Report description entry	242
13.7.4 Report group description entry	242
13.7.5 Report subdivisions	242
13.8 Screen section	244
13.9 Constant entry	245
13.10 Record description entry	247
13.11 77-level data description entry	248
13.12 Report description entry	248
13.13 Report group description entry	249
13.14 Data description entry	251
13.15 Screen description entry	255
13.16 Data division clauses	259
13.16.1 ALIGNED clause	259
13.16.2 ANY LENGTH clause	260
13.16.3 AUTO clause	261
13.16.4 BACKGROUND-COLOR clause	262
13.16.5 BASED clause	263
13.16.6 BELL clause	264
13.16.7 BLANK clause	265
13.16.8 BLANK WHEN ZERO clause	266
13.16.9 BLINK clause	267
13.16.10 BLOCK CONTAINS clause	268
13.16.11 CLASS clause	269
13.16.12 CODE clause	270
13.16.13 CODE-SET clause	271

13.16.14 COLUMN clause	273
13.16.15 CONTROL clause	277
13.16.16 DEFAULT clause	279
13.16.17 DESTINATION clause	280
13.16.18 Entry-name clause	281
13.16.19 ERASE clause	282
13.16.20 EXTERNAL clause	283
13.16.21 FOREGROUND-COLOR clause	284
13.16.22 FORMAT clause	285
13.16.23 FROM clause	288
13.16.24 FULL clause	289
13.16.25 GLOBAL clause	290
13.16.26 GROUP INDICATE clause	291
13.16.27 GROUP-USAGE clause	292
13.16.28 HIGHLIGHT clause	293
13.16.29 INVALID clause	294
13.16.30 JUSTIFIED clause	295
13.16.31 Level-number	296
13.16.32 LINAGE clause	297
13.16.33 LINE clause	299
13.16.34 LOWLIGHT clause	303
13.16.35 NEXT GROUP clause	304
13.16.36 OCCURS clause	306
13.16.37 PAGE clause	311
13.16.38 PICTURE clause	313
13.16.39 PRESENT WHEN clause	328
13.16.40 PROPERTY clause	330
13.16.41 RECORD clause	333
13.16.42 REDEFINES clause	336
13.16.43 RENAMES clause	338
13.16.44 REPORT clause	339
13.16.45 REQUIRED clause	340
13.16.46 REVERSE-VIDEO clause	341
13.16.47 SAME AS clause	342
13.16.48 SECURE clause	344
13.16.49 SELECT WHEN clause	345
13.16.50 SIGN clause	346
13.16.51 SOURCE clause	347
13.16.52 SUM clause	348
13.16.53 SYNCHRONIZED clause	351
13.16.54 TO clause	353
13.16.55 TYPE clause	354
13.16.56 TYPEDEF clause	359
13.16.57 UNDERLINE clause	360
13.16.58 USAGE clause	361
13.16.59 USING clause	366

13.16.60 VALIDATE-STATUS clause	367
13.16.61 VALUE clause	369
13.16.62 VARYING clause	375
14 Procedure division	377
14.1 Procedure division structure	377
14.2 Declaratives	381
14.3 Procedures	381
14.3.1 Sections	381
14.3.2 Paragraphs	381
14.4 Procedural statements and sentences	382
14.4.1 Conditional phrase	384
14.4.2 Scope of statements	384
14.5 Execution	385
14.5.1 Run unit organization	385
14.5.2 State of a function, method, object, or program	385
14.5.3 Explicit and implicit transfers of control	387
14.5.4 Item identification	388
14.5.5 Results of runtime element execution	388
14.5.6 Locale identification	388
14.5.7 Sending and receiving operands	389
14.5.8 Alignment of data within data items	389
14.5.9 Overlapping operands	390
14.5.10 Normal run unit termination	390
14.5.11 Abnormal run unit termination	391
14.5.12 Condition handling	391
14.6 Common phrases and features for statements	399
14.6.1 At end condition	399
14.6.2 Invalid key condition	399
14.6.3 ROUNDED phrase	399
14.6.4 SIZE ERROR phrase and size error condition	399
14.6.5 CORRESPONDING phrase	401
14.6.6 Arithmetic statements	401
14.6.7 THROUGH phrase	402
14.6.8 RETRY phrase	403
14.7 Conformance for parameters and returning items	404
14.7.1 Parameters	404
14.7.2 Returning items	407
14.8 Statements	409
14.8.1 ACCEPT statement	409
14.8.2 ADD statement	415
14.8.3 ALLOCATE statement	418
14.8.4 CALL statement	420
14.8.5 CANCEL statement	426
14.8.6 CLOSE statement	428
14.8.7 COMPUTE statement	431

14.8.8 CONTINUE statement	432
14.8.9 DELETE statement	433
14.8.10 DISPLAY statement	435
14.8.11 DIVIDE statement	438
14.8.12 EVALUATE statement	441
14.8.13 EXIT statement	446
14.8.14 FREE statement	450
14.8.15 GENERATE statement	451
14.8.16 GO TO statement	453
14.8.17 GOBACK statement	454
14.8.18 IF statement	455
14.8.19 INITIALIZE statement	457
14.8.20 INITIATE statement	461
14.8.21 INSPECT statement	462
14.8.22 INVOKE statement	468
14.8.23 MERGE statement	472
14.8.24 MOVE statement	477
14.8.25 MULTIPLY statement	482
14.8.26 OPEN statement	484
14.8.27 PERFORM statement	489
14.8.28 RAISE statement	495
14.8.29 READ statement	496
14.8.30 RELEASE statement	503
14.8.31 RESUME statement	504
14.8.32 RETURN statement	505
14.8.33 REWRITE statement	507
14.8.34 SEARCH statement	512
14.8.35 SET statement	516
14.8.36 SORT statement	524
14.8.37 START statement	531
14.8.38 STOP statement	535
14.8.39 STRING statement	536
14.8.40 SUBTRACT statement	539
14.8.41 SUPPRESS statement	542
14.8.42 TERMINATE statement	543
14.8.43 UNLOCK statement	544
14.8.44 UNSTRING statement	545
14.8.45 USE statement	549
14.8.46 VALIDATE statement	554
14.8.47 WRITE statement	558
15 Intrinsic functions	566
15.1 Types of functions	566
15.2 Arguments	566
15.3 Returned values	568
15.3.1 Numeric and integer functions	568

15.4 Date conversion functions	569
15.5 Summary of functions	569
15.6 ABS function	575
15.7 ACOS function	576
15.8 ANNUITY function	577
15.9 ASIN function	578
15.10 ATAN function	579
15.11 BOOLEAN-OF-INTEGERS function	580
15.12 BYTE-LENGTH function	581
15.13 CHAR function	582
15.14 CHAR-NATIONAL function	583
15.15 COS function	584
15.16 CURRENT-DATE function	585
15.17 DATE-OF-INTEGERS function	586
15.18 DATE-TO-YYYYMMDD function	587
15.19 DAY-OF-INTEGERS function	588
15.20 DAY-TO-YYYYDDD function	589
15.21 DISPLAY-OF function	590
15.22 E function	591
15.23 EXCEPTION-FILE function	592
15.24 EXCEPTION-FILE-N function	593
15.25 EXCEPTION-LOCATION function	594
15.26 EXCEPTION-LOCATION-N function	595
15.27 EXCEPTION-STATEMENT function	596
15.28 EXCEPTION-STATUS function	597
15.29 EXP function	598
15.30 EXP10 function	599
15.31 FACTORIAL function	600
15.32 FRACTION-PART function	601
15.33 HIGHEST-ALGEBRAIC function	602
15.34 INTEGER function	603
15.35 INTEGER-OF-BOOLEAN function	604
15.36 INTEGER-OF-DATE function	605
15.37 INTEGER-OF-DAY function	606
15.38 INTEGER-PART function	607
15.39 LENGTH function	608
15.40 LOCALE-COMPARE function	609
15.41 LOCALE-DATE function	610
15.42 LOCALE-TIME function	611
15.43 LOG function	612
15.44 LOG10 function	613
15.45 LOWER-CASE function	614
15.46 LOWEST-ALGEBRAIC function	615
15.47 MAX function	616
15.48 MEAN function	617
15.49 MEDIAN function	618

15.50 MIDRANGE function	619
15.51 MIN function	620
15.52 MOD function	621
15.53 NATIONAL-OF function	622
15.54 NUMVAL function	623
15.55 NUMVAL-C function	624
15.56 NUMVAL-F function	626
15.57 ORD function	627
15.58 ORD-MAX function	628
15.59 ORD-MIN function	629
15.60 PI function	630
15.61 PRESENT-VALUE function	631
15.62 RANDOM function	632
15.63 RANGE function	633
15.64 REM function	634
15.65 REVERSE function	635
15.66 SIGN function	636
15.67 SIN function	637
15.68 SQRT function	638
15.69 STANDARD-COMPARE function	639
15.70 STANDARD-DEVIATION function	640
15.71 SUM function	641
15.72 TAN function	642
15.73 TEST-DATE-YYYYMMDD function	643
15.74 TEST-DAY-YYYYDDD function	644
15.75 TEST-NUMVAL function	645
15.76 TEST-NUMVAL-C function	646
15.77 TEST-NUMVAL-F function	647
15.78 UPPER-CASE function	648
15.79 VARIANCE function	649
15.80 WHEN-COMPILED function	650
15.81 YEAR-TO-YYYY function	651
16 Standard classes	652
16.1 BASE class	652
16.1.1 New method	652
16.1.2 FactoryObject method	652
A Communications facility	654
A.1 Data division	655
A.2 Procedure division	667
A.2.1 ACCEPT MESSAGE COUNT statement	667
A.2.2 DISABLE statement	668
A.2.3 ENABLE statement	669
A.2.4 PURGE statement	670
A.2.5 RECEIVE statement	671

A.2.6 SEND statement	673
B Language element lists	677
B.1 Implementor-defined language element list	677
B.2 Undefined language element list	690
B.3 Processor-dependent language element list	696
C Characters permitted in user-defined words	698
C.1 Notation	698
C.2 Repertoire of characters permitted in user-defined words	698
D Mapping of uppercase letters to lowercase letters	701
D.1 Notations	701
D.2 Case mapping list	701
E Concepts	705
E.1 Files	705
E.2 Table handling	714
E.3 Shared memory area	720
E.4 Compilation group and run unit organization and communication	721
E.5 Communications facility	734
E.6 Intrinsic function facility	740
E.7 Debugging	742
E.8 Types	742
E.9 Addresses and pointers	745
E.10 Boolean support and bit manipulation	746
E.11 Character sets	750
E.12 Collating sequences	752
E.13 Culturally-specific, culturally-adaptable, and multilingual applications	756
E.14 External switches	761
E.15 Common exception processing	761
E.16 Standard arithmetic	763
E.17 Object oriented concepts	768
E.18 Report writer	785
E.19 Validate facility	792
E.20 Conditional expressions	796
E.21 Examples of the execution of the INSPECT statement	800
E.22 Examples of the execution of the PERFORM statement	803
E.23 Example of free-form reference format	807
E.24 Conditional compilation	808
E.25 CALL-CONVENTION directive	809
E.26 ENTRY-CONVENTION clause	809
F Substantive changes list	810
F.1 Substantive changes potentially affecting existing programs	810
F.2 Substantive changes not affecting existing programs	823

G Archaic and obsolete language element lists	833
G.1 Archaic language elements	833
G.2 Obsolete language elements	834
H Known errors in the standard	835
H.1 Rationale	835
H.2 List of errors	835
I Bibliography	836
Index	837

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

Tables

1 Verbal forms	21
2 COBOL character repertoire	61
3 Class and category relationships for elementary data items	111
4 Combinations of symbols in arithmetic expressions	120
5 Combination of symbols in boolean expressions	125
6 Combinations of conditions, logical operators, and parentheses	136
7 Relationship of alphabet-name to coded character set and collating sequence	199
8 Category and type of editing	321
9 Results of fixed insertion editing	322
10 Results of floating insertion editing	323
11 Format 1 picture symbol order of precedence	326
12 Format 2 picture symbol order of precedence	327
13 Procedural statements	382
14 Exception-names and exception conditions	394
15 Relationship of categories of physical files and the format of the CLOSE statement	428
16 Combination of operands in the EVALUATE statement	443
17 Validity of types of MOVE statements	478
18 Category of figurative constants used in the MOVE statement	481
19 Opening available and unavailable files (file not currently open)	485
20 Opening available shared files that are currently open by another file connector	485
21 Permissible I-O statements by access mode and open mode	486
22 Table of functions	570
A.1 Communication status key conditions	665
A.2 Error key values	666
A.3 SEND statement indicators	675
E.1 Summary of record lock acquisition and release	713
E.2 Examples of boolean operations	747

Figures

1 Fixed-form reference format	24
E.1 Format 1 SEARCH statement having two WHEN phrases	718
E.2 Compilation group sample structure example	722
E.3 Compilation group and run unit structures	723
E.4 COBOL communication environment	736
E.5 Hierarchy of queues	739
E.6 Manager class	773
E.7 Banking hierarchy	774
E.8 Example of page layout	786
E.9 Evaluation of the condition-1 AND condition-2 AND ... condition-n	796
E.10 Evaluation of the condition-1 OR condition-2 OR ... condition-n	797
E.11 Evaluation of condition-1 OR condition-2 AND condition-3	798
E.12 Evaluation of (condition-1 OR NOT condition-2) AND condition-3 AND condition-4	799
E.13 The VARYING option of a PERFORM statement with the TEST BEFORE phrase having one condition ...	803
E.14 The VARYING option of a PERFORM statement with the TEST BEFORE phrase having two conditions ..	804
E.15 The VARYING option of a PERFORM statement with the TEST AFTER phrase having one condition	805
E.16 The VARYING option of a PERFORM statement with the TEST AFTER phrase having two conditions	806

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International standards are drafted in accordance with the rules given in the ISO/IEC Directives, part 3.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 1989 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 22, *Programming languages, their environments and system software interfaces*.

This first edition of ISO/IEC 1989 cancels and replaces ISO 1989:1985, which has been technically revised. It incorporates Amd.1:1992 and Amd.2:1994. This edition introduces the following significant technical enhancements:

- features for object-oriented programming
- additional features for detection and reporting of exceptions
- a boolean data type for bit handling and boolean operations
- native binary and floating-point data types
- a national character data type for processing multiple-octet coded character sets
- cultural adaptability, multilingual features, and tailoring for a given local language or culture
- increased portability of arithmetic
- free-form source and library text
- compiler directives for portable specification of processing options
- conditional compilation
- an enhanced report writer
- features for data validation
- several enhancements to the CALL statement, including recursion
- improved interoperability with other programming languages
- user-defined functions
- a screen handling facility
- file sharing and record locking
- support for ISO/IEC 10646-1 and ISO/IEC 10646-2 for data interchange

A complete list of technical changes is given in Annex F.

Annexes A through D form a normative part of this International Standard. Annexes E through H are for information only.

Introduction

COBOL began as a business programming language, but its present use has spread well beyond that to a general-purpose programming language. COBOL is well known for its file handling capabilities, which are extended in this revision by the addition of file sharing and record locking capabilities. Other major enhancements add object-oriented capabilities, handling of national characters, and enhanced interoperability with other programming languages. Annex E, Concepts, includes an explanation of the major new features and is the suggested starting point for the reading of this document.

The previous revision of the COBOL standard was published in 1985 and extended by an amendment that added the Intrinsic Functions module in 1989 and a correction amendment in 1993. Implementors have provided language extensions in response to the demands of their users. Several changes and extensions have, therefore, been made to this revision in order to prevent further divergence, and to ensure consistency and coherence.

Development of the COBOL language began before the invention of formal techniques for specification of programming languages. Hence, the COBOL standard uses its own description techniques, which are described in 5, Description techniques. These techniques involve general formats, which describe the syntax, and natural language.

This revision is a result of the standardization efforts of working group ISO/IEC JTC 1/SC22/WG4 and technical committee J4, a subgroup of Accredited Standards Committee INCITS. During the development of this revision, great care was taken to minimize changes that would impact existing programs. Most substantive changes that potentially impact existing programs were introduced to resolve ambiguities in the previous revision. Details of the substantive changes are given in Annex F, Substantive changes list.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

Information technology — Programming languages — COBOL

1 Scope

This International Standard specifies the syntax and semantics of COBOL. Its purpose is to promote a high degree of machine independence to permit the use of COBOL on a variety of data processing systems.

This International Standard specifies:

- The form of a compilation group written in COBOL.
- The effect of compiling a compilation group.
- The effect of executing run units.
- The elements of the language for which a conforming implementation is required to supply a definition.
- The elements of the language for which meaning is explicitly undefined.
- The elements of the language that are dependent on the capabilities of the processor.

This International Standard does not specify:

- The means whereby a compilation group written in COBOL is compiled into code executable by a processor.
- The time at which method, function, or program runtime modules are linked or bound to an activating statement, except that runtime binding occurs of necessity when the identification of the appropriate program or method is not known at compile time.
- The time at which parameterized classes are expanded.
- The mechanism by which locales are defined and made available on a processor.
- The form or content of error, flagging, or warning messages.
- The form and content of listings produced during compilation, if any.
- The form of documentation produced by an implementor of products conforming to this International Standard.
- The sharing of resources other than files among run units.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 646, *Information technology — ISO 7-bit coded character set for information interchange*

ISO 1001:1986, *Information processing — File structure and labelling of magnetic tapes for information interchange*

ISO 8601:2000, *Data elements and interchange formats — Information interchange — Representation of dates and times*

ISO/IEC 9945-2:1993, *Information technology — Portable Operating System Interface (POSIX) — Part 2: Shell and Utilities*

ISO/IEC TR 10176:2001, *Information technology — Guidelines for the preparation of programming language standards*

ISO/IEC 10646-1, *Information technology — Universal Multiple-Octet Coded Character Set (UCS) — Part 1: Architecture and Basic Multilingual Plane*

ISO/IEC 10646-2, *Information technology — Universal Multiple-Octet Coded Character Set (UCS) — Part 2: Supplementary Planes*

ISO/IEC 14651:2001, *Information technology — International string ordering and comparison — Method for comparing character strings and description of the common template tailorable ordering (including AMD1)*

ISO/IEC TR 14652:—¹⁾, *Information technology — Specification method for cultural conventions*

1) To be published.

3 Conformance to this International Standard

Clause 3 specifies requirements that an implementation shall fulfill in order to conform to this International Standard and defines the conditions under which a compilation group or run unit conforms in its use of standard features.

3.1 A conforming implementation

To conform to this International Standard, an implementation of standard COBOL shall provide the normative elements specified in 6, Reference format through 16, Standard classes, and meet the criteria of 3.1.1 through 3.1.15.

An implementation may optionally provide the elements specified in Annex A, Communications facility.

3.1.1 Acceptance of standard language elements

An implementation shall accept the syntax and provide the functionality for all standard language elements required by this International Standard and the optional or processor-dependent language elements for which support is claimed.

An implementation shall provide a warning mechanism that optionally can be invoked by the user at compile time to indicate violations of the general formats and the explicit syntax rules of standard COBOL. This warning mechanism shall provide a suboption for selection or suppression of checking for violations of the set of conformance rules specified in 14.7, Conformance for parameters and returning items, and in 9.3.7.1.2, Conformance between interfaces.

There are rules in standard COBOL that are not identified as general formats or syntax rules, but nevertheless specify elements that are syntactically distinguishable. This warning mechanism shall indicate violations of such rules. For elements not specified in general formats or in explicit syntax rules, it is left to the implementor's judgement to determine what is syntactically distinguishable.

There are general rules in standard COBOL that could have been classified as syntax rules. These rules are classified as general rules for the purpose of avoiding syntax checking, and do not reflect errors in standard COBOL. An implementation may, but is not required to, flag violations of such rules.

3.1.2 Interaction with non-COBOL runtime modules

Facilities are provided in this specification that enable transfer of control and sharing of external items between COBOL runtime modules and non-COBOL runtime modules. No requirement is placed on an implementation to support this interaction. When supported, an implementor shall document the languages and the implementations supported.

3.1.3 Interaction between COBOL implementations

Facilities are provided in this specification that enhance the capability of transferring control and sharing external items between COBOL runtime elements translated on COBOL implementations produced by different implementors. No requirement is placed on an implementation to support this interaction. When supported, an implementor shall document the implementations supported.

3.1.4 Implementor-defined language elements

Language elements that depend on implementor definition to complete the specification of the syntax rules or general rules are listed in B.1, Implementor-defined language element list. To meet the requirements of standard COBOL, the implementor shall specify, at a minimum, the implementor-defined language elements that are identified as required. Each implementor-defined language element specified by the implementor shall be documented if the implementor-defined language element is identified as requiring user documentation.

An implementor shall not require the inclusion of non-standard language elements in a compilation group as part of the definition of an implementor-defined language element.

3.1.5 Processor-dependent language elements

Processor refers to the entire computing system that is used to translate compilation groups and execute run units, consisting of both hardware and relevant software. Language elements that depend on specific devices or on a specific processor capability, functionality, or architecture are listed in B.3, Processor-dependent language element list. To meet the requirements of standard COBOL, the implementor shall document the processor-dependent language elements for which the implementation claims support. Language elements that pertain to specific processor-dependent elements for which support is not claimed need not be implemented. The decision of whether to claim support for a processor-dependent language element is within an implementor's discretion. Factors that may be considered include, but are not limited to, hardware capability, software capability, and market positioning of the processor.

When standard-conforming support is claimed for a specific processor-dependent language element, all associated syntax and functionality required for that language element shall be implemented; when a subset of the syntax or functionality is implemented, that subset shall be identified as a standard extension in the implementor's user documentation. The absence of processor-dependent elements from an implementation shall be specified in the implementor's user documentation.

An implementation shall provide a warning mechanism at compile time to indicate use of syntactically-detectable processor-dependent language elements not supported by that implementation. Although this warning mechanism is required to identify processor-dependent elements that are not supported, it is not required to diagnose syntax errors within this unsupported syntax. The implementor is not required to produce executable code when unsupported processor-dependent language elements are used.

3.1.6 Reserved words

An implementation shall recognize as reserved words all the COBOL reserved words specified in 8.9, Reserved words; shall recognize in context all the context-sensitive words specified in 8.10, Context-sensitive words; and shall recognize in compiler directives all the compiler-directive reserved words specified in 8.12, Compiler-directive words.

3.1.7 Standard extensions

An implementor may claim support for all or a subset of the syntax and associated functionality of optional or processor-dependent elements. When an implementor claims support for a subset of the syntax, that syntax is a 'standard extension', provided that the associated functionality is that specified in this International Standard. If different functionality is provided, that syntax is a nonstandard extension.

3.1.8 Nonstandard extensions

Nonstandard extensions are language elements or functionality in an implementation that consist of any of the following:

- 1) documented language elements not defined in this International Standard;
- 2) language elements defined in this International Standard for which different functionality is implemented, where that language element is not required for conformance to this International Standard, and standard support for that element is not claimed by the implementor;
- 3) language elements defined in this International Standard for which different functionality is implemented, where that language element is required for conformance to this International Standard, provided that standard-conforming behavior is also implemented and that an implementor-defined mechanism exists for selection of the nonstandard behavior.

An implementation that introduces additional reserved words as nonstandard extensions conforms to this International Standard, even though the additional reserved words may prevent translation of some conforming compilation groups.

Documentation associated with an implementation shall identify nonstandard extensions for which support is claimed and shall specify any reserved words added for nonstandard extensions.

An implementation shall provide a warning mechanism that optionally can be invoked by the user at compile time to indicate use of a nonstandard extension in a compilation group. This warning mechanism is required to flag only extensions that are syntactically distinguishable.

3.1.9 Substitute or additional language elements

An implementation shall not require the inclusion of substitute or additional language elements in the compilation group in order to accomplish functionality specified for a standard language element.

3.1.10 Archaic language elements

Archaic language elements are those identified in G.1, Archaic language elements. Archaic language elements should not be used in new compilation groups because better programming practices exist. Because of widespread use, there is no schedule for deleting archaic elements from standard COBOL; however, this may be reevaluated for any future revisions of standard COBOL.

An implementation is required to support archaic language elements of the facilities for which support is claimed. Documentation associated with an implementation shall identify archaic language elements in the implementation.

An implementation shall provide a warning mechanism that optionally can be invoked by the user at compile time to indicate use of an archaic language element in a compilation group.

3.1.11 Obsolete language elements

Obsolete language elements are identified in G.2, Obsolete language elements. Obsolete language elements will be removed from the next revision of standard COBOL.

No language elements shall be deleted from the next revision of standard COBOL without having first been identified as obsolete in this International Standard.

An implementation is required to support obsolete language elements of the facilities for which support is claimed. Documentation associated with an implementation shall identify all obsolete language elements in the implementation.

An implementation shall provide a warning mechanism that optionally can be invoked by the user at compile time to indicate use of an obsolete element in a compilation group.

3.1.12 Externally-provided functionality

An implementation may require specifications outside the compilation group to interface with the operating environment to support functionality specified in a compilation group.

An implementation may require the presence in the operating environment of runtime modules or products in addition to the COBOL implementation to support syntax or functionality specified in a compilation group.

NOTE This permits an implementation to require components outside the COBOL implementation, such as pre-compilers, file systems, and sort products.

3.1.13 Limits

In general, standard COBOL specifies no upper limit on such things as the number of statements in a compilation group or the number of operands permitted in certain statements. A conforming implementation may place such limits. It is recognized that these limits will vary from one implementation of standard COBOL to another and may prevent the successful translation by a conforming implementation of some compilation groups that meet the requirements of standard COBOL.

3.1.14 User documentation

An implementation shall satisfy the user documentation requirements specified in 3.1.2, 3.1.3, 3.1.4, 3.1.5, 3.1.8, 3.1.10, and 3.1.11 by specification in at least one form of documentation. This may include, but is not limited to, hardcopy manuals, on-line documentation, and user help screens.

Documentation requirements may be met by reference to other documents, including those of the operating environment and other COBOL implementations.

3.1.15 Character substitution

The definition of the COBOL character repertoire in 8.1.2, COBOL character repertoire, presents the complete COBOL character repertoire for standard COBOL. When an implementation does not provide a graphic representation for all the basic characters of the COBOL character repertoire, substitute graphics may be specified by the implementor to replace the characters not represented.

3.2 A conforming compilation group

A conforming compilation group is one that does not violate the explicitly stated syntactic provisions and specifications of standard COBOL. In order for a compilation group to conform to standard COBOL, it shall not include any language elements not specified in this International Standard. A compilation group that uses elements that are optional, processor-dependent, or implementor-defined in this International Standard is a conforming compilation group, even on implementations where it does not compile successfully due to the use of those elements.

The compilation units contained in a conforming compilation group are conforming compilation units

3.3 A conforming run unit

A conforming run unit is one that:

- 1) is composed of one or more runtime modules, each resulting from a successful compilation of a conforming compilation unit, and
- 2) complies with the explicitly stated provisions and specifications of standard COBOL with respect to the runtime behavior of that run unit.

NOTE The inclusion of non-COBOL components in the run unit does not affect the conformance of the run unit.

The processing of a conforming run unit is predictable only to the extent defined in standard COBOL. The results of violating the formats or rules of standard COBOL are undefined unless otherwise specified in this International Standard.

Situations in which the results of executing a statement are explicitly undefined or unpredictable are identified in B.2, Undefined language element list. A COBOL run unit that allows these situations to happen is a conforming run unit, although the resultant execution is not defined by standard COBOL.

3.4 Relationship of a conforming compilation group to a conforming implementation

The translation of a conforming compilation group by a conforming implementation is defined only to the extent specified in standard COBOL. It is possible that a conforming compilation group will not be translated successfully. Translation may be unsuccessful due to factors other than lack of conformance of a compilation group.

NOTE These factors can include the use of optional, processor-dependent, or implementor-defined language elements and the limits of an implementation.

3.5 Relationship of a conforming run unit to a conforming implementation

The execution of a run unit composed of runtime modules resulting from translation of conforming compilation units is defined only to the extent specified in standard COBOL. It is possible that a conforming run unit will not execute successfully. Execution may be unsuccessful due to factors other than lack of conformance of a run unit.

NOTE These factors can include the logical incorrectness of the compilation units, errors in the data upon which the run unit operates, and the limits of an implementation.

4 Terms and Definitions

For the purposes of this International Standard, the following terms and definitions apply:

- 4.1 **absolute item:** An item in a report that has a fixed position on a page.
- 4.2 **activated runtime element:** A function, method, or program placed into the active state.
- 4.3 **activating statement:** A statement that causes the execution of a function, method, or program.
- 4.4 **activating runtime element:** The function, method, or program that executed a given activating statement.
- 4.5 **active state:** The state of a function, method, or program that has been activated but has not yet returned control to the activating runtime element.
- 4.6 **alphabetic character (in the COBOL character repertoire):** A basic letter or a space character.
- 4.7 **alphanumeric character:** Any coded character in an alphanumeric coded character set, whether or not there is an assigned graphic symbol for that coded character.
- 4.8 **alphanumeric character position:** The amount of physical storage required to store, or presentation space required to print or display, a single character of an alphanumeric character set.
- 4.9 **alphanumeric character set; alphanumeric coded character set:** See alphanumeric coded character set.
- 4.10 **alphanumeric coded character set; alphanumeric character set:** A coded character set that the implementor has designated for representation of data items of usage display and alphanumeric literals.
- 4.11 **alphanumeric group item:** Any group item except for:
- a strongly-typed group item
 - a bit group item
 - a national group item.
- 4.12 **argument:** An operand specified in an activating statement that specifies the data to be passed.
- 4.13 **assumed decimal point:** A decimal point position that does not involve the existence of an actual character in a data item. An assumed decimal point has logical meaning with no physical representation.
- 4.14 **based data item:** A data item established by association of a based entry with an actual data item or allocated storage.
- 4.15 **based entry:** A data description entry that serves as a template that is dynamically associated with data items or allocated storage.
- 4.16 **basic letter:** One of the uppercase letters 'A' through 'Z' and the lowercase letters 'a' through 'z' in the COBOL character repertoire.
- 4.17 **bit:** The smallest unit in a computer's storage structure capable of representing two distinct alternatives.
- 4.18 **bit data item:** An elementary data item of category boolean and usage bit or a bit group item.
- 4.19 **block; physical record:** A physical unit of data that is normally composed of one or more logical records.
- 4.20 **boolean character:** A unit of information that consists of the value zero or one. Each boolean character may be represented in storage as a bit, an alphanumeric character, or a national character.

- 4.21 **boolean data item:** A data item capable of containing a boolean value.
- 4.22 **boolean expression:** One or more boolean operands separated by boolean operators.
- 4.23 **boolean position:** The amount of physical storage required to store, or presentation space required to print or display, a single boolean character.
- 4.24 **boolean value:** A value consisting of a sequence of one or more boolean characters.
- 4.25 **byte:** A sequence of bits representing the smallest addressable character unit in the memory of a given computer.
- 4.26 **character (in a coded character set):** A code value that constitutes the coded representation of a letter, digit, symbol, control function, or other member of a set of elements used for the organization, control, or representation of data.

NOTE COBOL processes each code value in a coded character set as though it were a character.

- 4.27 **character (in a screen item):** A graphic character.
- 4.28 **character (in COBOL character repertoire); COBOL character:** A letter, digit, or special character, independent of its coded representation, that is used in formation of the words and separators of COBOL.
- 4.29 **character (in computer storage):** A single code value of a coded character set.
- 4.30 **character boundary:** The leftmost bit of an addressing boundary in the storage of the computer.
- 4.31 **character position:** The amount of physical storage required to store, or presentation space required to print or display, a single character -- either an alphanumeric character or a national character. One element of a coded character set occupies one character position.

NOTE As an example, each element of a combining sequence in the UCS occupies one character position. For a UTF-16 surrogate value, the left surrogate occupies one character position and the right surrogate occupies another character position.

- 4.32 **character-string:** A sequence of contiguous characters that form a COBOL word, a literal, or a picture character-string.
- 4.33 **class (in object orientation):** The entity that defines common behavior and implementation for zero, one, or more objects.
- 4.34 **class (of a data item):** A designation for a set of data items having common attributes or a common range of values, defined by the PICTURE clause, the USAGE clause, or the PICTURE and USAGE clauses in a data description entry, by the definition of a predefined identifier; or by the definition of an intrinsic function.
- 4.35 **class (of data values):** A designation for a set of data values that are permissible in the content of a data item.
- 4.36 **class definition (in object orientation):** A compilation unit that defines a class of objects.
- 4.37 **clause:** An ordered set of consecutive COBOL character-strings whose purpose is to specify an attribute of an entry.
- 4.38 **COBOL character; character (in COBOL character repertoire):** See character (in COBOL character repertoire).
- 4.39 **COBOL character repertoire:** The repertoire of characters used in writing the syntax of a COBOL compilation group, except for comments and the content of non-hexadecimal alphanumeric and national literals.

4.40 **coded character set:** A set of unambiguous rules that establishes a character set and the relationship between the characters of the set and their coded representation. [ISO/IEC 10646-1]

4.41 **combining character:** A UCS member that is intended for combination with the preceding non-combining graphic character or with a sequence of combining characters preceded by a non-combining character.

4.42 **common program:** A program that, despite being directly contained within another program, may be called from any program directly or indirectly contained in that other program.

4.43 **compilation group:** A sequence of one or more compilation units submitted together for compilation.

4.44 **compilation unit:** A source unit that is not nested within another source unit.

4.45 **composite sequence:** A sequence of graphic characters consisting of a non-combining character followed by one or more combining characters. [ISO/IEC 10646-1].

4.46 **conditional statement:** A statement for which the truth value of a specified condition is evaluated and used to determine subsequent flow of control.

4.47 **conformance (for object orientation):** A unidirectional relation that allows an object to be used according to an interface other than the interface of its own class.

4.48 **conformance (for parameters):** The requirements for the relationship between arguments and formal parameters and between returning items in activating and activated runtime elements.

4.49 **control function:** An action that affects the recording, processing, transmission, or interpretation of data, and that has a coded representation consisting of one or more bytes.

NOTE This definition is the same as that in ISO/IEC 10646-1 except that "octets" is replaced by "bytes" because the term "octet" is not used in the COBOL specification.

4.50 **cultural element:** An element of data for computer use that may vary dependent on language, geographical territory, or other cultural circumstances.

4.51 **currency sign:** The COBOL character '\$', used as the default currency symbol in a picture character-string and as the default currency string that appears in the edited format of data items.

NOTE Features exist for selection of other currency strings and currency symbols.

4.52 **currency string:** The set of characters to be placed into numeric-edited data items as a result of editing operations when the item includes a currency symbol in its picture character-string.

4.53 **currency symbol:** The character used in a picture character-string to represent the presence of a currency string.

4.54 **current record:** The record that is available in the record area associated with a file.

4.55 **current volume pointer:** A conceptual entity that points to the current volume of a sequential file.

4.56 **data item:** A unit of data defined by a data description entry or resulting from the evaluation of an identifier.

4.57 **debugging line:** A source line that is optionally compiled, depending on the setting of a debugging mode switch.

4.58 **decimal point; decimal separator:** The character used to represent the radix point. The default is the character period.

4.59 **decimal separator; decimal point:** See decimal point.

- 4.60 **declarative statement:** A USE statement, which defines the conditions under which the procedures that follow the statement will be executed.
- 4.61 **de-editing:** The logical removal of all editing characters from a numeric-edited data item in order to determine that item's unedited numeric value.
- 4.62 **delimited scope statement:** Any statement that is terminated by its explicit scope terminator.
- 4.63 **digit position:** The amount of physical storage required to store, or presentation space required to print or display, a single digit.
- 4.64 **dynamic access:** An access mode in which specific logical records may be obtained from or placed into a mass storage file in a nonsequential manner and obtained from a file in a sequential manner.
- 4.65 **dynamic storage:** Storage that is allocated and released on request during runtime.
- 4.66 **end marker:** A marker for the end of a source unit.
- 4.67 **entry:** A descriptive set of consecutive clauses terminated by a separator period.
- 4.68 **entry convention:** The information required to interact successfully with a function, method, or program.
- 4.69 **exception condition:** A condition detected at runtime that indicates that an error or exception to normal processing has occurred.
- 4.70 **exception object:** An object that acts as an exception condition.
- 4.71 **exception status indicator:** A conceptual entity that exists for each exception-name.
- 4.72 **EXIT FUNCTION statement:** an abbreviation for 'EXIT statement with the FUNCTION phrase'.
- 4.73 **EXIT METHOD statement:** an abbreviation for 'EXIT statement with the METHOD phrase'.
- 4.74 **EXIT PARAGRAPH statement:** an abbreviation for 'EXIT statement with the PARAGRAPH phrase'.
- 4.75 **EXIT PERFORM statement:** an abbreviation for 'EXIT statement with the PERFORM phrase'.
- 4.76 **EXIT PROGRAM statement:** an abbreviation for 'EXIT statement with the PROGRAM phrase'.
- 4.77 **EXIT SECTION statement:** an abbreviation for 'EXIT statement with the SECTION phrase'.
- 4.78 **explicit scope terminator:** A statement-dependent word that by its presence terminates the scope of that statement.
- 4.79 **extend mode:** A mode of file processing in which records may be added at the end of a sequential file, but no records may be deleted, read, or updated.
- 4.80 **extended letter:** A letter, other than the basic letters, in the set of characters defined for the COBOL character repertoire.
- 4.81 **external data:** Data that belongs to the run unit and may be accessed by any runtime element in which it is described.
- 4.82 **external media format:** A form of data suitable for presentation or printing, including any control functions necessary for representation as readable text.
- 4.83 **external switch:** A hardware or software device, defined and named by the implementor, that is used to indicate that one of two alternate states exists.

- 4.84 **factory object:** The single object associated with a class, defined by the factory definition of that class, typically used to create the instance objects of the class.
- 4.85 **file:** A logical entity that represents a collection of logical records. There is one logical file associated with one file connector and there may be several logical files associated with one physical file.
- 4.86 **file connector:** A storage area that contains information about a file and is used as the linkage between a file-name and a physical file and between a file-name and its associated record area.
- 4.87 **file organization:** The permanent logical file structure established at the time that a file is created.
- 4.88 **file position indicator:** A conceptual entity that either is used to facilitate exact specification of the next record to be accessed, or indicates why such a reference cannot be established.
- 4.89 **file sharing:** A cooperative environment that controls concurrent access to the same physical file.
- 4.90 **fixed file attribute:** An attribute of a physical file that is established when the physical file is created and is never changed during the existence of the physical file.
- 4.91 **formal parameter:** A data-name specified in the USING phrase of the procedure division header that gives the name used in the function, method, or program for a parameter.
- 4.92 **function:** An intrinsic or user-defined procedural entity that returns a value based upon the arguments.
- 4.93 **function prototype definition:** A definition that specifies the rules governing the arguments needed for the evaluation of a particular function, the data item resulting from the evaluation of the function, and all other requirements needed for the evaluation of that function.
- 4.94 **graphic character:** A character, other than a control function, that has a visual representation normally handwritten, printed, or displayed. [ISO/IEC 10646-1].
- 4.95 **graphic symbol:** The visual representation of a graphic character or of a composite sequence. [ISO/IEC 10646-1].
- 4.96 **grouping (in locale editing):** The separation of digits into groups in number and currency formatting.
- 4.97 **grouping separator:** The character used to separate digits in numbers for ease of reading. The default is the character comma.
- 4.98 **high-order end:** The leftmost position of a string of characters or a string of bits.
- 4.99 **i-o mode:** A mode of file processing in which records can be read, updated, added, and deleted.
- 4.100 **i-o status:** A conceptual entity that exists for a file, that contains a value indicating the result of the execution of an input-output operation for that file.
- 4.101 **imperative statement:** A statement that specifies an unconditional action or that is a delimited scope statement.
- 4.102 **index:** A storage area or a register, the content of which refers to a particular element in a table.
- 4.103 **indexed organization:** The permanent logical file structure in which each record is identified by the value of one or more keys within that record.
- 4.104 **inheritance (for classes):** A mechanism for using the interface and implementation of one or more classes as the basis for another class.

- 4.105 **inheritance (for interfaces):** A mechanism for using the specification of one or more interfaces as the basis for another interface.
- 4.106 **initial program:** A program that is placed into the initial state every time the program is called.
- 4.107 **initial state:** The state of a function, method, or program when it is first activated in a run unit.
- 4.108 **input mode:** A mode of file processing in which records can only be read.
- 4.109 **instance object:** A single instance of an object defined by a class and created by a factory object.
- 4.110 **interface (of an object):** The names of all the methods defined for the object, including inherited methods; for each of the methods:
- the ordered list of its formal parameters and the description and passing technique associated with each
 - any returned value and its description
 - exceptions that may be raised.
- 4.111 **interface (the language construct):** A grouping of method prototypes.
- 4.112 **internal data:** All data described in a source unit except external data and external file connectors.
- 4.113 **invocation; method invocation:** See method invocation.
- 4.114 **key of reference:** The key, either prime or alternate, currently being used to access records within an indexed file.
- 4.115 **letter:** A basic letter or an extended letter.
- 4.116 **locale:** A facility in the user's information technology environment that specifies language and cultural conventions.
- 4.117 **lock mode:** The state of a file for which record locking is in effect that indicates whether record locking is manual or automatic.
- 4.118 **low-order end:** The rightmost position of a string of characters or a string of bits.
- 4.119 **MCS; message control system:** See message control system.
- 4.120 **message control system; MCS:** A communication control system that supports the processing of messages.
- 4.121 **method:** A procedural entity defined by a method definition within, or inherited by, a class definition as an allowable operation upon objects of that class.
- 4.122 **method data:** Data declared in a method definition.
- 4.123 **method invocation; invocation:** The request to execute a named method on a given object.
- 4.124 **method prototype:** A source element that specifies the information needed for invocation of a method and for conformance checking.
- 4.125 **national character:** A character in a national character set.
- 4.126 **national character position:** The amount of physical storage required to store, or presentation space required to print or display, a single national character.
- 4.127 **national character set; national coded character set:** See national coded character set.

- 4.128 **national coded character set; national character set:** A coded character set that the implementor has designated for representation of data items described as usage national and for national literals.
- 4.129 **national data item:** An elementary data item of class national or a national group item.
- 4.130 **native alphanumeric character set:** The computer's alphanumeric coded character set.
- 4.131 **native arithmetic:** A mode of arithmetic in which the techniques used in handling arithmetic are specified by the implementor.
- 4.132 **native character set:** An implementor-defined character set, either alphanumeric or national or both, that is used for internal processing of a COBOL runtime module. The native character set is that referenced by the keyword NATIVE in the SPECIAL-NAMES paragraph.
- 4.133 **native collating sequence:** An implementor-defined collating sequence, either an alphanumeric collating sequence or a national collating sequence, that is associated with the computer on which a runtime module is executed.
- 4.134 **native national coded character set:** The computer's national coded character set.
- 4.135 **next record:** The record that logically follows the current record of a file.
- 4.136 **null:** The state of a pointer indicating that it contains no address, or the state of an object reference indicating that it contains no reference.
- 4.137 **numeric character (in the rules of COBOL):** A character that belongs to the following set of digits: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9.
- 4.138 **object:** A unit consisting of data and the methods that act upon that data.
- 4.139 **object data:** Data defined:
— in the factory definition, except for the data defined in its methods.
— in the instance definition, except for the data defined in its methods.
- 4.140 **object property; property:** A name that may be used to qualify an object reference to get a value from or pass a value to an object.
- 4.141 **object reference:** An explicitly- or implicitly-defined data item that contains a reference to an object.
- 4.142 **open mode:** The state of a file connector indicating input-output operations that are permitted for the associated file.
- 4.143 **optional file:** A file declared as being not necessarily present each time the runtime module is executed.
- 4.144 **outermost program:** A program, together with its contained programs, that is not contained in any other program.
- 4.145 **output file:** A file that is opened in either the output mode or extend mode.
- 4.146 **output mode:** A mode of file processing in which a file is created and records can only be added to the file.
- 4.147 **physical file:** A physical collection of physical records.
- 4.148 **physical record; block:** See block.
- 4.149 **previous record:** The record that logically precedes the current record of a file.

- 4.150 **procedure:** One or more successive paragraphs or sections in the procedure division.
- 4.151 **procedure branching statement:** A statement that causes the explicit transfer of control to a statement other than the next executable statement in the sequence in which the statements are written.
- 4.152 **processor:** The computing system, both hardware and software, used for compilation of source code or execution of run units, or both.
- 4.153 **program prototype definition:** A definition that specifies the rules governing the class of the parameters expected to be received by a particular subprogram, and any other requirements needed to transfer control to and get control and return information from that subprogram.
- 4.154 **property; object property:** See object property.
- 4.155 **random access:** An access mode in which the value of a key data item identifies the logical record that is obtained from, deleted from, or placed into a relative or indexed file.
- 4.156 **record key:** A data item within a record used to identify that record within an indexed file.
- 4.157 **record lock:** A conceptual entity that is used to control concurrent access to a given record within a shared physical file.
- 4.158 **record locking:** A facility for controlling concurrent access to records in a shared physical file.
- 4.159 **relative item:** An item in a report whose position is specified relative to the previous item.
- 4.160 **relative key:** A data item that contains a relative record number.
- 4.161 **relative organization:** The permanent logical file structure in which each record's logical position is uniquely identified by a relative record number.
- 4.162 **relative record number:** The ordinal number of a record in a file whose organization is relative.
- 4.163 **report:** A printed output described in the report section and generated from those data descriptions.
- 4.164 **report writer:** A comprehensive set of data clauses and statements that enable a print layout to be described according to its general appearance rather than through of a series of procedural steps.
- 4.165 **restricted pointer:** A pointer data item that is restricted to data items of a specified type or to programs with the same signature as a specified program.
- 4.166 **run unit:** One or more runtime modules that interact with one another and that function, at execution time, as an entity to provide problem solutions.
- 4.167 **runtime element:** The executable unit resulting from compiling a source element.
- 4.168 **runtime module:** The result of compiling a compilation unit.
- 4.169 **sequential access:** An access method in which logical records are either placed into a file in the order of execution of the statements writing the records or obtained from a file in the sequence in which the records were written to the file.
- 4.170 **sequential organization:** The permanent logical file structure in which a record is identified by a predecessor-successor relationship established when the record is placed into the file.
- 4.171 **sharing mode:** The state of a file that indicates the mode of file sharing.
- 4.172 **source element:** A source unit excluding any contained source units.

4.173 **source unit:** A sequence of statements beginning with an identification division and finishing with an end marker or the end of the compilation group, including any contained source units.

4.174 **standard arithmetic:** A mode of arithmetic in which the techniques used in handling arithmetic expressions, arithmetic statements, the SUM clause, and certain integer and numeric functions are specified in this International Standard.

4.175 **standard intermediate data item:** A temporary abstract decimal floating-point data item used to hold arithmetic operands when standard arithmetic is in effect.

4.176 **static data:** Data that has its last-used state when a runtime element is re-entered.

4.177 **subclass:** A class that inherits from another class. When two classes in an inheritance relationship are considered together, the subclass is the inheritor or inheriting class; the superclass is the inheritee or inherited class.

NOTE In the industry literature, the term derived class is also often used as an alternative to the term subclass. These terms are equivalent.

4.178 **subject of the entry:** The data item that is being defined by a data description entry.

4.179 **subscript:** A number used to refer to a specific element of a table, or in the case of the subscript 'ALL', to all elements of a table.

4.180 **superclass:** A class that is inherited by another class.

4.181 **surrogate pair:** A coded character representation for a single abstract character of the UTF-16 format of the UCS where the representation consists of a sequence of two two-octet values. The first value of the pair is a high-surrogate and the second is a low-surrogate.

4.182 **type (for type declaration):** A template that contains all the characteristics of a data item and its subordinates.

4.183 **UCS; Universal Multiple-Octet Coded Character set.** See Universal Multiple-Octet Coded Character Set.

4.184 **Universal Multiple-Octet Coded Character Set; UCS.** The coded character set defined by ISO/IEC 10646-1 together with ISO/IEC 10646-2. This coded character set includes the characters used in writing most of the languages of the modern world.

4.185 **universal object reference:** An object reference that is not restricted to a specific class or interface.

4.186 **unsuccessful execution:** The attempted execution of a statement that does not result in the execution of all the operations specified by that statement.

4.187 **variable-occurrence data item:** A table element that is repeated a variable number of times.

4.188 **zero-length item:** An item whose minimum permitted length is zero and whose length at execution time is zero.

5 Description techniques

The techniques used to describe standard COBOL are:

- General formats
- Rules
- Arithmetic expressions
- Informal description

5.1 General formats

General formats specify the syntax of the elements of standard COBOL and the sequence of arrangement of those elements.

The words, phrases, clauses, punctuation, and operands in each general format shall be written in the compilation group in the sequence given in the general format, unless otherwise specified by the rules of that format.

When more than one arrangement exists for a specific language construct, the general format is separated into multiple formats that are numbered and named.

Elements used in depicting general formats are:

- Keywords
- Optional words
- Operands
- Level numbers
- Options
 - Brackets
 - Braces
 - Choice indicators
- Ellipses
- Punctuation
- Special characters
- Meta-terms that refer to other formats

5.1.1 Keywords

Keywords are reserved words or context-sensitive words. They are shown in uppercase and underlined in general formats. They are required in order to select the functionality associated with that keyword, subject to the conventions specified in 5.1.5, Options, and syntax rules specified for the general format.

5.1.2 Optional words

Optional words are reserved words or context-sensitive words. They are shown in uppercase and not underlined in general formats. They may be written to add clarity when the clause or phrase in which they are defined is written in the source unit.

5.1.3 Operands

An operand is an expression, a literal, or a reference to data or an exception condition. Operands are shown in lowercase and represent values or identification of items, conditions, or objects that the programmer supplies when writing the source unit.

Any term listed below refers to an instance of the corresponding element as described in the text referenced under the column labeled 'described in'. Such instances of the term are represented in lower-case and suffixed with a number (n = 1, 2, ...) for unique reference.

Operand type	Described in	Term (n = 1, 2, 3, ...)
Argument	15.2, Arguments	argument-n
Expression	8.8, Expressions	arithmetic-expression-n boolean-expression-n conditional-expression-n
Integer	5.4, Integer operands	integer-n
Literal	8.3.1.2, Literals	literal-n
Reference	8.4, References	
a) User-defined word, including qualification and subscription if needed	8.3.1.1.1, User-defined words 8.4.1.1, Qualification 8.4.1.2, Subscripts	Any of the types listed in 8.3.1.1.1 suffixed by -n
b) Identifier	8.4.2.1, Identifier	identifier-n
c) Exception name	14.5.12.1.5, Exception-names and exception conditions	exception-name-1

5.1.4 Level numbers

Specific level numbers appearing in general formats are required to be specified when the formats in which they appear are written in the source unit. Level number forms 1, 2, ..., and 9, may be written as 01, 02, ..., 09, respectively.

5.1.5 Options

Options are indicated in a general format by vertically stacking alternative possibilities within brackets, braces, or choice indicators. An option is selected by specifying one of the possibilities from a stack of alternative possibilities or by specifying a unique combination of possibilities from a series of brackets, braces, or choice indicators.

5.1.5.1 Brackets

Brackets, [], enclosing a portion of a general format indicate that the syntax element contained within or one of the alternatives contained within the brackets may be explicitly specified or that portion of the general format may be omitted. No default is implied for the omitted element.

5.1.5.2 Braces

Braces, { }, enclosing a portion of a general format indicate that the syntax element contained within the braces or one of the alternatives contained within the braces shall be explicitly specified or is implicitly selected. If one of the alternatives contains only optional words, that alternative is the default and is selected unless another alternative is explicitly specified.

5.1.5.3 Choice indicators

Choice indicators are a pair of bars '|' surrounded by braces or by brackets that enclose a portion of a general format. When enclosed by braces, one or more of the alternatives contained within the choice indicators shall be specified, but any single alternative shall be specified only once. When enclosed by brackets, zero or more of the alternatives contained within the choice indicators shall be specified, but any single alternative may be specified only once. The alternatives may be specified in any order.

5.1.6 Ellipses

In the general formats, the ellipsis represents the position at which the user elects repetition of a portion of a format. The portion of the format that may be repeated is determined as follows: given an ellipsis in a format,

scanning right to left, determine the right bracket or right brace delimiter immediately to the left of the ellipsis; continue scanning right to left and determine the logically matching left bracket or left brace delimiter; the ellipsis applies to the portion of the format between the determined pair of delimiters.

NOTE In text other than general formats, the ellipsis (...) shows omission of a word or words when such omission does not impair comprehension. This is the conventional meaning of the ellipsis, and the use becomes apparent in context.

5.1.7 Punctuation

The separators comma and semicolon may be used anywhere the separator space is used in general formats and other syntactic specifications. In the compilation group, these separators are interchangeable.

The separator period, when specified in a general format, is required when that format is used.

5.1.8 Special characters

Special character words and separators that appear in formats, although not underlined, are required when such portions of the formats are used.

5.1.9 Meta-terms

Meta-terms appear in lowercase in general formats and are the names of subsections of general formats. Subsections are specified below the main format and are introduced by the phrase 'where x is:', with x replaced by the meta-term.

5.2 Rules

Except for intrinsic functions, rules are categorized as syntax rules and general rules. Intrinsic functions have argument rules and returned value rules instead.

5.2.1 Syntax rules

Syntax rules supplement general formats, identify equivalent words, and define or clarify the order in which words or elements may be written to form larger elements such as phrases, clauses, or statements. Syntax rules may also impose restrictions on individual words or elements, relax restrictions implied by words or elements, or define a term that may be used in the remaining syntax rules.

The rules of the PICTURE clause specified in 13.16.38.5, Precedence rules, are syntax rules.

When syntax rules specify that a word is synonymous with, an abbreviation for, or equivalent to another word (or words), those words may be written interchangeably and have the same meaning.

5.2.2 General rules

A general rule defines or clarifies the meaning or relationship of meanings of an element or set of elements. It is used to define or clarify the semantics of the statement and the effect that it has on either execution or compilation, and it may define a term that may be used in the remaining general rules.

The rules of the PICTURE clause specified in 13.16.38.4, Editing rules, are general rules.

5.2.3 Argument rules

Argument rules specify requirements, constraints, or defaults associated with arguments to intrinsic functions.

5.2.4 Returned value rules

Returned value rules specify the semantics of an intrinsic function.

5.3 Arithmetic expressions

Some rules contain arithmetic expressions that specify part or all of the results of the COBOL syntax. In presenting the arithmetic expressions, the following additional notation, or different meaning for notation, is used.

5.3.1 Textually subscripted operands

When an operand is textually subscripted, as operand- j_n , the term 'operand-j' identifies a specific operand and 'n' refers to the nth position or occurrence of operand-j.

NOTE An example is in the returned value rules for 15.61, PRESENT-VALUE function.

5.3.2 Ellipses

Ellipses show that the number of terms and operators is variable.

5.4 Integer operands

- 1) When the term 'integer-n' ($n = 1, 2, \dots$) is used in a general format and associated rules, it refers to a fixed-point integer literal that shall be unsigned and non-zero unless otherwise specified in the associated rules.
- 2) When the term 'integer' is used as a constraint for an operand in a syntax rule, then
 - a) if that operand is a literal, it shall be an integer literal, as defined in 8.3.1.2.2.1, Fixed-point numeric literals;
 - b) if that operand is a data-name or an identifier, it shall reference one of the following:
 1. an integer intrinsic function,
 2. a fixed-point numeric data item, other than an intrinsic function, whose description does not include any digit positions to the right of the radix point.
- 3) When the term 'integer' is used as a constraint for an operand in a general rule, that operand shall evaluate at runtime as follows:
 - a) If native arithmetic is in effect, the implementor shall define when the operand is an integer.
 - b) If standard arithmetic is in effect, the operand shall be equal to a standard intermediate data item that has the unique value zero or whose decimal fixed-point representation contains only zeros to the right of the decimal point.

NOTES

- 1 If the value of the exponent is greater than 31, the value of the standard intermediate data item is an integer.
 - 2 If the value of the exponent is less than 1 then the value of the standard intermediate data item is not an integer.
- c) If native arithmetic is in effect, the implementor shall define when an arithmetic expression is an integer.

5.5 Informal description

Substantial parts of the COBOL specification are described informally in text, tables, and diagrams other than general format diagrams. These parts normally specify semantics as described in 5.2.2, General rules, but may also include syntactical requirements in addition to those described in 5.1, General formats, and 5.2.1, Syntax rules. Syntactical requirements are distinguished from semantics by their characteristic of specifying rules for writing source code, as opposed to behavior.

5.6 Hyphens in text

A hyphen appearing at the end of a line of text is part of the character-string or word it divides. Hyphens are not added to divide character-strings or words across lines.

5.7 Verbal forms for the expression of provisions

Specific verbal forms are used in the normative clauses of this International Standard in order to distinguish among requirements for compliance, provisions allowing a freedom of choice, and recommendations. Those verbal forms are prescribed by ISO/IEC Directives, Part 3, Rules for the structure and drafting of International Standards.

Table 1, Verbal forms, summarizes the prescribed verbal forms and equivalent expressions used in this International Standard.

Table 1 — Verbal forms

Provision	Verbal form	Alternative expressions
a requirement on an implementation or a program, strictly to be followed for compliance to the standard	shall shall not	is required to is, is to is not permitted is not allowed
a permission expressed by the standard	may need not	is permitted is allowed is not required to
a recommendation expressed by the standard; it need not be followed	should should not	it is recommended that is recommended
a capability or possibility open to the user of the standard	can cannot	is able to it is possible to is possible
Alternative expressions are sometimes used to express other than a requirement; in such cases, the meaning is evident from context.		

6 Reference format

Reference format specifies the conventions for writing COBOL source text and library text. COBOL provides two reference formats: free-form reference format and fixed-form reference format. The two types of reference format may be mixed within and between source text and library text by use of SOURCE FORMAT compiler directives. The default reference format of a compilation group is fixed-form.

The following rules apply to the indicated reference formats:

1) Free-form and fixed-form

- a) Reference format is described in terms of character positions on a line on an input-output medium.
- b) A COBOL compiler shall accept source text and library text written in reference format.
- c) The implementor shall specify the meaning of lines and character positions.

NOTE The previous COBOL standard did not state what kind of characters were used, but alphanumeric characters of uniform size were generally assumed.

- d) For purposes of analyzing the text of a compilation group, the first character-string of a compilation group is treated as though it were preceded by a separator space and the last character-string of a compilation group is treated as though it were followed by a separator space.

2) Fixed-form

- a) A COBOL compiler shall process fixed-form reference format lines as though the lines had been logically converted from fixed form to free form as described in 6.4, Logical conversion.
- b) After logical conversion, the equivalent free-form lines shall meet the requirements of free-form reference format, except that lines may be longer and all characters of the computer's coded character set shall be retained in alphanumeric and national literals. (See rule 3b.)

3) Free-form

- a) The number of character positions on a line may vary from line to line, ranging from a minimum of 0 to a maximum of 255.
- b) The implementor shall specify any control characters that terminate a free-form line, and whether such control characters may be specified in comments and the content of alphanumeric and national literals.

6.1 Indicators

Indicators are instructions to the compiler for interpreting reference format. Each indicator is classified as either a fixed indicator or a floating indicator.

6.1.1 Fixed indicators

Fixed indicators may be specified in the indicator area of fixed-form reference format as described in 6.2, Fixed-form reference format. The following are fixed indicators:

<u>Character</u>	<u>Indicator name</u>	<u>Indicates</u>
*	comment indicator	a comment line
/	comment indicator	a comment line with page ejection
D	debugging indicator	a debugging line

d	debugging indicator	a debugging line
- (hyphen)	continuation indicator	a continuation line
space	source indicator	any line that is not a comment line, a debugging line, or a continuation line

Fixed indicators are characters in the implementor-defined coded character set or sets used for fixed-form reference format, and are not COBOL characters from the COBOL character repertoire.

NOTE This is significant in that equivalence of alphanumeric and national characters is not required for fixed indicators, nor is it precluded. The intent is to allow upward compatibility with the previous COBOL standard, which had no classification of characters as alphanumeric or national.

6.1.2 Floating indicators

Floating indicators may be used in fixed-form or free-form reference format. The following COBOL character-strings are floating indicators:

<u>Character-string</u>	<u>Indicator name</u>	<u>Indicates</u>
*>	comment indicator	1) a comment line when specified as the first character-string in the program-text area; 2) an inline comment when specified following one or more character-strings in the program-text area, subject to the additional rules in 6.1.2.1, Syntax Rules.
>>	compiler directive	a compiler-directive line when followed by a compiler-directive word; with or without an intervening space, subject to additional rules in 7.2, Compiler directives.
"- '-	literal continuation indicator	continuation of a literal when specified in an un-terminated literal with the same quotation symbol in its opening delimiter, subject to additional rules in 6.1.2.1, Syntax Rules.
>>D	debugging indicator	a debugging line when followed by at least one space character

6.1.2.1 Syntax Rules

- 1) For purposes of analyzing the text of a compilation group, a space is implied immediately following a floating comment indicator.
- 2) The floating comment indicator of an inline comment shall be preceded by a separator space, and may be specified wherever a separator space may be specified, except:
 - a) as the separator space preceding a floating comment indicator
 - b) following a floating literal continuation indicator.
- 3) All the characters forming a multiple-character floating indicator shall be specified on the same line.
- 4) A floating literal continuation indicator shall be specified only for an alphanumeric, boolean, or national literal. A given literal shall not be continued with more than one form of continuation.
- 5) A floating literal continuation indicator shall not be specified on a line that contains a fixed literal continuation indicator.

- 6) For a continued alphanumeric, boolean, or national literal, the first non-blank character of each continuation line shall be the quotation symbol used in the opening delimiter of the literal.
- 7) A floating debugging indicator may be preceded on a line only by zero or more space characters.
- 8) A floating debugging indicator shall not be specified on a line that contains a fixed debugging indicator or a fixed continuation indicator.

NOTE The debugging indicators and the debugging feature are obsolete and are to be removed in the next revision of this International Standard.

6.2 Fixed-form reference format

The format of a fixed-form reference format line is depicted in Figure 1 — Fixed-form reference format.

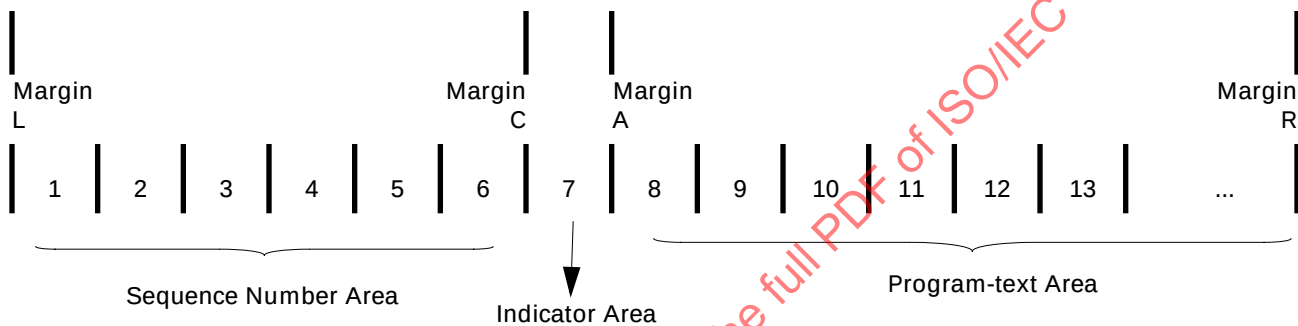


Figure 1 — Fixed-form reference format

Margin L is immediately to the left of the leftmost character position of a line.

Margin C is between the 6th and 7th character positions of a line.

Margin A is between the 7th and 8th character positions of a line.

Margin R is immediately to the right of the rightmost character position of the program-text area. The rightmost character position of the program-text area is a fixed position defined by the implementor.

The sequence number occupies six character positions (1-6), and is between margin L and margin C.

The indicator area is the 7th character position of a line.

The program-text area begins in character position 8 and terminates with the character position immediately to the left of margin R.

6.2.1 Sequence number area

The sequence number area may be used to label a line of source text or library text. The content of the sequence number area is defined by the user and may consist of any character in the computer's coded character set. There is no requirement that the content of the sequence number area appear in any particular sequence or be unique.

6.2.2 Indicator area

The indicator area identifies the type of a source line in accordance with the indicators specified in 6.1.1, Fixed indicators.

6.2.3 Program-text area

The program-text area may contain:

- 1) Comment-text of a comment line when the indicator area contains a fixed comment indicator.
- 2) Any of the following or combinations of the following, subject to further syntax specifications, when the indicator area contains a debugging indicator, a continuation indicator, or a source indicator:
 - character-strings (COBOL words)
 - separators
 - comments
 - floating indicators.
- 3) All spaces.

6.2.4 Continuation of lines

Any entry, sentence, statement, clause, phrase, or pseudo-text consisting of more than one character-string may be continued by starting subsequent COBOL words, literals, or picture character-strings in the program-text area of a subsequent line.

A COBOL word, literal, or picture character-string may be broken such that part of it appears on one or more subsequent lines. The subsequent lines are continuation lines; the line preceding the continuation line is a continued line. The continuation of a COBOL word, picture character-string, or literal other than an alphanumeric, boolean, or national literal is identified by a fixed continuation indicator in the continuation line.

NOTE Continuation of COBOL words is an archaic feature and its use should be avoided. It is allowed in fixed form for compatibility with the previous COBOL standard.

Continuation of an alphanumeric, boolean, or national literal is indicated when either:

- 1) A line terminates within an alphanumeric or boolean literal without a closing delimiter and the next line that is not a comment line or a blank line contains a fixed continuation indicator; or
- 2) A line terminates within an alphanumeric, boolean, or national literal that ends with a floating literal continuation indicator.

In the case of continuation with a fixed continuation indicator, any spaces at the end of the fixed-form continued line are part of the literal.

In the case of continuation with either a fixed or floating literal continuation indicator, the next line that is not a comment line or a blank line is the continuation line. The first non-space character in the program-text area of the continuation line shall be a quotation symbol matching the quotation symbol used in the opening delimiter. The continuation starts with the character immediately after the quotation symbol in the continuation line.

National literals may be continued only with a floating literal continuation indicator.

All characters composing any multiple-character separator or multiple-character indicator shall be specified on the same line. All characters forming an invocation operator shall be specified on the same line.

Comment lines and blank lines may be interspersed among lines containing the parts of a literal.

If there is no fixed continuation indicator in a line, a space is implied before the first non-blank character in the line for purposes of analyzing the text of the compilation group.

6.2.5 Blank lines

A blank line is one that contains only space characters between margin C and margin R. A blank line may be written as any line of a compilation group.

6.2.6 Comments

A comment consists of a comment indicator followed by comment-text. Any combination of characters from the compile-time computer's coded character set may be included in comment-text.

Comments serve only as documentation and have no effect on the meaning of the compilation group.

A comment may be a comment line or an inline comment.

6.2.6.1 Comment lines

A comment line is identified by either a fixed comment indicator or a floating comment indicator. All characters following the comment indicator up to margin R are comment-text. A comment line may be written as any line of a compilation group.

If a source listing is being produced, a comment line identified by the fixed comment indicator slant (/) causes page ejection followed by printing of the comment line; comments identified by the fixed comment indicator asterisk (*) are printed at the next available line position of the listing.

6.2.6.2 Inline comments

A floating comment indicator preceded by one or more character-strings in the program-text area identifies an inline comment. All characters following the floating comment indicator up to margin R are comment-text. An inline comment may be written on any line of a compilation group except on a line that contains a floating literal continuation indicator.

6.2.7 Debugging lines

A debugging line is identified by either a fixed debugging indicator or a floating debugging indicator.

A debugging line is permitted anywhere in a compilation unit after the SOURCE-COMPUTER paragraph.

After all COPY and REPLACE statements have been processed, a debugging line has the characteristics of a comment line if the WITH DEBUGGING MODE clause is not specified in the SOURCE-COMPUTER paragraph.

NOTE A debugging line is an obsolete element in this International Standard and is to be deleted from the next revision of standard COBOL.

6.3 Free-form reference format

In free-form reference format, the source or library text may be written anywhere on a line, except that there are specific rules for comments, debugging lines, and continuation.

The indicators specified in 6.1.2, Floating indicators, identify specific elements of a compilation group. The entire free-form line constitutes the program-text area of the line.

6.3.1 Continuation of lines

Any entry, sentence, statement, clause, phrase, or pseudo-text consisting of more than one character-string may be continued by writing some of the character-strings and separators that constitute it on successive lines. The last nonblank character of each line is treated as if it were followed by a space.

Alphanumeric literals, boolean literals, and national literals may be continued across lines. The line being continued is called the continued line; subsequent lines are called continuation lines. When such a literal is incomplete at the end of a line, the incomplete portion of the literal shall be terminated by a floating continuation indicator, as defined in 6.1.2, Floating indicators. The continuation indicator may optionally be followed by one or more spaces. The first nonblank character on the continuation line shall be a quotation symbol matching the quotation symbol used in the opening delimiter; the first character after the quotation symbol is the beginning character of the continuation of the literal. At least one alphanumeric character, national character, or hexadecimal digit of the literal content shall be specified on the continued line and on each continuation line.

All characters composing any multiple-character separator or multiple-character indicator shall be specified on the same line. A pair of quotation symbols indicating a single quotation symbol within a literal shall be specified on the same line.

Comment lines and blank lines may be interspersed among lines containing the parts of a literal.

6.3.2 Blank lines

A blank line is one that contains nothing but space characters or is a line with zero character positions. A blank line may appear anywhere in a compilation group.

6.3.3 Comments

A comment consists of a comment indicator followed by comment-text. All characters following the comment indicator up to the end of the line are comment-text.

Any combination of characters from the compile-time computer's coded character set may be included in comment-text, except as indicated in 6, Reference format, rule 3b.

Comments serve only as documentation and have no effect on the meaning of the compilation group.

A comment may be a comment line or an inline comment.

6.3.3.1 Comment lines

A comment line is identified by a floating comment indicator as the first character-string on a line. A comment line may be written as any line in a compilation group.

6.3.3.2 Inline comments

A floating comment indicator preceded by one or more character-strings on a line identifies an inline comment. An inline comment may be written on any line of a compilation group except on a line that contains a floating literal continuation indicator.

6.3.4 Debugging lines

A debugging line consists of a debugging indicator, optionally preceded by one or more space characters, followed by all successive character positions on the line. A debugging line is terminated at the end of the line.

A debugging line may be written as any line in a source unit after the SOURCE-COMPUTER paragraph.

After all COPY and REPLACE statements have been processed, a debugging line has the characteristics of a comment line if the WITH DEBUGGING MODE clause is not specified in the SOURCE-COMPUTER paragraph.

NOTE A debugging line is an obsolete element in this International Standard and is to be deleted from the next revision of standard COBOL.

6.4 Logical conversion

Source text and library text in fixed-form reference format are logically converted to free-form reference format before the application of replacing and conditional compilation actions. Continued and continuation lines in fixed format and in free format are concatenated to remove continuation indicators, and comments and blank lines are removed from both formats. There is no restriction on the maximum line length of the free-format text resulting from logical conversion.

NOTE Fixed-form reference format is logically converted during compilation to free-form to simplify understanding of other rules of the language, for example, the COPY statement with the REPLACING phrase and the REPLACE statement. No implementor is required to perform an actual conversion as long as the effect is as though it were performed. The rules of reference format and text manipulation apply regardless of whether there is or is not an actual conversion.

The rules of logical conversion are applied to each line of a compilation group in the order that lines of source text and library text are obtained by the compiler. Lines are examined sequentially beginning with the first line of the compilation group and continuing until the end of the compilation group is reached. The resultant logically-converted compilation group is created in free-form reference format as follows:

- 1) If the line is a SOURCE FORMAT directive, the reference format mode is determined and the SOURCE FORMAT directive line is logically discarded.
- 2) If the line is a comment line or a blank line, that line is logically discarded.
- 3) If the line contains an inline comment, the inline comment is replaced by spaces and processing of that line continues.
- 4) If the line is a fixed-form or free-form line that contains a floating literal continuation indicator, the end of the program text area is set to immediately follow the character preceding the continuation indicator. The continuation indicator and any following characters are logically discarded, and processing of that line continues.
- 5) If the line is a fixed-form line that contains a fixed debugging indicator, a free-form line is created in the resultant compilation group that consists of the following: a floating debugging indicator, followed by a space, followed by the content of the fixed-form program-text area.
- 6) If the line is a fixed-form line, contains a source indicator, and is not a continuation line, the program text area of that line is copied to the resultant compilation group.
- 7) If the line is a fixed-form continuation line identified by a fixed continuation indicator:
 - a) if the continued string is an alphanumeric or boolean literal, the content of the program-text area, beginning with the first character after the initial quotation symbol, is appended immediately to the right of the last character in the latest logical line of the resultant compilation group.
 - b) otherwise, the content of the program-text area, beginning with the first non-space character, is appended immediately to the right of the last character in the latest logical line of the resultant compilation group.
- 8) If the line is a free-form line and is not a continuation line, that line is copied to the resultant compilation group.
- 9) If the line is a fixed-form or free-form continuation line that follows a line continued with a floating literal continuation indicator, the content of the program-text area, beginning with the first character after the initial quotation symbol, is appended immediately to the right of the last character in the latest logical line of the resultant compilation group.
- 10) The next input line is obtained and processing iterates at step 1.

At the end of the compilation group, processing continues with the resultant logically-converted compilation group. The implementor shall define the effect on the source listing, if any, of logical conversion.

7 Compiler directing facility

The compiler directing facility consists of compiler directing statements for text manipulation, compiler directives for text manipulation, and compiler directives for specifying compilation options.

The actions of compiler directing statements and compiler directives occur in two logical stages of compilation group processing - the text manipulation stage and the compilation stage.

The text manipulation stage accepts an initial compilation group, performs modifications specified by COPY and REPLACE statements and conditional compilation directives, and substitutes compilation variables into constant entries. The result is a structured compilation group for processing by the compilation stage.

The compilation stage completes the compilation process utilizing the structured compilation group.

The following are the compiler directing statements and compiler directives and the stage during which their actions take place:

<u>Compiler directing statements</u>	<u>Stage</u>
COPY statement	Text manipulation
SUPPRESS option	Implementor-defined
REPLACE statement	Text manipulation
<u>Compiler directives</u>	<u>Stage</u>
CALL-CONVENTION	Compilation
DEFINE	Text manipulation
EVALUATE	Text-manipulation
FLAG-85	Compilation
IF	Text-manipulation
LEAP-SECOND	Compilation
LISTING	Implementor-defined
PAGE	Implementor-defined
PROPAGATE	Compilation
SOURCE FORMAT	Text-manipulation
TURN	Compilation

The implementor defines the stage during which actions associated with listings, if any, take place.

The substitution of compilation-variable values into constant entries occurs in the text manipulation stage. The inclusion or exclusion of debugging lines occurs in the compilation stage. The manner and time of expansion of parameterized classes and parameterized interfaces is defined by the implementor, except that it occurs after the text manipulation stage of processing.

7.1 Text manipulation

The text manipulation stage of compilation group processing accepts source lines from source text and library text, selectively includes source lines through conditional compilation, and modifies text to produce a structured compilation group.

The following elements and the separators required to distinguish them shall be syntactically correct in the initial source text and library text:

- COPY statements
- compiler directives
- alphanumeric, boolean, and national literals
- fixed and floating indicators
- constant entries specifying a FROM phrase

REPLACE statements shall be syntactically correct after the action of the replacing phrase of the COPY statement.

Other indicators, language elements, and separators need not be syntactically correct until the completion of the text manipulation stage.

Text manipulation consists of processes acting on the lines of source text and library text such that the processes take effect in a specific order. An implementor may optimize the actual processing and interactions in any manner as long as the final result is the same. The following processes are applied in order:

- 1) An expanded compilation group is created in logical free-form reference format — input lines are accepted sequentially; logically converted to free-form reference format as specified in 6.4, Logical conversion, and placed in the expanded compilation group. Library text identified in COPY statements is incorporated; replacing actions are deferred to step 3. COPY statements and their incorporated text shall be identifiable in the expanded compilation group for purposes of any logically subsequent processing associated with a REPLACING phrase.

Lines that appear in the false path of an IF or EVALUATE directive, including library text identified in COPY statements, may be omitted from the expanded compilation group. SOURCE FORMAT directives in the false path shall be processed to correctly interpret input lines.

NOTE Recognition of true and false paths during logical conversion is neither required nor precluded.

The resulting lines constitute an expanded compilation group.

- 2) A conditionally-processed compilation group is created — the expanded compilation group is read and the following compiler directives and substitutions are processed in the order encountered in the expanded compilation group:
 - a) DEFINE, IF, and EVALUATE directives
 - b) substitution of compilation-variable values into constant entries
 - c) the replacing actions of all COPY statements.

The resulting lines constitute a conditionally-processed compilation group.

- 3) A structured compilation group is created — the conditionally-processed compilation group is read and the replacing actions of REPLACE statements are applied in order.

The resulting lines constitute a structured compilation group.

References to a compilation group after text manipulation processing are to the structured compilation group, which contains the lines to be used in the compilation stage.

7.1.1 Text manipulation elements

Language elements referenced and not defined in 7, Compiler directing facility, have the meaning defined in 8, Language fundamentals.

7.1.1.1 Compiler directing statements

The compiler directing statements are the COPY statement and the REPLACE statement.


7.1.1.2 Source text and library text

Source text is the primary input to the compiler for a single compilation group. Library text is secondary input to the compiler as a result of processing a COPY statement.

The source text and library text processed by text manipulation consists of indicators, character-strings, comments, and separators. A character-string is either a text-word or the word 'COPY'.

7.1.1.3 Pseudo-text

Pseudo-text is an operand in the REPLACE statement and in the REPLACING phrase of the COPY statement. Pseudo-text may be any sequence of zero or more text-words, comments, and the separator space bounded by, but not including, pseudo-text delimiters.

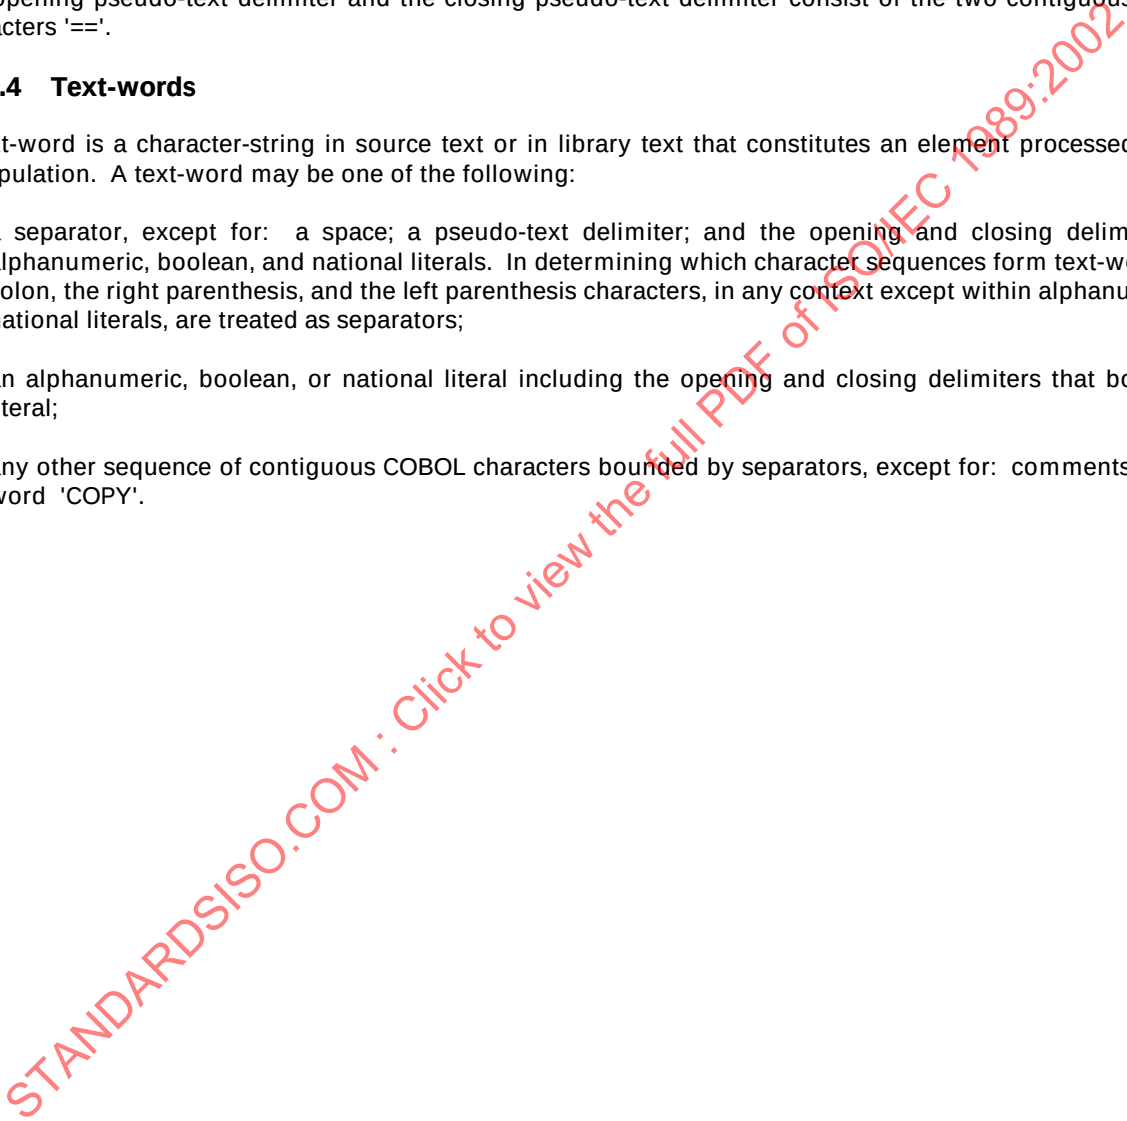The opening pseudo-text delimiter and the closing pseudo-text delimiter consist of the two contiguous COBOL characters '=='.


7.1.1.4 Text-words


A text-word is a character-string in source text or in library text that constitutes an element processed by text manipulation. A text-word may be one of the following:

- 1) a separator, except for: a space; a pseudo-text delimiter; and the opening and closing delimiters for alphanumeric, boolean, and national literals. In determining which character sequences form text-words, the colon, the right parenthesis, and the left parenthesis characters, in any context except within alphanumeric or national literals, are treated as separators;
- 2) an alphanumeric, boolean, or national literal including the opening and closing delimiters that bound the literal;
- 3) any other sequence of contiguous COBOL characters bounded by separators, except for: comments and the word 'COPY'.

7.1.2 COPY statement

The COPY statement incorporates library text into a COBOL compilation group.

7.1.2.1 General format

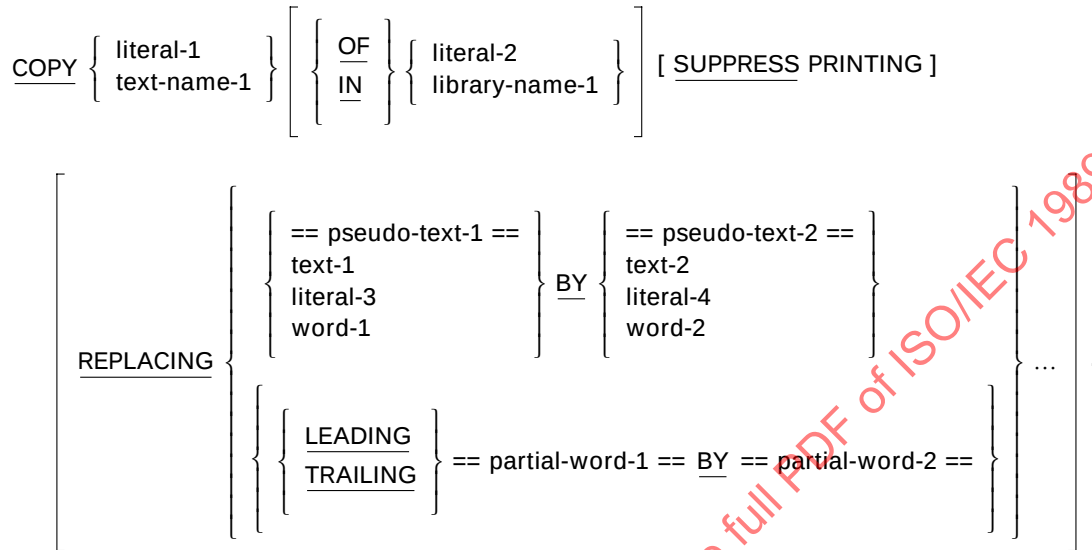

7.1.2.2 Syntax rules

- 1) A COPY statement may be specified anywhere in source text or in library text that a character-string or a separator, other than the closing delimiter of a literal, may appear except that a COPY statement shall not appear within a COPY statement.
- 2) A COPY statement shall be preceded by a space except when it is the first statement in a compilation group.
- 3) Within one COBOL library, each text-name shall be unique.
- 4) A concatenation expression or figurative constant shall not be specified for literal-1, literal-2, literal-3, or literal-4.
- 5) Literal-1 and literal-2 shall be alphanumeric literals. The allowable value of literal-1 and literal-2 is defined by the implementor.
- 6) Pseudo-text-1 shall contain one or more text-words, at least one of which shall be neither a separator comma nor a separator semicolon.
- 7) Pseudo-text-2 shall contain zero, one, or more text-words.
- 8) Character-strings within pseudo-text-1 and pseudo-text-2 may be continued in accordance with the rules of reference format.
- 9) Text-1 and text-2 shall be one of the following formats of identifiers: function-identifier, qualified-data-name-with-subscripts, reference-modification, qualified-linage-counter, or qualified-report-counter.

NOTE Text-1 and text-2 are archaic features and their use should be avoided.

If subscripting is specified, it shall not include any arithmetic expressions as subscripts with the exception of a single literal or identifier, or an identifier plus or minus an integer. The format of any identifier specified in

subscripts, reference modifiers, or function arguments shall be: a function-identifier, qualified-data-name-with-subscripts, reference-modification, qualified-lineage-counter, or qualified-report-counter. Function identifiers in text-1 or text-2 shall be intrinsic function references only.

- 10) Word-1 or word-2 may be any single COBOL word except 'COPY', the compiler directive indicator, the floating debug indicator, or the comment indicator.
- 11) The length of a text-word within pseudo-text and within library text shall be from 1 through 322 character positions.
- 12) Pseudo-text-1 and pseudo-text-2 may contain debugging lines. A debugging line is specified within pseudo-text if the debugging line begins after the opening pseudo-text delimiter but before the matching closing pseudo-text delimiter.
- 13) Compiler directive lines shall not be specified within pseudo-text-1, pseudo-text-2, partial-word-1, or partial-word-2.
- 14) Partial-word-1 shall consist of one text-word.
- 15) Partial-word-2 shall consist of zero or one text-word.
- 16) An alphanumeric, boolean, or national literal shall not be specified as partial-word-1 or partial-word-2.

7.1.2.3 General rules

- 1) Text-name-1 or literal-1 identifies the library text to be processed by the COPY statement.
- 2) Library-name-1 names a resource that shall be available to the compiler and shall provide access to the library text referenced by text name-1.
- 3) The implementor shall define the rules for locating the library text referenced by text-name-1 or literal-1. When neither library-name-1 nor literal-2 is specified, a default COBOL library is used. The implementor defines the mechanism for identifying the default COBOL library.
- 4) If the SUPPRESS phrase is specified, library text incorporated as a result of COPY statement processing is not listed. If a listing is being produced, the COPY statement itself is listed.
- 5) At the completion of copying the library text into the compilation group, the LISTING directive that is in effect for the COPY statement itself is considered to be in effect, regardless of any LISTING directives in the library text.
- 6) The effect of processing a COPY statement is that the library text associated with text-name-1 or the value of literal-1 is copied into the compilation group, logically replacing the entire COPY statement beginning with the reserved word COPY and ending with the separator period, inclusive.
- 7) If the REPLACING phrase is not specified, the library text is included in the resultant text unchanged.
- 8) If the REPLACING phrase is specified, library text is modified during creation of the structured compilation group that is described in 7.1, Text manipulation. Each matched occurrence of pseudo-text-1, text-1, word-1, literal-3, or partial-word-1 in the library text is replaced by the corresponding pseudo-text-2, text-2, word-2, literal-4, or partial-word-2 in accordance with subsequent rules of the COPY statement.
- 9) For purposes of matching, text-1, word-1, and literal-3 are treated as pseudo-text containing only text-1, word-1, or literal-3, respectively.
- 10) The comparison operation to determine text replacement occurs in the following manner:

- a) The leftmost library text-word that is not a separator comma or a separator semicolon is the first text-word used for comparison. Any text-word or space preceding this text-word is copied into the resultant text. Starting with the first text-word for comparison and first pseudo-text-1, text-1, word-1, literal-3, or partial-word-1 that was specified in the REPLACING phrase, the entire REPLACING phrase operand that precedes the reserved word BY is compared to an equivalent number of contiguous library text-words.
- b) Pseudo-text-1, text-1, word-1, or literal-3 match the library text only if the ordered sequence of text-words that forms pseudo-text-1, text-1, word-1, or literal-3 is equal, character for character, to the ordered sequence of library text-words. When the LEADING phrase is specified, partial-word-1 matches the library text only if the contiguous sequence of characters that forms partial-word-1 is equal, character for character, to an equal number of contiguous characters starting with the leftmost character position of a library text-word. When the TRAILING phrase is specified, partial-word-1 matches the library text only if the contiguous sequence of characters that forms partial-word-1 is equal, character for character, to an equal number of contiguous characters ending with the rightmost character position of a library text-word.
- c) The following rules apply for the purpose of matching:
 1. Each occurrence of a separator comma, semicolon, or space in pseudo-text-1 or in the library text is considered to be a single space. Each sequence of one or more space separators is considered to be a single space.
 2. Each operand and operator of a concatenation expression is a separate text-word.
 3. Except when used in the non-hexadecimal formats of alphanumeric and national literals, each alphanumeric character is equivalent to its corresponding national character and each lowercase letter is equivalent to its corresponding uppercase letter, as specified for the COBOL character repertoire in 8.1.2, COBOL character repertoire.
 4. For alphanumeric, boolean and national literals:
 - a. The two representations of the quotation symbol match when specified in the opening and closing delimiters of the literal.

NOTE The opening and closing delimiters are required to be in the same representation.
 - b. In the content of the literal, two contiguous occurrences of the character used as the quotation symbol in the opening delimiter are treated as a single occurrence of that character.
 5. Each occurrence of a compiler directive line is treated as a single space.
 6. A debugging indicator shall be treated as if it did not appear in the line. Text-words within a debugging line participate in the matching.
 7. Comments, if any, are treated as a single space.

NOTE Because comments are removed during logical conversion, none are expected.
- d) If no match occurs, the comparison is repeated with each next successive pseudo-text-1, text-1, word-1, literal-3, or partial-word-1, if any, in the REPLACING phrase until either a match is found or there is no next successive REPLACING operand.
- e) When all the REPLACING phrase operands have been compared and no match has occurred, the leftmost library text-word is copied into the resultant text. The next successive library text-word is then considered as the leftmost library text-word, and the comparison cycle starts again with the first pseudo-text-1, text-1, word-1, literal-3, or partial-word-1 specified in the REPLACING phrase.
- f) When a match occurs between pseudo-text-1, text-1, word-1, or literal-3 and the library text, the corresponding pseudo-text-2, text-2, word-2, or literal-4 is placed into the resultant text. When a match occurs between partial-word-1 and the library text-word, the library text-word is placed into the resultant

text with the matched characters either replaced by partial-word-2 or deleted when partial-word-2 consists of zero text-words. The library text-word immediately following the rightmost text-word that participated in the match is then considered as the leftmost text-word. The comparison cycle starts again with the first pseudo-text-1, text-1, word-1, literal-3, or partial-word-1 specified in the REPLACING phrase.

- g) The comparison operation continues until the rightmost text-word in the library text has either participated in a match or been considered as a leftmost library text-word and participated in a complete comparison cycle.
- 11) If the REPLACING phrase is specified, the library text shall not contain a COPY statement.
- 12) The resultant text after replacement shall be in logical free-form reference format. When copying text-words into the resultant text, additional spaces may be introduced only between text-words where there already exists a space or where a space is assumed.
- NOTE A space is assumed at the end of a source line.
- 13) If additional lines are introduced as a result of a COPY statement, each text-word introduced appears on a debugging line if the COPY statement begins on a debugging line or if the text-word being introduced appears on a debugging line in library text. When a text-word specified in the BY phrase is introduced, it appears on a debugging line if the first library text-word being replaced is specified on a debugging line. Except in the preceding cases, only those text-words that are specified on debugging lines where the debugging line is within pseudo-text-2 appear on debugging lines in the resultant source text.
- 14) If the REPLACING phrase is not specified, the library text may contain a COPY statement that does not include a REPLACING phrase. The implementation shall support nesting of at least 5 levels, including the first COPY statement in the sequence. The library text being copied shall not cause the processing of a COPY statement that directly or indirectly copies itself.
- 15) The replacing action of a COPY statement shall not introduce a COPY statement, a SOURCE FORMAT directive, a comment, or a blank line.

7.1.3 REPLACE statement

The REPLACE statement modifies text in a compilation group.

7.1.3.1 General format

Format 1 (replacing):

$$\text{REPLACE [ALSO] } \left\{ \begin{array}{l} \text{== pseudo-text-1 == BY == pseudo-text-2 ==} \\ \left\{ \begin{array}{l} \text{LEADING} \\ \text{TRAILING} \end{array} \right\} \text{== partial-word-1 == BY == partial-word-2 ==} \end{array} \right\} \dots$$

Format 2 (off):

REPLACE [LAST] OFF .

7.1.3.2 Syntax rules

- 1) A REPLACE statement may be specified anywhere in source text or in library text that a character-string or a separator, other than the closing delimiter of a literal, may appear.
- 2) A REPLACE statement shall be preceded by a space except when it is the first statement in a compilation group.
- 3) Pseudo-text-1 shall contain one or more text-words, at least one of which shall be neither a separator comma nor a separator semicolon.
- 4) Pseudo-text-2 shall contain zero, one, or more text-words.
- 5) Partial-word-1 shall consist of one text-word.
- 6) Partial-word-2 shall consist of zero or one text-word.
- 7) An alphanumeric, boolean, or national literal shall not be specified as partial-word-1 or partial-word-2.
- 8) Character-strings within pseudo-text-1 and pseudo-text-2 may be continued in accordance with the rules of reference format.
- 9) The length of a text-word within pseudo-text shall be from 1 through 322 characters.
- 10) Pseudo-text-1 and pseudo-text-2 may contain debugging lines.
- 11) Compiler directive lines shall not be specified within pseudo-text-1, pseudo-text-2, partial-word-1, or partial-word-2.

7.1.3.3 General Rules

- 1) In subsequent general rules of the REPLACE statement, 'source text' refers to the conditionally-processed compilation group.
- 2) Pseudo-text-1 specifies the text to be replaced by pseudo-text-2.
- 3) Partial-word-1 specifies the text to be replaced by partial-word-2.

- 4) Once encountered, a format 1 REPLACE statement has one of three states:
 - a) active, meaning it is the current statement in use for replace processing for the compilation group;
 - b) inactive, meaning it is not currently in use for replace processing but is held in a last-in first-out queue, from which it may be popped and made active or cancelled in accordance with the rules for subsequent REPLACE statements encountered in the compilation group;
 - c) cancelled, meaning it is removed from use for replace processing for the remainder of the compilation group or, if inactive, it is removed from the queue of inactive statements for the remainder of the compilation group.
- 5) A REPLACE statement that is placed in the active state remains active until it is placed in the inactive state, it is cancelled, or the end of the compilation group is reached, whichever occurs first.
- 6) When there is no REPLACE statement in the active state:
 - a) A format 1 REPLACE statement is placed in the active state at the point at which it is encountered in the compilation group. The ALSO phrase, if specified, has no effect.
 - b) A format 2 REPLACE statement has no effect.
- 7) When there is a REPLACE statement in the active state:
 - a) A format 1 REPLACE statement with the ALSO phrase results in the following:
 1. the active REPLACE statement is made inactive and is pushed into the queue of inactive REPLACE statements.
 2. The current REPLACE statement is expanded into a single REPLACE statement, without the ALSO phrase, having as its operands all the operands of the current statement followed by the operands of the most recent statement pushed into the queue of inactive REPLACE statements. The expanded REPLACE statement is placed in the active state.
 - b) A format 1 REPLACE statement without the ALSO phrase cancels the active REPLACE statement and cancels any REPLACE statements in the queue of inactive REPLACE statements. Then the current REPLACE statement is placed in the active state.
 - c) A format 2 REPLACE statement with the LAST phrase cancels the active REPLACE statement and pops the last statement that was pushed into the queue of inactive REPLACE statements, if any. The popped statement, if any, is placed in the active state.
 - d) A format 2 REPLACE statement without the LAST phrase cancels the active REPLACE statement and cancels all REPLACE statements in the queue of inactive REPLACE statements, if any.
- 8) The comparison operation to determine text replacement begins with the text immediately following the REPLACE statement and occurs in the following manner:
 - a) Starting with the leftmost source text-word and the first pseudo-text-1 or partial-word-1, pseudo-text-1 or partial-word-1 is compared to an equivalent number of contiguous source text-words.
 - b) Pseudo-text-1 matches the source text if, and only if, the ordered sequence of text-words that forms pseudo-text-1 is equal, character for character, to the ordered sequence of source text-words. When the LEADING phrase is specified, partial-word-1 matches the source text-word only if the contiguous sequence of characters that forms partial-word-1 is equal, character for character, to an equal number of contiguous characters starting with the leftmost character position of that source text-word. When the TRAILING phrase is specified, partial-word-1 matches the source text-word only if the contiguous sequence of

characters that forms partial-word-1 is equal, character for character, to an equal number of contiguous characters ending with the rightmost character position of that source text-word.

c) The following rules apply for the purpose of matching:

1. Each occurrence of a separator comma, semicolon, or space in pseudo-text-1 or in the source text is considered to be a single space. Each sequence of one or more space separators is considered to be a single space.
2. Each operand and operator of a concatenation expression is a separate text-word.
3. Except when used in the non-hexadecimal formats of alphanumeric and national literals, each alphanumeric character is equivalent to its corresponding national character and each lowercase letter is equivalent to its corresponding uppercase letter, as specified for the COBOL character repertoire in 8.1.2, COBOL character repertoire.

4. For alphanumeric, boolean, and national literals:

- a. The two representations of the quotation symbol match when specified in the opening and closing delimiters of the literal.

NOTE The opening and closing delimiters are required to be in the same representation.

- b. In the content of the literal, two contiguous occurrences of the character used as the quotation symbol in the opening delimiter are treated as a single occurrence of that character.

5. Each occurrence of a compiler directive line is treated as a single space.

6. A debugging indicator shall be treated as if it did not appear in the line. Text words within a debugging line participate in the matching.

7. Comments, if any, are treated as a single space.

NOTE Because comments are removed during logical conversion, none are expected.

- d) If no match occurs, the comparison is repeated with each next successive occurrence of pseudo-text-1 or partial-word-1, until either a match is found or there is no next successive occurrence of pseudo-text-1 or partial-word-1.
- e) When all occurrences of pseudo-text-1 or partial-word-1 have been compared and no match has occurred, the next successive source text-word is then considered as the leftmost source text-word, and the comparison cycle starts again with the first occurrence of pseudo-text-1 or partial-word-1.
- f) When a match occurs between pseudo-text-1 and the source text, the corresponding pseudo-text-2 replaces the matched text in the source text. When a match occurs between partial-word-1 and the source text-word, the matched characters of that source text-word are either replaced by partial-word-2 or deleted when partial-word-2 consists of zero text-words. The source text-word immediately following the rightmost text-word that participated in the match is then considered as the leftmost source text-word. The comparison cycle starts again with the first occurrence of pseudo-text-1 or partial-word-1.
- g) The comparison operation continues until the rightmost text-word in the source text that is within the scope of the REPLACE statement has either participated in a match or been considered as a leftmost source text-word and participated in a complete comparison cycle.

9) The text produced as a result of processing a REPLACE statement shall not contain a COPY statement, a REPLACE statement, a SOURCE FORMAT directive, a comment, or a blank line.

10) The text that results from the processing of a REPLACE statement shall be in logical free-form reference format. Text-words inserted into the resultant text as a result of processing a REPLACE statement are placed in

accordance with the rules of free-form reference format. When inserting text-words of pseudo-text-2 into the resultant text, additional spaces may be introduced only between text-words where there already exists a space or a space is assumed.

NOTE A space is assumed at the end of a source line.

- 11) If the text being replaced begins on a debugging line, the resultant text is on a debugging line.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

7.2 Compiler directives

Compiler directives specify options for use by the compiler, define compilation-variables, and control conditional compilation.

7.2.1 General format

>>compiler-instruction

7.2.2 Syntax rules

- 1) A compiler directive shall be specified on one line, except for the EVALUATE and the IF directives for which specific rules are specified.
- 2) A compiler directive shall be preceded only by zero, one, or more space characters.
- 3) When the reference format is fixed-form, a compiler directive shall be written in the program-text area and may be followed only by space characters and an optional inline comment.
- 4) When the reference format is free-form, a compiler directive may be followed only by space characters and an optional inline comment.
- 5) A compiler directive is composed of the compiler directive indicator, optionally followed by the COBOL character space, followed by compiler-instruction. The compiler directive indicator shall be treated as though it were followed by a space if no space is specified after the indicator.
- 6) Compiler-instruction is composed of compiler-directive words, system-names, and user-defined words as specified in the syntax of each directive. Compiler-directive words are identified in 8.12, Compiler-directive words.
- 7) A compiler-directive word is reserved within the context of the compiler directive in which it is specified.
- 8) A compiler directive may be specified anywhere in a compilation group, in source text or in library text, except
 - a) as restricted by the rules for the specific compiler directive,
 - b) within a source text manipulation statement,
 - c) between the lines of a continued character-string,
 - d) on a debugging line.
- 9) The compiler-directive word 'IMP' is reserved for use by the implementor. If the implementor defines the IMP directive, the syntax rules for that directive shall be implementor-defined.

NOTE >>IMP provides an optional place holder for all current and future implementor-defined directives. In this way the implementor can optionally support the use of >>IMP to indicate the start of one or more implementor-defined directives.

- 10) A literal in a compiler directive shall not be specified as a concatenation expression, a figurative constant, or a floating-point numeric literal.

7.2.3 General rules

- 1) A compiler directive line is not affected by the replacing action of a COPY statement or a REPLACE statement.
- 2) Compiler directives are processed either in the text manipulation stage or the compilation stage of processing, as specified in 7.1, Text manipulation. The order of processing during the text manipulation stage is specified

in 7.1, Text manipulation. During the compilation stage, compiler directives are processed in the order encountered in the structured compilation group.

- 3) If the implementor defines the IMP directive, the general rules for that directive shall be implementor-defined.
- 4) A compiler directive applies to all of the source text and library text that follows and is independent of execution flow.

7.2.4 Conditional compilation

The use of certain compiler directives provides a means of including or omitting selected lines of source code. This is called conditional compilation. The compiler directives that are used for conditional compilation are the DEFINE directive, the EVALUATE directive, and the IF directive. The DEFINE directive is used to define compilation variables, which may be referenced in the EVALUATE and IF directives in order to select lines of code that are to be compiled or are to be omitted during compilation. Compilation variables may be referenced in constant entries as specified in 13.9, Constant entry.

7.2.5 Compile-time arithmetic expressions

A compile-time arithmetic expression may be specified in the DEFINE and EVALUATE directives, in a constant conditional expression, and in a constant entry.

7.2.5.1 Syntax rules

- 1) Compile-time arithmetic expressions shall be formed in accordance with 8.8.1, Arithmetic expressions, with the following exceptions:
 - a) The exponentiation operator shall not be specified.
 - b) All operands shall be fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals.
 - c) The expression shall be specified in such a way that a division by zero does not occur and the value of the standard intermediate data item after each operation is within the range specified in 8.8.1.3.1.1, Precision and allowable magnitude.

7.2.5.2 General rules

- 1) The order of precedence and the rules for evaluation of compile-time arithmetic expressions are shown in 8.8.1, Arithmetic expressions. Standard arithmetic shall be used for all arithmetic operations.
- 2) The final result of the arithmetic expression shall be truncated to the integer part of the value as specified in 15.38, INTEGER-PART function, and the resultant value shall be considered to be an integer numeric literal.

7.2.6 Compile-time boolean expressions

A compile-time boolean expression may be specified in the EVALUATE directive and in a constant conditional expression.

7.2.6.1 Syntax rules

- 1) Compile-time boolean expressions shall be formed in accordance with 8.8.2, Boolean expressions, except that all operands shall be boolean literals or boolean expressions in which all operands are boolean literals.

7.2.6.2 General rules

- 1) The order of precedence and the rules for evaluation of compile-time boolean expressions are shown in 8.8.2, Boolean expressions.

7.2.7 Constant conditional expression

A constant conditional expression is a conditional expression in which the operands are a defined condition, a literal, or an arithmetic or boolean expression containing only literal terms. A defined condition tests whether a compilation-variable has a defined value.

7.2.7.1 Syntax Rules

- 1) A constant conditional expression shall be one of the following:
 - a) A relation condition in which both operands are literals, arithmetic expressions containing only literal terms, or boolean expressions containing only literal terms. The condition shall be formed according to the rules in 8.8.4.1.1, Relation conditions. The following rules also apply:
 1. The operands shall be of the same category. An arithmetic expression is of the category numeric. A boolean expression is of the category boolean.
 2. If literals are specified and they are not numeric literals, the relational operator shall be 'IS [NOT] EQUAL TO' or 'IS [NOT] ='.
 - b) A boolean condition as specified in 8.8.4.1.2, Boolean condition, in which all operands are boolean literals.
 - c) A defined condition.
 - d) A complex condition as specified in 8.8.4.2, Complex conditions, formed by combining the above forms of simple conditions into complex conditions. Abbreviated combined relation conditions shall not be specified.
- 2) An arithmetic expression in a constant conditional expression shall be formed in accordance with 7.2.5, Compile-time arithmetic expressions.
- 3) A boolean expression in a constant conditional expression shall be formed in accordance with 7.2.6, Compile-time boolean expressions.

7.2.7.2 General rules

- 1) Complex conditions are evaluated according to the rules in 8.8.4.2, Complex conditions.
- 2) For a simple relation condition where the operands are not numeric or boolean, no collating sequence is used for the comparison. A character by character comparison for equality based on the binary value of each character's encoding is used. If the literals are of unequal length they are not equal.

NOTE This means that uppercase and lowercase letters are not equivalent.

7.2.7.3 Defined condition

A defined condition tests whether a given compilation-variable is defined.

7.2.7.3.1 General format

compilation-variable-name-1 IS [NOT] DEFINED

7.2.7.3.2 Syntax rules

- 1) Compilation-variable-name-1 shall not be the same as a compiler-directive reserved word.

7.2.7.3.3 General rules

- 1) A defined condition using the IS DEFINED syntax evaluates TRUE if compilation-variable-name-1 is currently defined.
- 2) A defined condition using the IS NOT DEFINED syntax evaluates TRUE if compilation-variable-name-1 is not currently defined.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

7.2.8 CALL-CONVENTION directive

The CALL-CONVENTION directive instructs the compiler how to treat references to program-names and method-names and may be used to determine other details for interacting with a function, method, or program.

7.2.8.1 General format

>>CALL-CONVENTION { COBOL
call-convention-name-1 }

7.2.8.2 General rules

- 1) The default for the CALL-CONVENTION directive is '>>CALL-CONVENTION COBOL'.
- 2) The CALL-CONVENTION directive determines how program-names and method-names specified in subsequent INVOKE statements, inline method invocations, CALL statements, CANCEL statements, and program-address-identifiers are processed by the compiler. This directive applies when a program-name or method-name is referenced in those language constructs.
 - a) When COBOL is specified, that program-name or method-name is treated as a COBOL word that maps to the externalized name of the method to be invoked or the program to be called, canceled, or referenced in the program-address-identifier, respectively, applying the same implementor defined mapping rules as for a method-name or program-name for which no AS phrase is specified.
 - b) When call-convention-name-1 is specified, that program-name or method-name is treated as a literal that maps to the externalized name of the method to be invoked or the program to be called, canceled, or referenced in the program-address-identifier, respectively, in a manner defined by the implementor.
- 3) The CALL-CONVENTION directive may also be used by the implementor to determine other details needed to interact with a function, method, or program.

7.2.9 DEFINE directive

The DEFINE directive specifies a symbolic name, called a compilation variable, for a particular literal value. This name may then be used in a constant conditional expression, an EVALUATE directive, or a constant entry. A compilation variable can be set to a value obtained by the compiler from the operating environment.

7.2.9.1 General format

```
>> DEFINE compilation-variable-name-1 AS {
    { arithmetic-expression-1
      literal-1
      PARAMETER
    } [ OVERRIDE ]
    OFF
}
```

7.2.9.2 Syntax rules

- 1) Compilation-variable-name-1 shall not be the same as a compiler-directive reserved word.
- 2) If a DEFINE directive specifies neither the OFF nor the OVERRIDE phrase, then either
 - compilation-variable-name-1 shall not have been declared previously within the same compilation group; or
 - the last previous DEFINE directive referring to compilation-variable-name-1 shall have been specified with the OFF phrase; or
 - the last previous DEFINE directive referring to compilation-variable-name-1 shall have specified the same value.
- 3) Arithmetic-expression-1 shall be formed in accordance with 7.2.5, Compile-time arithmetic expressions.

7.2.9.3 General rules

- 1) In text that follows a DEFINE directive specifying compilation-variable-name-1 without the OFF phrase, compilation-variable-name-1 may be used in the compilation group in any compiler directive where a literal of the category associated with the name is permitted, in a defined condition, or in a constant entry where the FROM phrase is specified.
- 2) Following a DEFINE directive in which the OFF phrase is specified, compilation-variable-name-1 shall not be used except in a defined condition unless it is redefined in a subsequent DEFINE directive.
- 3) If the OVERRIDE phrase is specified, compilation-variable-name-1 is unconditionally set to reference the value of the specified operand.
- 4) If the PARAMETER phrase is specified, the value referenced by compilation-variable-name-1 is obtained from the operating environment by an implementor-defined method when the DEFINE directive is processed. If no value is made available from the operating environment, compilation-variable-name-1 is not defined.
- 5) If the operand of the DEFINE directive consists of a single numeric literal, that operand is treated as a literal, not as an arithmetic-expression.
- 6) If arithmetic-expression-1 is specified, arithmetic-expression-1 is evaluated according to 7.2.5, Compile-time arithmetic expressions, and compilation-variable-name-1 references the resultant value.
- 7) If literal-1 is specified, compilation-variable-name-1 references literal-1.

7.2.10 EVALUATE directive

The EVALUATE directive provides for multi-branch conditional compilation.

7.2.10.1 General format

Format 1

```
>> EVALUATE { literal-1
                arithmetic-expression-1
                boolean-expression-1 }

{ >> WHEN { literal-2
              arithmetic-expression-2
              boolean-expression-2 } [ { THROUGH
                                         THRU
              { literal-3
                arithmetic-expression-3 } ] [ text-1 ] } ...

[ >> WHEN OTHER [ text-2 ] ]

>> END-EVALUATE
```

Format 2

```
>> EVALUATE TRUE
{ >> WHEN constant-conditional-expression-1 [ text-1 ] } ...

[ >> WHEN OTHER [ text-2 ] ]

>> END-EVALUATE
```

7.2.10.2 Syntax rules

ALL FORMATS

- 1) For descriptive purposes in these syntax rules, operand-1 refers to literal-1, arithmetic-expression-1, or boolean-expression-1 in format 1 and to the TRUE keyword in format 2; operand-2 refers to literal-2, arithmetic-expression-2, or boolean-expression-2 in format 1 and to constant-conditional-expression-1 in format 2; and operand-3 refers to literal-3 or arithmetic-expression-3 in format 1.
- 2) EVALUATE operand-1 shall begin on a new line and shall be specified entirely on that line.
- 3) >>WHEN operand-2 [THROUGH operand-3] shall begin on a new line and shall be specified entirely on that line.
- 4) Text-1 shall begin on a new line.
- 5) >>WHEN OTHER shall begin on a new line and shall be specified entirely on that line.
- 6) Text-2 shall begin on a new line.
- 7) >>END-EVALUATE shall be specified on a new line and shall be specified entirely on that line.

- 8) Text-1 and text-2 may be any kind of source lines, including compiler directives. Text-1 and text-2 may consist of multiple lines.
- 9) The phrases of a given EVALUATE directive shall be specified all in the same library text or all in source-text. For purposes of this rule, text-1 and text-2 are not considered phrases of the EVALUATE directive. A nested EVALUATE directive specified in text-1 or in text-2 is considered a new EVALUATE directive.

FORMAT 1

- 10) Literal-1, arithmetic-expression-1, and boolean-expression-1 are selection subjects. The operands specified in the WHEN phrase are selection objects.
- 11) All operands of one EVALUATE directive shall be of the same category. For this rule, an arithmetic expression is of category numeric and a boolean expression is of category boolean.
- 12) If the THROUGH phrase is specified, all selection subjects and selection objects shall be of category numeric.
- 13) The words THROUGH and THRU are equivalent.
- 14) Arithmetic-expression-1, arithmetic-expression-2, and arithmetic-expression-3 shall be formed in accordance with 7.2.5, Compile-time arithmetic expressions.
- 15) Boolean-expression-1 and boolean-expression-2 shall be formed in accordance with 7.2.6, Compile-time boolean expressions.
- 16) Constant-conditional-expression-1 shall be formed in accordance with 7.2.7, Constant conditional expression.

7.2.10.3 General rules

ALL FORMATS

- 1) Text-1 and text-2 are not part of the EVALUATE compiler directive line. Any text words in text-1 or text-2 that do not form a compiler directive line are subject to the matching and replacing rules of the COPY statement and the REPLACE statement.

FORMAT 1

- 2) If an operand of the EVALUATE directive consists of a single numeric literal, that operand is treated as a literal, not as an arithmetic-expression.
- 3) Boolean-expression-1 and boolean-expression-2 are evaluated in accordance with 7.2.6, Compile-time boolean expressions.
- 4) The selection subject is compared against the values specified in each WHEN phrase in turn as follows:
 - a) If the THROUGH phrase is not specified, a TRUE result is returned if the selection subject is equal to literal-2, arithmetic-expression-2, or boolean-expression-2.
 - b) If the THROUGH phrase is specified, a TRUE result is returned if the selection subject lies in the inclusive range determined by literal-2 or arithmetic-expression-2 and literal-3 or arithmetic-expression-3.

If a WHEN phrase evaluates to TRUE, all lines of text-1 associated with that WHEN phrase are included in the resultant text. All lines of text-1 associated with other WHEN phrases in that EVALUATE directive and all lines of text-2 associated with a WHEN OTHER phrase are omitted from the resultant text.

- 5) If no WHEN phrase evaluates to TRUE, all lines of text-2 associated with the WHEN OTHER phrase, if specified, are included in the resultant text. All lines of text-1 associated with other WHEN phrases are omitted from the resultant text.

- 6) If the END-EVALUATE phrase is reached without any WHEN phrase evaluating to TRUE, or without encountering a WHEN OTHER phrase, all lines of text-1 associated with all WHEN phrases are omitted from the resultant text.
- 7) If literal-1 is an alphanumeric or national literal, a character by character comparison for equality based on the binary value of each character's encoding is used. If the literals are of unequal length they are not equal.

FORMAT 2

- 8) For each WHEN phrase in turn, the constant-conditional-expression is evaluated in accordance with 7.2.7, Constant conditional expression.

If a WHEN phrase evaluates to TRUE, all lines of text-1 associated with that WHEN phrase are included in the resultant text. All lines of text-1 associated with other WHEN phrases of that EVALUATE directive and all lines of text-2 associated with a WHEN OTHER phrase are omitted from the resultant text.


- 9) If no WHEN phrase evaluates to TRUE, all lines of text-2 associated with the WHEN OTHER phrase, if specified, are included in the resultant text. All lines of text-1 associated with other WHEN phrases are omitted from the resultant text.
- 10) If the END-EVALUATE phrase is reached without any WHEN phrase evaluating to TRUE, or without encountering a WHEN OTHER phrase, all lines of text-1 associated with all WHEN phrases are omitted from the resultant text.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

7.2.11 FLAG-85 directive

The FLAG-85 directive specifies options to flag certain syntax that might be incompatible between the previous COBOL standard and the current COBOL standard.

7.2.11.1 General format

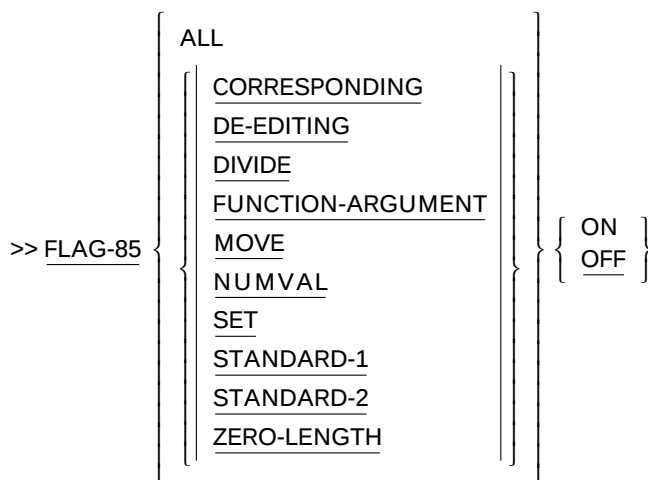

7.2.11.2 Syntax rules

- 1) The FLAG-85 directive may be specified only between clauses in divisions other than the procedure division and only between statements in the procedure division.

7.2.11.3 General rules

- 1) The implementor shall provide a warning mechanism that flags the incompatibilities potentially affecting existing programs for the selected option, where the incompatibility is between the specifications in ISO 1989, including ISO 1989/Amd 1 and ISO 1989/Amd 2, and this International Standard.

NOTE A complete list of changes that potentially impact existing programs is given in D.1, Substantive changes potentially affecting existing programs.

- 2) If ON is explicitly or implicitly specified for an option, the warning mechanism is enabled for that option for all text that follows until the end of the compilation group is reached, a FLAG-85 directive is encountered that turns off all flagging options, or a FLAG-85 directive is encountered that turns off that option.
- 3) If OFF is specified, flagging for the selected option or options is disabled.
- 4) The word or words following FLAG-85 indicate the syntax to be diagnosed:
 - a) ALL: All of the options apply.
 - b) CORRESPONDING: In an ADD, MOVE, or SUBTRACT statement with the CORRESPONDING phrase, if subscripting with other than a constant is specified on any of the operands, the statement shall be flagged.
 - c) DE-EDITING: A de-editing MOVE statement shall be flagged.
 - d) DIVIDE: In a DIVIDE statement with the REMAINDER phrase, if the quotient data item is not described with a sign (there is no S in the PICTURE clause) and either the divisor or dividend is described with a sign, the DIVIDE statement shall be flagged.

- e) **FUNCTION-ARGUMENT:** If the intrinsic function **RANDOM** is followed immediately by an arithmetic expression that is enclosed in parentheses, and the function is specified as an argument in an intrinsic function that allows multiple arithmetic expressions as arguments, the function **RANDOM** shall be flagged.
 - f) **MOVE:** If an alphanumeric literal or data item is moved to a numeric data item and the number of characters in the sending operand is greater than 31, the **MOVE** statement shall be flagged.
 - g) **NUMVAL:** The **NUMVAL** and **NUMVAL-C** intrinsic functions shall be flagged.
 - h) **SET:** If a condition-setting format **SET** statement references a variable length group item, the **SET** statement shall be flagged.
 - i) **STANDARD-1:** if **STANDARD-1** is specified in an **ALPHABET** clause in the **SPECIAL-NAMES** paragraph, the **ALPHABET** clause shall be flagged.
 - j) **STANDARD-2:** if **STANDARD-2** is specified in an **ALPHABET** clause in the **SPECIAL-NAMES** paragraph, the **ALPHABET** clause shall be flagged.
 - k) **ZERO-LENGTH:** A **READ** statement that could return a zero-length item or any statement that references a data item that could be a zero-length item shall be flagged.
- 5) If the **FLAG-85** directive is not specified, the default for all options is off.

7.2.12 FLAG-NATIVE-ARITHMETIC directive

The FLAG-NATIVE-ARITHMETIC directive specifies that when standard arithmetic has been specified or implied for the source unit, any arithmetic operation that uses native arithmetic shall be flagged.

7.2.12.1 General format

$$>>\underline{\text{FLAG-NATIVE-ARITHMETIC}} \left\{ \begin{array}{c} \text{ON} \\ \text{OFF} \end{array} \right\}$$

7.2.12.2 Syntax rules

- 1) The FLAG-NATIVE-ARITHMETIC directive may be specified only between clauses in divisions other than the procedure division and only between statements in the procedure division.

7.2.12.3 General rules

- 1) The implementor shall provide a warning mechanism that flags the use of native arithmetic when standard arithmetic has been specified or implied for the source unit.
- 2) If standard arithmetic has been specified or implied for the source unit and ON is explicitly or implicitly specified, flagging is enabled for any operation that uses or has the potential to use native arithmetic.
- 3) If OFF is specified, no flagging for native arithmetic shall occur.
- 4) If native arithmetic is in effect, no flagging of native arithmetic occurs.
- 5) If the FLAG-NATIVE-ARITHMETIC directive is not specified, the default is off.

7.2.13 IF directive

The IF directive provides for 1- or 2-way conditional compilation.

7.2.13.1 General format

```
>> IF constant-conditional-expression-1 [ text-1 ]  
  
    [ >> ELSE [ text-2 ] ]  
  
    >> END-IF
```

7.2.13.2 Syntax rules

- 1) >>IF conditional-expression-1 shall begin on a new line and shall be specified entirely on that line.
- 2) Text-1 shall begin on a new line.
- 3) >>ELSE shall begin on a new line and shall be specified entirely on that line.
- 4) Text-2 shall begin on a new line.
- 5) >>END-IF shall begin on a new line and shall be specified entirely on that line.
- 6) Text-1 and text-2 may be any kind of source lines, including compiler directives. Text-1 and text-2 may consist of multiple lines.
- 7) The phrases of a given IF directive shall be specified all in the same library text or all in source-text. For purposes of this rule, text-1 and text-2 are not considered phrases of the IF directive. A nested IF directive specified in text-1 or in text-2 is considered a new IF directive.

7.2.13.3 General rules

- 1) Text-1 and text-2 are not part of the IF compiler directive line. Any text words in text-1 or text-2 that do not form a compiler directive line are subject to the matching and replacing rules of the COPY statement and the REPLACE statement.
- 2) If constant-conditional-expression-1 evaluates to TRUE, all lines of text-1 are included in the resultant text and all lines of text-2 are omitted from the resultant text.
- 3) If constant-conditional-expression-1 evaluates to FALSE, all lines of text-2 are included in the resultant text and all lines of text-1 are omitted from the resultant text.

7.2.14 LEAP-SECOND directive

The LEAP-SECOND directive specifies whether a value greater than 59 may be returned in the seconds position of the value returned by the ACCEPT statement with the TIME phrase, the CURRENT-DATE intrinsic function, and the WHEN-COMPILED intrinsic function.

7.2.14.1 General format

$$>>\underline{\text{LEAP-SECOND}} \left\{ \begin{array}{l} \text{ON} \\ \text{OFF} \end{array} \right\}$$

7.2.14.2 Syntax rules

- 1) The LEAP-SECOND directive shall not be specified within a compilation unit.

7.2.14.3 General rules

- 1) If the LEAP-SECOND directive is not specified, a LEAP-SECOND directive with the OFF phrase is implied before the first compilation unit in the compilation group.
- 2) When ON is specified or implied, the implementor defines whether a value greater than 59 may be reported in the seconds position of the value returned from:
 - the ACCEPT statement with the TIME phrase
 - the CURRENT-DATE intrinsic function
 - the WHEN-COMPILED intrinsic function.
- 3) When OFF is specified or implied, a value greater than 59 shall not be reported in the seconds position of the value returned from:
 - the ACCEPT statement with the TIME phrase
 - the CURRENT-DATE intrinsic function
 - the WHEN-COMPILED intrinsic function.

7.2.15 LISTING directive

The LISTING directive instructs the compiler to turn any source listing on or off.

NOTE This International Standard does not define the content or layout of any listing. It is recommended that the implementor provide a listing of the original compilation group and, optionally, a listing of the result of any text manipulation applied to the original compilation group.

7.2.15.1 General Format

$$>>\underline{\text{LISTING}} \left\{ \begin{array}{c} \text{ON} \\ \text{OFF} \end{array} \right\}$$

7.2.15.2 General Rules

- 1) Whether the compiler produces a source listing is implementor defined. If the compiler does not produce a source listing, the LISTING directive shall be ignored. Otherwise, the following general rules apply.
- 2) The default LISTING directive is '>>LISTING ON'.
- 3) Each LISTING directive shall be listed, even if the listing is being suppressed by a LISTING directive.
- 4) If OFF is specified, source lines shall not be listed until a LISTING directive specifying or implying the ON phrase is encountered, with the exception that another LISTING OFF directive shall be listed.
- 5) If ON is specified or implied, source lines shall be listed until either a LISTING OFF directive is encountered or the end of the compilation group is reached.

7.2.16 PAGE directive

The PAGE directive specifies page ejection and provides documentation for the source listing.

7.2.16.1 General format

>>PAGE [comment-text-1]

7.2.16.2 Syntax rules

- 1) Comment-text-1 may contain any character in the compile-time computer's coded character set except for control characters as specified in 6, Reference format, rule 3b.
- 2) Comment-text-1 is not checked syntactically.

7.2.16.3 General rules

- 1) Comment-text-1 shall serve only as documentation.
- 2) If a source listing is being produced, a PAGE directive shall cause page ejection followed by listing of the PAGE directive.
- 3) If a source listing is not being produced, a PAGE directive shall have no effect.

7.2.17 PROPAGATE directive

The PROPAGATE directive is used to cause propagation of exception conditions to the activating runtime element.

7.2.17.1 General format

$$>>\underline{\text{PROPAGATE}} \left\{ \begin{array}{l} \text{ON} \\ \underline{\text{OFF}} \end{array} \right\}$$

7.2.17.2 Syntax rules

- 1) A PROPAGATE directive shall not be specified within a compilation unit.

7.2.17.3 General rules

- 1) When the ON phrase is specified or implied, automatic propagation of exception conditions becomes enabled for functions, methods, and programs that follow in the compilation group. Automatic propagation remains enabled until a PROPAGATE directive specifying the OFF phrase is encountered or the end of the compilation group is reached.
- 2) During execution of a runtime element for which automatic propagation of exception conditions is enabled, any exception condition raised and not handled by either an exception phrase or a declarative in that runtime element shall be propagated as though a GOBACK RAISING LAST statement were executed in a declarative for that exception condition.
- 3) When the OFF phrase is specified, automatic propagation of exception conditions becomes disabled for functions, methods, and programs that follow in the compilation group until a PROPAGATE directive specifying the ON phrase is encountered.
- 4) The default for a compilation group is PROPAGATE OFF.

7.2.18 SOURCE FORMAT directive

The SOURCE FORMAT directive specifies whether the reference format of the source text or library text that follows is fixed form or free form.

7.2.18.1 General format

$$>> \text{SOURCE FORMAT IS } \left\{ \begin{array}{c} \text{FIXED} \\ \text{FREE} \end{array} \right\}$$

7.2.18.2 General rules

- 1) The SOURCE FORMAT directive indicates that the source text or library text following the directive and continuing through a subsequent SOURCE FORMAT directive shall be treated as fixed form if FIXED is specified, or as free form if FREE is specified. (See 6.2, Fixed-form reference format, and 6.3, Free-form reference format.)
- 2) The default reference format of a compilation group is fixed form.
- 3) The default reference format of library text is the reference format that was in effect for the COPY statement that resulted in processing of this library text.
- 4) A SOURCE FORMAT directive that is the first line of a compilation group or library text may be in either fixed form or free form.
- 5) If a SOURCE FORMAT directive is specified in library text, the specified format shall be in effect until another SOURCE FORMAT directive is encountered or the end of the library text is reached. When the processing of that library text is completed, the reference format shall revert to the reference format that was in effect for the COPY statement that resulted in processing of that library text.

7.2.19 TURN directive

The TURN directive is used to turn checking for specified exception conditions on or off.

7.2.19.1 General format

```
>>TURN { exception-name-1 [ file-name-1 ] ... } ... CHECKING { ON [ WITH LOCATION ]  
OFF }
```

7.2.19.2 Syntax rules

- 1) Any user-defined word beginning with the COBOL characters 'EC-' is interpreted as an exception-name-1 rather than as file-name-1. Any user-defined word that duplicates a compiler-directive word is interpreted as a compiler-directive word rather than as file-name-1.
- 2) Exception-name-1 shall be one of the exception names listed in 14.5.12.1, Exception conditions. There shall be no verification that a user-defined exception-name or a file-name specified in a TURN directive is actually used within the range of the TURN directive.

NOTE An exception object is always enabled.

- 3) No exception-name shall be specified more than once in one TURN directive.
- 4) No file-name shall be specified more than once for one exception condition.
- 5) If file-name-1 is specified, exception-name-1 shall begin with the COBOL characters 'EC-I-O'.

7.2.19.3 General rules

- 1) The default TURN directive is '>>TURN EC-ALL CHECKING OFF'.
- 2) If exception-name-1 EC-ALL is specified, the effect is as if the same TURN directive were specified containing all exception-names.
- 3) If exception-name-1 is one of the level-2 exception-names, the effect is as if that TURN directive were specified containing all exception-names that are subordinate to that level-2 exception-name. If file-name-1 is specified, the effect is as if file-name-1 were specified for each of these exception-names.
- 4) If the ON phrase is specified or implied, checking for the exception condition associated with exception-name-1 is enabled for the procedure division statements and procedure division headers that follow in the compilation group; if file-name-1 is specified, checking is enabled only for exception conditions associated with that file-name. If specified within a statement, the TURN directive does not apply to that statement. Checking remains enabled for every qualifying procedure division statement and procedure division header that follows in the compilation group until it is disabled by a TURN directive with the OFF phrase.
- 5) If the LOCATION phrase is specified, all information necessary to identify a source statement for the EXCEPTION-LOCATION, EXCEPTION-LOCATION-N, and EXCEPTION-STATEMENT functions is made available to the run unit. If the LOCATION phrase is not specified, the implementor shall specify whether this information is made available or not.
- 6) If the OFF phrase is specified, checking for the exception condition associated with exception-name-1 is disabled for all procedure division statements and procedure division headers that follow in the compilation group and remains disabled until another TURN directive for exception-name-1 with the ON phrase is encountered; if file-name-1 is specified, checking is disabled only for exception conditions associated with that file-name. If specified within a statement, checking for that statement is not turned off.

8 Language fundamentals

8.1 Character sets

The character set concepts in COBOL are the computer's coded character set, the COBOL character repertoire, and alphabets.

The computer's coded character set is the character set used for COBOL's internal processing.

The COBOL character repertoire is a repertoire of characters used in defining the syntax of the language. It is an abstract character set in that it is a list of characters independent of their encoding. The elements of the language that are specified in the COBOL character repertoire are given in 8.1.2, COBOL character repertoire.

Alphabets identify coded character sets for representing data on external media or identify collating sequences, or both. The programmer can define alphabets in the SPECIAL-NAMES paragraph or reference predefined alphabets identified in the SPECIAL-NAMES paragraph.

The CODE-SET clause may be used in a file description entry, referencing alphabets as defined in SPECIAL-NAMES, to describe alternative encoding of records on external media. During input-output operations, records for files declared with the CODE-SET clause are converted to and from that encoding and the encoding of the computer's coded character set.

8.1.1 Computer's coded character set

The computer's coded character set is the set of characters used in the memory of the computer during compilation or during execution of a COBOL runtime element.

In source code, the content of alphanumeric and national literals, except for hexadecimal formats, may contain any characters in the computer's coded character set used for writing source code, consistent with the characters the implementor allows for the class of the literal. The coded character set used during compilation may be the same as or different from the coded character set used during execution of the resultant runtime elements.

In source code, comments may contain any characters in the coded character set that is used for writing source code, subject to the rules in 6, Reference format.

The runtime computer's coded character set consists of a coded character set used to represent data described as usage display and a coded character set used to represent data described as usage national, called the computer's alphanumeric coded character set and the computer's national coded character set, respectively. The alphanumeric coded character set and the national coded character set may be two distinct coded character sets, or they may be one coded character set where a subset is designated as alphanumeric and the set or a subset is designated as national. In either case, unless specifically qualified as alphanumeric or national, the term computer's coded character set references both the alphanumeric and the national coded character sets. The characters of the alphanumeric coded character set and the characters of the national coded character set may, but need not be, disjoint sets.

NOTES

- 1 In general, the specification assumes that the national character set includes the characters of the alphanumeric character set; for example, intrinsic functions are defined for conversion between the two. An alphanumeric character set is typically a Latin alphabet coded character set, such as ISO/IEC 646, but may be any coded character set. A national character set is intended for larger coded character sets, such as the Universal Multiple-Octet Coded Character Set (UCS) defined by ISO/IEC 10646-1 and ISO/IEC 10646-2, but may be any coded character set.
- 2 An example of one coded character set used to represent both the alphanumeric and the national coded character set is UTF-16 in the UCS where the national coded character set might consist of the entire UCS coded character set and the alphanumeric coded character set might consist of a subset of the UCS. Nothing precludes the alphanumeric and the national coded character sets from both consisting of the entire UCS coded character set.

At runtime, an implementor may recognize a combination of characters from the computer's alphanumeric coded character set and the computer's national coded character set in the content of data items of category alphanumeric. This combination is referred to as mixed alphanumeric and national data. When this capability is provided, the implementor shall specify any applicable general rules.

The COBOL specification is independent of the encoding used to represent a computer's coded character set, except that:

- 1) The number of bytes used in the memory of the computer to represent characters in the alphanumeric coded character set shall be the same for all characters in that coded character set; the number of bytes shall be determined at compile time.
- 2) The number of bytes used in the memory of the computer to represent characters in the national coded character set shall be the same for all characters in that coded character set; the number of bytes shall be determined at compile time.
- 3) The number of bytes used to represent a character of the national coded character set shall be equal to or greater than the number of bytes used to represent a character of the alphanumeric coded character set.

NOTE COBOL processes each fixed-size element of a character set as one character, even when a graphic symbol requires two or more elements for its representation in that character set.

Source code rules are described in 8.1.2, COBOL character repertoire.

The implementor shall specify the number of bits in a byte for each supported computer.

The implementor shall specify the set of characters in and the encoding of each of the computer's alphanumeric character set and the computer's national character set. When these are implemented as one character set, the implementor shall specify the characters that map into the computer's alphanumeric coded character set and the characters that map into the computer's national coded character set. If more than one encoding of the computer's character set is supported, the implementor shall specify the mechanism for selecting the encoding for use at runtime.

When the computer's coded character set at runtime differs from the coded character set known at compile time, the content of alphanumeric and national literals shall be converted, prior to use at runtime, to the computer's runtime alphanumeric or national coded character set as appropriate for the class of the literal, except that the hexadecimal-alphanumeric format and the hexadecimal-national format literals shall not be converted. The implementor shall define the correspondence of each character of the compile-time coded character set with an associated character in the runtime coded character set. If the runtime coded character set is known at compile time, the conversion may occur either at compile time or at runtime. If the runtime coded character set is not known at compile time, conversion occurs at runtime. The implementor determines the point at which runtime conversion occurs.

8.1.2 COBOL character repertoire

The COBOL character repertoire is used to specify the syntax of the language. COBOL words, separators, picture symbols, numeric literals, the currency sign, floating format indicator characters, and the content of boolean and hexadecimal literals are defined in the COBOL character repertoire. The implementor maps the COBOL character repertoire to one or more coded character sets to be used in writing source code.

The COBOL character repertoire consists of the basic letters, basic digits, basic special characters, and extended letters as shown in table 2, COBOL character repertoire. Extended letters permit writing user-defined words in many languages in addition to the English language.

Table 2 — COBOL character repertoire

Description	Character	Meaning
Basic letters	A, B, ... Z	the basic Latin capital letters in ISO/IEC 646 or in ISO/IEC 10646-1
	a, b, ... z	the basic Latin small letters in ISO/IEC 646 or in ISO/IEC 10646-1
Basic digits	0, 1, ... 9	digits
Basic special character	+ - * / = \$, ; . " ' () > < & : _	space plus sign minus sign (hyphen) asterisk slant (slash, solidus) equal sign currency sign comma semicolon period quotation mark apostrophe left parenthesis right parenthesis greater than less than ampersand colon underscore
Extended letters		additional characters from the repertoire of ISO/IEC 10646-1 used in formation of user-defined words

8.1.2.1 General rules

- 1) The implementor shall define a mapping of the basic letters, basic digits, basic special characters, and extended letters of the COBOL character repertoire to one or more coded character sets. The COBOL character repertoire may be represented in any encoding scheme chosen by the implementor, including but not limited to one coded character set containing all characters of the repertoire or two distinct coded character sets, one alphanumeric and one national, mixed together. When two distinct coded character sets are used, the implementor shall define a correspondence between the basic letters, basic digits, and basic special characters of the alphanumeric and national coded character sets.

NOTES

1 The concepts 'alphanumeric character' and 'national character' apply to the encoding of data. The concepts 'basic letter' and 'extended letter' apply to source code and specify the symbols themselves, not their encoding. A given instance of a basic letter in a compilation group may be encoded in either an alphanumeric coded character set or in a national coded character set, but it is the same letter in either case. For example, within a compilation group, a basic letter 'A' encoded in ISO/IEC 646 has the same meaning in COBOL words as a basic letter 'A' encoded in ISO/IEC 10646-1 -- just as an uppercase 'A' has the same meaning as a lowercase 'a'.

2 Examples of coded character sets that may be used to represent the COBOL character repertoire are ISO/IEC 10646-1 UCS-4, UTF-8, or UTF-16; and implementor-defined coded character sets consisting of two distinct coded character sets mixed together, one a national coded character set and one an alphanumeric coded character set. There are other possible implementor-defined encodings of the COBOL character repertoire.

- 2) If the COBOL character repertoire is mapped to mixed alphanumeric and national coded character sets, the implementor shall specify the control functions or other mechanism for distinguishing alphanumeric characters from national characters. If more than one encoding is permitted in a single compilation group, the

implementor shall specify the control functions or other methods used for distinguishing between encodings. Any control functions used to switch between coded character sets are utilized in the compilation process and are not part of the syntax of the compilation group unless otherwise specified by the implementor.

3) Within a compilation group, the following rules apply:

- a) Except when used in the non-hexadecimal formats of alphanumeric and national literals, each uppercase COBOL basic letter is equivalent to its corresponding lowercase COBOL basic letter, if any.
- b) Each basic letter, basic digit, basic special character, and extended letter represented in the alphanumeric character set is equivalent to its corresponding basic letter, basic digit, basic special character, and extended letter, represented in the national character set, respectively.

Equivalence of uppercase and lowercase basic letters is achieved by folding from uppercase to lowercase in accordance with the case mapping described in Annex D.

4) The set of extended letters consists of characters from the repertoire specified in Annex C, Characters permitted in user-defined words, excluding any character that is defined as a basic letter, basic digit, or basic special character in the COBOL character repertoire. Extended letters in identifiers are subject to the following rules:

- a) A character in Annex C is included in the set of extended letters if it exists in the implementor-defined compile-time coded character set.
- b) Characters identified as special characters in Annex C shall not be written as the first or last character of a user-defined word. Characters identified as combining characters in Annex A of ISO/IEC TR 10176:2001 shall not be written as the first or last character of a user-defined word.
- c) An uppercase extended letter is treated as though it were folded to its corresponding lowercase extended letter in accordance with the case mapping described in Annex D, if any.
- d) If the set of extended letters includes any of the combining characters identified in Annex A of ISO/IEC TR 10176:2001, the base character and each combining character are treated as separate characters in determining the length of a user-defined word.

NOTE 1 For portable source code, programmers need to form identifiers from the basic letters, the basic digits, the underscore, and the hyphen in the COBOL character repertoire.

NOTE 2 ISO/IEC TR 10176:2001 identifies characters recommended for use in programming language identifiers. The list of characters in ISO/IEC TR 10176:2001 excludes punctuation and symbols that are not generally used in words or that are considered inappropriate for programming language identifiers. Some characters in ISO/IEC TR 10176:2001 may have an appearance similar to basic special characters specified in COBOL or may appear strange to speakers of some languages, but are necessary for representing certain languages. They are permitted in COBOL on the assumption that no confusion will result for user-defined words written by programmers fluent in the languages for which those characters are essential.

NOTE 3 The list of characters recommended for identifiers in ISO/IEC TR 10176:2001 includes combining sequences from ISO/IEC 10646-1 level 2, but not from level 3. The list does not include combining sequences that form alternate representations of composite characters such as é.

NOTE 4 Extended letters are case folded to lowercase for determining equivalency of uppercase and lowercase.

5) When an implementation does not provide a graphic representation of all characters of the COBOL character repertoire, substitute graphics may be specified by the implementor to replace the characters not represented.

8.1.3 Alphabets

Alphabets in COBOL are named specifications of coded character sets or collating sequences or both. The SPECIAL-NAMES paragraph provides the means for naming alphabets and for specifying user-defined coded character sets and collating sequences. A coded character set or collating sequence can be used by specifying its

alphabet-name in COBOL statements or entries that reference a coded character set or collating sequence as an operand.

8.1.4 Collating sequences

A collating sequence defines the order of characters within a coded character set or COBOL alphabet for purposes of sorting, merging, and comparing data and for processing files with indexed organization. Logically, there are two collating sequences - an alphanumeric collating sequence and a national collating sequence. An alphanumeric collating sequence defines the order associated with data items or record keys described as usage display; a national collating sequence defines the order associated with data items or record keys described as usage national. These two logical collating sequences may be defined and implemented separately or may be defined and implemented as one composite collating sequence with characters mapped into a logical alphanumeric collating sequence and a logical national collating sequence.

The default ordering associated with these collating sequences is defined by the implementor. Specific orderings may be selected:

- as the program collating sequence, by specification of an alphabet or a locale in the PROGRAM COLLATING SEQUENCE clause of the OBJECT-COMPUTER paragraph;
- for SORT or MERGE statements, by specification of a locale or alphabet in a SORT or MERGE statement;
- for indexed files, by specification of a locale or alphabet in a COLLATING SEQUENCE clause of the file control entry;
- for specific comparisons, by use of the LOCALE-COMPARE or STANDARD-COMPARE intrinsic functions.

When a locale is specified, the associated ordering is determined at runtime.

8.2 Locales

A locale provides a specification of cultural elements for use at runtime. Cultural elements are grouped into named locale-categories that control specific aspects of runtime behavior, as follows:

Locale-category name	Behavior affected
LC_COLLATE	Collating sequence
LC_CTYPE	Character classification and case conversion
LC_MESSAGES	Formats of informative and diagnostic messages and interactive responses
LC_MONETARY	Monetary formatting
LC_NUMERIC	Numeric formatting
LC_TIME	Date and time formats
LC_ALL	Locale-categories LC_COLLATE, LC_CTYPE, LC_MESSAGES, LC_MONETARY, LC_NUMERIC, and LC_TIME, and any other categories included in the locale.

Locale category names, the details of locale-categories, and locale field names are defined in ISO/IEC 9945-2:1993. The format and implementation of locales may differ from ISO/IEC 9945-2:1993 provided that logically-equivalent functionality is supported.

When the use of cultural elements from a locale is specified for a source unit, the specific values, formats, or algorithms associated with the locale categories are determined at runtime.

Some operating environments provide a locale for system-wide use, called a system-default locale. Those environments might also provide for selection of a locale for use within a run unit, called a user-default locale.

At the time a run unit is activated, the current runtime locale is set to the user default locale and remains in effect for the run unit until another runtime locale is established. The SET statement provides the capability of establishing any locale as the current runtime locale, as well as the ability to set the user default locale to any locale. While there is always a current locale for the entire run unit, it has effect only for compilation units using language features that reference a locale.

Execution of a SET statement specifying USER-DEFAULT as the sending operand sets the current runtime locale for the specified locale categories to the user default locale. The implementor shall specify the manner in which the user default locale is defined and shall provide at least one user default locale for use in computing environments that do not provide a user default locale.

Execution of a SET statement specifying SYSTEM-DEFAULT as the sending operand sets the current runtime locale for the specified locale categories to the current system default locale. The implementor shall specify the manner in which the system default locale is defined and shall provide at least one system default locale for use in computing environments that do not provide a system default locale.

Execution of a SET statement specifying a locale-name as the sending operand sets the current runtime locale for the specified locale categories to the locale associated with that locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph. The SET statement can be used to save information about the current locale so that the particular locale can later be made current by using another SET statement.

If the user default locale or the system default locale is switched by a non-COBOL runtime module, the new user default or system default locale is not utilized by COBOL unless a SET statement is executed to make it the current runtime locale. A locale switch for any locale categories by an activated COBOL runtime module is utilized on return by the activating runtime module. It is implementor-defined whether, and for which locale categories, a switch of current locale by a non-COBOL runtime module is utilized by COBOL.

NOTE The capability of setting the system default locale from COBOL is not provided.

The manner of identifying the current locale is specified in 14.5.6, Locale identification.

If the locale is not found during an operation requiring a locale, the EC-LOCALE-MISSING exception condition is set to exist and the operation is unsuccessful. If the locale content is invalid or incomplete during an operation using a locale, the EC-LOCALE-INVALID exception condition is set to exist and the operation is unsuccessful.

If a locale does not define both alphanumeric and national collating sequences in category LC_COLLATE, the locale shall define a national collating sequence such that it contains characters to which a correspondence exists for the characters permitted in data items of usage display; this correspondence is used in converting alphanumeric characters to national characters in locale-based evaluation of a relation condition.

The locale categories LC_MESSAGES and LC_NUMERIC are not used directly by COBOL; however, the ability to set and query these locale categories is provided so that applications may use it.

The set of cultural elements constituting LC_ALL may include categories and cultural elements not used by COBOL.

8.2.1 Locale field names

Several locale field names are referenced in the COBOL specification in order to clarify processing. These and other relevant locale fields are defined in ISO/IEC 9945-2. The following locale field names are explicitly referenced:

Category	Field name	Description
LC_MONETARY		
	int_curr_symbol	international currency symbol
	currency_symbol	local currency symbol
	mon_decimal_point	decimal delimiter
	mon_thousands_sep	string used to group digits to the left of the decimal delimiter
	mon_grouping	size of each group of digits
	positive_sign	string used to indicate nonnegative valued quantities
	negative_sign	string used to indicate negative-valued quantities
	int_frac_digits	number of fractional digits to the right of the decimal delimiter
	frac_digits	number of fractional digits to the right of the decimal delimiter
	p_cs_precedes	indicator of whether the currency symbol precedes or succeeds the value for a nonnegative quantity
	n_cs_precedes	indicator of whether the currency symbol precedes or succeeds the value for a negative quantity
LC_TIME		
	d_fmt	date representation
	t_fmt	time representation

8.3 Lexical elements

The lexical elements are character-strings and separators.

8.3.1 Character-strings

A character-string is a character or a sequence of contiguous characters that forms a COBOL word, a literal, or a picture character-string. A character-string is delimited by separators.

8.3.1.1 COBOL words

A COBOL word is a character-string of not more than 31 characters that forms a compiler-directive word, a context-sensitive word, an intrinsic-function-name, a reserved word, a system-name, or a user-defined word. Each character of a COBOL word that is not a special character word shall be selected from the set of basic letters, basic digits, extended letters, and the basic special characters hyphen and underscore. The hyphen or underscore shall not appear as the first or last character in such words.

Within a compilation group, compilation-variable-names form intersecting sets with other types of user-defined words, system-names, context-sensitive words, and intrinsic-function names. The same COBOL word may be used as a compilation-variable-name and as one of these other types of words.

Within a source element the following apply:

- 1) Reserved words shall not be used as user-defined words or system-names.
- 2) Compiler-directive words, except those that are also reserved words, may be used as user-defined words and system-names.
- 3) Context-sensitive words may be used as user-defined words and system-names in contexts other than the language construct in which they are defined. Specific rules may apply to the interpretation of a word as user-defined or context-sensitive.
- 4) A given word may be used as a system-name and as a user-defined word, subject to the rules specified in 8.3.1.1.1, User-defined words, and 8.3.1.1.2, System-names.
- 5) Intrinsic-function-names may be used as user-defined words and system-names, except for
 - intrinsic function names LENGTH, RANDOM, SIGN, and SUM; and
 - intrinsic function names identified in a function-specifier in the REPOSITORY paragraph.

8.3.1.1.1 User-defined words

A user-defined word is a COBOL word that is supplied by the user to satisfy the format of a clause or statement.

The types of user-defined words are:

- alphabet-name
- cd-name (obsolete element)
- class-name (for object orientation)
- class-name (for truth value proposition)
- compilation-variable-name
- condition-name
- constant-name
- data-name
- file-name
- function-prototype-name
- index-name
- interface-name

- level-number
- locale-name
- method-name
- mnemonic-name
- ordering-name
- paragraph-name
- parameter-name
- program-name
- program-prototype-name
- property-name
- record-key-name
- record-name
- report-name
- screen-name
- section-name
- symbolic-character
- type-name
- user-function-name

Within a source element, a given user-defined word may be used as only one type of user-defined word with the following exceptions:

- 1) a compilation-variable-name may be the same as any other type of user-defined word
- 2) a level-number may be the same as a paragraph-name or a section-name
- 3) the same name may be used as any of the following types of user-defined words:
 - constant-name
 - data-name
 - property-name
 - record-key-name
 - record-name

Further rules for uniqueness are specified in 8.4.1, Uniqueness of reference.

With the exception of section-names, paragraph-names, and level-numbers, each user-defined word shall contain at least one basic letter or extended letter. Level-numbers need not be unique; a given specification of a level-number may be identical to any other level-number.

The following user-defined words shall be externalized to the operating environment:

- 1) program-names of outermost programs, class-names, function-prototype-names, interface-names, method-names, program-prototype-names, property-names, and user-function-names
- 2) data-names, file-names, and record-names of items described with the EXTERNAL attribute.

The implementor shall specify whether extended letters may be specified in user-defined words externalized to the operating environment.

For any externalized user-defined words for which the AS phrase is specified, the content of the literal specified in that AS phrase is a name that is externalized to the operating environment. The implementor defines the formation and mapping rules of these names.

NOTE The AS phrase provides a way to specify names that are either case-sensitive or not valid COBOL words. Such names may be required by other programming languages or system components.

For any externalized user-defined words for which the AS phrase is not specified, the implementor defines the mapping between the user-defined word and the corresponding name that is externalized to the operating environment.

Within a run unit, all instances of a given name that is externalized to the operating environment shall identify the same kind of entity or item. Except for method-names and property-names, when two or more source elements identify something with the same externalized name, they refer to the same instance.

Externalized names shall be referenced in a source element only:

- 1) in the AS phrase in a repository paragraph entry,
- 2) in the AS phrase in an EXTERNAL clause,
- 3) as program-name in a CALL statement,
- 4) as program-name in a CANCEL statement,
- 5) as program-name in a program-address-identifier,
- 6) as method-name in an INVOKE statement or inline method invocation.

All other references to names for which externalization is permitted shall be specified using the user-defined words, as opposed to the externalized names.

In the AS phrases, only the externalized names shall be referenced. In the CALL, CANCEL, and INVOKE statements, the inline method invocation, and in the program-address-identifier, either the externalized names or the user-defined words may be referenced, depending on the conditions described below.

When an INVOKE statement or an inline method invocation references a method-name using a universal object reference:

- 1) When the COBOL call convention is implied or COBOL is specified in a CALL-CONVENTION compiler directive, that method-name is treated as a COBOL word that maps to the externalized name of the method to be invoked, applying the same implementor-defined mapping rules as for a method-name for which no AS phrase is specified.
- 2) When call-convention-name-1 is specified in an applicable CALL-CONVENTION compiler directive, that method-name is treated as a literal that maps, in a manner defined by the implementor, to the externalized name of the method to be invoked.

When an INVOKE statement or an inline method invocation references a method-name using an object reference that is not a universal object reference, the naming convention and mapping to be used for the method-name is determined by the entry convention of the class or interface that contains the method.

NOTE If the method being invoked is referenced using a universal object reference, the ENTRY-CONVENTION, if any, in the class or interface definition containing the method is ignored.

When a CALL statement, a CANCEL statement, or a program-address-identifier references a program-name that names a compilation unit:

- 1) If the CALL statement, CANCEL statement, or program-address-identifier specifies a program-prototype-name, the naming convention and mapping used for the program-name is determined by the entry convention of the called program;
- 2) otherwise:

- a) When the COBOL call convention is implied or COBOL is specified in the CALL-CONVENTION compiler directive, the program-name is treated as a COBOL word that maps to the externalized name of the program, applying the same implementor-defined mapping rules as for a program-name for which no AS phrase is specified.
- b) When call-convention-name-1 is specified in the CALL-CONVENTION compiler directive, the program-name is treated as a literal that maps, in a manner defined by the implementor, to the externalized name of the program.

8.3.1.1.1.1 Alphabet-name

An alphabet-name identifies a specific character set or collating sequence, or both. This relationship is established in the SPECIAL-NAMES paragraph.

8.3.1.1.1.2 Cd-name

A cd-name identifies an MCS interface area described in a communication description entry within the communication section of the data division.

8.3.1.1.1.3 Class-name (for object orientation)

A class-name identifies a class, the entity that defines common behavior and implementation for zero, one, or more objects.

8.3.1.1.1.4 Class-name (for truth value proposition)

A class-name identifies a proposition, for which a truth value can be determined, that the content of a data item consists exclusively of those characters listed in the definition of the class-name.

8.3.1.1.1.5 Compilation-variable-name

A compilation-variable-name identifies a compilation variable defined in a DEFINE compiler directive.

8.3.1.1.1.6 Condition-name

A condition-name identifies a value, set of values, or range of values defined in the data division, or identifies an on or off status defined in the SPECIAL-NAMES paragraph.

8.3.1.1.1.7 Constant-name

A constant-name identifies a constant, which is defined by a constant entry in the data division.

8.3.1.1.1.8 Data-name

A data-name identifies a data item described in a data description entry or a record described in a record description entry.

8.3.1.1.1.9 File-name

A file-name identifies a file connector described in a file description entry or a sort-merge file description entry within the file section of the data division.

8.3.1.1.1.10 Function-prototype-name

A function-prototype-name identifies a function prototype.

8.3.1.1.1.11 Index-name

An index-name identifies an index associated with a specific table.

8.3.1.1.1.12 Interface-name

An interface-name identifies an interface, a grouping of method prototypes.

8.3.1.1.1.13 Level-number

A level-number, expressed as a one-digit or two-digit number, indicates the hierarchical position of a data item or the special properties of a data description entry.

8.3.1.1.1.14 Locale-name

A locale-name identifies a locale that specifies a set of cultural elements. A locale-name is defined in the SPECIAL-NAMES paragraph.

8.3.1.1.1.15 Method-name

A method-name identifies a method.

8.3.1.1.1.16 Mnemonic-name

A mnemonic-name identifies an implementor-named device-name, feature-name, or switch-name. This relationship is established in the SPECIAL-NAMES paragraph.

8.3.1.1.1.17 Ordering-name

An ordering-name identifies an ordering table in compliance with ISO/IEC 14651:2001, used for the execution of the STANDARD-COMPARE intrinsic function.

8.3.1.1.1.18 Paragraph-name

A paragraph-name identifies a paragraph in the procedure division. Paragraph-names are equivalent if they are composed of the same sequence of the same number of COBOL characters.

NOTE The paragraph-names '00123' and '123' are different paragraph-names.

8.3.1.1.1.19 Parameter-name

A parameter-name identifies a formal parameter of a parameterized class or a parameterized interface.

8.3.1.1.1.20 Program-name

A program-name identifies a program. For a COBOL program, program-name is the name specified in the PROGRAM-ID paragraph of the program's identification division. For a non-COBOL program, the rules for formation of the program-name are defined by the implementor.

8.3.1.1.1.21 Program-prototype-name

A program-prototype-name identifies a program prototype.

8.3.1.1.1.22 Property-name

A property-name identifies a means of getting information out of and passing information back into an object.

8.3.1.1.1.23 Record-key-name

A record-key-name identifies a key associated with an indexed file.

8.3.1.1.1.24 Record-name

A record-name identifies a record described in a record description entry. A record-name may be specified where a data-name is allowed unless specific rules for the format disallow it.

8.3.1.1.1.25 Report-name

A report-name identifies a report described in a report description entry within the report section of the data division.

8.3.1.1.1.26 Screen-name

A screen-name identifies a screen description entry in the screen section.

8.3.1.1.1.27 Section-name

A section-name identifies a section in the procedure division.

8.3.1.1.1.28 Symbolic-character

A symbolic-character is a user-defined figurative constant that represents a value specified in the SPECIAL-NAMES paragraph.

8.3.1.1.1.29 Type-name

A type-name identifies a type declaration specified by a data description entry.

8.3.1.1.1.30 User-function-name

A user-function-name identifies a function.

8.3.1.1.2 System-names

A system-name is used to communicate with the operating environment. The implementor may define rules for the formation of a system-name that add restrictions to the rules for formation of a COBOL word.

The types of system-names are:

- call-convention-name
- code-name
- computer-name
- device-name
- entry-convention-name
- external-locale-name
- feature-name
- library-name
- switch-name
- text-name

Within an implementation, a given system-name shall not belong to more than one of the following types of system-names: device-name, feature-name, and switch-name.

8.3.1.1.2.1 Call-convention-name

A call-convention-name identifies an implementor-defined convention for mapping a method-name or a program-name to its externalized name and may identify attributes of the linkage mechanism used to interact with a function, method, or program.

8.3.1.1.2.2 Code-name

A code-name identifies a character code set and a collating sequence.

8.3.1.1.2.3 Computer-name

A computer-name may identify the computer upon which the compilation unit is to be compiled or the runtime module is to be run.

8.3.1.1.2.4 Device-name

A device-name identifies an input-output device.

8.3.1.1.2.5 Entry-convention-name

An entry-convention-name identifies attributes of the linkage mechanism by which a function, method, or program is to receive control.

8.3.1.1.2.6 External-locale-name

An external-locale-name identifies a locale that specifies a set of cultural elements. This locale is provided in the operating environment.

8.3.1.1.2.7 Feature-name

A feature-name identifies a feature of an input-output device.

8.3.1.1.2.8 Library-name

A library-name identifies a COPY library.

8.3.1.1.2.9 Switch-name

A switch-name identifies an implementor-defined external switch.

8.3.1.1.2.10 Text-name

A text-name identifies a library text.

8.3.1.1.3 Reserved words

The COBOL words shown in 8.9, Reserved words, are reserved for use as keywords, optional words, or special-character words in language constructs. Reserved words shall not be used as system-names or user-defined words.

In order to reduce conflict between reserved words and user-defined words, the following rules apply to the formation of reserved words in this International Standard.

NOTE It is intended to apply these rules in future editions. It is recommended that implementors follow these rules in defining extensions.

- 1) Reserved words shall not begin with the digits 0 through 9 or the letters 'X', 'Y', or 'Z', except for the words ZERO, ZEROES, and ZEROS.
- 2) Reserved words shall be composed of at least two basic letters, except for special-character words.
- 3) Reserved words shall not begin with 1 or 2 letters followed by a hyphen, except for the words I-O and I-O-CONTROL and words beginning with 'B-'.
- 4) Reserved words shall not be formed with two or more consecutive hyphens.

The types of reserved words are:

- required words
- optional words

8.3.1.1.3.1 Required words

A required word is a word whose presence is required when the format in which the word appears is used.

Required words are of two types:

- 1) Keywords. Within each format, such words are uppercase and underlined.
- 2) Special character words. The special character words are:

Word	Meaning
+	Arithmetic operator - unary plus or addition
-	Arithmetic operator - unary minus or subtraction
*	Arithmetic operator - multiplication
/	Arithmetic operator - division
**	Arithmetic operator - exponentiation
&	Concatenation operator
>	Relational operator - greater than
<	Relational operator - less than
=	Relational operator - equal and assignment operator in COMPUTE
==	Pseudo-text delimiter in COPY and REPLACE statements
>=	Relational operator - greater than or equal
<=	Relational operator - less than or equal
*>	Comment indicator
>>	Compiler directive indicator
::	Method invocation operator

8.3.1.1.3.2 Optional words

Within each format, uppercase words that are not underlined are called optional words and may be specified at the user's option with no effect on the semantics of the format.

8.3.1.1.4 Context-sensitive words

A context-sensitive word is a COBOL word that is reserved only in the general formats in which it is specified. Context-sensitive words and the contexts in which they are reserved are specified in 8.10, Context-sensitive words.

8.3.1.1.5 Intrinsic-function-names

An intrinsic-function-name is a COBOL word that identifies a specific intrinsic function. The list of intrinsic function names is given in 8.11, Intrinsic function names.

8.3.1.1.6 Exception-names

An exception-name is a COBOL word that identifies an exception condition. The list of exception-names is given in 14.5.12.1, Exception conditions.

8.3.1.2 Literals

A literal is defined by a reserved word that references a figurative constant or is a character-string representing a data value derived from the ordered set of characters of which the literal is composed. Each literal possesses a class and category: alphanumeric, boolean, national, or numeric.

The paired quotation symbols specified in the opening and closing delimiters of alphanumeric, boolean, and national literals may be either apostrophes or quotation marks. Both forms may be used within a single source unit.

Hexadecimal digits are used to specify the value of the literal in the hexadecimal-alphanumeric, hexadecimal-boolean, and hexadecimal-national formats of literals. The hexadecimal digits are the basic digits '0' through '9' and the basic letters 'A' through 'F'.

8.3.1.2.1 Alphanumeric literals

Alphanumeric literals are of the class and category alphanumeric.

8.3.1.2.1.1 General format

Format 1 (alphanumeric):

$$\left\{ \begin{array}{l} \text{" {character-1} ... " } \\ \text{' {character-1} ... ' } \end{array} \right\}$$

Format 2 (hexadecimal-alphanumeric):

$$\left\{ \begin{array}{l} \text{X" {hex-character-sequence-1} ... " } \\ \text{X' {hex-character-sequence-1} ... ' } \end{array} \right\}$$
8.3.1.2.1.2 Syntax rules

ALL FORMATS

- 1) The length of an alphanumeric literal, excluding the separators that delimit the literal, shall be greater than zero and less than or equal to 160 alphanumeric character positions.

FORMAT 1

- 2) Character-1 may be any character in the coded character set that the implementor has chosen for source code representation and designated as a character in the compile-time alphanumeric coded character set.

NOTE This allows, but does not require, characters in an alphanumeric literal to be represented in source code in a national coded character set. This permits, for example, a literal of the form "ABC" to be represented in the source code in UTF-16 and stored as ISO/IEC 646. This is essential in order to allow source code to be represented entirely in a coded character set such as UTF-16, but is not restricted to that case.

An implementation is neither required to recognize nor prohibited from recognizing UTF-8 or mixed alphanumeric and national characters in format 1 alphanumeric literals. When permitted, the capability shall be optionally available to the user in a manner that does not restrict the characters normally recognized by that implementation; the implementor shall specify any applicable syntax rules.

- 3) Two contiguous quotation symbol characters matching the quotation symbol used in the opening delimiter represent a single occurrence of that quotation symbol character in the content of the literal.
- 4) The two contiguous quotation symbols used to represent a single quotation symbol character shall be in the same coded character set representation as the opening quotation symbol.

FORMAT 2

- 5) Hex-character-sequence-1 shall be composed of hexadecimal digits.
- 6) Each hex-character-sequence-1 shall consist of the number of hexadecimal digits that the implementor has specified as the number of hexadecimal digits that map to an alphanumeric character.

8.3.1.2.1.3 General rules

ALL FORMATS

- 1) The separators that delimit the alphanumeric literal are not included in the value of the alphanumeric literal.
- 2) Alphanumeric literals are of the class and category alphanumeric.

FORMAT 1

- 3) The value of the literal at compile time is the string of occurrences of character-1, represented in the computer's compile-time coded character set defined by the implementor for usage DISPLAY.

The value of the literal at runtime is the string of alphanumeric characters that results from converting the compile-time value of the literal to its runtime equivalent, as described in 8.1.1, Computer's coded character set.

NOTE This rule permits storing alphanumeric literals in national character representation when usage display is implemented in a large character set such as the UCS.

When the implementor provides the option of UTF-8 or mixed alphanumeric and national characters in the content of format 1 alphanumeric literals, the implementor shall specify the applicable general rules.

FORMAT 2

- 4) The value of the literal at runtime shall be a string of alphanumeric characters, each of which has the bit configuration specified by one occurrence of hex-character-sequence-1.

The implementor defines the result of specifying a hex-character-sequence-1 for which no corresponding character in that coded character set exists. The implementor also defines the mapping of each hex-character-sequence-1 to a character, when the characters do not occupy a multiple of four bits.

8.3.1.2.2 Numeric literals

Numeric literals are of the class and category numeric.

8.3.1.2.2.1 Fixed-point numeric literals

A fixed-point numeric literal is a character-string whose characters are selected from the digits '0' through '9', the plus sign, the minus sign, and the decimal point. The implementor shall allow for fixed-point numeric literals of 1 through 31 digits in length. The rules for the formation and value of fixed-point numeric literals are as follows:

- 1) A literal shall contain at least one digit.

- 2) A literal shall not contain more than one sign character. If a sign is used, it shall appear as the leftmost character of the literal. If the literal is unsigned, the literal is nonnegative.
- 3) A literal shall not contain more than one decimal point. The decimal point is treated as an assumed decimal point, and may appear anywhere within the literal except as the rightmost character.
- 4) The value of a fixed-point numeric literal is the algebraic quantity represented by the characters in the fixed-point numeric literal. The size of a fixed-point numeric literal is equal to the number of digits in the string of characters in the literal.

An integer literal is a fixed-point numeric literal that contains no decimal point.

8.3.1.2.2.2 Floating-point numeric literals

The rules for the formation and value of floating-point numeric literals are:

- 1) A floating-point numeric literal is formed from two fixed-point numeric literals separated by the letter 'E' without intervening spaces.
- 2) The literal to the left of the 'E' represents the significand. It may be signed and shall include a decimal point. The significand shall be 1 through 31 digits in length. If the significand is signed, the floating-point numeric literal is considered to be signed. If the significand is unsigned, the floating-point numeric literal is considered to be positive.
- 3) The literal to the right of the 'E' represents the exponent. It may be signed and shall have a maximum of three digits and no decimal point. The maximum permitted value and minimum permitted value of the exponent is implementor-defined.
- 4) If all the digits in the significand are zero, then all the digits of the exponent shall also be zero and neither significand nor exponent shall have a negative sign.
- 5) The value of a floating-point numeric literal is the algebraic product of the value of its significand and the quantity derived by raising ten to the power of the exponent.

8.3.1.2.3 Boolean literals

Boolean literals are of the class and category boolean.

8.3.1.2.3.1 General format

Format 1 (boolean)

$$\left\{ \begin{array}{l} B\{\text{boolean-character-1}\} \dots " \\ B\{\text{boolean-character-1}\} \dots ' \end{array} \right\}$$

Format 2 (hexadecimal-boolean)

$$\left\{ \begin{array}{l} BX\{\text{hexadecimal-digit-1}\} \dots " \\ BX\{\text{hexadecimal-digit-1}\} \dots ' \end{array} \right\}$$

8.3.1.2.3.2 Syntax rules

ALL FORMATS

- 1) The length of a boolean literal, excluding the separators that delimit the literal, shall be greater than zero and less than or equal to 160 boolean character positions.

FORMAT 1

- 2) Boolean-character-1 shall be a boolean character, '0' or '1', from the computer's coded character set.

FORMAT 2

- 3) Hexadecimal-digit-1 shall be a hexadecimal digit.

8.3.1.2.3.3 General rules

ALL FORMATS

- 1) The separators that delimit the boolean literal are not included in the value of the boolean literal.
- 2) Boolean literals are of the class and category boolean.

FORMAT 1

- 3) The value of a boolean literal is the value of the sequence of occurrences of boolean-character-1.

FORMAT 2

- 4) Each hexadecimal digit has the following boolean equivalent value: '0' is B"0000", '1' is B"0001", '2' is B"0010", '3' is B"0011", '4' is B"0100", '5' is B"0101", '6' is B"0110", '7' is B"0111", '8' is B"1000", '9' is B"1001", 'A' is B"1010", 'B' is B"1011", 'C' is B"1100", 'D' is B"1101", 'E' is B"1110", 'F' is B"1111".
- 5) The value of the literal at runtime is the value of an equivalent boolean literal formed by replacing each hexadecimal digit by its boolean equivalent value, and replacing the leading BX" separator with the B" separator.

8.3.1.2.4 National literals

National literals are of the class and category national.

8.3.1.2.4.1 General format**Format 1 (national)**

$$\left\{ \begin{array}{l} N\{\text{character-1}\} \dots " \\ N'\{\text{character-1}\} \dots ' \end{array} \right\}$$
Format 2 (hexadecimal-national)

$$\left\{ \begin{array}{l} NX\{\text{hex-character-sequence-1}\} \dots " \\ NX'\{\text{hex-character-sequence-1}\} \dots ' \end{array} \right\}$$
8.3.1.2.4.2 Syntax rules

ALL FORMATS

- 1) The length of a national literal, excluding the separators that delimit the literal, shall be greater than zero and less than or equal to 160 national character positions.
- 2) Character-1 may be:

- any character in the national coded character set that the implementor has designated for source code representation
- any character in the alphanumeric coded character set that the implementor has designated for source code representation such that a correspondence exists between that alphanumeric character and a national character.

NOTE The implementor can choose to represent the source code entirely in a national coded character set or in a mix of alphanumeric and national coded character sets. The content of a national literal can be coded in either representation and stored in national representation. For example, a literal of the form N'ABC' can be represented in single-byte characters and stored as UTF-16. This is essential in order to allow source code to be represented in a coded character set such as UTF-8, but is not restricted to that case.

FORMAT 1

- 3) Two contiguous quotation symbol characters matching the quotation symbol used in the opening delimiter represent a single occurrence of that quotation symbol character in the content of the literal. The two contiguous quotation symbol characters shall be in the same coded character set representation as the opening quotation symbol.

FORMAT 2

- 4) Hex-character-sequence-1 shall be composed of hexadecimal digits.
- 5) Each hex-character-sequence-1 shall consist of the number of hexadecimal digits that the implementor has specified as the number of hexadecimal digits that map to a national character.

8.3.1.2.4.3 General rules

ALL FORMATS

- 1) The separators that delimit the national literal are not included in the value of the national literal.
- 2) National literals are of the class and category national.

FORMAT 1

- 3) The value of the literal at compile time is the string of occurrences of character-1, represented in the computer's compile-time coded character set defined by the implementor for usage NATIONAL. Control functions, if any, that switch character set encoding are not included in the value of the literal.

The value of the literal at runtime is the string of national characters that results from converting the compile-time value of the literal to its runtime equivalent, as described in 8.1.1, Computer's coded character set.

FORMAT 2

- 4) The value of the literal at runtime shall be a string of national characters, each of which has the bit configuration specified by one occurrence of hex-character-sequence-1.

The implementor defines the result of specifying a hex-character-sequence-1 for which no corresponding character in that coded character set exists. The implementor also defines the mapping of each hex-character-sequence-1 to a character, when the characters do not occupy a multiple of four bits.

8.3.1.2.5 Figurative constant values

Figurative constant values are generated by the compiler and referenced through the use of the reserved words given below.

8.3.1.2.5.1 General format**Format 1 (zero):**

$$\text{ALL} \left\{ \begin{array}{l} \underline{\text{ZERO}} \\ \underline{\text{ZEROES}} \\ \underline{\text{ZEROS}} \end{array} \right\}$$
Format 2 (space):

$$\text{ALL} \left\{ \begin{array}{l} \underline{\text{SPACE}} \\ \underline{\text{SPACES}} \end{array} \right\}$$
Format 3 (high-value):

$$\text{ALL} \left\{ \begin{array}{l} \underline{\text{HIGH-VALUE}} \\ \underline{\text{HIGH-VALUES}} \end{array} \right\}$$
Format 4 (low-value):

$$\text{ALL} \left\{ \begin{array}{l} \underline{\text{LOW-VALUE}} \\ \underline{\text{LOW-VALUES}} \end{array} \right\}$$
Format 5 (quote):

$$\text{ALL} \left\{ \begin{array}{l} \underline{\text{QUOTE}} \\ \underline{\text{QUOTES}} \end{array} \right\}$$
Format 6 (all-literal):

ALL literal-1

Format 7 (symbolic-character):

ALL symbolic-character-1

8.3.1.2.5.2 Syntax rules**ALL FORMATS**

- 1) A figurative constant may be used whenever 'literal' appears in a format or when a rule allows it, with the following restrictions:
 - a) If the literal is restricted to a numeric literal, the only figurative constant permitted is ZERO (ZEROS, ZEROES) without the ALL phrase.
 - b) A figurative constant shall not be specified where a syntax rule prohibits it.

FORMAT 6

- 2) Literal-1 shall be an alphanumeric, boolean, or national literal, any of which may be a concatenation expression. The literal shall not be a figurative constant.
- 3) If the length of literal-1 is greater than one, it is not permitted to be associated with a numeric or numeric-edited item.

FORMAT 7

- 4) Symbolic-character-1 shall be specified in the SYMBOLIC CHARACTERS clause of the SPECIAL-NAMES paragraph.

8.3.1.2.5.3 General rules

ALL FORMATS

- 1) When a figurative constant is used in a context requiring national characters, the figurative constant represents a national character value. Otherwise, when a figurative constant represents a character value, the figurative constant represents an alphanumeric character value. In both cases, the character value representation of the figurative constant ZERO (ZEROS, ZEROES), SPACE (SPACES), and QUOTE (QUOTES) is the value of the character '0', space, and "'", respectively, in the computer's runtime coded character set. The implementor shall specify the unique representation of ZERO, SPACE, and QUOTE in the computer's alphanumeric and national coded character sets.
- 2) When a figurative constant represents a string of one or more characters, the length of the string is determined from context by applying the following rules in order:
 - a) When a figurative constant is specified in a concatenation expression, the length of the string is one character.
 - b) When a figurative constant is specified in a VALUE clause or in association with a data item, literal, or intermediate result, the string of characters is repeated character by character until the size of the resultant string is greater than or equal to the number of character positions in the associated data item, literal, or intermediate result. This resultant string is then truncated from the right until the number of character positions remaining is equal either to 1 or to the number of character positions in the associated data item, literal, or intermediate result, whichever is greater. This is done prior to and independent of the application of any JUSTIFIED clause that may be associated with the data item.

NOTE A figurative constant is associated with a data item or literal when, for example, the figurative constant is moved to it, compared with it, or paired with it in a binary operation.

- c) When a figurative constant is other than ALL literal-1, the length of the string is one character.

NOTE For example, when the figurative constant appears in a DISPLAY, STOP, STRING, or UNSTRING statement, it is one character.

- d) The length of the string is the length of literal-1.

FORMAT 1

- 3) The zero format represents the numeric value '0', one or more of the boolean character '0', or one or more of the character '0' in the computer's runtime coded character set, depending on context.

FORMAT 2

- 4) The space format represents one or more of the character space in the computer's runtime coded character set.

FORMAT 3

- 5) At compile time and when referenced in the SPECIAL-NAMES paragraph, the high-value format represents the character, or multiple-character combination, that has the highest ordinal position in the collating sequence used during compilation.

At runtime, when referenced outside the SPECIAL-NAMES paragraph, the high-value format represents the character, or multiple-character combination, that has the highest ordinal position in the runtime collating sequence.

When locale category LC_COLLATE is in effect for the program collating sequence, HIGH-VALUES is the character, or multiple-character combination, that has the highest ordinal position in the collating sequence specified by the locale in effect.

If the context of the figurative constant requires national characters, the national program collating sequence is used; otherwise, the alphanumeric program collating sequence is used.

FORMAT 4

- 6) At compile time and when referenced in the SPECIAL-NAMES paragraph, the low-value format represents the character, or multiple-character combination, that has the lowest ordinal position in the collating sequence used during compilation.

At runtime, when referenced outside the SPECIAL-NAMES paragraph, the low-value format represents the character, or multiple-character combination, that has the lowest ordinal position in the runtime collating sequence.

When locale category LC_COLLATE is in effect for the program collating sequence, LOW-VALUES is the character, or multiple-character combination, that has the lowest ordinal position in the collating sequence specified by the locale in effect.

If the context of the figurative constant requires national characters, the national program collating sequence is used; otherwise, the alphanumeric program collating sequence is used.

FORMAT 5

- 7) The quote format represents one or more of the quotation mark character (' " ') in the computer's runtime coded character set. The word QUOTE or QUOTES shall not be used in place of a quotation symbol to bound a literal.

FORMAT 6

- 8) The all-literal format represents all or part of the string generated by successive concatenations of the characters comprising literal-1.

FORMAT 7

- 9) The symbolic-character format represents one or more of the character specified as the value of symbolic-character-1 in the SYMBOLIC CHARACTERS clause of the SPECIAL-NAMES paragraph.

8.3.1.3 Picture character-strings

A picture character-string consists of certain symbols that are composed of the currency symbol and certain combinations of characters in the COBOL character repertoire. An explanation of the picture character-string and the rules that govern its use are given in 13.16.38, PICTURE clause.

8.3.2 Separators

A separator is one of the following, except when appearing in a literal or picture character-string:

- 1) The COBOL character space is a separator. Anywhere a space is used as a separator or as part of a separator, more than one space may be used. All spaces immediately following the separators comma, semicolon, or period are considered part of that separator and are not considered to be the separator space.
- 2) The COBOL characters comma and semicolon, immediately followed by a space, are separators that may be used anywhere the separator space is used. They can be used to improve readability.
- 3) The COBOL character period, when followed by a space, is a separator. The separator period shall be used only to indicate the end of a sentence, or as shown in formats.
- 4) The COBOL characters right and left parentheses are separators. Except in pseudo-text, parentheses may appear only in balanced pairs of left and right parentheses delimiting subscripts, a list of function or method arguments, a reference modifier, arithmetic or boolean expressions, or conditions.

- 5) The opening delimiters and closing delimiters of literals are separators. Either an apostrophe or a quotation mark may be used as the quotation symbol character in opening and closing delimiters.

The opening delimiters of literals are:

- a quotation symbol
- the two contiguous characters B", B', N", N', X", and X'
- the three contiguous characters BX", BX', NX", and NX'

The closing delimiters of literals are:

- a quotation mark when the opening delimiter uses a quotation mark
- an apostrophe when the opening delimiter uses an apostrophe

The opening delimiter shall be immediately preceded by a space, left parenthesis, or opening pseudo-text delimiter. The closing delimiter shall be immediately followed by one of the separators space, comma, semicolon, period, right parenthesis, or closing pseudo-text delimiter. Separators immediately preceding the opening delimiter are not part of the opening delimiter. Separators immediately following the closing delimiter are not part of the closing delimiter.

- 6) Pseudo-text delimiters are separators. An opening pseudo-text delimiter shall be immediately preceded by a space; a closing pseudo-text delimiter shall be immediately followed by one of the separators space, comma, semicolon, or period. Pseudo-text delimiters may appear only in balanced pairs delimiting pseudo-text.
- 7) The COBOL character colon, except as part of the invocation operator, is a separator and is required when shown in the general formats.
- 8) The separator space may optionally immediately precede all separators except:
 - a) As specified by reference format rules (see 6, Reference format.)
 - b) The closing delimiter of a literal. In this case, a preceding space is considered as part of the literal and not as a separator.
 - c) The opening pseudo-text delimiter, where the preceding space is required.
- 9) The separator space may optionally immediately follow any separator except the opening delimiter of a literal. A space following the opening delimiter of a literal is part of the literal and not a separator.

8.4 References

References identify elements referred to during compilation of source unit or execution of a run unit. The reserved words and types of names specified in 8.3, Lexical elements, are forms of reference. Additional forms of reference are identifiers and condition-names.

8.4.1 Uniqueness of reference

Every user-defined name in a source element is assigned, by the user, to name a resource that is to be used in solving a data processing problem. (See 8.3.1.1.1, User-defined words.) In order to use a resource, a statement shall contain a reference that uniquely identifies that resource. In order to ensure uniqueness of reference, a user-defined name may be qualified, subscripted, or reference modified as described in the following paragraphs.

When the same name has been assigned in separate source elements to two or more occurrences of a resource of a given type, and when qualification by itself does not allow the reference in one of those source elements to differentiate between the two identically named resources, then certain conventions that limit the scope of names apply. These conventions ensure that the resource identified is that described in the source element containing the reference. (See 8.4.5, Scope of names.)

8.4.1.1 Qualification

Qualification is used to allow unique reference of user names.

Every user-defined name explicitly referenced shall be uniquely referenced because either:

- 1) No other name has the identical spelling.
- 2) It is unique within the context of a REDEFINES clause.
- 3) It is unique within the context of a VARYING clause.
- 4) The name is associated with a data description entry that is subordinate to a TYPEDEF clause and the type-name defined by that TYPEDEF clause is not referenced in a TYPE clause.
- 5) The name is a data-name referenced in a data description entry clause whose subject is subordinate to the same group item as that data-name. In this case, the names of any group items superordinate to both the data-name and the subject of the data description entry clause are used as implicit qualifiers for the reference, in addition to any explicit qualifiers needed to establish uniqueness within that group.
- 6) The name exists within, or is associated with a data definition entry within, a hierarchy of names such that reference to the name can be made unique by mentioning one or more of the higher level names in the hierarchy.

These higher level names are called qualifiers and this process that specifies uniqueness is called qualification. Identical user-defined names may appear in a source unit; however, uniqueness shall then be established through qualification for each user-defined name explicitly referenced, except as specified in rules 2 through 5. All available qualifiers need not be specified so long as uniqueness is established. The LINAGE-COUNTER and report counter identifiers require qualification to provide uniqueness of reference whenever a source unit would result in more than one occurrence of any of these identifiers.

- 7) A source element is contained within a source element or contains another source element. (See 8.4.5, Scope of names.)

Regardless of the above, the same data-name shall not be used as the name of an external record and as the name of any other external data item described in the run unit. The same data-name shall not be used as the name of an item possessing the global attribute and as the name of any other data item described in the source element that describes that global data item.

8.4.1.1.1 General format

Format 1 (qualified-data-name):

data-name-1 [data-qualifier] ... [file-cd-report-qualifier]

Format 2 (qualified-condition-name):

condition-name-1 [data-qualifier] ... [file-cd-report-qualifier]

Format 3 (qualified-index-name):

index-name-1 [data-qualifier] ... [file-cd-report-qualifier]

Format 4 (qualified-procedure-name):

paragraph-name-1 $\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\}$ section-name-1

Format 5 (qualified-screen-name):

screen-name-1 $\left\{ \left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\} \text{screen-name-2} \right\} \dots$

Format 6 (qualified-record-key-name):

record-key-name-1 $\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\}$ file-name-2

Format 7 (qualified-linage-counter):

LINAGE-COUNTER $\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\}$ file-name-3

Format 8 (qualified-report-counter):

$\left\{ \begin{array}{c} \underline{\text{PAGE-COUNTER}} \\ \underline{\text{LINE-COUNTER}} \end{array} \right\} \left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\}$ report-name-2

where data-qualifier is:

$\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\}$ data-name-2

where file-cd-report-qualifier is:

$$\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\} \left\{ \begin{array}{l} \text{file-name-1} \\ \text{cd-name-1} \\ \text{report-name-1} \end{array} \right\}$$

8.4.1.1.2 Syntax rules

- 1) For each nonunique user-defined name that is explicitly referenced, uniqueness shall be established through a sequence of qualifiers that precludes any ambiguity of reference.
- 2) A name may be qualified even though it does not need qualification; if there is more than one combination of qualifiers that ensures uniqueness, then any such set may be used.
- 3) The words IN and OF are equivalent.
- 4) Each data-name-2 shall be the name associated with a level number to which the item being qualified is subordinate. Qualifiers shall be specified in the order of successively more inclusive levels in the hierarchy. For a condition-name, the hierarchy is that of the associated conditional variable.
- 5) If explicitly referenced, a paragraph-name shall not be duplicated within a section. A paragraph-name need not be qualified when referred to from within the same section.
- 6) LINEAGE-COUNTER shall be qualified if more than one file description entry containing a LINEAGE clause has been specified in the source element.
- 7) LINE-COUNTER shall be qualified each time it is referenced in the procedure division if more than one report description entry is specified in the source element. In the report section, an unqualified reference to LINE-COUNTER is qualified implicitly by the name of the report in whose report description entry the reference is made. Whenever the LINE-COUNTER of a different report is referenced, LINE-COUNTER shall be qualified explicitly by the report-name associated with the different report.
- 8) PAGE-COUNTER shall be qualified each time it is referenced in the procedure division if more than one report description entry is specified in the source element. In the report section, an unqualified reference to the PAGE-COUNTER is qualified implicitly by the name of the report in whose report description entry the reference is made. Whenever the PAGE-COUNTER of a different report is referenced, PAGE-COUNTER shall be qualified explicitly by the report-name associated with the different report.

8.4.1.2 Subscripts

Subscripts are used when reference is made to an individual element within a table of like elements.

8.4.1.2.1 General format

Format 1 (qualified-data-name-with-subscripts):

qualified-data-name-1 [(subscript ...)]

Format 2 (qualified-condition-name-with-subscripts):

qualified-condition-name-1 [(subscript ...)]

where subscript is:

$$\left\{ \begin{array}{l} \text{ALL} \\ \text{arithmetic-expression-1} \\ \text{index-name-1} \left[\left\{ \begin{array}{c} + \\ - \end{array} \right\} \text{integer-1} \right] \end{array} \right\}$$

NOTE Qualified-data-name-1 and qualified-condition-name-1 are shown for context and are not part of the subscript general format.

8.4.1.2.2 Syntax rules

- 1) Qualified-data-name-1 and qualified-condition-name-1 are defined in 8.4.1.1, Qualification.
- 2) If a subscript is specified, the data description entry describing qualified-data-name-1 or the conditional variable associated with qualified-condition-name-1 shall contain an OCCURS clause or shall be subordinate to a data description entry that contains an OCCURS clause.
- 3) Except as defined in syntax rule 5, when a reference is made to a table element, the number of subscripts shall equal the number of OCCURS clauses in the description of the table element being referenced. This allows a maximum of seven subscripts to be specified. When more than one subscript is required, the subscripts are written in the order of successively less inclusive dimensions of the table.
- 4) Index-name-1 shall correspond to a data description entry in the hierarchy of the table being referenced that contains an INDEXED BY phrase specifying that index-name.
- 5) Each table element reference shall be subscripted except when such reference appears:
 - a) As the subject of a SEARCH statement.
 - b) In a REDEFINES clause.
 - c) In the KEY IS phrase of an OCCURS clause.
 - d) In a SORT statement that references a table.
 - e) In the FROM, TO, or USING clause of a screen description entry when the subject of the entry has an OCCURS clause.In a SORT statement that references a table, subscripting may be specified with the rightmost subscript being the word ALL.
- 6) The subscript ALL may be used only when the subscripted identifier is used as an intrinsic function argument or to identify the table in the table format of the SORT statement.
- 7) ALL shall not be specified if qualified-condition-name-1 is specified.
- 8) In the report section, neither a sum counter nor the LINE-COUNTER and PAGE-COUNTER identifiers may be used as a subscript.

8.4.1.2.3 General rules

- 1) A subscript is determined as follows:

- a) If ALL is specified, the subscript is all of the possible values of a subscript for the associated table as specified in the rules for the functions for which the subscript ALL is allowed.
 - b) If arithmetic-expression-1 is specified, the subscript is the result of the evaluation of arithmetic-expression-1. If the evaluation of arithmetic-expression-1 does not result in an integer, the EC-BOUND-SUBSCRIPT exception condition is set to exist.
 - c) If index-name-1 is specified, the subscript is the occurrence number represented by the value of the index referenced by index-name-1 modified by integer-1, if specified. The mapping of the value of the index referenced by index-name-1 to an occurrence number is defined by the implementor. If integer-1 is specified, the subscript is the occurrence number derived from the index incremented by the value of integer-1 (when the operator + is used) or decremented by the value of integer-1 (when the operator – is used).
- 2) The value of a subscript shall be a positive integer. The lowest possible occurrence number represented by a subscript is 1, which identifies the first element of any given dimension of a table. Each successive element within that dimension of the table is referenced by occurrence numbers of 2, 3, ... The highest permissible occurrence number for any given dimension of the table is the maximum number of occurrences of the item as specified in the associated OCCURS clause. If the value of the subscript is not a positive integer or is less than one or greater than the highest permissible occurrence number, the EC-BOUND-SUBSCRIPT exception condition is set to exist.

8.4.2 Identifiers

8.4.2.1 Identifier

An identifier is a sequence of character-strings and separators used to reference a data item uniquely.

8.4.2.1.1 General format

Format 1 (function-identifier):

function-identifier-1

Format 2 (qualified-data-name-with-subscripts):

qualified-data-name-with-subscripts-1

Format 3 (reference-modification):

identifier-1 reference-modifier-1

Format 4 (inline-method-invocation):

inline-invocation-1

Format 5 (object-view):

identifier-2 object-view-1

Format 6 (predefined-object):

$$\left\{ \begin{array}{l} \text{EXCEPTION-OBJECT} \\ \text{NULL} \\ \text{SELF} \\ \text{[class-name-1 OF] SUPER} \end{array} \right\}$$

Format 7 (object-property):

property-name-1 OF identifier-3

Format 8 (predefined-address)

NULL

Format 9 (address-identifier)

$$\left\{ \begin{array}{l} \text{data-address-identifier-1} \\ \text{program-address-identifier-1} \end{array} \right\}$$

Format 10 (qualified-linage-counter):

$$\text{LINAGE-COUNTER} \left\{ \begin{array}{l} \text{IN} \\ \text{OF} \end{array} \right\} \text{filename-1}$$

Format 11 (qualified-report-counter):

$$\left\{ \begin{array}{l} \text{PAGE-COUNTER} \\ \text{LINE-COUNTER} \end{array} \right\} \left\{ \begin{array}{l} \text{IN} \\ \text{OF} \end{array} \right\} \text{report-name-1}$$

8.4.2.1.2 Syntax rules

ALL FORMATS

- 1) Identifier is defined recursively: whenever the format for an identifier allows another identifier to be specified, that other identifier may be any of the formats for an identifier, including the one being defined provided the rules for each format are followed.

FORMAT 1

- 2) Function-identifier-1 is defined by 8.4.2.2, Function-identifier.

FORMAT 2

- 3) Qualified-data-name-with-subscripts-1 is defined by 8.4.1.2, Subscripts.

FORMAT 3

- 4) Reference-modifier-1 is defined by 8.4.2.3, Reference-modification.

FORMAT 4

- 5) Inline-invocation-1 is defined by 8.4.2.4, Inline method invocation.

FORMAT 5

- 6) Object-view-1 is defined by 8.4.2.5, Object-view.

FORMAT 6

- 7) Predefined-object references are defined by 8.4.2.6, EXCEPTION-OBJECT; 8.4.2.7, NULL; and 8.4.2.8, SELF and SUPER.

FORMAT 7

- 8) Object properties are defined by 8.4.2.9, Object property.

FORMAT 8

- 9) Predefined-address NULL is defined in 8.4.2.10, Predefined-address.

FORMAT 9

- 10) Address-identifiers are defined by 8.4.2.11, Data-address-identifier and 8.4.2.12, Program-address-identifier.

FORMAT 10

- 11) The LINAGE-COUNTER identifier is defined by 8.4.2.13, LINAGE-COUNTER.

FORMAT 11

- 12) The PAGE-COUNTER and LINE-COUNTER identifiers are defined by 8.4.2.14, Report counters.

8.4.2.1.3 General rules

- 1) The order in which the various components of an identifier are applied is as follows, with the first to be applied listed first:
 - a) a qualified-data-name-with-subscript; a predefined-object reference; a function-identifier without arguments; a qualified-report-counter; or a qualified-linage-counter
 - b) an address-identifier applies to an identifier on the right
 - c) an object-view applies to the identifier on the left
 - d) OF for object properties applies the property-name on the left to the identifier on the right
 - e) the inline method invocation operator applies the literal method-name with optional arguments enclosed in parentheses on the right to the identifier on the left
 - f) a function-identifier with arguments applies the function-name on the left to a list of arguments enclosed in parentheses on the right
 - g) a reference modifier applies to the identifier on the left.

8.4.2.2 Function-identifier

A function-identifier references the unique data item that results from the evaluation of a function.

8.4.2.2.1 General format

$$[\text{FUNCTION}] \left\{ \begin{array}{l} \text{function-prototype-name-1} \\ \text{intrinsic-function-name-1} \end{array} \right\} \left[\left[\begin{array}{l} \text{argument-1} \\ \text{OMITTED} \end{array} \right] \dots \right]$$

8.4.2.2.2 Syntax rules

- 1) A function-identifier shall not be specified as a receiving operand.
- 2) If intrinsic-function-name-1 or the ALL phrase is specified in the REPOSITORY paragraph or if function-prototype-name-1 is specified, the word FUNCTION may be omitted from the function-identifier; otherwise the word FUNCTION is required.
- 3) Function-prototype-name-1 shall be the user-function-name of the containing function definition or a function prototype specified in the REPOSITORY paragraph.
- 4) If a function's definition permits arguments and a left parenthesis immediately follows function-prototype-name-1 or intrinsic-function-name-1, the left parenthesis is always treated as the left parenthesis of that function's arguments.

NOTE For a function that may be referenced either with or without arguments, such as the RANDOM function, careful coding is necessary to ensure correct interpretation. For example, in the following:

FUNCTION MAX (FUNCTION RANDOM (A) B)

'A' is treated as an argument to the RANDOM function. If 'A' is instead meant to be a second argument to the MAX function, different coding is necessary - either:

FUNCTION MAX ((FUNCTION RANDOM) (A) B)

or

FUNCTION MAX (FUNCTION RANDOM (A B)

or

FUNCTION MAX (FUNCTION RANDOM A B).

- 5) The word OMITTED shall not be specified if intrinsic-function-name-1 is specified.
- 6) Argument-1 shall be an identifier, a literal, a boolean expression, or an arithmetic expression. Specific rules governing the number, class, category, and type of argument-1 are given for intrinsic functions in the definition of that intrinsic function in 15, Intrinsic functions, and for user-defined functions in 14.7, Conformance for parameters and returning items.
- 7) If the word OMITTED is specified, the OPTIONAL phrase shall be specified for the corresponding formal parameter.
- 8) If function-prototype-name-1 is specified and the formal parameter corresponding to argument-1 is specified with a BY VALUE phrase, argument-1 shall be of class numeric, object, or pointer.
- 9) A numeric function shall not be specified where an integer operand is required, even though a particular reference of the numeric function might yield an integer value.
- 10) An integer function other than the integer form of the ABS function shall not be specified where an unsigned integer is required.

- 11) If function-prototype-name-1 is specified, the rules for conformance specified in 14.7, Conformance for parameters and returning items, apply.
- 12) If function-prototype-name-1 is specified and the formal parameter corresponding to argument-1 is specified with the BY REFERENCE phrase in the USING phrase of the procedure division header and argument-1 is a bit data item, argument-1 shall be described such that:
 - a) subscripting and reference modification in argument-1 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.

8.4.2.2.3 General rules

- 1) A function-identifier references a temporary data item whose value is determined when the function is referenced at runtime.

If intrinsic-function-name-1 is specified, the temporary data item is an elementary data item whose description and category are specified by the definition of that intrinsic function in 15, Intrinsic functions.

If function-prototype-name-1 is specified, the description, class, and category of the temporary data item is that specified by the description in the linkage section of the item specified in the RETURNING phrase of the procedure division header of the function prototype identified by function-prototype-name-1.

- 2) At the time reference is made to a function, its arguments are evaluated individually in the order specified in the list of arguments, from left to right. An argument being evaluated may itself be a function-identifier or may be an expression containing function-identifiers. There is no restriction preventing the function referenced in evaluating an argument from being the same function as that for which the argument is specified. Additional rules for intrinsic functions are given in 15, Intrinsic functions, for user-defined functions in 14.1.3, General rules of the procedure division and in 14.7, Conformance for parameters and returning items.
- 3) If function-prototype-name-1 is specified, the function to be activated is identified by function-prototype-name-1 in accordance with the rules specified in 12.2.7, REPOSITORY paragraph, and function-prototype-name-1 is used to determine the characteristics of the activated function.
- 4) If function-prototype-name-1 is specified, the manner used for passing each argument is determined as follows:
 - a) BY REFERENCE is assumed when the BY REFERENCE phrase is specified or implied for the corresponding formal parameter and argument-1 is an identifier that is permitted as a receiving operand, other than an object property or object data item.
 - b) BY CONTENT is assumed when the BY REFERENCE phrase is specified or implied for the corresponding formal parameter and argument-1 is a literal, an arithmetic expression, a boolean expression, an object property, object data item, or any identifier that is not permitted as a receiving operand.
 - c) BY VALUE is assumed when the BY VALUE phrase is specified for the corresponding formal parameter.
- 5) Evaluation of the function-identifier proceeds as follows:
 - a) Each argument-1 is evaluated at the beginning of the evaluation of the function-identifier. If an exception condition exists, no function is activated and execution proceeds as specified in general rule 5f. If an exception condition does not exist, the values of argument-1 are made available to the activated function at the time control is transferred to that function.
 - b) The runtime system attempts to locate the function being activated. If function-prototype-name-1 is specified, the rules are specified in 8.4.5, Scope of names and 8.4.5.5, Scope of function-prototype-names.

Additional rules are given in 12.2.7, REPOSITORY paragraph. If the function is not found, the EC-PROGRAM-NOT-FOUND exception condition is set to exist, the function is not activated, and execution continues as specified in general rule 5f.

- c) If the function is located but the resources necessary to execute the function are not available, the EC-PROGRAM-RESOURCES exception condition is set to exist, the function is not activated, and execution continues as specified in general rule 5f. The runtime resources that are checked in order to determine the availability of the function for execution are defined by the implementor.
 - d) The function specified by the function-identifier is made available for execution and control is transferred to the activated function in a manner consistent with the entry convention specified for the function. If function-prototype-name-1 is specified and the function to be activated is a COBOL function, its execution is described in 14.1.3, General rules of the procedure division; if intrinsic-function-name-1 is specified, its execution is described in 15, Intrinsic functions; if function-prototype-name-1 is specified and the function to be activated is not a COBOL function, the execution is defined by the implementor.
 - e) After control is returned from the activated function, if an exception condition is propagated from the activated function, execution continues as specified in general rule 5f.
 - f) If an exception condition exists, any declarative that is associated with that exception condition is executed. Execution then proceeds as defined for the exception condition and execution of the declarative.
- 6) If the word OMITTED is specified or a trailing argument is omitted, the omitted-argument condition for that parameter evaluates to TRUE in the activated function. (See 8.8.4.1.7, Omitted-argument condition.)
 - 7) If a parameter for which the omitted-argument condition is true is referenced in an activated function, except as an argument or in the omitted-argument condition, the EC-PROGRAM-ARG-OMITTED exception condition is set to exist and the results of the execution of the function are undefined.

8.4.2.3 Reference-modification

Reference modification defines a unique data item by specifying an identifier, a leftmost position, and a length.

8.4.2.3.1 General format

identifier-1(leftmost-position : [length])

8.4.2.3.2 Syntax rules

- 1) Identifier-1 shall reference a data item that is one of the following:
 - a boolean data item,
 - a national data item,
 - an elementary data item of category alphanumeric or an alphanumeric group item,
 - an alphabetic data item,
 - a numeric-edited data item that is not subordinate to a strongly-typed group item,
 - an alphanumeric-edited data item that is not subordinate to a strongly-typed group item,
 - a national-edited data item that is not subordinate to a strongly-typed group item,
 - a numeric data item of usage display or national that is not subordinate to a strongly-typed group item,
 - a group item that is not strongly-typed.

For purposes of reference modification, bit group items and national group items are treated as elementary data items.

- 2) If identifier-1 is a function-identifier, it shall reference an alphanumeric, boolean, or national function.
- 3) Identifier-1 shall not be a reference-modification format identifier.

- 4) Leftmost-position and length shall be arithmetic expressions.
- 5) Unless otherwise specified, reference modification is allowed anywhere an identifier referencing a data item of class alphanumeric, boolean, or national is permitted.

8.4.2.3.3 General rules

- 1) Leftmost-position represents a boolean position, alphanumeric position, or national position when identifier-1 references a boolean, alphanumeric, or national data item, respectively.
- 2) If the data item referenced by identifier-1 is explicitly or implicitly described as usage DISPLAY and its category is other than alphanumeric, identifier-1 is operated upon for purposes of reference modification as if it were redefined as a data item of class and category alphanumeric of the same size as the data item referenced by identifier-1.
- 3) If the data item referenced by identifier-1 is explicitly or implicitly described as usage NATIONAL and its category is other than national, it is operated upon for purposes of reference modification as if it were redefined as a data item of class and category national of the same size as the data item referenced by identifier-1.
- 4) Each position of the data item referenced by identifier-1 is assigned an ordinal number incrementing by one from the leftmost position to the rightmost position. The leftmost position is assigned the ordinal number one. If the data description entry for identifier-1 contains a SIGN IS SEPARATE clause, the sign position is assigned an ordinal number within that data item.
- 5) Reference modification creates a unique data item that is a subset of the data item referenced by identifier-1. This unique data item is defined as follows:
 - a) If the usage of identifier-1 is bit, positions used in evaluation are bit positions; otherwise, positions used in evaluation are character positions.
 - b) The evaluation of leftmost-position specifies the ordinal position of the leftmost bit or character of the unique data item in relation to the leftmost bit or character of the data item referenced by identifier-1. Evaluation of leftmost-position shall result in a positive nonzero integer less than or equal to the number of positions in the data item referenced by identifier-1.
 - c) The evaluation of length specifies the number of bit positions or character positions of the data item to be used in the operation. The evaluation of length shall result in a positive nonzero integer. The sum of leftmost-position and length minus the value one shall be less than or equal to the number of positions in the data item referenced by identifier-1. If length is not specified, the unique data item extends from and includes the position identified by leftmost-position up to and including the rightmost position of the data item referenced by identifier-1.

If the evaluation of leftmost-position or length results in a non-integer value or a value that references a position outside the area of identifier-1, the EC-BOUND-REF-MOD exception condition is set to exist.

NOTE When the runtime coded character set is the UTF-16 format of the UCS, the COBOL system does not detect reference modification that bisects the two halves of a surrogate pair.

- 6) The unique data item is considered to be an elementary data item without the JUSTIFIED clause. The unique data item has the same class, category, and usage as that defined for identifier-1, except that:
 - a) the category alphanumeric-edited is considered class and category alphanumeric,
 - b) the category national-edited is considered class and category national,
 - c) the categories numeric and numeric-edited are considered class and category national if the usage is national; otherwise they are considered class and category alphanumeric, and

- d) an alphanumeric group item is considered to have usage display.

8.4.2.4 Inline method invocation

Inline method invocation references a temporary data item returned from invocation of a method.

8.4.2.4.1 General format

$$\left\{ \begin{array}{l} \text{class-name-1} \\ \text{identifier-1} \end{array} \right\} :: \text{literal-1} \left[\left(\left\{ \begin{array}{l} \text{arithmetic-expression-1} \\ \text{boolean-expression-1} \\ \text{identifier-2} \\ \text{literal-2} \\ \text{OMITTED} \end{array} \right\} \dots \right) \right]$$

8.4.2.4.2 Syntax rules

- 1) Inline method invocation shall not be specified as a receiving operand.
- 2) Identifier-1 shall be of class object; neither the predefined object reference NULL nor a universal object reference shall be specified.
- 3) One of the INVOKE statements specified in general rule 1 shall be valid according to 14.8.22, INVOKE statement, syntax rules.
- 4) The data item referenced in the RETURNING phrase of the invoked method's procedure division header shall not be described with the ANY LENGTH clause.

8.4.2.4.3 General rules

- 1) An inline method invocation references a temporary data item with the same class, category, and content as the temp-identifier that would be returned from the execution of the applicable form of INVOKE statement, as follows:

INVOKE identifier-1 literal-1 USING arguments RETURNING temp-identifier
 INVOKE identifier-1 literal-1 RETURNING temp-identifier
 INVOKE class-name-1 literal-1 USING arguments RETURNING temp-identifier
 INVOKE class-name-1 literal-1 RETURNING temp-identifier

where:

- a) arguments are the operands specified within parentheses in the inline method invocation, if any;
 - b) temp-identifier has the same description, class, and category as the RETURNING parameter in the specification of the method identified by literal-1 and either identifier-1 or class-name-1;
 - c) temp-identifier is a temporary item that exists for the purpose of effecting the inline invocation in this way and for no other purpose.
- 2) If an exception occurs during the execution of a statement containing this format, the resumption point is the next executable statement.

8.4.2.5 Object-view

An object-view causes an object reference to be treated as though it had the specified description. A runtime conformance check for this description will be done on the object.

8.4.2.5.1 General format

$$\text{identifier-1 AS } \left\{ \begin{array}{l} [\text{FACTORY OF}] \text{ class-name-1 } [\text{ONLY}] \\ \text{interface-name-1} \\ \text{UNIVERSAL} \end{array} \right\}$$

8.4.2.5.2 Syntax rules

- 1) Identifier-1 shall be of class object; the predefined object references SUPER and NULL shall not be specified.
- 2) An object-view shall not be specified as a receiving operand.

8.4.2.5.3 General rules

- 1) This reference of identifier-1 is treated at compile-time as though it had the description specified by the AS phrase.
- 2) If class-name-1 is specified without either of the optional phrases, identifier-1 is treated as though it were described as USAGE IS OBJECT REFERENCE class-name-1. If the object referenced by identifier-1 is not an object of class-name-1 or an object of a subclass of class-name-1, the EC-OO-CONFORMANCE exception condition is set to exist.
- 3) If the FACTORY phrase is specified and the ONLY phrase is not specified, identifier-1 is treated as though it were described as USAGE OBJECT REFERENCE FACTORY OF class-name-1. If the object referenced by identifier-1 is not the factory object of class-name-1 or the factory object of a subclass of class-name-1, the EC-OO-CONFORMANCE exception condition is set to exist.
- 4) If the ONLY phrase is specified and the FACTORY phrase is not specified, identifier-1 is treated as though it were described as USAGE OBJECT REFERENCE class-name-1 ONLY. If the object referenced by identifier-1 is not an object of class-name-1, the EC-OO-CONFORMANCE exception condition is set to exist.
- 5) If both the FACTORY phrase and the ONLY phrase are specified, identifier-1 is treated as though it were described as USAGE OBJECT REFERENCE FACTORY OF class-name-1 ONLY. If the object referenced by identifier-1 is not the factory object of class-name-1, the EC-OO-CONFORMANCE exception condition is set to exist.
- 6) If interface-name-1 is specified, identifier-1 is treated as though it were described as USAGE OBJECT REFERENCE interface-name-1. If the object referenced by identifier-1 does not implement interface-name-1, the EC-OO-CONFORMANCE exception condition is set to exist.
- 7) If UNIVERSAL is specified, identifier-1 is treated as though it were described as USAGE OBJECT REFERENCE without any of the optional phrases to indicate the class or interface for objects referenced by identifier-1. The EC-OO-CONFORMANCE exception condition is not set to exist.

8.4.2.6 EXCEPTION-OBJECT

EXCEPTION-OBJECT is a predefined object reference that is used in a declarative procedure to reference the current exception object.

8.4.2.6.1 General format

EXCEPTION-OBJECT

8.4.2.6.2 Syntax rules

- 1) EXCEPTION-OBJECT shall not be specified as a receiving operand.
- 2) EXCEPTION-OBJECT is implicitly described as class object and category object reference, as an external data item, and as a universal object reference.

8.4.2.6.3 General rules

- 1) EXCEPTION-OBJECT references the current exception object. If an exception object is not associated with the current exception, EXCEPTION-OBJECT is set to null.
- 2) There is one instance of EXCEPTION-OBJECT in a run unit.

8.4.2.7 NULL

NULL is a predefined object reference that contains the null object reference value.

8.4.2.7.1 General format

NULL

8.4.2.7.2 Syntax rules

- 1) NULL shall not be specified as a receiving operand.
- 2) NULL is implicitly described as class object and category object reference, and is not a universal object reference.

8.4.2.7.3 General rules

- 1) Predefined object reference NULL contains the null object reference value; this is a unique value defined by the implementor such that it is guaranteed to never reference an object.

8.4.2.8 SELF and SUPER

SELF and SUPER are predefined object references that reference the object on which the current method is executing.

8.4.2.8.1 General format

$$\left\{ \begin{array}{l} \underline{\text{SELF}} \\ [\text{class-name-1 } \underline{\text{OF}}] \underline{\text{SUPER}} \end{array} \right\}$$

8.4.2.8.2 Syntax rules

- 1) This identifier format may be specified only in a method definition.
- 2) This identifier format shall not be specified as a receiving operand.

- 3) SUPER may be specified only as the object in an object-property identifier or as the object used to invoke a method with the INVOKE statement or an inline invocation of a method.
- 4) Class-name-1 shall be the name of a class specified in the INHERITS clause of the containing class definition.
- 5) If the INHERITS clause of the containing class definition specifies more than one class-name, class-name-1 shall be specified.
- 6) If the INHERITS clause of the containing class definition specifies only one class-name, class-name-1 may be specified.
- 7) SELF and SUPER are both implicitly described as class object and category object reference, and are not universal object references.

8.4.2.8.3 General rules

- 1) SELF and SUPER both reference the object that was used to invoke the method in which the reference to SELF or SUPER appears.
- 2) If SELF is specified for a method invocation, the method resolution is based upon the set of methods defined for the runtime class of the object referenced by SELF.

NOTE The method resolution is not limited to the methods that are defined for the class that contains the method invocation. The object referenced by SELF at runtime may be an object of a subclass of the class that contains the invocation. Thus method invocation through the predefined object reference SELF uses the same method binding mechanism as is used for any other object identifier, based on the runtime class of the object.

- 3) If SUPER is specified for a method invocation, the method resolution ignores all the methods defined in the class containing the invocation and all the methods defined in any subclass of that class.

NOTE The invoked method will be one that is defined in a superclass.

- 4) If class-name-1 is specified, the search for the method shall include only those methods defined for class-name-1.

8.4.2.9 Object property

Object properties provide a special syntax to get information out of and pass information back into an object. The mechanisms for accessing object properties are get property methods and set property methods. A get property method is a method explicitly defined with the GET PROPERTY phrase or a method implicitly generated for a data item described with the PROPERTY clause; a set property method is a method explicitly defined with the SET PROPERTY phrase or a method implicitly generated for a data item described with the PROPERTY clause.

8.4.2.9.1 General format

property-name-1 OF { class-name-1
 identifier-1 }

8.4.2.9.2 Syntax rules

- 1) Property-name-1 shall be an object property specified in the REPOSITORY paragraph.
- 2) Identifier-1 shall be an object reference; neither a universal object reference nor the predefined object reference NULL shall be specified.
- 3) If the object property is used as a sending item, a get property method shall exist for property-name-1 in the object referenced by identifier-1 or in the factory object of the class class-name-1.

- 4) If the object property is used as a receiving item, a set property method shall exist for property-name-1 in the object referenced by identifier-1 or in the factory object of the class class-name-1.
- 5) The description of an object property used as a sending item is the same as the description of the returning item of the get property method. This object property may be specified wherever a data item with that description would be valid as a sending item.
- 6) The description of an object property used as a receiving item is the same as the description of the using parameter of the set property method. This object property may be specified wherever a data item with that description would be valid as a receiving item.
- 7) The data description of the item specified in the RETURNING phrase of the get property method shall be the same as the data description of the item specified as the USING parameter of the set property method.

8.4.2.9.3 General rules

- 1) When an object property is used only as a sending item, a conceptual temporary data item, temp-1, is used in its place. The value of the property is determined as though the associated get property method were invoked, in accordance with the rules of the INVOKE statement, and the returned value placed in temp-1. The data description of temp-1 is the same as the data description of the item specified in the RETURNING phrase of the get property method.
- 2) When an object property is used only as a receiving item, a conceptual temporary data item, temp-2, is used in its place. The value of the property is assigned as though the associated set property method were invoked, in accordance with the rules of the INVOKE statement, passing the content of temp-2 as the parameter. The data description of temp-2 is the same as the data description of the item specified as the USING parameter of the set property method.
- 3) When an object property is used as both a sending item and a receiving item, conceptual temporary data items temp-1 and temp-2 are used in its place; temp-1 and temp-2 are the same temporary data item, where temp-2 redefines temp-1. For sending operations, the value of the property is determined in the same manner as for sending items in general rule 1; for receiving operations, the value of the property is assigned in the same manner as for receiving items in general rule 2. The data descriptions of temp-1 and temp-2 are the same as the data description of the item specified in the RETURNING phrase of the get property method.

8.4.2.10 Predefined-address

NULL is a predefined address of class pointer.

8.4.2.10.1 General format

NULL

8.4.2.10.2 Syntax rules

- 1) This format may be used only as a sending operand in an INITIALIZE or a SET statement; as an argument in a program-prototype format CALL statement, a function-prototype format function activation, or a method invocation; or in a data-pointer or program-pointer relation-condition.

8.4.2.10.3 General rules

- 1) When associated with a data-pointer, the predefined address NULL references a data item of category data-pointer that contains the null address. The null data address is an implementor-defined value that is guaranteed not to represent the address of any data item.
- 2) When associated with a program-pointer, the predefined address NULL references a data item of category program-pointer that contains the NULL program address. The null program address is an implementor-defined value that is guaranteed not to represent the address of any program.

8.4.2.11 Data-address-identifier

A data-address-identifier references the unique data item that contains the address of a data item.

8.4.2.11.1 General Format

ADDRESS OF identifier-1

8.4.2.11.2 Syntax rules

- 1) Identifier-1 shall reference a data item defined in the file section, working-storage section, local-storage section, or linkage section. Identifier-1 shall not be defined in the working-storage or file section of an object or a factory object.
- 2) Identifier-1 shall not reference an object reference or an elementary item subordinate to a strongly-typed group item.
- 3) If identifier-1 is a bit data item, identifier-1 shall be described such that:
 - a) subscripting and reference modification in identifier-1 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 4) If identifier-1 references a strongly-typed group item, identifier-1 shall be defined with a TYPE clause referencing a type declaration described with the STRONG phrase.
- 5) This identifier format shall not be specified as a receiving operand.

8.4.2.11.3 General rules

- 1) Data-address-identifier creates a unique data item of class pointer and category data-pointer that contains the address of identifier-1.
- 2) If identifier-1 is a strongly-typed group item or a restricted data-pointer, the data-address-identifier is a data-pointer restricted to the type of identifier-1.

8.4.2.12 Program-address-identifier

A program-address-identifier references the unique data item that contains the address of a program.

8.4.2.12.1 General Format

ADDRESS OF PROGRAM { identifier-1
literal-1
program-prototype-name-1 }

8.4.2.12.2 Syntax rules

- 1) Identifier-1 shall be of category alphanumeric or national.
- 2) Literal-1 shall be an alphanumeric or national literal.
- 3) Program-prototype-name-1 shall be a program prototype specified in the REPOSITORY paragraph.

- 4) This identifier format shall not be specified as a receiving operand.

8.4.2.12.3 General rules

- 1) Program-address-identifier creates a unique data item of class pointer and category program-pointer that contains the address of a program identified by one of the following:

- a) the content of the data item referenced by identifier-1
- b) the value of literal-1
- c) program-prototype-name-1.

If identifier-1 or literal-1 is specified, paragraph 8.3.1.1.1, User-defined words, describes how this value is used to identify the referenced program.

- 2) The program may be written in COBOL or in another language for which the implementor has declared support. For a COBOL program, the address is that of the outermost program identified by the externalized program-name in its PROGRAM-ID paragraph. For a non-COBOL program, the relation between the address and the associated program is defined by the implementor.
- 3) When program-prototype-name-1 is specified, the program-address-identifier has the characteristics of a program-pointer restricted to program-prototype-name-1.
- 4) If the runtime system cannot locate the program, the EC-PROGRAM-NOT-FOUND exception condition is set to exist and the value of the address-identifier is the predefined address NULL.

8.4.2.13 LINAGE-COUNTER

The LINAGE-COUNTER identifier is generated by the presence of a LINAGE clause in a file description entry.

8.4.2.13.1 General format

$$\underline{\text{LINAGE-COUNTER}} \left[\left\{ \begin{array}{c} \underline{\text{IN}} \\ \underline{\text{OF}} \end{array} \right\} \text{file-name-1} \right]$$
8.4.2.13.2 Syntax rules

- 1) LINAGE-COUNTER may be referenced only in procedure division statements.
- 2) The LINAGE-COUNTER identifier shall not be referenced as a receiving operand.
- 3) Qualification requirements for LINAGE-COUNTER are defined by 8.4.1.1, Qualification.

8.4.2.13.3 General rules

- 1) LINAGE-COUNTER references a temporary unsigned integer data item of class and category numeric whose size is equal to the page size specified in the LINAGE clause.
- 2) The semantics of the LINAGE-COUNTER identifier is described in 13.16.32, LINAGE clause, general rule 7.

8.4.2.14 Report counters

The PAGE-COUNTER and LINE-COUNTER identifiers are generated automatically and exist independently for each report.

8.4.2.14.1 General format

$$\left\{ \begin{array}{c} \text{PAGE-COUNTER} \\ \text{LINE-COUNTER} \end{array} \right\} \left[\left\{ \begin{array}{c} \text{IN} \\ \text{OF} \end{array} \right\} \text{report-name-1} \right]$$

8.4.2.14.2 Syntax rules

- 1) In the report section, PAGE-COUNTER and LINE-COUNTER may be referenced only in a SOURCE clause. In the procedure division, PAGE-COUNTER and LINE-COUNTER may be referenced in any context where an integer data item may appear.
- 2) Qualification requirements for PAGE-COUNTER and LINE-COUNTER are defined by 8.4.1.1, Qualification.

NOTE Because each report maintains an independent PAGE-COUNTER and LINE-COUNTER, it is the programmer's responsibility to assign the correct values to any page numbers and to ensure that report groups are printed correctly within the limits of the page.

- 3) LINE-COUNTER shall not be referenced as a receiving operand.

8.4.2.14.3 General rules

- 1) PAGE-COUNTER and LINE-COUNTER reference temporary unsigned integer data items of class and category numeric, which are maintained for each report.
- 2) The initial value of PAGE-COUNTER is set to 1 by the execution of an INITIATE statement for the corresponding report and its value is updated by 1 during each page advance. It is reset to 1 when a report group that contains a NEXT GROUP clause with a RESET phrase is printed.
- 3) The initial value of LINE-COUNTER is set to zero by execution of an INITIATE statement for the corresponding report. It is reset to zero whenever a page advance takes place.
- 4) At the time each report line is printed, the value of LINE-COUNTER specifies the line number of the page on which the line is printed. The value of LINE-COUNTER after the printing of a report group is the same as the line number of the last line printed, unless a NEXT GROUP clause is defined for the report group, in which case the final value of LINE-COUNTER is defined by the general rules for the NEXT GROUP clause.
- 5) The values of PAGE-COUNTER and LINE-COUNTER are not affected by the processing of a dummy report group, nor by the processing of a report group whose printing is suppressed by means of the SUPPRESS statement.

8.4.3 Condition-name

There are two kinds of condition-names. One is used to identify a subset of the values that an associated data item may assume. The other is associated with the on status or off status of an implementor-defined switch.

The level-number 88 identifies a condition-name and a specific value, set of values, or range of values. This condition-name is associated with the data item to which it is subordinate, called a conditional variable. Referencing this condition-name in a condition, as described in 8.8.4.1.4, Condition-name condition (conditional variable), is an abbreviation for the conditional expression that posits that the value of the associated conditional variable is equal to one of the set of values identified with condition-name. This kind of condition-name is defined in 13.14, Data description entry. This kind of condition-name can be used in a SET statement to move a value to the associated conditional variable to make the condition-name either 'true' or 'false'.

Within the SPECIAL-NAMES paragraph, a condition-name identifies the on status or off status of an implementor-defined switch. Referencing this condition-name, as described in 8.8.4.1.5, Switch-status condition, in a condition

posits that the associated switch has the 'on' or 'off' status that is associated with the condition-name. This condition-name can also be used in a SET statement to set the associated switch to the 'on' or 'off' status.

8.4.3.1 General format

Format 1 (switch-status-condition-name):

condition-name-1

Format 2 (qualified-condition-name-with-subscripts):

qualified-condition-name-with-subscripts-1

8.4.3.2 Syntax rules

FORMAT 1

- 1) Condition-name-1 shall be associated with a switch-name in the SPECIAL-NAMES paragraph.

FORMAT 2

- 2) Qualified-condition-name-with-subscripts-1 is defined by 8.4.1.1, Qualification.

8.4.4 Explicit and implicit references

A source element may reference data items either explicitly or implicitly in procedure division statements. An explicit reference occurs when the name of the referenced item is written in a procedure division statement. An implicit reference occurs when the item is referenced by a procedure division statement without the name of the referenced item being written in the source statement. An implicit reference also occurs, during the execution of a PERFORM statement, when the index or data item referenced by the index-name or identifier specified in the VARYING, AFTER, or UNTIL phrase is initialized, modified, or evaluated by the control mechanism associated with that PERFORM statement. Such an implicit reference occurs if and only if the data item contributes to the execution of the statement.

8.4.5 Scope of names

When source elements are directly or indirectly contained within other source elements, each source element may use identical user-defined words to name items independent of the use of these user-defined words by other source elements. (See 8.3.1.1.1, User-defined words.) When identically named items exist, a source element's reference to such a name, even when it is a different type of user-defined word, is to the item which that source element describes rather than to the item, possessing the same name, described in another source element.

Except for program-names and method-names, a source element shall not reference any name declared in any source element it contains.

The following types of user-defined words may be referenced throughout a compilation group:

- library-name
- text-name

The following types of user-defined words may be referenced only by statements in the source element in which the user-defined word is declared:

- paragraph-name
- section-name

The following types of user-defined words, when they are declared within a configuration section, may be referenced only by statements and entries either in that source element that contains a configuration section or in any source element contained within that source element:

- alphabet-name
- class-name (for truth value proposition)
- condition-name (declared in a configuration section)
- locale-name
- mnemonic-name
- ordering-name
- symbolic-character

Specific conventions for declarations and references to the following types of user-defined words are specified in 8.4.5.1, Local and global names, through 8.4.5.10, Scope of property-names:

- class-name (for object orientation)
- compilation-variable-name
- condition-name (not declared in a configuration section)
- constant-name
- data-name
- file-name
- function-prototype-name
- index-name
- interface-name
- method-name
- parameter-name
- program-name
- program-prototype-name
- property-name
- record-key-name
- record-name
- report-name
- screen-name
- type-name
- user-function-name

A cd-name (obsolete element) may be referenced only by statements and entries in the source element that contains the communication section in which it is declared

8.4.5.1 Local and global names

A local name may be referenced only in the source element in which it is declared.

A global name may be referenced in the source element in which it is declared or in any source elements that are directly or indirectly contained within that source element.

When a source element, source element B, is directly contained within another source element, source element A, both source elements may define a name using the same user-defined word. In addition, source element A may be contained in another source element and that other source element may also define a name using the same user-defined word. When such a duplicated name is referenced in source element B, the following rules are used to determine the referenced item:

- 1) The set of names to be used for determination of a referenced item consists of all names that are defined in source element B and all global names that are defined in source element A and in any source elements that directly or indirectly contain source element A. Using this set of names, the normal rules for qualification and any other rules for uniqueness of reference are applied until one or more items is identified.
- 2) If only one item is identified, it is the referenced item.

- 3) If more than one item is identified, no more than one of them may have a name local to source element B. If zero or one of the items has a name local to source element B, the following rules apply:
- a) If the name is declared in source element B, the item in source element B is the referenced item.
 - b) Otherwise, if source element A is contained within another source element, the referenced item is:
 1. The item in source element A if the name is declared in source element A.
 2. The item in the containing source element if the name is not declared in source element A and is declared in the source element containing source element A. This rule is applied to further containing source elements until a single valid name has been found.

8.4.5.1.1 Scope of condition-names, constant-names, data-names, file-names, record-names, report-names, screen-names, and type-names

A constant-name, file-name, record-name, report-name, screen-name, or type-name described with a GLOBAL clause is a global name. A constant-name, data-name or file-name declared in a source element for an object definition, whether factory or instance, is a global name. All data-names and screen-names subordinate to a global name are global names. All condition-names associated with a global name are global names.

When a condition-name, constant-name, data-name, file-name, record-name, report-name, screen-name, or type-name is not a global name, it is a local name.

The requirements governing the uniqueness of the names allocated by a single source element to be condition-names, constant-names, data-names, file-names, record-names, report-names, screen-names, and type-names are explained elsewhere in these specifications. (See 8.3.1.1.1, User defined words.)

8.4.5.1.2 Scope of index-names

If a data item possessing the global attribute includes a table described with an index-name, that index-name also possesses the global attribute. Therefore, the scope of an index-name is identical to that of the data-name that names the table whose index is named by that index-name.

8.4.5.1.3 Scope of record-key-names

The record-key-name defined by a SOURCE phrase in the ALTERNATE RECORD KEY clause or RECORD KEY clause of the file control entry for an indexed file is global if the GLOBAL clause is specified in the file description entry for that file; otherwise, the record-key-name is local.

8.4.5.1.4 Scope of PAGE-COUNTER AND LINE-COUNTER

PAGE-COUNTER and LINE-COUNTER are global if the GLOBAL clause is specified in report description entry of the associated report; otherwise, they are local.

8.4.5.1.5 Scope of LINAGE-COUNTER

LINAGE-COUNTER is global if the GLOBAL clause is specified in the file description entry for the associated file; otherwise, it is local.

8.4.5.2 Scope of program-names

The program-name of a program is declared in the PROGRAM-ID paragraph of the program's identification division. A program-name may be referenced only by the CALL statement, the CANCEL statement, the program-address-identifier, and the end program marker. The names assigned to programs that are contained directly or indirectly within the same outermost program shall be unique within that outermost program.

The following rules regulate the scope of a program-name for the CALL and CANCEL statements, and the program-address-identifier:

- 1) If the program-name is that of a program that does not possess the common attribute and that is directly contained within another program, that program-name may be referenced only by statements included in that containing program or, if the program possesses the recursive attribute, in the program itself.
- 2) If the program-name is that of a program that does possess the common attribute and that is directly contained within another program, that program-name may be referenced only by statements included in that containing program and any programs directly or indirectly contained within that containing program, except that the program possessing the common attribute and any programs contained within it may reference the program-name only if the program possesses the recursive attribute.
- 3) If the program-name is that of an outermost program, that program-name may be referenced by statements included in any source element in the run unit.

8.4.5.3 Scope of class-names and interface-names

The class-name of a class referenced within a source element shall be either the name of the containing class definition or declared in the REPOSITORY paragraph of that or a containing source element.

Class definitions within a compilation group shall have unique class-names.

The interface-name of an interface referenced within a source element shall be either the name of the containing interface definition or declared in the REPOSITORY paragraph of that or a containing source element.

Interface definitions within a compilation group shall have unique interface-names.

A class-name or interface-name declared in the REPOSITORY paragraph of a source element may be used in that source element and any nested source element.

8.4.5.4 Scope of method-names

The method-name of a method is declared in the METHOD-ID paragraph. A method-name may be referenced only by the INVOKE statement, an inline invocation, and the end method marker.

The methods declared in a class definition shall have unique method-names within that class definition. The methods declared in a subclass may have the same name as a method in the superclass, subject to the conditions in 11.6, METHOD-ID paragraph.

The methods declared in an interface definition shall have unique method-names within that interface definition. The methods declared in an inheriting interface may have the same name as a method in the inherited interface, subject to the conditions in 11.6, METHOD-ID paragraph.

8.4.5.5 Scope of function-prototype-names

Function-prototype-names referenced within a source element shall be either the user-function-name of the containing function definition or a function-prototype-name declared in the REPOSITORY paragraph.

8.4.5.6 Scope of user-function-names

A user-function-name may be referenced in the REPOSITORY paragraph of any source element that follows that function definition within the compilation group and, if the external repository is updated, in any subsequently-compiled source unit that specifies that user-function-name as a function-prototype-name in its REPOSITORY paragraph.

8.4.5.7 Scope of program-prototype-names

Program-prototype-names referenced within a source element shall be either the program-name of a containing program definition or a program-prototype-name declared in the REPOSITORY paragraph

8.4.5.8 Scope of compilation-variable-names

The scope of a compilation-variable-name is from the point of definition to the end of the compilation group. Compilation-variable-names may be referenced in compiler directives and in a constant entry.

8.4.5.9 Scope of parameter-names

Parameter-names may be referenced only within the class definition or interface definition in which they are specified in the USING phrase, subject to the rules in 11.2, CLASS-ID paragraph, or 11.5, INTERFACE-ID paragraph.

8.4.5.10 Scope of property-names

The property-name of a property referenced within a source element shall be declared in the REPOSITORY paragraph of that or a containing source element.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

8.5 Data description and representation

8.5.1 Computer independent data description

To make data as computer-independent as possible, the characteristics or properties of data are described in the data division in a format that is largely independent from the manner in which data are stored internally in the computer or on a particular external medium. When the implementation provides multiple ways of storing data, the clauses of the data description entries determine the specific representation of the data in storage. Each implementor shall provide a complete specification of the possible representations on the computer for which COBOL is implemented.

Except for the hexadecimal formats, the contents of literals are described in the computer's coded character set known at compile time. When a different coded character set is in effect on the computer at runtime, the content of the literal is converted to the computer's runtime coded character set as described in 8.1.4, Computer's coded character set. The hexadecimal literal formats specify the bit patterns to be used at runtime.

8.5.1.1 Files and records

COBOL has some language elements for describing physical aspects of a file, like the external name used to associate the logical file with a physical file, and the grouping of logical records within the physical limitations of the file medium.

For the most part, COBOL deals with logical files. COBOL input and output statements refer to logical records. Each logical record consists of a set of data description entries that describe the characteristics of a particular record. Each data description entry consists of a level-number followed by a data-name, if required, followed by a series of independent clauses, as required.

Data items described in the working-storage section, the local storage section, or the linkage section can also be grouped into logical records using record description entries.

Files, including their physical aspects, the relationship between physical and logical files, and the characteristics of logical files, are described in 9.1, Files.

8.5.1.2 Levels

A level concept is inherent in the structure of a record. This concept arises from the need to specify subdivision of a record for the purpose of data reference. Once a subdivision has been specified, it may be further subdivided to permit more detailed data referral.

The most basic subdivisions of a record, that is, those not further subdivided, are called elementary items; consequently, a record is said to consist of a sequence of elementary items, or the record itself may be an elementary item.

In order to refer to a set of elementary items, the elementary items are combined into groups. Each group consists of a named sequence of one or more elementary items. Groups, in turn, may be combined into groups of one or more groups. An elementary item may belong to more than one group in a hierarchy of groups.

8.5.1.2.1 Level-numbers

A system of level-numbers shows the organization of elementary items and group items. Since records are the most inclusive data items, level-numbers for records start at 1. Less inclusive data items are assigned higher (not necessarily successive) level-numbers not greater in value than 49. There are special level-numbers, 66, 77, and 88, that are exceptions to this rule.

A group includes all group and elementary items following it until a level-number less than or equal to the level-number of that group is encountered. All items that are immediately subordinate to a given group item shall be described using numerically equal level-numbers greater than the level-number used to describe that group item.

Three types of entries exist for which there is no true concept of level. These are:

- 1) Entries that specify elementary items or groups introduced by a RENAME clause.
- 2) Entries that specify noncontiguous working-storage, local storage, and linkage data items.
- 3) Entries that specify condition-names.

Entries describing items by means of RENAME clauses for the purpose of re-grouping data items have been assigned the special level-number 66.

Entries that specify noncontiguous data items that are not subdivisions of other items, and are not themselves subdivided, have been assigned the special level-number 77.

Entries that specify condition-names to be associated with particular values of a conditional variable have been assigned the special level-number 88.

8.5.1.3 Limitations of character handling

Each coded character of the character sets supported by an implementation is processed at runtime as a single character position. The following processing limitations apply when ISO/IEC 10646 is chosen as a computer's coded character set:

- 1) the non-combining character and the following combining characters of a composite sequence defined in ISO/IEC 10646 are each treated as a single character position.
- 2) the R-octet (high-half 2 octets) and the C-octet (low-half 2 octets) of a four-octet sequence defined in the UTF-16 format of ISO/IEC 10646-1 are each treated as a single character position.

NOTE The UTF-16 format of ISO/IEC 10646-1 is a coded character set where each code element (or 'code value') consists of two octets. Many, but not all, of the letters and symbols are represented in one code element. In order to accommodate more entities than could otherwise be defined in a two-octet coded character set, the following techniques are used in ISO/IEC 10646-1:

- some abstract characters or text entities are defined as 'combining sequences' of multiple code elements where a two-octet base character and one or more two-octet combining characters form a complete entity, together called a composite sequence.
- some abstract characters or text entities are defined as 'surrogate pairs' consisting of two code elements that form a high-half and a low-half of the abstract character or text entity.

These techniques facilitate efficient processing of data as fixed-size two-octet code elements, but present opportunities for corruption of data if not handled correctly. To achieve a better understanding, see ISO/IEC 10646-1 and ISO/IEC 10646-2.

COBOL supports UTF-16 as a Level U implementation as defined in ISO/IEC 10646-1, which means that COBOL does not provide any special handling or recognition of surrogate pairs; nor does COBOL provide recognition of composite sequences. Each two-octet code element of UTF-16 is treated in COBOL as though it were itself a character. Users are responsible for ensuring that any truncation or replacement that occurs is consistent with the needs of their application.

8.5.1.4 Algebraic signs

Algebraic signs fall into two categories: operational signs, which are associated with signed numeric data items and signed numeric literals to indicate their algebraic properties; and editing signs, which appear in edited data items to identify the sign of the item.

The SIGN clause permits the programmer to state explicitly the location of the operational sign. This clause is optional; if it is not used, operational signs will be represented as defined by the implementor.

Editing signs are inserted into a data item through the use of the sign control symbols of the PICTURE clause.

8.5.1.5 Alignment of data items in storage

8.5.1.5.1 Alignment of alphanumeric groups and of data items of usage display

Alignment of alphanumeric groups and of data items of usage display is at a natural alphanumeric character boundary and is coincident with a byte boundary in the architecture of the processor.

The alignment of the start of an alphanumeric group item relative to the first item within that group is defined by the implementor, with the exception that alignment of the group is coincident with the first item when that item is a national data item or a data item of class boolean, object, or pointer.

8.5.1.5.2 Alignment of data items of usage national

Alignment of data items of usage national is at a natural national character boundary.

The alignment of the start of a group item and the alignment of the start of the first item within that group, when the first item is of usage national, are at the same position in storage.

8.5.1.5.3 Alignment of data items of usage bit

Alignment of elementary bit data items and bit group items within a record, when neither a SYNCHRONIZED clause nor an ALIGNED clause is specified, is at the next bit position in storage when that item is:

- an elementary bit data item immediately following an elementary bit data item or bit group item of the same level;
- a bit group item immediately following a bit group item or elementary bit data item of the same level.

Alignment of all other bit data items within a record, when a SYNCHRONIZED clause is not specified, is at the first bit position of the first available byte.

Alignment of elementary bit data items of level 1 or level 77 and a level 1 bit group are at the first bit of a byte.

Implicit filler bit positions are generated:

- As defined by the implementor for a bit data item described with the SYNCHRONIZED clause. The implementor defines the positioning rules associated with any filler bit positions.
- Following a bit data item within an alphanumeric group item, within a strongly-typed group item, or within a bit group item, as needed to advance alignment to a required natural boundary for the next item within that group. The filler bit positions are implicitly described as a filler elementary bit data item of the necessary number of bits and of the same level number as the next item within that group.
- Following a bit data item that is the last data item in a record that is an alphanumeric group or strongly-typed group item, as needed to increase the number of bits to fill an integral number of characters. The filler bit positions are implicitly described as a filler elementary bit data item of the necessary number of bits with a level number the same as the highest hierarchical level of any bit data item superordinate to the last item, or, if there is no such superordinate item, the same as the level number of the last data item in the record.

NOTE No filler is generated at the end of a record that is entirely a bit group, at the end of a level 77 item, or at the end of a level 1 elementary item.

The alignment of the start of a group item and the alignment of the first item within that group, when the first item is a bit data item, are at the same bit position in storage.

8.5.1.5.4 Item alignment for increased object-code efficiency

Some computer memories are organized in such a way that there are natural addressing boundaries in the computer memory, such as word boundaries, half-word boundaries, and byte boundaries. The way in which data is stored is determined by the runtime module, and need not respect these natural boundaries.

However, certain uses of data in such constructs as arithmetic operations or subscripting may be facilitated if the data is stored so as to be aligned on these natural boundaries. Specifically, additional machine operations might be required at execution time for the accessing and storage of data if portions of two or more data items appear between adjacent natural boundaries, or if certain natural boundaries bifurcate a single data item.

Data items that are aligned on these natural boundaries in such a way as to avoid such additional machine operations are defined to be synchronized.

Synchronization can be accomplished in two ways:

- 1) By use of the SYNCHRONIZED clause.
- 2) By recognizing the appropriate natural boundaries and organizing the data suitably without the use of the SYNCHRONIZED clause.

Each implementor who provides for special types of alignment shall specify the precise interpretations that are to be made. The use of such items within a group may affect the results of statements in which the group is used as an operand. Each implementor who provides for these special types of alignment shall describe the effect of the implicit FILLER and the semantics of any statement referencing these groups.

8.5.1.5.5 Alignment of strongly-typed group items

Alignment of strongly-typed group items is at a natural alphanumeric character boundary and is coincident with a byte boundary in the architecture of the processor.

The alignment of the start of a strongly-typed group item relative to the first item within that group is defined by the implementor, with the following exceptions:

- The alignment of the group shall be coincident with the first item when that item is a national group item or a data item of class boolean, object, or pointer.
- The alignment of the elementary items contained in the group shall be such that the essential characteristics of the type, as defined in 8.5.3, Types, is preserved.

8.5.2 Class and category of data items and literals

Each data item and each literal has a class and a category.

Both the class and the category of a strongly-typed group item are the type-name specified in the TYPE clause in the data description of the group item. The class and the category of a group item that is not strongly typed are as follows:

- an alphanumeric group item has class and category alphanumeric
- a bit group item has class and category boolean
- a national group item has class and category national.

An alphanumeric group item is treated as though it had a usage of display.

The category of an elementary data item depends upon its description. The class of an elementary data item is related to its category, as shown in Table 3, Class and category relationships for elementary data items.

Table 3 — Class and category relationships for elementary data items

Class	Category
Alphabetic	Alphabetic
Alphanumeric	Alphanumeric Alphanumeric-edited Numeric-edited (if usage is display)
Boolean	Boolean
Index	Index
National	National National-edited Numeric-edited (if usage is national)
Numeric	Numeric
Object	Object-reference
Pointer	Data-pointer Program-pointer

The class and category of a literal are defined in 8.3.1.2, Literals.

Use of the name of a data class or data category in the rules of COBOL refers to the category unless class is specifically indicated.

8.5.2.1 Alphabetic category

An elementary data item described as alphabetic by its PICTURE character-string is of category alphabetic.

Such an item is referred to as an alphabetic data item.

An alphabetic data item may be specified wherever an elementary alphanumeric data item is permitted as an operand. Where an alphabetic data item is not expressly permitted, the alphabetic data item is treated as though it were an alphanumeric data item.

8.5.2.2 Alphanumeric category

Each of the following is a data item of category alphanumeric:

- 1) An elementary data item described as alphanumeric by its PICTURE character-string.
- 2) An elementary data item described with a VALUE clause containing an alphanumeric literal, and without a PICTURE clause.
- 3) An alphanumeric group item.
- 4) An alphanumeric function.

Such an item is referred to as an alphanumeric data item.

8.5.2.3 Alphanumeric-edited category

An elementary data item described as alphanumeric-edited by its PICTURE character-string is of category alphanumeric-edited.

Such an item is referred to as an alphanumeric-edited data item.

8.5.2.4 Boolean category

Each of the following is a data item of category boolean:

- 1) An elementary data item described as boolean by its PICTURE character-string.
- 2) An elementary data item described with a VALUE clause containing a boolean literal, and without a PICTURE clause.
- 3) A group item explicitly or implicitly described with a GROUP-USAGE clause with the BIT phrase.
- 4) A boolean function.

Such an item is referred to as a boolean data item.

8.5.2.5 Data-pointer category

An elementary data item explicitly or implicitly described as usage data-pointer is of category data-pointer.

Such an item is referred to as a data-pointer or as a data-pointer data item.

8.5.2.6 Index category

Each of the following is a data item of category index:

- 1) An elementary data item explicitly or implicitly described as usage index.
- 2) An index function.

Such an item is referred to as an index data item.

8.5.2.7 National category

Each of the following is a data item of category national:

- 1) An elementary data item described as national by its PICTURE character-string.
- 2) An elementary data item described with a VALUE clause containing a national literal and described without a PICTURE clause.
- 3) An elementary data item explicitly or implicitly described as usage national.
- 4) A group item explicitly or implicitly described with a GROUP-USAGE clause with the NATIONAL phrase.
- 5) A national function.

Such an item is referred to as a national data item.

8.5.2.8 National-edited category

An elementary data item described as national-edited by its PICTURE character-string is of category national-edited.

Such an item is referred to as a national-edited data item.

8.5.2.9 Numeric category

Each of the following is a data item of category numeric:

- 1) An elementary data item described as numeric by its PICTURE character-string and not described with a BLANK WHEN ZERO clause.
- 2) An elementary data item described with one of the following usages: binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended.
- 3) A LINE-COUNTER.
- 4) A LINAGE-COUNTER.
- 5) A PAGE-COUNTER.
- 6) A numeric function.
- 7) An integer function.

Such an item is referred to as a numeric data item.

8.5.2.10 Numeric-edited category

Each of the following is a data item of category numeric-edited:

- 1) A data item described as numeric-edited by its PICTURE character-string.
- 2) A data item described as numeric by its PICTURE character-string and described with a BLANK WHEN ZERO clause.

Such an item is referred to as a numeric-edited data item.

8.5.2.11 Object-reference category

An elementary data item explicitly or implicitly described as usage object-reference is of category object-reference.

Such an item is referred to as an object-reference.

8.5.2.12 Program-pointer category

An elementary data item explicitly or implicitly described as usage program-pointer is of category program-pointer.

Such an item is referred to as a program-pointer or as a program-pointer data item.

8.5.3 Types

A type is a template that contains all the characteristics of a data item and its subordinates. A type is declared and named by specifying the TYPEDEF clause. A type is referenced in a data description entry by specifying the TYPE clause. The essential characteristics of a type, which is identified by its type-name, are the relative positions and lengths of the elementary items defined in the type declaration, and the BLANK WHEN ZERO, JUSTIFIED, PICTURE, SIGN, SYNCHRONIZED, and USAGE clauses specified for each of these elementary items.

A type is referenced by specifying a data description entry with the TYPE clause. The typed item defined by this specification has all the characteristics of the referenced type.

Group items can be strongly or weakly typed. A typed group item is strongly typed in any of the following cases:

- The item is described with a TYPE clause that references a type declaration specifying the STRONG phrase.
- The item is subordinate to a group item described with the TYPE clause that references a type declaration specifying the STRONG phrase.

Elementary items cannot be strongly typed.

Two typed items are of the same type when:

- The items are described with TYPE clauses that reference equivalent type declarations; or
- The items are described as subordinate items in equivalent type declarations, starting at the same relative byte position and having the same length in bytes.

Two type declarations are considered equivalent when they have the same type-name, and for each elementary item in one type declaration there is a corresponding elementary item in the other type declaration, starting at the same relative byte position and having the same length in bytes. Each pair of corresponding elementary items shall have the same BLANK WHEN ZERO, JUSTIFIED, PICTURE, SIGN, SYNCHRONIZED, and USAGE clauses, with the following exceptions:

- 1) Currency symbols match if and only if the corresponding currency strings are the same.
- 2) Period picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these type declarations. Comma picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these type declarations.

Additionally, locale specifications in the PICTURE clauses match if and only if:

- both specify the same SIZE phrase in the LOCALE phrase of the PICTURE clause, and
- both specify the LOCALE phrase without a locale-name or both specify the LOCALE phrase with the same external identification, where the external identification is the external-locale-name or literal value associated with a locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph.

NOTE When two typed items are defined in the same source element, the above rules mean that either both items are described with the same TYPE clause or both items are described as the same subordinate item in the same type declaration.

8.5.3.1 Weakly-typed items

Weakly-typed items have the characteristics of their corresponding type declarations. These characteristics cannot be overridden by specifications on a group superordinate to the typed item.

Weakly-typed items can be used in the same manner as untyped items.

NOTE The type declaration can be regarded as a 'shorthand' for one or more data description entries.

8.5.3.2 Strongly-typed group items

Like weakly-typed items, strongly-typed group items have the characteristics of their corresponding type declarations. Additionally, use of a strongly-typed group item is subject to restrictions to protect the integrity of the data.

The only kind of items that may be strongly typed are group items.

8.5.4 Zero-length items

A zero-length item is a data item whose minimum length is zero and whose length at execution time is zero. A zero-length item is one of the following:

- 1) A group data item containing only a variable-occurrence data item in which the number of occurrences is zero.
- 2) A group data item containing only a subordinate zero-length item.
- 3) A data item defined with the ANY LENGTH clause corresponding to an argument or returning item that is a zero-length item.

- 4) A logical record that has been specified using the variable-length or the fixed- or-variable-length format of the RECORD clause in which the number of characters positions is zero.
- 5) An intrinsic function that returns a zero-length value.

8.6 Scope and life cycle of data

A source unit may contain other source units, and these contained source units may reference some of the resources of the source unit in which they are contained. (See 10, Structured compilation group, for full details of the structure.)

8.6.1 Global names and local names

The scope of global and local names is described in 8.4.5, Scope of names.

8.6.2 External and internal items

Accessible data items require that certain representations of data be stored. File connectors require that certain information concerning files be stored. The storage associated with a data item or a file connector may be external or internal.

A record described in the working-storage section is given the external attribute by the presence of the EXTERNAL clause in its data description entry. Any data item described by a data description entry subordinate to an entry describing an external record also attains the external attribute. If a record or data item does not have the external attribute, it is internal.

A file connector is given the external attribute by the presence of the EXTERNAL clause in the associated file description entry. If the file connector does not have the external attribute, it is internal.

The records described subordinate to a file description entry that does not contain the EXTERNAL clause or a sort-merge file description entry, as well as any data items described subordinate to the data description entries for such records, are always internal. If the EXTERNAL clause is included in the file description entry, its records and their subordinate data items attain the external attribute.

Records, subordinate data items, and various associated control information described in the local-storage, linkage, communication, report, and screen sections are always internal. Special considerations apply to data described in the linkage section whereby an association is made between the records described and other data items accessible to other runtime elements.

External and internal data items and file connectors may have either global or local names.

If a data item or file connector is external, the storage associated with that item is associated with the run unit rather than with any particular runtime element within the run unit. An external item may be accessed by any runtime element in the run unit that describes it. References to external items from different runtime elements using separate descriptions of the data item or file connector are always references to the same item. In a run unit, there is only one representation of an external item.

If a data item or file connector is internal, the storage associated with it is associated only with the runtime module that describes it. Internal items are described in 8.6.3, Automatic, initial, and static internal items.

8.6.3 Automatic, initial, and static internal items

Each internal item has one of the three persistence attributes: automatic, initial, or static. The designation of automatic, initial, and static items relates to their persistence and the persistence of their contents during the execution of the run unit.

Data items, file connectors, and screen item attributes have two states: initial and last-used. The initial state of a data item depends on the presence or absence of a VALUE clause in its data description entry, the section in which

the data item is described, and the description of the data item. The initial state of a file connector is that it is not in an open mode. The initial state of a screen item attribute depends on the description of the screen item.

Last-used state means that the content of the data item, file connector, or screen item attribute is that of the last time it was modified.

Data items defined in the local-storage section are automatic items. Their storage is allocated and set to initial state each time the runtime element containing them is activated. Each activated instance of the runtime element has its own copy of the item that persists while that instance of the runtime element is in active state.

Data items and file connectors defined in the file, working-storage, and communication sections of an initial program are initial items. Also, screen item attributes in an initial program are treated as initial items. They are set to their initial state each time an initial program is activated. An initial item persists while the program is in active state. It is undefined whether each activation of an initial program has its own copy of initial items.

Data items and file connectors defined in the working-storage, communication, or file section of a source element that is not an initial program are static items. Also, screen item attributes in a source element that is not an initial program are treated as static items. These items are set to their initial state each time the runtime element or object containing them is set to its initial state, as described in 14.5.2.1.2.1, Initial state, and in 14.5.2.2, Initial state of object data. They are allocated no later than immediately before initialization and persist to the first of the following:

- the end of the run unit,
- the execution of a CANCEL statement of a program that directly or indirectly contains the items,
- the end of the object's life cycle in the case of object data.

For static items that are not object data, there is one copy in a run unit.

For static items that are object data:

- In the factory object of a given class, there is one copy of each static item that is described in or inherited by the factory definition of that class.
- In each instance object of a given class, there is one copy of each static item that is described in or inherited by the instance definition of that class.

Further details are specified in 9.3.1, Objects and classes, 9.3.9, Class inheritance, and 9.3.14, Object life cycle.

Data items described in the linkage section, when specified as formal parameters or the returning item in an activated source element, have the same persistence attributes as their corresponding arguments or the corresponding returning item in the activating source element. They are in last-used state when the runtime element is activated, and they persist while the argument persists and the source element that contains their definition is in active state.

A table index is treated as a static item if the associated table is static and as an automatic item if the associated table is automatic.

8.6.4 Based entries and based data items

A based entry is a data description entry in the working-storage section, local-storage section, or linkage section that is described with a BASED clause. A based entry is not initially associated with an actual data item. An association is established linking the based entry to actual data when its implicit data-address pointer is assigned the address of an existing data item or assigned the address of storage obtained with an ALLOCATE statement. This association establishes a based data item. The association is maintained in an implicit data-address pointer that may be referenced by an identifier of the form ADDRESS OF data-name, where data-name is the name of the based entry.

The association may cease to exist because the actual data no longer exists, as specified 8.6.3, Automatic, initial, and static internal items, and in 14.8.3, ALLOCATE statement, or because the implicit data-address pointer no longer references the actual data.

The association ends:

- when its implicit data-address pointer is set to a different value,
- when the based entry is defined in the working-storage or local-storage section, at the end of the life cycle of the data items defined in that section,
- when the based entry is defined in the linkage section, at the end of the execution of the runtime element.

8.6.5 Common, initial, and recursive attributes

A program can be described with attributes that affect its initial state or that define the manner in which it can be called.

A common program is one that is directly contained within another program and that can be called by programs directly or indirectly contained in that other program, as described in 8.4.5.2, Scope of program-names. The common attribute is attained by specifying the COMMON clause in a program's identification division. When the COMMON clause is not specified, a contained program that is not recursive may be called only from the directly-containing program. The COMMON clause facilitates the writing of subprograms that can be used by all the programs contained within a program.

An initial program is one whose program state is initialized when the program is called. During the process of initializing an initial program, that program's internal data is initialized as described in 14.5.2, State of a function, method, object, or program. The initial attribute is attained by specifying the INITIAL clause in the program's identification division.

A recursive program may call itself directly or indirectly. The program's internal data is initialized as described in 14.5.2, State of a function, method, object, or program. The recursive attribute is attained by specifying the RECURSIVE clause in the program's identification division.

Functions and methods are always recursive. Their data is initialized in the same way as recursive programs.

If neither the INITIAL nor RECURSIVE clause is specified in a program's identification division, the program's data is in the last-used state on other than the first activation of the program as described in 14.5.2, State of a function, method, object, or program. The program cannot be activated while it is active unless RECURSIVE is specified.

8.6.6 Sharing data items

Two runtime elements in a run unit may reference common data in the following circumstances:

- 1) The data content of an external data record may be referenced from any runtime element provided that the runtime element has described that record.
- 2) If a program is contained within another program, both programs may refer to data possessing the global attribute either in the containing program or in any program that directly or indirectly contains the containing program.
- 3) The mechanism whereby an argument value is passed by reference from an activating runtime element to an activated runtime element establishes a common data item. The activated unit and the activating unit may use a different name to refer to the common data item.

8.7 Operators

8.7.1 Arithmetic operators

There are five binary arithmetic operators and two unary arithmetic operators that may be used in arithmetic expressions. They are represented by specific COBOL characters that shall be preceded by a space and followed by a space except that no space is required between a left parenthesis and a unary operator or between a unary operator and a left parenthesis. The following are the arithmetic operators:

Binary Arithmetic Operators	Meaning
+	Addition
−	Subtraction
*	Multiplication
/	Division
**	Exponentiation
Unary Arithmetic Operators	Meaning
+	The effect of multiplication by the numeric literal +1
−	The effect of multiplication by the numeric literal −1

8.7.2 Boolean operators

A boolean operator specifies the type of boolean operation to be performed on one or two operands, for a unary operator or binary operator, respectively. The following are the boolean operators:

Binary boolean operators	Meaning
B-AND	AND operation (boolean conjunction)
B-OR	Inclusive OR operation (boolean inclusive disjunction)
B-XOR	Exclusive OR operation (boolean exclusive disjunction)
Unary boolean operator	Meaning
B-NOT	Negation operation

8.7.3 Concatenation operator

The concatenation operator is the COBOL character '&', which shall be immediately preceded and followed by a separator space.

8.7.4 Invocation operator

The invocation operator is the two contiguous COBOL characters '::', which shall be immediately preceded and followed by a separator space. The use of the invocation operator is given in 8.4.2.4, Inline method invocation.

8.7.5 Relational operators

The relational operators specify the type of comparison to be made in a relation condition.

8.7.5.1 General format

Format 1 (simple-relational-operator):

$$\left\{ \begin{array}{l} \text{IS [NOT] GREATER THAN} \\ \text{IS [NOT] >} \\ \text{IS [NOT] LESS THAN} \\ \text{IS [NOT] <} \\ \text{IS [NOT] EQUAL TO} \\ \text{IS [NOT] =} \end{array} \right\}$$

Format 2 (extended-relational-operator):

$$\left\{ \begin{array}{l} \text{IS GREATER THAN OR EQUAL TO} \\ \text{IS >=} \\ \text{IS LESS THAN OR EQUAL TO} \\ \text{IS <=} \end{array} \right\}$$

8.7.5.2 Syntax rules

- 1) When specified, NOT creates one relational operator that defines the comparison to be executed for truth value.
- 2) Format 1 specifies simple relational operators.
- 3) Format 2 specifies extended relational operators.
- 4) > is an abbreviation for GREATER THAN.
- 5) < is an abbreviation for LESS THAN.
- 6) = is an abbreviation for EQUAL TO.
- 7) >= is an abbreviation for GREATER THAN OR EQUAL TO.
- 8) <= is an abbreviation for LESS THAN OR EQUAL TO.

8.7.6 Logical operators

The logical operators are the words AND, NOT, and OR. The use of the logical operators is given in 8.8.4.2, Complex conditions.

8.8 Expressions

8.8.1 Arithmetic expressions

An arithmetic expression may be an identifier referencing a numeric data item, a numeric literal, the figurative constant ZERO (ZEROS, ZEROES), such identifiers, figurative constants, and literals separated by arithmetic operators, two arithmetic expressions separated by an arithmetic operator, or an arithmetic expression enclosed in parentheses. Any arithmetic expression may be preceded by a unary operator. The permissible combinations of identifiers, numeric literals, arithmetic operators, and parentheses are given in table 4, Combinations of symbols in arithmetic expressions.

Evaluation rules for arithmetic expressions depend on whether the mode of arithmetic in effect is native or standard.

8.8.1.1 Native and standard arithmetic

The following rules apply regardless of the mode of arithmetic that is in effect:

- 1) Parentheses may be used in arithmetic expressions to specify the order of the arithmetic operations. Operations within parentheses are executed before operations on the parenthesized expression; the result is treated as a single operand in any further operation. When nested parentheses are specified, operations are executed from within the least inclusive set of parentheses to the most inclusive set.
- 2) When operands are at the same level of inclusiveness, the following hierarchical order of execution is implied:

1st	—	Unary plus and minus
2nd	—	Exponentiation
3rd	—	Multiplication and division
4th	—	Addition and subtraction

- 3) When the sequence of execution is not specified by parentheses, the order of execution of consecutive operations of the same hierarchical level is from left to right.

NOTE Parentheses are used to eliminate ambiguities in logic where consecutive operations of the same hierarchical level appear, to modify the normal hierarchical sequence of execution in expressions where it is necessary to have some deviation from the normal precedence, or to emphasize the normal sequence for the sake of clarity.

- 4) The ways in which identifiers, literals, operators, and parentheses may be combined in arithmetic expressions are summarized in Table 4, Combinations of symbols in arithmetic expressions.

Table 4 — Combinations of symbols in arithmetic expressions

First symbol	Second symbol				
	Identifier or literal	+ - * / **	Unary + or -	(	)
Identifier or literal	—	P	—	—	P
+ - * / **	P	—	P	P	—
Unary + or -	P	—	—	P	—
(	P	—	P	P	—
)	—	P	—	—	P
The letter 'P' indicates a permissible pair of symbols. The character '—' indicates an invalid pair.					

- 5) An arithmetic expression may begin only with the symbol '(', '+', '-', an identifier, or a literal and may end only with a ')', an identifier, or a literal. There shall be a one-to-one correspondence between left and right parentheses of an arithmetic expression such that each left parenthesis is to the left of its corresponding right parenthesis. If the first operator in an arithmetic expression is a unary operator, it shall be immediately preceded by a left parenthesis if that arithmetic expression immediately follows an identifier or another arithmetic expression.

NOTE For example, when '1' and '+ 2' are used as subscripts for a two-dimensional table A, the arithmetic expression '+ 2' needs to be enclosed in parentheses, as in A (1 (+ 2)).

- 6) The following rules apply to evaluation of exponentiation in an arithmetic expression:
- a) If the value of an expression to be raised to a power is zero, the exponent shall have a value greater than zero. Otherwise, the EC-SIZE-EXPONENTIATION exception condition is set to exist and the size error condition is raised.
 - b) If the evaluation yields both a positive and a negative real number, the value returned as the result is the positive number.
 - c) If the value of an expression to be raised to a power is less than zero, the evaluation of the exponent shall result in an integer. Otherwise, the EC-SIZE-EXPONENTIATION exception condition is set to exist and the size error condition is raised.
- 7) Arithmetic expressions allow the user to combine arithmetic operations without the restrictions on composite of operands and receiving data items.

8.8.1.2 Native arithmetic

Native arithmetic is an implementor-defined method of evaluating an arithmetic expression, an arithmetic statement, the SUM clause, and all integer and numeric functions. Native arithmetic is in effect when the ARITHMETIC IS NATIVE clause is specified in the OPTIONS paragraph or no ARITHMETIC clause is specified. It will also be in effect when the ARITHMETIC IS STANDARD clause is specified and certain operations use data items as indicated in 8.8.1.3, Standard arithmetic. The implementor shall specify techniques used for native arithmetic.

8.8.1.3 Standard arithmetic

Standard arithmetic is a standard method of evaluating an arithmetic expression, an arithmetic statement, the SUM clause, and certain integer and numeric functions as specified in 15.3.1, Numeric and integer functions. The rules for standard arithmetic are defined in 8.8.1.3.1, Standard intermediate data item through 8.8.1.3.8, Unary minus. Standard arithmetic is in effect when the ARITHMETIC IS STANDARD clause is specified in the OPTIONS paragraph. When a data item described with a usage of binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended is an operand in an arithmetic expression, an arithmetic statement, the SUM clause, or certain integer and numeric functions, the techniques used shall be those specified for native arithmetic.

When standard arithmetic has been specified or implied for the source unit and the FLAG-NATIVE-ARITHMETIC directive is enabled, any arithmetic operation that uses native arithmetic shall be flagged.

8.8.1.3.1 Standard intermediate data item

A standard intermediate data item is of the class numeric and the category numeric. It is the unique value zero or an abstract, signed, normalized decimal floating-point temporary data item. The internal representation shall be defined by the implementor. Implementors may use whatever method or methods they wish as long as the results conform to the rules for standard intermediate data items.

NOTE The internal representation of a standard intermediate data item is permitted to vary so that implementors can choose the most efficient implementation for the circumstances.

When standard arithmetic is in effect the following rules apply:

- 1) Any operand of an arithmetic expression that is not already contained in a standard intermediate data item shall be converted into a standard intermediate data item.

NOTE This rule covers such cases as an arithmetic expression that contains only one operand and no operator. For example, IF (A = 1) and COMPUTE A = B.

- 2) The size error condition is raised and the EC-SIZE-OVERFLOW or EC-SIZE-UNDERFLOW exception condition is set to exist if the value is too large or too small, respectively, to be contained in a standard intermediate data item. (See 14.6.4, SIZE ERROR phrase and size error condition.)

NOTE Underflow is treated as a SIZE ERROR and is not rounded to zero.

8.8.1.3.1.1 Precision and allowable magnitude

A standard intermediate data item has the unique value of zero or a value whose magnitude is in the range of

10^{-999} (1.000 000 000 000 000 000 000 000 000 0E-999)

through

$10^{1000} - 10^{968}$ (9.999 999 999 999 999 999 999 999 999 9E+999)

inclusive, with a precision of 32 decimal digits. A standard intermediate data item shall be truncated or rounded to fewer than 32 digits only as explicitly specified.

8.8.1.3.1.2 Normalized values

When the value of a standard intermediate data item is not zero, the significand shall contain exactly one non-zero digit to the left of the decimal point.

8.8.1.3.1.3 Rounding rules

A standard intermediate data item shall be rounded to 31 digits in the situations listed below and the rounding shall occur as described for the ROUNDED phrase.

- 1) When a standard intermediate data item is compared except when the comparison is among the arguments of an intrinsic function, in which case it shall not be rounded and all 32 digits shall be used.
- 2) When a standard intermediate data item is the argument of a function and there is no equivalent arithmetic expression defined for the rules of the function, unless otherwise specified in the rules for a function or unless situation 1, above, applies.
- 3) When a standard intermediate data item is being moved to a resultant-identifier for which the ROUNDED phrase has not been specified. Rounding of a standard intermediate data item may cause the size error condition to be raised or the EC-SIZE-OVERFLOW exception condition to exist.

NOTE These rules are intended to eliminate excessive rounding and to ensure that rounding occurs once at the end of the evaluation of nested arithmetic expressions.

When a standard intermediate data item is being moved to a resultant-identifier for which the ROUNDED phrase is specified, the number of digits to which rounding occurs is as specified in 14.6.3, ROUNDED phrase.

8.8.1.3.2 Addition

For addition, the operands and operator are: operand-1 + operand-2. The result shall be the exact sum truncated to 32 significant digits, normalized, and stored in a standard intermediate data item.

8.8.1.3.3 Subtraction

For subtraction, the operands and operator are: operand-1 – operand-2. The result shall be equivalent to the evaluation of the arithmetic expression

$$(\text{operand-1} + (- \text{operand-2}))$$

8.8.1.3.4 Multiplication

For multiplication, the operands and operator are: operand-1 * operand-2. The result shall be the exact product truncated to 32 significant digits, normalized, and stored in a standard intermediate data item.

8.8.1.3.5 Division

For division, the operands and operator are: operand-1 / operand-2. The result shall be the exact quotient truncated to 32 significant digits, normalized, and stored in a standard intermediate data item.

8.8.1.3.6 Exponentiation

For exponentiation, the operands and operator are: operand-1 ** operand-2.

- 1) When operand-2 is zero and operand-1 is other than zero, the result shall be equivalent to the evaluation of the arithmetic expression

$$(1)$$

- 2) When the value of operand-2 is greater than zero, the results shall be determined as follows:

- a) When operand-2 is an integer and the following condition is true

$$(\text{operand-2} = 1)$$

the equivalent expression shall be

$$(\text{operand-1})$$

- b) When operand-2 is an integer and the following condition is true

$$(\text{operand-2} = 2)$$

the equivalent expression shall be

$$(\text{operand-1} * \text{operand-1})$$

- c) When operand-2 is an integer and the following condition is true

$$(\text{operand-2} = 3)$$

the equivalent expression shall be

$$((\text{operand-1} * \text{operand-1}) * \text{operand-1})$$

- d) When operand-2 is an integer and the following condition is true

$$(\text{operand-2} = 4)$$

the equivalent expression shall be

$$((\text{operand-1} * \text{operand-1}) * (\text{operand-1} * \text{operand-1}))$$

- e) Otherwise, the value of the result shall be an implementor-defined value that is normalized and stored in a standard intermediate data item.
- 3) When operand-2 is less than zero, the result shall be equivalent to the evaluation of the arithmetic expression

$$(1 / (\text{operand-1} ** \text{FUNCTION ABS}(\text{operand-2})))$$
- 4) When both operand-1 and operand-2 are equal to zero, the EC-SIZE-EXPONENTIATION exception condition is set to exist.

8.8.1.3.7 Unary plus

For unary plus, the operator and operand are: + operand. The result shall be equivalent to the evaluation of the arithmetic expression

$$(\text{operand})$$
8.8.1.3.8 Unary minus

For unary minus, the operator and operand are: – operand. The result shall be equivalent to the evaluation of the arithmetic expression

$$(-1 * \text{operand})$$
8.8.2 Boolean expressions

A boolean expression may be:

- an identifier referencing a boolean data item,
- a boolean literal,
- the figurative constant ZERO (ZEROS, ZEROES),
- the figurative constant ALL literal, where literal is a boolean literal,
- a boolean expression preceded by a unary boolean operator,
- two boolean expressions separated by a binary boolean operator, or
- a boolean expression enclosed in parentheses.

The following are formation and evaluation rules for boolean expressions:

- 1) A boolean expression shall begin with one of the following:
 - the symbol '('
 - an identifier that references a boolean data item
 - a boolean literal
 - the unary operator B-NOT.
- 2) A boolean expression shall end with one of the following:
 - the symbol ')'
 - an identifier that references a boolean data item
 - a boolean literal.
- 3) There shall be a one-to-one correspondence between left and right parentheses such that each left parenthesis shall be to the left of its corresponding right parenthesis.
- 4) The two operands in a binary boolean operation shall not both be the figurative constant ALL literal.

- 5) The permissible combinations of operands, operators, and parentheses in a boolean expression are specified in table 5, Combination of symbols in boolean expressions.

Table 5 — Combination of symbols in boolean expressions

First Symbol	Second symbol				
	Identifier or literal	B-AND B-OR B-XOR	B-NOT	(	)
Identifier or literal	—	P	—	—	P
B-AND, B-OR, B-XOR	P	—	P	P	—
B-NOT	P	—	—	P	—
(	P	—	P	P	—
)	—	P	—	—	P
Legend: P indicates a permissible pair — indicates an invalid pair					

- 6) Evaluation of a boolean expression shall proceed as follows:
- Expressions within parentheses shall be evaluated before the parenthesized expression is used in the evaluation of a more inclusive expression. Within parentheses, evaluation shall proceed from the least inclusive set of nested parentheses to the most inclusive set.
 - The precedence of operations at the same level of inclusiveness, is:
 - 1st — negation (B-NOT)
 - 2nd — conjunction (B-AND)
 - 3rd — exclusive disjunction (B-XOR)
 - 4th — inclusive disjunction (B-OR)
 - When the sequence of evaluation is not specified by parentheses, the evaluation of operations with the same precedence shall proceed from left to right.

NOTE Parentheses can be used to clarify the logic where consecutive operations of the same precedence are specified or to modify the precedence when it is necessary to deviate from the normal precedence.

- 7) Binary boolean operations shall be performed without regard for the usage of the operands. If the two operands are of equal length, the specified operation, conjoining or disjoining (inclusively or exclusively), shall proceed by operation on boolean values in corresponding boolean positions starting from the leftmost boolean position and continuing to the rightmost boolean position. If the operands are of unequal length, the operation shall proceed as though the shorter operand were extended on the right by a sufficient number of boolean zeros to make the operands of equal length.

NOTE Lengths are established for each boolean operation, including unary operations, in the order in which the operations are evaluated.

- 8) The result of the evaluation of each boolean operation shall be a boolean value whose length shall be the number of boolean positions of the larger item referenced in that operation.

8.8.3 Concatenation expressions

A concatenation expression consists of two operands separated by the concatenation operator.

8.8.3.1 General format

$$\left\{ \begin{array}{l} \text{literal-1} \\ \text{concatenation-expression-1} \end{array} \right\} \& \text{literal-2}$$

8.8.3.2 Syntax rules

- 1) Both operands shall be of the same class, either alphanumeric, boolean, or national, except that a figurative constant may be specified as one or both operands. Neither literal-1 nor literal-2 shall be a figurative constant that begins with the word ALL.
- 2) For operands of class alphanumeric, the length of the value resulting from concatenation shall be less than or equal to 160 alphanumeric character positions.
- 3) For operands of class boolean, the length of the value resulting from concatenation shall be less than or equal to 160 boolean character positions.
- 4) For operands of class national, the length of the value resulting from concatenation shall be less than or equal to 160 national character positions.

8.8.3.3 General rules

- 1) The class of the concatenation expression resulting from the concatenation operation shall be:
 - a) when one of the operands is a figurative constant, the class of the literal or concatenation expression that constitutes the other operand, or
 - b) when both of the operands are figurative constants, the class alphanumeric, or
 - c) the same class as the operands.
- 2) The value of a concatenation expression shall be the concatenation of the value of the literals, figurative constants, and concatenation expressions of which it is composed.
- 3) A concatenation expression shall be equivalent to a literal of the same class and value, and may be used anywhere a literal of that class may be used.

8.8.4 Conditional expressions

Conditional expressions identify conditions that are tested to enable selecting one of multiple processing alternatives depending upon the truth value of the condition. A conditional expression has a truth value represented by either true or false. There are two categories of conditions associated with conditional expressions: simple conditions and complex conditions. Each may be enclosed within any number of paired parentheses, in which case its category is not changed.

8.8.4.1 Simple conditions

The simple conditions are the relation, boolean, class, condition-name, switch-status, sign, and omitted-argument conditions. A simple condition has a truth value of true or false. The inclusion in parentheses of simple conditions does not change the simple condition truth value.

8.8.4.1.1 Relation conditions

A relation condition specifies a comparison of two operands. The relational operator that joins the two operands specifies the type of comparison. A relation condition shall have a truth value of 'true' if the specified relation exists between the two operands, and a truth value of 'false' if the relation condition does not exist.

A relation condition involving operands of class boolean is a boolean relation condition; a relation condition involving operands of class pointer or object is a pointer-or-object-reference relation condition; otherwise, the relation condition is a general-relation condition.

Comparisons are defined for the following:

- 1) Two operands of class numeric.
- 2) Two operands of class alphabetic.
- 3) Two operands of class alphanumeric.
- 4) Two operands of class boolean.
- 5) Two operands of class national.
- 6) Two operands where one is a numeric integer and the other is class alphanumeric or national.
- 7) Two operands of different classes where each operand is from the set of classes alphanumeric, alphabetic, or national.
- 8) Comparisons involving indexes or index data items.
- 9) Two operands of class object.
- 10) Two operands of class pointer where each operand is of the same category.
- 11) Two strongly-typed operands of the same type.

For purposes of comparison, an alphanumeric group item shall be treated as an elementary alphanumeric data item. A class alphabetic operand shall be treated as though it were an operand of class alphanumeric. A national group item or a bit group item shall be treated as an elementary national data item or an elementary bit data item, respectively.

The first operand is called the subject of the condition; the second operand is called the object of the condition. A relation condition shall contain at least one reference to an operand that is not a literal.

8.8.4.1.1.1 General format

Format 1 (general-relation):

$\left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \\ \text{arithmetic-expression-1} \\ \text{index-name-1} \end{array} \right\}$	$\left\{ \begin{array}{l} \text{IS [NOT] GREATER THAN} \\ \text{IS [NOT] >} \\ \text{IS [NOT] LESS THAN} \\ \text{IS [NOT] <} \\ \text{IS [NOT] EQUAL TO} \\ \text{IS [NOT] =} \\ \text{IS GREATER THAN OR EQUAL TO} \\ \text{IS >=} \\ \text{IS LESS THAN OR EQUAL TO} \\ \text{IS <=} \end{array} \right\}$	$\left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \\ \text{arithmetic-expression-2} \\ \text{index-name-2} \end{array} \right\}$

Format 2 (boolean):

$\text{boolean-expression-1}$	$\left\{ \begin{array}{l} \text{IS [NOT] EQUAL TO} \\ \text{IS [NOT] =} \end{array} \right\}$	$\text{boolean-expression-2}$

Format 3 (pointer-or-object-reference):

$$\text{identifier-3} \left\{ \begin{array}{l} \text{IS [NOT] EQUAL TO} \\ \text{IS [NOT] =} \end{array} \right\} \text{identifier-4}$$

8.8.4.1.1.2 Syntax rules

FORMAT 1

- 1) If either identifier-1 or identifier-2 is a strongly-typed group, both operands shall be of the same type.
- 2) All identifiers shall be of class alphabetic, alphanumeric, national, or numeric or shall be strongly-typed group items.
- 3) All literals shall be of class alphanumeric, national, or numeric.
- 4) Strongly-typed group items that contain elementary items of class boolean, pointer, or object-reference may be compared only for equality or inequality.

FORMAT 3

- 5) Identifier-3 and identifier-4 shall reference data items of class pointer or object, and both shall be of the same category.

8.8.4.1.1.3 Comparison of numeric operands

For operands whose class is numeric, a comparison is made with respect to the algebraic value of the operands regardless of the manner in which their usage is described. The length of the literal or arithmetic expression operands, in terms of the number of digits represented, is not significant. Zero is considered a unique value regardless of the sign; an operand having the value zero is equal to any other operand having the value zero – whether positive, negative, or unsigned. When one or both of the operands is an operand for which native arithmetic applies, the comparison proceeds by the rules of native arithmetic regardless of the mode of arithmetic in effect. When standard arithmetic is used, the number of digits of the standard intermediate data item used and whether there is rounding shall be as specified in 8.8.1.3.1.3, Rounding rules.

8.8.4.1.1.4 Comparison of a numeric integer operand with an operand of class alphanumeric or national

The numeric integer operand shall be an integer literal or an integer numeric data item of usage display or national. The other operand may be a literal or data item of class alphanumeric or national.

The integer is treated as though it were moved to an elementary data item of a length the same as the number of digits in the integer and of the same class and usage as the comparand, according to the rules of the MOVE statement. Comparison then proceeds by the rules for comparison of two operands of the class of the comparand.

8.8.4.1.1.5 Comparison of alphanumeric and national operands

Two operands, one class alphanumeric and one class national, may be compared. The alphanumeric operand is treated as though it were converted and moved in accordance with the rules of the MOVE statement to an elementary data item of class national with the same length in terms of character positions as the alphanumeric operand. Comparison then proceeds by the rules for comparison of two operands of class national.

8.8.4.1.1.6 Comparison of alphanumeric operands

An operand of class alphanumeric may be compared to another operand of class alphanumeric or to another operand treated as class alphanumeric for the purposes of comparison. Comparison is made with respect to the

collating sequence of characters specified for the current alphanumeric program collating sequence. The length of an operand is the number of alphanumeric character positions in the operand.

Two kinds of comparison are defined: standard comparison and locale-based comparison. Locale-based comparison is used when the alphanumeric program collating sequence in effect is locale based; otherwise, standard comparison is used.

8.8.4.1.1.6.1 Standard comparison

There are two cases to consider: operands of equal length and operands of unequal length.

- 1) Operands of equal length. Comparison effectively proceeds by comparing alphanumeric characters in corresponding alphanumeric character positions starting from the high-order end and continuing until either a pair of unequal characters is encountered or the low-order end of the operand is reached, whichever comes first. The operands are determined to be equal if all pairs of corresponding alphanumeric characters are equal. Two zero-length operands are equal.

The first pair of unequal characters encountered are compared to determine their relative position in the alphanumeric collating sequence. The operand that contains the character that is positioned higher in the alphanumeric collating sequence is the greater operand.

- 2) Operands of unequal length. If the operands are of unequal length, comparison proceeds as though the shorter operand were extended on the right by sufficient alphanumeric spaces to make the operands of equal length. The preceding rule for operands of equal length then apply.

8.8.4.1.1.6.2 Locale-based comparison

For purposes of comparison, trailing spaces are truncated from the operands except that an operand consisting of all spaces is truncated to a single space.

NOTE Locale-based comparison is not necessarily a character-by-character comparison; extending the shorter operand with spaces as for non-locale based comparison could alter the culturally-expected results.

If the locale does not specify a distinct alphanumeric collating sequence, class alphanumeric and alphabetic operands are mapped to their corresponding representation in the national character set for purposes of comparison; the correspondence between alphanumeric characters and national characters is defined by the implementor.

Comparison then proceeds by the algorithm associated with the collating sequence defined by category LC_COLLATE from the current locale. This may be a culturally-sensitive comparison, and is not necessarily performed character-by-character. The determination of whether the relation condition is satisfied is based on the locale specification. Two zero-length operands are equal.

If the locale does not define a collating sequence for all characters of the operands, the EC-LOCALE-INCOMPATIBLE exception condition is set to exist.

8.8.4.1.1.7 Comparison of boolean operands

An operand of class boolean may be compared with another operand of class boolean. Comparison of operands of class boolean is a comparison of their boolean value, regardless of their usage. The length of an operand is the number of boolean positions in the operand. There are two cases to consider: operands of equal length and operands of unequal length.

- 1) Operands of equal length. Comparison effectively proceeds by comparing boolean values in corresponding boolean positions starting from the leftmost boolean position and continuing until either a pair of unequal boolean values is encountered or the rightmost boolean position of the operand is reached, whichever comes first. The operands are determined to be equal if all pairs of corresponding boolean values are equal. Two zero-length operands are equal.

- 2) Operands of unequal length. If the operands are of unequal length, comparison proceeds as though the shorter operand were extended on the right by sufficient boolean zeros to make the operands of equal length. The preceding rule for operands of equal length then apply.

8.8.4.1.1.8 Comparison of national operands

An operand of class national may be compared with another operand of class national. Comparison is made with respect to the collating sequence of characters specified for the current national program collating sequence. The length of an operand is the number of national character positions in the operand.

Two kinds of comparison are defined: standard comparison and locale-based comparison. Locale-based comparison is used when the national program collating sequence in effect is locale based; otherwise, standard comparison is used.

NOTE An alphanumeric and a national item can be compared. The rules for comparison of alphanumeric and national operands specify that the alphanumeric operand is converted to national. Comparison then proceeds by the rules for comparison of two national items.

8.8.4.1.1.8.1 Standard comparison

There are two cases to consider: operands of equal length and operands of unequal length.

- 1) Operands of equal length. Comparison effectively proceeds by comparing national characters in corresponding national character positions starting from the high-order end and continuing until either a pair of unequal characters is encountered or the low-order end of the operand is reached, whichever comes first. The operands are determined to be equal if all pairs of corresponding national characters are equal. Two zero-length operands are equal.

The first pair of unequal characters encountered are compared to determine their relative position in the national collating sequence. The operand that contains the character that is positioned higher in the national collating sequence is the greater operand.

- 2) Operands of unequal length. If the operands are of unequal length, comparison proceeds as though the shorter operand were extended on the right by sufficient national spaces to make the operands of equal length. The preceding rule for operands of equal length then apply.

8.8.4.1.1.8.2 Locale-based comparison

For purposes of comparison, trailing spaces are truncated from the operands except that an operand consisting of all spaces is truncated to a single space.

NOTE Locale-based comparison is not necessarily a character-by-character comparison; extending the shorter operand with spaces as for non-locale based comparison could alter the culturally-expected results.

Comparison then proceeds by the algorithm associated with the collating sequence defined by category LC_COLLATE from the current locale. This may be a culturally-sensitive comparison, and is not necessarily performed character-by-character. The determination of whether the relation condition is satisfied is based on the locale specification. Two zero-length operands are equal.

If the locale does not define a collating sequence for all characters of the operands, the EC-LOCALE-INCOMPATIBLE exception condition is set to exist.

8.8.4.1.1.9 Comparison of strongly-typed group items

When two strongly-typed group items are compared, each elementary item of the first operand is compared with the corresponding elementary item of the second operand, in accordance with the rules for comparison of elementary items and in the order in which the elementary items are specified in the strongly-typed group items.

This comparison proceeds until a pair of elementary items is unequal or the final pair of elementary items is compared. The operand that contains the elementary item that is greater than the corresponding elementary item is determined to be the greater operand. Two strongly-typed group operands are determined to be equal if all pairs of corresponding elementary items are equal.

8.8.4.1.1.10 Comparisons involving index-names or index data items

Relation tests may be made only between

- 1) two index-names. The result is the same as if the corresponding occurrence numbers were compared.
- 2) an index-name and a numeric data item or numeric literal. The occurrence number that corresponds to the value of the index-name is compared to the data item or literal.
- 3) an index data item and an index-name or another index data item. The actual values are compared without conversion.

8.8.4.1.1.11 Comparisons of operands of class object

An operand of class object may be compared with another operand of class object.

NOTE Comparison of predefined object references with themselves is allowed, although it does not make much sense to do so.

The relation 'identifier-3 = identifier-4' has a true value if the object referenced by identifier-3 is the same object that is referenced by identifier-4; otherwise, the relation has a false value.

8.8.4.1.1.12 Comparison of pointer operands

The operands are equal if they reference the same address.

8.8.4.1.2 Boolean condition

A boolean condition determines whether a boolean expression is true or false.

8.8.4.1.2.1 General format

[NOT] boolean-expression-1

8.8.4.1.2.2 Syntax rules

- 1) Boolean-expression-1 shall reference only boolean items of length 1.

8.8.4.1.2.3 General rules

- 1) Boolean-expression-1 evaluates true if the result of the expression is 1 and evaluates false if the result of the expression is 0.
- 2) The condition NOT boolean-expression-1 evaluates to the reverse truth-value of boolean-expression-1.

8.8.4.1.3 Class condition

The class condition determines whether an operand is numeric, alphabetic, alphabetic-lower, alphabetic-upper, boolean, or contains only the characters in the set of characters specified by the ALPHABET or CLASS clause as defined in the SPECIAL-NAMES paragraph of the environment division.

8.8.4.1.3.1 General format

identifier-1 IS [NOT] {
NUMERIC
ALPHABETIC
ALPHABETIC-LOWER
ALPHABETIC-UPPER
BOOLEAN
 alphabet-name-1
 class-name-1
}

8.8.4.1.3.2 Syntax rules

- 1) Identifier-1 shall not reference a data item of class index, object, or pointer.
- 2) If the NUMERIC phrase is specified, identifier-1 shall reference a data item whose usage is display or national or whose category is numeric.
- 3) If the NUMERIC phrase is not specified, identifier-1 shall reference a data item whose usage is display or national. If identifier-1 is a function-identifier, it shall reference an alphanumeric or national function.
- 4) BOOLEAN shall not be specified if the category of the data item referenced by identifier-1 is numeric or numeric-edited.
- 5) ALPHABETIC, ALPHABETIC-LOWER, ALPHABETIC-UPPER, or class-name-1 shall not be specified if the category of the data item referenced by identifier-1 is boolean, numeric, or numeric-edited.
- 6) Alphabet-name-1 shall not reference an alphabet associated with a locale.

8.8.4.1.3.3 General rules

- 1) If the data item referenced by identifier-1 is a zero-length item, the truth value of the class condition without the word NOT is false.
- 2) If the data item referenced by identifier-1 is not a zero-length item, the truth value of the class condition without the word NOT is determined as follows:
 - a) If NUMERIC is specified,
 1. If the category of the data item referenced by identifier-1 is numeric,
 - a. If the usage of the data item referenced by identifier-1 is implicitly or explicitly display or national, the condition is true if the presence or absence of an operational sign in the content of the data item referenced by identifier-1 is in agreement with the data description of identifier-1 and if the content, except for the operational sign, consists entirely of the characters 0, 1, 2, 3, ..., 9. Valid operational signs are defined in 13.16.50, SIGN clause.
 - b. If the usage of the data item referenced by identifier-1 is not display or national, the condition is true if the content of the data item referenced by identifier-1 consists entirely of a valid representation for the usage and, if a PICTURE clause is specified, its numeric value is within the range of values implied by the PICTURE clause.
 2. If the category of the data item referenced by identifier-1 is not numeric, the condition is true if the content of the data item referenced by identifier-1 consists entirely of the characters 0, 1, 2, 3, ..., 9.

- b) If ALPHABETIC is specified, the condition is true in the following circumstances:
1. If a locale is in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of characters identified as alphabetic in locale category LC_CTYPE of the current locale.
 2. If a locale is not in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of a combination of the uppercase letters A, B, C, ..., Z, and space; or a combination of the lowercase letters a, b, c, ..., z and space; or any combination of the uppercase letters and lowercase letters and space.
- c) If ALPHABETIC-LOWER is specified, the condition is true in the following circumstances:
1. If a locale is in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of characters identified as lowercase alphabetic in locale category LC_CTYPE of the current locale.
 2. If a locale is not in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of a combination of the lowercase letters a, b, c, ..., z, and space.
- d) If ALPHABETIC-UPPER is specified, the condition is true in the following circumstances:
1. If a locale is in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of characters identified as uppercase alphabetic in locale category LC_CTYPE of the current locale.
 2. If a locale is not in effect for character classification, the condition is true if the content of the data item referenced by identifier-1 consists only of a combination of the uppercase letters A, B, C, ..., Z, and space.
- e) If BOOLEAN is specified, the condition is true if the content of the data item referenced by identifier-1 consists entirely of the boolean values '0' and '1'.
- f) If alphabet-name-1 is specified, the condition is true if the content of the data item referenced by identifier-1 consists entirely of characters in the coded character set identified by alphabet-name-1 in the SPECIAL-NAMES paragraph.
- g) If class-name-1 is specified, the condition is true if the content of the data item referenced by identifier-1 consists entirely of the characters listed in the definition of class-name-1 in the SPECIAL-NAMES paragraph.
- 3) If the word NOT is specified, the truth value is reversed.

8.8.4.1.4 Condition-name condition (conditional variable)

In a condition-name condition, a conditional variable is tested to determine whether or not its value is equal to one of the values associated with condition-name-1. A conditional variable is defined in 8.4.3, Condition-name.

8.8.4.1.4.1 General Format

condition-name-1

8.8.4.1.4.2 Rules

- 1) If condition-name-1 is associated with a range or ranges of values, then the conditional variable is tested to determine whether or not its value falls in this range, including the end values.

- 2) The rules for comparing a conditional variable with a condition-name value are the same as those specified for relation conditions.
- 3) The result of the test is true if one of the values corresponding to condition-name-1 equals the value of its associated conditional variable.

8.8.4.1.5 Switch-status condition

A switch-status condition determines the on or off status of an implementor-defined external switch. The switch-name and the on or off value associated with the condition shall be named in the SPECIAL-NAMES paragraph of the environment division.

8.8.4.1.5.1 General format

condition-name-1

8.8.4.1.5.2 Rules

The result of the test is true if the switch is set to the specified position corresponding to condition-name-1.

8.8.4.1.6 Sign condition

The sign condition determines whether or not the algebraic value of an arithmetic expression is less than, greater than, or equal to zero.

8.8.4.1.6.1 General format

$$\text{arithmetic-expression-1 IS [NOT] } \left\{ \begin{array}{c} \text{POSITIVE} \\ \text{NEGATIVE} \\ \text{ZERO} \end{array} \right\}$$
8.8.4.1.6.2 Rules

- 1) When used, NOT and the next keyword specify one sign condition that defines the algebraic test to be executed for truth value. An operand is positive, if its value is greater than zero, negative if its value is less than zero, and zero if its value is equal to zero.

NOTE NOT ZERO is a truth test for a nonzero (positive or negative) value.

8.8.4.1.7 Omitted-argument condition

The omitted-argument condition determines whether an argument was provided to a function, method, or program.

8.8.4.1.7.1 General format

data-name-1 IS [NOT] OMITTED

8.8.4.1.7.2 Syntax rules

- 1) Data-name-1 shall be a formal parameter defined in the source element in which this condition is specified.

8.8.4.1.7.3 General rules

- 1) The result of the OMITTED test is true:

- a) if the OMITTED phrase, rather than an identifier or literal, is specified as the argument corresponding to data-name-1 in the statement that activated this program, function, or method; or,
 - b) the argument corresponding to data-name-1 was a trailing argument that was omitted from the activating statement; or,
 - c) if the argument corresponding to data-name-1 is itself a formal parameter for which the omitted-argument condition is true.
- 2) When used, NOT and the keyword OMITTED specify one condition to be executed for truth value.

8.8.4.2 Complex conditions

A complex condition is formed by combining simple conditions and/or complex conditions with logical connectors (logical operators 'AND' and 'OR') or by negating these conditions with logical negation (the logical operator 'NOT'). The truth value of a complex condition, whether parenthesized or not, is the truth value that results from the interaction of the stated logical operators on its constituent conditions.

The logical operators and their meanings are:

Logical Operator	Meaning
AND	Logical conjunction; the truth value is true if both of the conjoined conditions are true; false if one or both of the conjoined conditions is false.
OR	Logical inclusive OR; the truth value is true if one or both of the included conditions is true; false if both included conditions are false.
NOT	Logical negation or reversal of truth value; the truth value is true if the condition is false; false if the condition is true.

8.8.4.2.1 Negated conditions

A condition is negated by use of the logical operator 'NOT', which reverses the truth value of the condition to which it is applied. Including a negated condition in parentheses does not change its truth value.

NOTE The truth value of a negated condition is true if the truth value of the condition being negated is false; the truth value of a negated condition is false if the truth value of the condition being negated is true.

8.8.4.2.1.1 General format

NOT condition-1

8.8.4.2.2 Combined conditions

A combined condition results from connecting conditions with one of the logical operators 'AND' or 'OR'.

8.8.4.2.2.1 General format

$$\text{condition-1} \left\{ \left\{ \begin{array}{c} \text{AND} \\ \text{OR} \end{array} \right\} \text{condition-2} \right\} \dots$$

8.8.4.2.3 Precedence of logical operators and the use of parentheses

The precedence of logical operators determines the conditions to which logical operators apply, unless the precedence is overridden by explicit parentheses. The order of precedence of logical operators is 'NOT', 'AND',

'OR'. Explicit parentheses in a complex condition alter the order of evaluation of the conditions, as described in 8.8.4.3, Order of evaluation of conditions.

NOTE 'condition-1 OR NOT condition-2 AND condition-3' has the meaning 'condition-1 OR ((NOT condition-2) AND condition-3)'. Parentheses can be used to alter the meaning. For example, '(condition-1 OR (NOT condition-2)) AND condition-3' evaluates differently than 'condition-1 OR NOT condition-2 AND condition-3'.

Table 6, Combinations of conditions, logical operators, and parentheses, indicates the ways in which conditions and logical operators may be combined and parenthesized. There shall be a one-to-one correspondence between left and right parentheses such that each left parenthesis is to the left of its corresponding right parenthesis.

Table 6 — Combinations of conditions, logical operators, and parentheses

Given the following element:	In a conditional expression:		In a left-to-right sequence of elements:	
	May element be first?	May element be last?	Element, when not first, may be immediately preceded by only:	Element, when not last, may be immediately followed by only:
simple-condition	Yes	Yes	OR, NOT, AND, (	OR, AND,)
OR or AND	No	No	simple-condition,)	simple-condition, NOT, (
NOT	Yes	No	OR, AND, (	simple-condition, (
(	Yes	No	OR, NOT, AND, (	simple-condition, NOT, (
)	No	Yes	simple-condition,)	OR, AND,)
NOTE The element pair 'OR NOT' is permissible while the pair 'NOT OR' is not permissible; the pair 'NOT (' is permissible while the pair 'NOT NOT' is not permissible.				

8.8.4.2.4 Abbreviated combined relation conditions

When simple or negated simple relation conditions are combined with logical connectives in a consecutive sequence such that a succeeding relation condition contains a subject or subject and relational operator that is common with the preceding relation condition, and no parentheses are used within such a consecutive sequence, any relation condition except the first may be abbreviated by:

- 1) The omission of the subject of the relation condition, or
- 2) The omission of the subject and relational operator of the relation condition.

Within a sequence of relation conditions, both forms of omission may be used.

8.8.4.2.4.1 General format

$$\text{relation-condition-1} \left\{ \left\{ \begin{array}{c} \text{AND} \\ \text{OR} \end{array} \right\} \left\{ \begin{array}{c} \text{NOT} \\ \text{[NOT] simple-relational-operator} \\ \text{extended-relational-operator} \end{array} \right\} \text{object-1} \right\} \dots$$

where simple-relational-operator and extended-relational-operator are described in 8.7.5, Relational operators

8.8.4.2.4.2 Syntax Rules

- 1) Relation-condition-1 shall not be a boolean relation condition.

- 2) The result of implied insertion shall comply with the rules of table 6, Combinations of conditions, logical operators, and parentheses.
- 3) The word NOT shall not be followed immediately by the word NOT or the words IS NOT.

8.8.4.2.4.3 General rules

- 1) The effect of using abbreviations is as if the last preceding stated subject were inserted in place of the omitted subject, and the last stated relational operator were inserted in place of the omitted relational operator. The insertion of an omitted subject and/or relational operator terminates once a complete simple condition is encountered within a complex condition.
- 2) The interpretation applied to the use of the word NOT in an abbreviated combined relation condition is as follows:
 - a) If an extended relational operator immediately follows the word NOT, then the NOT is interpreted as a logical operator; otherwise,
 - b) If the relational operator following the word NOT is a simple relational operator, then the NOT participates as part of the simple relational operator; otherwise,
 - c) The NOT is interpreted as a logical operator and, therefore, the implied insertion of subject or relational operator results in a negated relation condition.

NOTE The use of NOT often leads to results that are not intuitive and therefore it should be avoided. Some examples of such usage with the expanded equivalent expression follow:

Abbreviated combined relation condition	Expanded equivalent
$a > b \text{ AND NOT } < c \text{ OR } d$	$((a > b) \text{ AND } (a \text{ NOT } < c)) \text{ OR } (a \text{ NOT } < d)$
$a \text{ NOT EQUAL } b \text{ OR } c$	$(a \text{ NOT EQUAL } b) \text{ OR } (a \text{ NOT EQUAL } c)$
$\text{NOT } a = b \text{ OR } c$	$(\text{NOT } (a = b)) \text{ OR } (a = c)$
$\text{NOT } (a \text{ GREATER } b \text{ OR } < c)$	$\text{NOT } ((a \text{ GREATER } b) \text{ OR } (a < c))$
$\text{NOT } (a \text{ NOT } > b \text{ AND } c \text{ AND NOT } d)$	$\text{NOT } (((a \text{ NOT } > b) \text{ AND } (a \text{ NOT } > c)) \text{ AND } (\text{NOT } (a \text{ NOT } > d)))$

8.8.4.3 Order of evaluation of conditions

Parentheses, both explicit and implicit, denote a level of inclusiveness within a complex condition. Two or more conditions connected by only the logical operator 'AND' or only the logical operator 'OR' at the same level of inclusiveness establish a hierarchical level within a complex condition. An entire complex condition can be considered to be a nested structure of hierarchical levels with the entire complex condition itself being the most inclusive hierarchical level. Within this context, the evaluation of the conditions within an entire complex condition begins at the left of the entire complex condition and proceeds according to the following rules recursively applied where necessary:

- 1) The constituent connected conditions within a hierarchical level are evaluated in order from left to right, and evaluation of that hierarchical level terminates as soon as a truth value for it is determined regardless of whether all the constituent connected conditions within that hierarchical level have been evaluated.
- 2) Values are established for arithmetic expressions and functions if and when the conditions containing them are evaluated. Similarly, negated conditions are evaluated if and when it is necessary to evaluate the complex condition that they represent. (See 8.8.1, Arithmetic expressions.)

8.9 Reserved words

The following is the list of reserved words:

ACCEPT	CLASS	DIVISION
ACCESS	CLASS-ID	DOWN
ACTIVE-CLASS	CLOSE	DUPLICATES
ADD	CODE	DYNAMIC
ADDRESS	CODE-SET	
ADVANCING	COL	EC
AFTER	COLLATING	EGI
ALIGNED	COLS	ELSE
ALL	COLUMN	EMI
ALLOCATE	COLUMNS	ENABLE
ALPHABET	COMMA	END
ALPHABETIC	COMMON	END-ACCEPT
ALPHABETIC-LOWER	COMMUNICATION	END-ADD
ALPHABETIC-UPPER	COMP	END-CALL
ALPHANUMERIC	COMPUTATIONAL	END-COMPUTE
ALPHANUMERIC-EDITED	COMPUTE	END-DELETE
ALSO	CONDITION	END-DISPLAY
ALTERNATE	CONFIGURATION	END-DIVIDE
AND	CONSTANT	END-EVALUATE
ANY	CONTAINS	END-IF
ANYCASE	CONTENT	END-MULTIPLY
ARE	CONTINUE	END-OF-PAGE
AREA	CONTROL	END-PERFORM
AREAS	CONTROLS	END-READ
AS	CONVERTING	END-RECEIVE
ASCENDING	COPY	END-RETURN
ASSIGN	CORR	END-REWRITE
AT	CORRESPONDING	END-SEARCH
	COUNT	END-START
B-AND	CRT	END-STRING
B-NOT	CURRENCY	END-SUBTRACT
B-OR	CURSOR	END-UNSTRING
B-XOR		END-WRITE
BASED	DATA	ENVIRONMENT
BEFORE	DATA-POINTER	EO
BINARY	DATE	EOP
BINARY-CHAR	DAY	EQUAL
BINARY-DOUBLE	DAY-OF-WEEK	ERROR
BINARY-LONG	DE	ESI
BINARY-SHORT	DEBUGGING	EVALUATE
BIT	DECIMAL-POINT	EXCEPTION
BLANK	DECLARATIVES	EXCEPTION-OBJECT
BLOCK	DEFAULT	EXIT
BOOLEAN	DELETE	EXTEND
BOTTOM	DELIMITED	EXTERNAL
BY	DELIMITER	
	DEPENDING	FACTORY
CALL	DESCENDING	FALSE
CANCEL	DESTINATION	FD
CD	DETAIL	FILE
CF	DISABLE	FILE-CONTROL
CH	DISPLAY	FILLER
CHARACTER	DIVIDE	FINAL
CHARACTERS		

FIRST	LIMIT	PAGE-COUNTER
FLOAT-EXTENDED	LIMITS	PERFORM
FLOAT-LONG	LINAGE	PF
FLOAT-SHORT	LINAGE-COUNTER	PH
FOOTING	LINE	PIC
FOR	LINE-COUNTER	PICTURE
FORMAT	LINES	PLUS
FREE	LINKAGE	POINTER
FROM	LOCAL-STORAGE	POSITIVE
FUNCTION	LOCALE	PRESENT
FUNCTION-ID	LOCK	PRINTING
	LOW-VALUE	PROCEDURE
	LOW-VALUES	PROGRAM
GENERATE		PROGRAM-ID
GET	MERGE	PROGRAM-POINTER
GIVING	MESSAGE	PROPERTY
GLOBAL	METHOD	PROTOTYPE
GO	METHOD-ID	PURGE
GOBACK	MINUS	QUEUE
GREATER	MODE	QUOTE
GROUP	MOVE	QUOTES
GROUP-USAGE	MULTIPLY	
HEADING	NATIONAL	RAISE
HIGH-VALUE	NATIONAL-EDITED	RAISING
HIGH-VALUES	NATIVE	RANDOM
	NEGATIVE	RD
I-O	NESTED	READ
I-O-CONTROL	NEXT	RECEIVE
IDENTIFICATION	NO	RECORD
IF	NOT	RECORDS
IN	NULL	REDEFINES
INDEX	NUMBER	REEL
INDEXED	NUMERIC	REFERENCE
INDICATE	NUMERIC-EDITED	RELATIVE
INHERITS		RELEASE
INITIAL	OBJECT	REMAINDER
INITIALIZE	OBJECT-COMPUTER	REMOVAL
INITIATE	OBJECT-REFERENCE	RENAMES
INPUT	OCCURS	REPLACE
INPUT-OUTPUT	OF	REPLACING
INSPECT	OFF	REPORT
INTERFACE	OMITTED	REPORTING
INTERFACE-ID	ON	REPORTS
INTO	OPEN	REPOSITORY
INVALID	OPTIONAL	RESERVE
INVOKE	OPTIONS	RESET
IS	OR	RESUME
	ORDER	RETRY
JUST	ORGANIZATION	RETURN
JUSTIFIED	OTHER	RETURNING
	OUTPUT	REWIND
KEY	OVERFLOW	REWRITE
	OVERRIDE	RF
LAST		RH
LEADING	PACKED-DECIMAL	RIGHT
LEFT	PADDING	ROUNDED
LENGTH	PAGE	RUN
LESS		

SAME	TABLE	VAL-STATUS
SCREEN	TALLYING	VALID
SD	TERMINAL	VALIDATE
SEARCH	TERMINATE	VALIDATE-STATUS
SECTION	TEST	VALUE
SEGMENT	TEXT	VALUES
SELECT	THAN	VARYING
SELF	THEN	
SEND	THROUGH	WHEN
SENTENCE	THRU	WITH
SEPARATE	TIME	WORKING-STORAGE
SEQUENCE	TIMES	WRITE
SEQUENTIAL	TO	
SET	TOP	ZERO
SHARING	TRAILING	ZEROES
SIGN	TRUE	ZEROS
SIZE	TYPE	
SORT	TYPEDEF	+
SORT-MERGE		-
SOURCE	UNIT	*
SOURCE-COMPUTER	UNIVERSAL	/
SOURCES	UNLOCK	**
SPACE	UNSTRING	>
SPACES	UNTIL	<
SPECIAL-NAMES	UP	=
STANDARD	UPON	>=
STANDARD-1	USAGE	<=
STANDARD-2	USE	&
START	USER-DEFAULT	*>
STATUS	USING	::
STOP		>>
STRING		
SUB-QUEUE-1		
SUB-QUEUE-2		
SUB-QUEUE-3		
SUBTRACT		
SUM		
SUPER		
SUPPRESS		
SYMBOLIC		
SYNC		
SYNCHRONIZED		
SYSTEM-DEFAULT		

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

8.10 Context-sensitive words

The following are context-sensitive words and are reserved in the specified language construct or context. If a context-sensitive word is used where the context-sensitive word is permitted in the general format, the word is treated as a keyword; otherwise it is treated as a user-defined word:

Context-sensitive word	Language construct or context
ARITHMETIC	OPTIONS paragraph
ATTRIBUTE	SET statement
AUTO	screen description entry
AUTOMATIC	LOCK MODE clause
BACKGROUND-COLOR	screen description entry
BELL	screen description entry and SET attribute statement
BLINK	screen description entry and SET attribute statement
BYTE-LENGTH	constant entry
CENTER	COLUMN clause
CLASSIFICATION	OBJECT-COMPUTER paragraph
CYCLE	EXIT statement
EOL	ERASE clause in a screen description entry
EOS	ERASE clause in a screen description entry
ENTRY-CONVENTION	OPTIONS paragraph
ERASE	screen description entry
EXPANDS	class-specifier and interface-specifier of the REPOSITORY paragraph
FOREGROUND-COLOR	screen description entry
FOREVER	RETRY phrase
FULL	screen description entry
HIGHLIGHT	screen description entry and SET attribute statement
IGNORING	READ statement
IMPLEMENTS	FACTORY paragraph and OBJECT paragraph
INITIALIZED	ALLOCATE statement
INTRINSIC	function-specifier of the REPOSITORY paragraph
LC_ALL	SET statement
LC_COLLATE	SET statement
LC_CTYPE	SET statement
LC_MESSAGES	SET statement
LC_MONETARY	SET statement
LC_NUMERIC	SET statement
LC_TIME	SET statement
LOWLIGHT	screen description entry and SET attribute statement

Context-sensitive word	Language construct or context
MANUAL	LOCK MODE clause
MULTIPLE	LOCK ON phrase
NONE	DEFAULT clause
NORMAL	STOP statement
NUMBERS	COLUMN clause and LINE clause
ONLY	Object-view, SHARING clause, SHARING phrase, and USAGE clause
PARAGRAPH	EXIT statement
PREVIOUS	READ statement
RECURSIVE	PROGRAM-ID paragraph
RELATION	VALIDATE-STATUS clause
REQUIRED	screen description entry
REVERSE-VIDEO	screen description entry and SET attribute statement
SECONDS	RETRY phrase
SECURE	screen description entry
SIGNED	USAGE clause
STATEMENT	RESUME statement
STEP	OCCURS clause
STRONG	TYPED clause
SYMBOL	CURRENCY clause
UCS-4	ALPHABET clause
UNDERLINE	screen description entry and SET attribute statement
UNSIGNED	USAGE clause
UTF-8	ALPHABET clause
UTF-16	ALPHABET clause
YYYYDDD	ACCEPT statement
YYYYMMDD	ACCEPT statement

All exception-names are context-sensitive because they may appear only following RAISE, RAISING (in GOBACK, EXIT FUNCTION, EXIT METHOD and EXIT PROGRAM), USE EXCEPTION, and in the TURN compiler directive. The list of exception-names is given in 14.5.12.1, Exception conditions.

8.11 Intrinsic function names

The following is the list of intrinsic function names:

ABS	HIGHEST-ALGEBRAIC	ORD-MIN
ACOS		
ANNUITY	INTEGER	PI
ASIN	INTEGER-OF-BOOLEAN	PRESENT-VALUE
ATAN	INTEGER-OF-DATE	
	INTEGER-OF-DAY	RANDOM
BOOLEAN-OF-INTEGER	INTEGER-PART	RANGE
BYTE-LENGTH		REM
	LENGTH	REVERSE
CHAR	LOCALE-COMPARE	
CHAR-NATIONAL	LOCALE-DATE	SIGN
COS	LOCALE-TIME	SIN
CURRENT-DATE	LOG	SQRT
	LOG10	STANDARD-COMPARE
DATE-OF-INTEGER	LOWER-CASE	STANDARD-DEVIATION
DATE-TO-YYYYMMDD	LOWEST-ALGEBRAIC	SUM
DAY-OF-INTEGER		
DAY-TO-YYYYDDD	MAX	TAN
DISPLAY-OF	MEAN	TEST-DATE-YYYYMMDD
	MEDIAN	TEST-DAY-YYYYDDD
E	MIDRANGE	TEST-NUMVAL
EXCEPTION-FILE	MIN	TEST-NUMVAL-C
EXCEPTION-FILE-N	MOD	TEST-NUMVAL-F
EXCEPTION-LOCATION		
EXCEPTION-LOCATION-N	NATIONAL-OF	UPPER-CASE
EXCEPTION-STATEMENT	NUMVAL	
EXCEPTION-STATUS	NUMVAL-C	VARIANCE
EXP	NUMVAL-F	
EXP10	ORD	WHEN-COMPILED
	ORD-MAX	YEAR-TO-YYYY
FACTORIAL		
FRACTION-PART		

8.12 Compiler-directive words

The following words are reserved in compiler directives:

ALL	FREE	SET
AND	FUNCTION-ARGUMENT	SIZE
AS		SOURCE
	GREATER	STANDARD-1
B-AND		STANDARD-2
B-NOT	IF	
B-OR	IMP	THAN
B-XOR	IS	THROUGH
		THRU
CALL-CONVENTION	LEAP-SECOND	TO
CHECKING	LESS	TRUE
COBOL	LISTING	TURN
CORRESPONDING	LOCATION	
		WHEN
DE-EDITING	MOVE	WITH
DEFINE		
DEFINED	NOT	ZERO-LENGTH
DIVIDE	NUMVAL	
		+
ELSE	OFF	-
END-IF	ON	*
END-EVALUATE	OR	/
EQUAL	OTHER	<=
EVALUATE	OVERRIDE	>=
		<
FIXED	PAGE	>
FLAG-85	PARAMETER	=
FLAG-NATIVE-ARITHMETIC	PROPAGATE	(
FORMAT		)

In addition to the above list, all of the exception-names specified in 14.5.12.1, Exception conditions, are also compiler-directive words.

8.13 External repository

The external repository contains information specified in program definitions, function definitions, class definitions, and interface definitions.

The information stored from these source units consists of all information required for activating programs, functions, or methods and for checking conformance. This information includes

- the externalized name of the source unit
- the type of the source unit - program, function, class, or interface
- the description of the parameters of the source unit, if any, and the manner of receiving parameters (by reference or by value) and whether they are optional or not
- the description of the returning item of the source unit, if any
- the exceptions that may be raised by the runtime element, if any
- the entry convention of the source unit, if any
- the object properties of the source unit, if any
- the methods contained in the source unit, if any, and details about the method's externalized name, parameters, returning item, and entry convention
- type declarations required for the description of parameters and returning items
- whether the DECIMAL-POINT IS COMMA clause is specified in the source unit
- any currency symbols and their corresponding currency strings defined in the source unit
- any external locale identification for locales associated with formal parameters or returning items of the source unit
- any other information that the implementor requires

This information about a source unit, excluding the externalized name of the source unit, is called its signature. Whether the information is taken from a prototype or a definition, the information stored in the external repository about the signature of a program or a function is the same.

The implementor shall provide a mechanism that allows the user to specify whether to update the external repository when a compilation unit is compiled.

The implementor shall provide a mechanism that allows the user to specify whether to flag differences in prototypes and definitions in the compilation group from the information in the external repository.

The details on the association of the name of a source unit with information in the external repository are specified in 12.2.7, REPOSITORY paragraph.

9 I-O, objects, and user-defined functions

9.1 Files

9.1.1 Physical and logical files

The physical aspects of a file describe the data as it appears on the input or output media and include such features as:

- 1) The grouping of logical records within the physical limitations of the file medium.
- 2) The means by which the file shall be identified.

The conceptual, or logical, characteristics of a file are the explicit definition of each logical entity within the file itself. COBOL input or output statements refer to one logical record at a time.

It is important to distinguish between a physical record and a logical record. A COBOL logical record is a group of related information, uniquely identifiable, and treated as a unit.

A physical record is a physical unit of information transferred to or recorded on an output device or transferred from an input device. The size of a physical record is hardware dependent and bears no direct relationship to the size of the file of information contained on a device.

A logical record may be contained within a single physical unit; or several logical records may be contained within a single physical unit; or a logical record may require more than one physical unit to contain it. There are several source language methods available for describing the relationship of logical records and physical units. When a permissible relationship has been established, control of the accessibility of logical records as related to the physical unit is provided by the interaction of the runtime module with the processor. In this document, references to records mean to logical records, unless the term 'physical record' is specifically used. Similarly, references to files mean to the logical characteristics of a file, unless 'physical file' is used. For each file connector there is one associated logical file that is referenced by the file-name that refers to that file connector, even though there may be several logical files associated with one physical file.

When a logical record is transferred to or from a physical unit, any translation required by the presence of a CODE-SET or FORMAT clause is accomplished. Padding characters are added or deleted as necessary.

9.1.2 Record area

The record area is a storage area associated with a file in which logical records from that file are made accessible to a runtime element. The record area is made accessible to the runtime element at the completion of a successfully executed OPEN statement. For files open in the input mode, the logical record is available in the record area after execution of a successful read. For files open in the extend or output mode, the logical record is available until execution of a successful write or rewrite. For files open in the I-O mode, the logical record is available after execution of a successful read until the execution of either a read or successful rewrite.

9.1.3 File connector

A file connector is referenced by a file-name and it is a storage area that is not visible to the user that contains information used by the run unit to determine the status of input-output operations and of the connection to the physical file.

A file connector has several attributes that are specified by phrases and clauses in the file description entry and the file control entry for the associated file-name and by the execution of input-output statements. These attributes are: organization (sequential, indexed, or relative); access mode (sequential, dynamic, or random); lock mode (automatic, manual, or none); locking mode (single record locking, multiple record locking, or none); in an open mode (input, output, i-o, extend); sharing mode (sharing with no other, sharing with read only, sharing with all other, implementor-defined, or no sharing); and whether or not it is a report file connector. It also contains

information about the file position indicator, the key of reference, the I-O status value, the current volume pointer, and file and record locks.

A file connector is either internal or external as described in 8.6.2, External and internal items. For internal file connectors, one file connector is associated with each file description entry. For external file connectors, there is only one file connector that is associated with the run unit no matter how many file description entries describe the same file-name.

9.1.4 Open mode

A file connector is open when its open mode is either input, output, i-o, or extend. When a file connector is open, it is the linkage between the logical file and the physical file.

A file connector is placed in an open mode by the execution of a successful OPEN statement that references the associated file-name. The OPEN statement also associates the file connector with a physical file. When a CLOSE statement references the associated file-name, the file connector is no longer associated with the physical file and the file connector is no longer in an open mode. In the following cases, the COBOL runtime system executes an implicit CLOSE statement without any optional phrases for a file connector that is in the open mode:

- When the run unit terminates.
- For initial file connectors described in a program when a GOBACK or an EXIT PROGRAM statement is executed in a called program in which they are described.
- For file connectors in the program to which a CANCEL statement is executed or in any program contained in that program.
- For file connectors in an object when the object is deleted.

9.1.5 Sharing file connectors

Two runtime elements in a run unit may reference common file connectors in the following circumstances:

- 1) An external file connector may be referenced from any runtime element that describes that file connector.
- 2) If a program is contained within another program, both programs may refer to a common file connector by referring to an associated global file-name either in the containing program or in any program that directly or indirectly contains the containing program.

9.1.6 Fixed file attributes

A physical file has several attributes that apply to the file at the time it is created and cannot be changed throughout the lifetime of the file. The primary attribute is the organization of the file, that describes its logical structure. There are three organizations: sequential, relative, and indexed. Other fixed attributes of the physical file provided through COBOL are prime record key, alternate record keys, code set, the minimum and maximum logical record size in bytes, the record type (fixed or variable), the collating sequence of the keys for indexed files, the minimum and maximum physical record size in bytes, the padding character, and the record delimiter. The implementor shall specify whether the ability to share a physical file is a fixed file attribute.

9.1.7 Organization

There are three file organizations: sequential, relative, and indexed.

9.1.7.1 Sequential

Sequential files are organized so that each record, except the last, has a unique successor record; each record, except the first, has a unique predecessor record. The successor relationships are established by the order of

execution of WRITE statements when the physical file is created. Once established, successor relationships do not change except in the case where records are added to the end of a physical file.

A sequential physical file that is on a mass storage device has the same logical structure as a physical file on any sequential medium; however, logical records that are mapped to physical records on a sequential physical file on a mass storage device may be updated in place. When this technique is used, the replacing physical record shall have the same size as the original physical record.

9.1.7.2 Relative

Relative files are organized so that each record may be stored or retrieved by providing the value of the record's relative record number. A relative file shall be associated with a relative physical file that is on a mass storage device.

Conceptually, a file with relative organization is a serial string of areas, each capable of holding a logical record. Each of these areas is denominated by a relative record number. Each logical record in a relative file is identified by the relative record number of its storage area.

NOTE For example, the tenth record is the one addressed by relative record number 10 and is in the tenth record area, whether or not records have been written in any of the first through the ninth record areas.

In order to achieve more efficient access to records in a relative file, the number of bytes reserved in a physical record on the mass storage device to store a particular logical record may be different from the number of bytes in the description of that record in the data division.

9.1.7.3 Indexed

Indexed files are organized so that each record may be stored, retrieved, or deleted by providing the value of a specified key in that record. An indexed file shall be associated with an indexed physical file that is on a mass storage device. For each key data item defined for the records of a file, an index is maintained. Each such index represents the set of values from the corresponding key data item in each record. Each index is a mechanism that provides access to any record in the file.

Each indexed file has a primary index that represents the prime record key of each record in the file. Each record is inserted in the file, changed, or deleted from the file based solely upon the value of its prime record key. The prime record key of each record in the file shall be unique, and it shall not be changed when updating a record. The prime record key is declared in the RECORD KEY clause of the file control entry for the file.

Alternate record keys provide alternate means of retrieval for the records of a file. Such keys are named in the ALTERNATE RECORD KEY clause of the file control entry. When the DUPLICATES phrase is specified in the ALTERNATE RECORD KEY clause, the value of a particular alternate record key need not be unique within the file.

Both the prime record and any alternate record keys are made up from one or more portions of the record area associated with the file. For each key, the number of such components, their length, and their relative positions within the record area are fixed file attributes and shall not be changed once the physical file has been created.

9.1.8 Access modes

The ACCESS MODE clause of the file description entry specifies the manner in which the runtime element operates upon records within a file. The access mode may be sequential, random, or dynamic.

For files that are organized as relative or indexed, any of the three access modes may be used to access the file regardless of the access mode used to create the physical file. A file with sequential organization may be accessed only in sequential mode.

9.1.8.1 Sequential access mode

For sequential organization the order of sequential access when NEXT is specified or implied on a READ statement is the order in which the records were originally written to the physical file. When PREVIOUS is specified on a READ statement the order is the reverse of the order in which the records were originally written. The START statement can be used to position the file at the beginning or the end for subsequent retrievals.

For relative organization the order of sequential access when NEXT is specified or implied on a READ statement is ascending based on the value of the relative record number. When PREVIOUS is specified on a READ statement the order is descending based on the value of the relative record number. The START statement can be used to establish a starting point for a series of subsequent sequential retrievals, either in a forward or reverse direction.

For indexed organization the order of sequential access when NEXT is specified or implied on a READ statement is ascending based on the value of the key of reference according to the collating sequence of the physical file. Any of the keys associated with the file may be established as the key of reference during the processing of the file. The order of retrieval from a set of records that have duplicate key of reference values is the original order of arrival of those records into that set. When PREVIOUS is specified on a READ statement the order is descending based on the value of the key of reference according to the collating sequence of the physical file. The order of retrieval from a set of records that have duplicate key of reference values is the reverse of the original order of arrival of those records into that set. The START statement can be used to establish a starting point for a series of subsequent sequential retrievals, either in a forward or reverse direction.

9.1.8.2 Random access mode

When a file is accessed in random mode, input-output statements are used to access the records in a programmer-specified order. The random access mode may be used only with relative or indexed file organizations. For a file with relative organization, the programmer specifies the desired record by placing its relative record number in a relative key data item. With the indexed organization, the programmer specifies the desired record by placing the value of one of its record keys in a record key or an alternate record key data item.

9.1.8.3 Dynamic access mode

With dynamic access mode, the programmer can change at any time between sequential access and random access, using appropriate forms of input-output statements. The dynamic access mode may be used only on files with relative or indexed organizations.

9.1.9 Reel and unit

The terms 'reel' and 'unit' are synonymous. They are applicable only to files with sequential organization that are associated with a physical file that may be contained on multiple physical devices. Treatment of such files is logically equivalent to the treatment of a sequential file that is associated with a physical file that is wholly contained on one physical device.

NOTE An example of a physical file stored on multiple physical devices is a physical file that is contained on multiple magnetic tapes. Another is one that is stored on multiple removable disk packs.

9.1.10 Current volume pointer

The current volume pointer is a conceptual entity used in this document to facilitate exact specification of the current physical volume of a sequential file. The status of the current volume pointer is affected by the CLOSE, OPEN, READ, and WRITE statements.

9.1.11 File position indicator

The file position indicator is a conceptual entity that exists for each file connector that is open in the i-o mode or input mode, and is used to facilitate exact specification of the record to be accessed during certain sequences of input-output operations. The setting of the file position indicator is affected only by the CLOSE, OPEN, READ, and START statements.

The file position indicator contains the value of the current key within the key of reference for an indexed file, the record number of the current record for a sequential file, the relative record number of the current record for a relative file, or indicates one of the following conditions for the file connector:

- 1) No valid record position has been established.
- 2) An optional file is not present.
- 3) No next or previous logical record exists.

9.1.12 I-O status

The I-O status is a two-character conceptual entity whose value is set to indicate the status of an input-output operation during the execution of a CLOSE, DELETE, OPEN, READ, REWRITE, START, UNLOCK or WRITE statement and prior to the execution of any imperative statement associated with that input-output statement or prior to the execution of any applicable USE EXCEPTION procedure. The value of the I-O status is made available through the use of the FILE STATUS clause in the file control entry for the file or through the use of the EXCEPTION-FILE or EXCEPTION-FILE-N function.

The I-O status also determines whether an applicable USE EXCEPTION procedure is executed. If any condition occurs other than those specified in 9.1.12.1, Successful completion, execution of such a procedure is dependent on rules stated elsewhere. No such procedure is executed if one of the conditions specified in 9.1.12.1, Successful completion, occurs.

Certain classes of I-O status values indicate fatal exception conditions. These are: any that begin with the digit 3 or 4, and any that begin with the digit 9 that the implementor defines as fatal. If the value of the I-O status for an input-output operation indicates a fatal exception condition, the implementor determines what action is taken after the execution of any applicable USE EXCEPTION procedure, or if none applies, after completion of the normal input-output control system error processing. The implementor may either continue or terminate the execution of the run unit. If the implementor chooses to continue execution of the run unit, control is transferred to the end of the statement that produced the fatal exception condition unless the rules for that statement define other behavior. Any NOT AT END or NOT INVALID KEY phrase specified for that statement is ignored.

Any I-O status associated with an unsuccessful completion is associated with an exception condition. Whether or not the exception condition is raised depends on whether or not checking for that exception condition is enabled. The exception condition depends on the first character of the I-O status value that results after the execution of an input-output statement. The exception-names and the first digit of their corresponding I-O status values are:

EC-I-O-AT-END	'1'
EC-I-O-INVALID-KEY	'2'
EC-I-O-PERMANENT-ERROR	'3'
EC-I-O-LOGIC-ERROR	'4'
EC-I-O-RECORD-OPERATION	'5'
EC-I-O-FILE-SHARING	'6'
EC-I-O-IMP	'9'

If the first character of the resulting I-O status value is one of the above values, the associated exception condition is set to exist. If the exception condition EC-I-O-AT-END or EC-I-O-INVALID-KEY exists and the input-output statement that caused the exception condition to exist is specified with an AT END or INVALID KEY phrase respectively, no USE procedure shall be executed. Otherwise, the exception condition that exists determines whether an applicable USE procedure shall be executed according to the rules in 14.8.45, USE statement.

I-O status expresses one of the following conditions upon completion of the input-output operation:

- 1) Successful completion. The input-output statement was successfully executed.
- 2) Implementor-defined successful completion. A condition specified by the implementor occurred and the input-output statement was successfully executed.

- 3) At end. A sequential READ statement was unsuccessfully executed as a result of an at end condition.
- 4) Invalid key. The input-output statement was unsuccessfully executed as a result of an invalid key condition.
- 5) Permanent error. The input-output statement was unsuccessfully executed as the result of an error that precluded further processing of the file. Any specified exception procedures are executed. The permanent error condition remains in effect for all subsequent input-output operations on the file unless an implementor-defined technique is invoked to correct the permanent error condition.
- 6) Logic error. The input-output statement was unsuccessfully executed as a result of an improper sequence of input-output operations that were performed on the file or as a result of violating a limit defined by the user.
- 7) Record operation conflict. The input-output statement was unsuccessfully executed as a result of the record being locked by another file connector.
- 8) File sharing conflict. The input-output statement was unsuccessfully executed as a result of the file being locked by another file connector.
- 9) Implementor-defined unsuccessful completion. The input-output statement was unsuccessfully executed as a result of a condition that is specified by the implementor.

9.1.12.1 through 9.1.12.9 specify the values placed in the I-O status for the previously named conditions resulting from the execution of an input-output operation. If more than one value applies, the implementor determines which of the applicable values to place in the I-O status.

9.1.12.1 Successful completion

- 1) I-O status = 00. The input-output statement is successfully executed and no further information is available concerning the input-output operation.
- 2) I-O status = 02. The input-output statement is successfully executed but a duplicate key is detected.
 - a) For a READ statement with the NEXT phrase specified or implied, the key value for the current key of reference is equal to the value of the same key in the next record in the physical file.
 - b) For a READ statement with the PREVIOUS phrase specified, the key value for the current key of reference is equal to the value of the same key in the prior record in the physical file.
 - c) For a REWRITE or WRITE statement, the record just written created a duplicate key value for at least one alternate record key for which duplicates are allowed.
- 3) I-O status = 04. A READ statement is successfully executed but the length of the record being processed does not conform to the fixed file attributes for that file.
- 4) I-O status = 05. An OPEN statement is successfully executed but the file is described as optional and the physical file is not present at the time the OPEN statement is executed. If the open mode is I-O or extend, the physical file has been created.
- 5) I-O status = 07. The input-output statement is successfully executed but a CLOSE statement with the NO REWIND, REEL/UNIT, or FOR REMOVAL phrase or for an OPEN statement with the NO REWIND phrase references a physical file on a non-reel/unit medium.

9.1.12.2 Implementor-defined successful completion

- 1) I-O status = 0x. An implementor-defined condition exists. The value of x is specified by the implementor and may be any of the uppercase letters 'A' through 'M' or lowercase letters 'a' through 'm', where the range of letters is defined by the sequence of letters in ISO/IEC 646. This condition shall not duplicate any condition specified for I-O status values 9x or 00 through 61.

9.1.12.3 At end condition with unsuccessful completion

- 1) I-O status = 10. A sequential READ statement is attempted and no next or prior logical record exists in the physical file because:
 - a) NEXT was specified or implied and the end of the physical file has been reached, or
 - b) PREVIOUS was specified and the beginning of the physical file has been reached, or
 - c) a sequential READ statement is attempted for the first time on a file described as optional and the physical file is not present.
- 2) I-O status = 14. A sequential READ statement is attempted for a relative file and the number of significant digits in the relative record number is larger than the size of the relative key data item described for the file.

9.1.12.4 Invalid key condition with unsuccessful completion

- 1) I-O status = 21. A sequence error exists for a sequentially accessed indexed file. The prime record key value has been changed by the runtime element between the successful execution of a READ statement through a file connector and the execution of the next REWRITE statement for that file through the same file connector, or the ascending sequence requirements for successive record key values are violated. (See 14.8.47, WRITE statement.)
- 2) I-O status = 22. An attempt is made either:
 - a) to write a record that would create a duplicate key in a physical relative file.
 - b) to write a record that would create a duplicate prime record key in a physical indexed file, or
 - c) to write or rewrite a record that would create a duplicate alternate record key when the DUPLICATES phrase is not specified for that alternate record key in the physical file.
- 3) I-O status = 23. This condition exists because:
 - a) an attempt is made to randomly access a record that does not exist in the physical file; or
 - b) a START or random READ statement is attempted on a file described as optional and the physical file is not present; or
 - c) a START statement is attempted with an invalid key length specification; or
 - d) a START statement is attempted on a sequential file that has no records or that does not support the ability to position at the specified record.
- 4) I-O status = 24. An attempt is made to write beyond the externally-defined boundaries of a physical relative or indexed file. The implementor specifies the manner in which these boundaries are defined. Or, a sequential WRITE statement is attempted for a relative file and the number of significant digits in the relative record number is larger than the size of the relative key data item described for the file.

9.1.12.5 Permanent error condition with unsuccessful completion

- 1) I-O status = 30. A permanent error exists and no further information is available concerning the input-output operation.
- 2) I-O Status = 31. A permanent error exists during execution of an OPEN statement because the content of the data item referenced by the data-name specified in the USING phrase of the file control entry is not consistent with the specification for the device-name or literal in the ASSIGN clause of that file control entry.

- 3) I-O status = 34. A permanent error exists because of a boundary violation; an attempt is made to write beyond the externally-defined boundaries of a physical sequential file. The implementor specifies the manner in which these boundaries are defined.
- 4) I-O status = 35. A permanent error exists because an OPEN statement with the INPUT, I-O, or EXTEND phrase is attempted on a file that is not described as optional and the physical file is not present.
- 5) I-O status = 37. A permanent error exists because an OPEN statement is attempted on a file and that file will not support the open mode specified in the OPEN statement. The possible violations are:
 - a) the EXTEND or OUTPUT phrase is specified but the file will not support write operations.
 - b) the I-O phrase is specified but the file will not support the input and output operations that are permitted for the organization of that file when opened in the I-O mode.
 - c) the INPUT phrase is specified but the file will not support read operations.
- 6) I-O status = 38. A permanent error exists because an OPEN statement is attempted on a file connector previously closed with lock.
- 7) I-O status = 39. The OPEN statement is unsuccessful because a conflict has been detected between the fixed file attributes and the attributes specified for that file in the source unit.

9.1.12.6 Logic error condition with unsuccessful completion

- 1) I-O status = 41. An OPEN statement is attempted for a file connector in an open mode.
- 2) I-O status = 42. A CLOSE or UNLOCK statement is attempted for a file connector that is not in an open mode.
- 3) I-O status = 43. For a mass storage file in the sequential access mode, the last input-output statement executed for the associated file through a file connector prior to the execution of a DELETE or REWRITE statement through the same file connector was not a successfully executed READ statement.
- 4) I-O status = 44. A boundary violation exists because:
 - a) an attempt is made to write or rewrite a record that is larger than the largest or smaller than the smallest record allowed by the RECORD IS VARYING clause of the associated file-name, or
 - b) an attempt is made to rewrite a record to a sequential file and the record is not the same size as the record being replaced.
 - c) an attempt is made to write or rewrite a record that is larger than the largest or smaller than the smallest record allowed by the fixed-or-variable-length format of the RECORD clause when the implementor has specified that variable-length records are produced.
- 5) I-O status = 45. Record identification failure. The input-output statement was unsuccessful because no record description entry was selected for processing with the FORMAT clause or the CODE-SET clause.
- 6) I-O status = 46. A sequential READ statement is attempted referencing a file connector open in the input or I-O mode and no valid next record has been established because:
 - a) The preceding START statement referencing that file connector was unsuccessful, or
 - b) The preceding READ statement referencing that file connector was unsuccessful.
- 7) I-O status = 47. The execution of a READ or START statement is attempted referencing a file connector that is not open in the input or I-O mode.

- 8) I-O status = 48. The execution of a WRITE statement is attempted referencing a file connector that is not open in the correct open mode as follows:
 - a) If the access mode is sequential, the file connector is not open in the extend or output mode.
 - b) If the access mode is dynamic or random, the file connector is not open in the I-O or output mode.
- 9) I-O status = 49. The execution of a DELETE or REWRITE statement is attempted referencing a file connector that is not open in the I-O mode.

9.1.12.7 Record operation conflict condition with unsuccessful completion

- 1) I-O status = 51. The input-output statement is unsuccessful due to an attempt to access a record that is currently locked by another file connector.
- 2) I-O status = 52. The input-output statement is unsuccessful due to a deadlock. The implementor shall specify under what conditions a deadlock is detected.
- 3) I-O status = 53. The input-output statement is unsuccessful because the statement requested a record lock, but this run unit holds the maximum number of locks allowed by this implementation.
- 4) I-O status = 54. The input-output statement is unsuccessful because the statement requested a record lock, but this file connector holds the maximum number of locks allowed by this implementation.

9.1.12.8 File sharing conflict condition with unsuccessful completion

- 1) I-O status = 61. A file sharing conflict condition exists because an OPEN statement is attempted on a physical file and that physical file is already open by another file connector in a manner that conflicts with this request. The possible violations are:
 - a) An attempt is made to open a physical file that is currently open by another file connector in the sharing with no other mode.
 - b) An attempt is made to open a physical file in the sharing with no other mode and the physical file is currently open by another file connector.
 - c) An attempt is made to open a physical file for I-O or extend and the physical file is currently open by another file connector in the sharing with read only mode.
 - d) An attempt is made to open a physical file in the sharing with read only mode and the physical file is currently open by another file connector in the I-O or extend mode.
 - e) An attempt is made to open a physical file in the output mode and the physical file is currently open by another file connector.

9.1.12.9 Implementor-defined condition with unsuccessful completion

- 1) I-O status = 9x. An implementor-defined condition exists. This condition shall not duplicate any condition specified by the I-O status values 00 through 61. The value of x is defined by the implementor.

9.1.13 Invalid key condition

The invalid key condition may occur as a result of the execution of a DELETE, READ, REWRITE, START, or WRITE statement. When the invalid key condition occurs, execution of the input-output statement that recognized the condition is unsuccessful and the file is not affected.

If the invalid key condition exists after the execution of the input-output operation specified in an input-output statement, the following actions occur in the order shown:

- 1) The I-O status of the file connector associated with the statement is set to a value indicating the invalid key condition.
- 2) If the INVALID KEY phrase is specified in the input-output statement, any USE EXCEPTION file procedure associated with the file connector or any USE EXCEPTION EC-I-O-INVALID-KEY procedure, if that exception condition was raised, is not executed and control is transferred to the imperative-statement specified in the INVALID KEY phrase. Execution then continues according to the rules for each statement specified in that imperative-statement. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of the imperative-statement specified in the INVALID KEY phrase, control is transferred to the end of the input-output statement and the NOT INVALID KEY phrase, if specified, is ignored.
- 3) If the INVALID KEY phrase is not specified in the input-output statement and a USE AFTER EXCEPTION procedure is associated with the file connector associated with the input-output statement, that USE AFTER EXCEPTION procedure is executed and control is transferred according to the rules of the USE statement. The NOT INVALID KEY phrase is ignored, if it is specified.
- 4) If the INVALID KEY phrase is not specified in the input-output statement and there is no USE AFTER EXCEPTION procedure associated with the file connector associated with the input-output statement, control is transferred to the end of the input-output statement. The NOT INVALID KEY phrase is ignored, if it is specified.

If the invalid key condition does not exist after the execution of the input-output operation specified by an input-output statement, the INVALID KEY phrase is ignored, if specified. The I-O status of the file connector associated with the statement is updated and the following actions occur:

- 1) If the I-O status indicates an unsuccessful completion that is not an invalid key condition, control is transferred according to the rules of any USE EXCEPTION file procedure associated with the file connector or USE EXCEPTION exception-name procedure associated with an EC-I-O exception condition that was raised.
- 2) If the I-O status indicates a successful completion, control is transferred to the end of the input-output statement or to the imperative-statement specified in the NOT INVALID KEY phrase if it is specified. In the latter case, execution continues according to the rules for each statement specified in that imperative-statement. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of the imperative-statement specified in the NOT INVALID KEY phrase, control is transferred to the end of the input-output statement.

9.1.14 Sharing mode

The sharing mode indicates whether a file is to participate in file sharing and record locking, and specifies the degree of file sharing (or non-sharing) to be permitted for the file. The sharing mode specifies the types of operations that may be performed on the shared physical file through other file connectors throughout the duration of this OPEN.

The SHARING phrase on an OPEN statement overrides the SHARING clause in the file control entry for establishing the sharing mode. If there is no SHARING phrase on the OPEN statement, the sharing mode is completely determined by the SHARING clause in the file control entry. If no specification is made in either location, the implementor defines the sharing mode in which the file is opened; the implementor-defined sharing mode may be one of the modes specified in this International Standard or may be a mode completely specified by the implementor. The rules are the same for a given standard sharing mode regardless of whether the sharing mode is specified on the OPEN statement, specified in the file control paragraph, or specified as the default by the implementor.

Other facilities may specify some degree of file sharing, however, their interaction with COBOL file sharing is defined by the implementor.

NOTE These facilities can include a job control language or another programming language. Implementors are encouraged to honor file and record locks in a multi-language environment. The implementor should document the file sharing and record locking facility in a way that programs written in other languages might make use of it, if it is possible for these programs to do so.

A shared physical file shall reside on a device that allows concurrent access to the file. The implementor shall specify which devices allow concurrent access to a physical file.

Before access to a shared physical file is allowed through an OPEN statement, the sharing mode and the open mode shall be allowed by all other file connectors that are currently associated with the physical file. Additionally, the sharing mode for the current OPEN statement shall permit all of the sharing modes and open modes that exist for all other file connectors that are currently associated with the physical file. (See 9.1.12, I-O status; 14.8.26, OPEN statement; and table 20, Opening available shared files that are currently open by another file connector.)

The sharing mode controls access to a physical file as follows:

- 1) The sharing with no other mode specifies exclusive access to a physical file. Associating this file connector with the physical file will be unsuccessful if the physical file is currently open through other file connectors. If the OPEN statement is successful, subsequent requests to open the physical file through other file connectors before this file connector is closed will be unsuccessful. Record locks are ignored.
- 2) The sharing with read only mode restricts concurrent access to a physical file through file connectors other than this one, to input mode. Associating this file connector with the physical file will be unsuccessful if the physical file is associated with another file connector whose open mode is other than input. If the OPEN statement is successful, subsequent requests to open the physical file through other file connectors in a mode other than input before this file connector is closed will be unsuccessful. Record locks are in effect.
- 3) The sharing with all other mode allows concurrent access to a physical file through other file connectors specifying input, I-O, or extend mode, subject to any further restrictions that apply. Record locks are in effect.

Multiple paths of access may exist in the same runtime element, contained elements, separate runtime elements within the same run unit, or runtime elements in different run units.

The setting of a file lock is part of the atomic operation of an I-O statement.

The file lock is removed by an explicit or implicit CLOSE statement executed for that file connector.

9.1.15 Record locking

Record locking provides the capability of controlling concurrent access to logical records in a shared file. Two modes of locking are available, AUTOMATIC and MANUAL. Single-record locking or multiple-record locking is available for both AUTOMATIC and MANUAL locking.

For automatic single-record locking, the runtime system controls the setting and releasing of locks. For automatic multiple-record locking, the runtime system controls the setting of locks, and the application controls the releasing of locks by the execution of an explicit UNLOCK statement.

For manual single-record and multiple-record locking, the application controls the setting and releasing of locks by the use of locking phrases on input-output statements and the use of the UNLOCK statement.

While locked by a given file connector, a record is not accessible to another file connector in the same or a different run unit, except by the execution of a READ statement with the IGNORING LOCK phrase. A locked record may be re-accessed by the same file connector that holds the lock.

In all cases, all record locks established for a file are released by the execution of an explicit or implicit CLOSE statement for the file.

The implementor may specify circumstances other than a locked logical record that result in the return of a locked record status.

NOTE Examples of such circumstances are the locking of records while an index is being organized and the locking of a physical block containing a locked logical record. By defining the physical file to contain one logical record per physical record, users can avoid the situation where a record locked status occurs for a record because it is contained in a block in which a different record is locked.

9.1.16 Sort file

A sort file is a collection of records to be sorted by a SORT statement. The rules for blocking and for allocation of internal storage are peculiar to the SORT statement. The RELEASE and RETURN statements imply nothing with respect to buffer areas, blocks, or reels. A sort file, then, can be considered as an internal file that is created (RELEASE statement) from the input file, processed (SORT statement), and then made available (RETURN statement) to the output file.

A sort file is named by a file control entry and is described by a sort-merge file description entry. The only statements that may reference a sort file are the RELEASE, RETURN, and SORT statements.

9.1.17 Merge file

A merge file is a collection of records to be merged by a MERGE statement. The rules for blocking and for allocation of internal storage are peculiar to the MERGE statement. The RETURN statement implies nothing with respect to buffer areas, blocks, or reels. A merge file, then, can be considered as an internal file that is created from input files by combining them (MERGE statement) as the file is made available (RETURN statement) to the output file.

A merge file is named by a file control entry and is described by a sort-merge file description entry. The only statements that may reference a merge file are the RETURN and MERGE statements.

9.1.18 Dynamic file assignment

Dynamic file assignment allows the user to defer until runtime the association between a file connector and a physical file. This feature may also be used to associate one file connector with different physical files during execution of a run unit. It is specified by the USING phrase of the ASSIGN clause on the file control entry. The USING phrase references an alphanumeric data item whose content at the time an OPEN, SORT, or MERGE statement for that file is executed uniquely identifies the specific physical file to be accessed.

9.1.19 Report file

A report file is an output file having sequential organization whose file description entry contains a REPORT clause.

9.2 Screens

9.2.1 Terminal screen

A terminal provides I-O via a screen and a keyboard. A screen is considered a grid of rows and columns, where the size of a column is one fixed-size alphanumeric character position. There is a one-to-one correspondence between a column and a character in the computer's alphanumeric coded character set. There is a fixed correspondence, specified by the implementor, between a column and a character in the computer's national coded character set.

NOTE 1 This International Standard does not specify the manner of presenting data on a screen in a proportional font.

A screen contains one or more fields during each input or output operation. A field may range in size from one character to the maximum number of characters permitted on the screen. Each field represents an elementary screen item. One or more fields may be logically grouped together into a group screen item; such fields need not be contiguous. A group screen item may contain other group screen items. The fields within a group screen item are ordered for the purposes of determining the next field and the previous field operations during terminal input. The order of fields is determined by the order of declaration of screen items in a screen description entry.

NOTE 2 A group screen item, unlike a group data item, is never treated as a single contiguous string of characters of a particular category.

A screen has visible attributes associated with each display location.

9.2.2 Function keys

A function key has a function key number associated with it that is returned to the run unit when it is pressed.

The implementor may define context-dependent function keys to carry out a particular function in a specific context. If any context-dependent function key is defined, the implementor shall specify the function number that is returned for each context-dependent function key.

The implementor shall specify the method, if one exists, for enabling and disabling function keys and context-dependent function keys.

9.2.3 CRT status

The CRT status is a four-character conceptual entity whose value is set to indicate the status of a terminal input-output operation during the execution of an ACCEPT screen statement and prior to the execution of any imperative statement associated with any ON EXCEPTION or NOT ON EXCEPTION clauses for that ACCEPT statement. The value of the CRT status is available through the use of the CRT STATUS clause in the SPECIAL-NAMES paragraph.

CRT status expresses one of the following conditions upon completion of the input operation:

- 1) Successful completion with normal termination. The input statement was successfully executed.
- 2) Successful completion with termination by a function key keystroke. The input statement was successfully executed.
- 3) Unsuccessful completion. The input statement was not successfully executed. Further terminal I-O statements are not precluded.
- 4) Implementor-defined unsuccessful completion.

The following is a list of the values placed in the CRT status for the conditions resulting from the execution of an input operation.

- 1) Successful completion with normal termination

CRT status = 0000. The input statement was successfully executed. Termination was achieved by the operator pressing the enter key or entering data into the last character of a screen item for which the AUTO clause is specified and for which no logical next field exists.

- 2) Successful completion with termination by a function key keystroke
 - a) CRT status = 1xxx. The input statement was successfully executed. Termination was achieved by the operator pressing a function key. The number of the function key that was pressed is given by the numeric value of xxx.
 - b) CRT status = 2xxx. The input statement was successfully executed. Termination was achieved by the operator pressing a context-dependent function key. The number of the function assigned to the key that was pressed is given by the numeric value of xxx.
- 3) Unsuccessful completion with standard-defined condition
 - a) CRT status = 8000. The ACCEPT screen statement was unsuccessful because no input screen item was located at a valid screen position.
 - b) CRT status = 8001. The ACCEPT screen statement was unsuccessful because inconsistent data was entered into a screen item and allowed to remain there.

NOTE On some implementations, this will not occur because the operator is forced to correct the data before execution will continue.
- 4) Unsuccessful completion with implementor-defined condition
 - a) CRT status = 9xxx. An implementor-defined condition exists. The numeric value xxx is defined by the implementor.

9.2.4 Cursor

Character addressable terminals use the concept of a cursor to indicate the position on the screen at which keyboard operations will be displayed. This is generally indicated by the position of a visible cursor symbol.

During execution of a DISPLAY screen statement, the position and visibility of the cursor is undefined.

During execution of an ACCEPT screen statement, the position and visibility of the cursor is defined only during the period that the keyboard is synchronously enabled for operator input; the cursor shall be visible and shall indicate the position on the screen at which keyboard input will be displayed.

During execution of an ACCEPT screen statement, the cursor is initially positioned at the first elementary screen item in the screen description entry whose specification includes a TO or USING phrase, unless the CURSOR clause is specified in the SPECIAL-NAMES paragraph, in which case the cursor is positioned as specified in that clause.

Once the keyboard is enabled for operator input, the operator may move the cursor to elementary screen items whose specification includes a TO or USING clause. Depending on the screen description entry for the item, the operator may move the cursor to characters within the displayed item.

The implementor shall specify any keys that change the position of the cursor and the associated cursor movement.

9.2.5 Cursor locator

The cursor locator is a six-character conceptual entity whose value is set by the runtime element to indicate the position of the visible cursor on the display screen when the keyboard becomes synchronously enabled during execution of an ACCEPT screen statement. The position is relative to the top left hand corner of the screen.

Upon successful termination of execution of an ACCEPT screen statement, the cursor locator is set to indicate the position of the visible cursor at the time the operator presses the terminator key or a function key. If the execution of the ACCEPT statement was unsuccessful, the value of the cursor locator is undefined.

The cursor locator is made available to the runtime element through the use of the CURSOR clause in the SPECIAL-NAMES paragraph. The first three characters represent a three-digit number giving the line number, the topmost line being 001. The second three characters represent a three-digit number giving the column number, the first column number being 001. If the position of the visible cursor is at a line or column number that is greater than 999, the value of the cursor locator is undefined.

9.2.6 Current screen item

During the execution of an ACCEPT statement, one or more elementary input screen items can be displayed on the terminal display. The operator is able to move the cursor between the screen items using context-dependent cursor positioning keys. The cursor may also move automatically from one screen item to another when the screen item becomes full or the last character in the screen item is keyed. The screen item in which the cursor is located is the current screen item. Any data keyed by the operator is assigned to the current screen item and might cause the display of the current screen item to change.

9.2.7 Color number

Color is one of the attributes that may be specified for screen items. For a monochrome terminal, the color attributes are mapped onto other attributes by the implementor.

A color is selected by specifying an integer that represents the color. The colors and their associated color numbers are:

black	0
blue	1
green	2
cyan	3
red	4
magenta	5
brown/yellow	6
white	7

NOTE The colors above are a rough guide; the actual color depends on the terminal capabilities and may be affected by other considerations such as the HIGHLIGHT attribute. For example, the value 6 might appear as brown, but when HIGHLIGHT is also specified it might appear as yellow. The value 0 might appear as black, but when HIGHLIGHT is also specified it might appear as gray.

9.3 Objects

9.3.1 Objects and classes

An object is an information processing unit consisting of data and methods. Methods are units of code designed to act on the data of objects. Each object contains its own instance of data and file connectors and shares the methods that are defined for that object with other objects of its class.

A class is the template from which objects are made. The source unit that defines the template is a class definition, which specifies the characteristics of data and the methods of an object. A class may describe a factory object and an instance object. There is at most one runtime instance of a factory object for a given class in a given run unit. There may be any number of instances of an instance object in a given run unit at any given time.

9.3.2 Object references

An object reference is an implicitly- or explicitly-defined data item containing an object reference value that uniquely references an object for the lifetime of the object. Implicitly-defined object references are the predefined object references and object references returned from an object property, an object-view, an inline method invocation, or a function. Explicitly-defined object references are data items defined by a data description entry specifying a USAGE OBJECT REFERENCE clause.

No two distinct objects have the same object reference value and every object has at least one object reference.

9.3.3 Predefined object references

A predefined object reference is an implicitly-generated data item referenced by one of the identifiers EXCEPTION-OBJECT, NULL, SELF, and SUPER. Each predefined object reference has a specific meaning, as described in 8.4.2, Identifiers.

9.3.4 Methods

The procedural code in an object is placed in methods. Each method has its own method-name and its own data division and procedure division. When a method is invoked, the procedural code it contains is executed. A method is invoked by specifying an identifier that references the object and the name of the method. A method may specify parameters and a returning item. A method always possesses the recursive attribute and may call itself.

9.3.5 Method invocation

The procedural code in a method is executed by invoking the method either with an INVOKE statement, an inline method invocation, or a reference to an object property. The method implementation that is bound to the invocation depends on the class, at runtime, of the object on which the method is invoked. In particular, it is not necessarily the class specified statically in the definition of the object reference; it is the class of the actual object referenced at runtime that is used in resolving a method invocation to a particular method implementation.

If an invocation specifies the object using an object reference, then:

- 1) if the identified object is a factory object, the method invocation will resolve to a factory method
- 2) otherwise, the resolution will be to an instance method.

Additionally, if an invocation specifies the object using SUPER, the invocation will resolve to a method by using a restricted search, as specified in 8.4.2.8, SELF and SUPER.

If an invocation specifies the object using a class name, the factory object of the specified class is used as the object on which the method is invoked, and the method invocation will resolve to a factory method.

Method resolution proceeds as follows:

- 1) if a method with the method-name specified in the invocation is defined in the class of the object, that method is bound;
- 2) otherwise, each inherited class upward in the hierarchy of inheritance is inspected in left to right order as written in the INHERITS clause until either a method with the method-name specified in the invocation is defined in the inspected class or all inherited classes have been inspected without finding such a method. If a method is found, that method is bound; otherwise, the EC-OO-METHOD exception condition is set to exist.

9.3.6 Method prototypes

Method definitions within an interface definition define method prototypes. Method prototypes do not specify procedural code, but rather they specify the details needed to interface with and check the conformance of a method.

9.3.7 Conformance and interfaces

The term “conformance” is used in this document with several different meanings. In the context of object orientation, the term “conformance” is used to describe a relationship between object interfaces, and it is the basis of such fundamental features as inheritance, interface definitions, and conformance checking.

NOTE Conformance checking is done at compile time only, except that conformance checking for object views and methods using universal object references is done at runtime.

9.3.7.1 Conformance for object orientation

Conformance for objects allows an object to be used according to an interface other than the interface of its own class. Conformance is a unidirectional relation from one interface to another interface and from an object to an interface.

9.3.7.1.1 Interfaces

Every object has an interface consisting of the names and parameter specifications for each method supported by the object, including inherited methods. Each class has two interfaces: an interface for the factory object and an interface for the instance objects.

Interfaces may also be defined independently from a specific class by specifying method prototypes in an interface definition.

9.3.7.1.2 Conformance between interfaces

If an interface interface-1 and an interface interface-2 are the same interface, they conform to each other. If interface-1 and interface-2 are different interfaces, interface-1 conforms to interface-2 if and only if the following conditions are satisfied:

- 1) For every method in interface-2 there is a method in interface-1 with the same name taking the same number of parameters, with consistent BY REFERENCE and BY VALUE specifications.
- 2) If the formal parameter of a given method in interface-2 is an object reference, the corresponding parameter in interface-1 is an object reference following these rules:
 - a) If the parameter in interface-2 is a universal object reference, the corresponding parameter in interface-1 is a universal object reference.
 - b) If the parameter in interface-2 is described with an interface-name, the corresponding parameter in interface-1 is described with the same interface- name.

- c) If the parameter in interface-2 is described with a class-name, the corresponding parameter in interface-1 is described with the same class-name, and the presence or absence of the FACTORY and ONLY phrases is the same in both interfaces.
 - d) If the parameter in interface-2 is described with the ACTIVE-CLASS phrase, the corresponding parameter in interface-1 is described with the ACTIVE-CLASS phrase, and the presence or absence of the FACTORY phrase is the same in both interfaces.
- 3) If the formal parameter of a given method in interface-2 is not an object reference, the corresponding formal parameter in interface-1 has the same ANY LENGTH, BLANK WHEN ZERO, JUSTIFIED, PICTURE, SIGN, and USAGE clauses, with the following exceptions:
- a) Currency symbols match if and only if the corresponding currency strings are the same.
 - b) Period picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these interfaces. Comma picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these interfaces.

Additionally, locale specifications in the PICTURE clauses match if and only if:

- both specify the same SIZE phrase in the LOCALE phrase of the PICTURE clause, and
 - both specify the LOCALE phrase without a locale-name or both specify the LOCALE phrase with the same external identification, where the external identification is the external-locale-name or literal value associated with the locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph.
- 4) The presence or absence of the procedure division RETURNING phrase is the same in the corresponding methods.
- 5) If the returning item in a given method of interface-2 is an object reference, the corresponding returning item in interface-1 is an object reference following these rules:
- a) If the returning item in interface-2 is a universal object reference, the corresponding returning item in interface-1 is an object reference.
 - b) If the returning item in interface-2 is described with an interface-name that identifies the interface int-r, the corresponding returning item in interface-1 is either of the following:
 - 1. an object reference described with an interface-name that identifies int-r or an interface described with an INHERITS clause that references int-r,
 - 2. an object reference described with a class-name, subject to the following rules:
 - a. if described with the FACTORY phrase, the factory object of the specified class shall be described with an IMPLEMENTS clause that references int-r,
 - b. if described without the FACTORY phrase, the instance objects of the specified class shall be described with an IMPLEMENTS clause that references int-r.
 - c) If the returning item in interface-2 is described with a class-name, the corresponding returning item in interface-1 is an object reference, subject to the following rules:
 - 1. If the returning item in interface-2 is described with the ONLY phrase, the returning item in interface-1 shall be described with the ONLY phrase and the same class-name.
 - 2. If the returning item in interface-2 is described without the ONLY phrase, the returning item in interface-1 shall be described with the same class-name or a subclass of that class-name.

3. The presence or absence of the FACTORY phrase shall be the same.

- d) If the returning item in interface-2 is described with the ACTIVE-CLASS phrase, the corresponding returning item in interface-1 is described with the ACTIVE-CLASS phrase, and the presence or absence of the FACTORY phrase is the same.

If the description of the returning item of a method in interface-1 directly or indirectly references interface-2, the description of the returning item of the corresponding method in interface-2 shall not directly or indirectly reference interface-1.

- 6) If the returning item in a given method of interface-2 is not an object reference, the corresponding returning item has the same ANY LENGTH, BLANK WHEN ZERO, JUSTIFIED, PICTURE, SIGN, and USAGE clauses, with the following exceptions:
- a) Currency symbols match if and only if the corresponding currency strings are the same.
 - b) Period picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these interfaces. Comma picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both or for neither of these interfaces.

Additionally, locale specifications in the PICTURE clauses match if and only if:

- both specify the same SIZE phrase in the LOCALE phrase of the PICTURE clause, and
- both specify the LOCALE phrase without a locale-name or both specify the LOCALE phrase with the same external identification, where the external identification is the external-locale-name or literal value associated with a locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph.

- 7) If either of the corresponding formal parameters or returning items in interface-1 or interface-2 is a strongly-typed group item, both are of the same type.
- 8) The presence or absence of the OPTIONAL phrase is the same for corresponding parameters.
- 9) If the RAISING phrase is specified in the procedure division header of a given method in interface-1, the corresponding method in interface-2 specifies the RAISING phrase following these rules:
- a) If an exception-name is specified in the RAISING phrase in interface-1, the corresponding RAISING phrase in interface-2 specifies the same exception-name.
 - b) If a class-name is specified in the RAISING phrase in interface-1, the corresponding RAISING phrase in interface-2 specifies one of the following:
 - the same class-name or the name of a superclass of the class identified by that class-name, including the FACTORY phrase if and only if the RAISING phrase in interface-1 specifies the FACTORY phrase,
 - the name of an interface implemented by the factory object of that class, if the RAISING phrase in interface-1 specifies the FACTORY phrase,
 - the name of an interface implemented by the instance object of that class, if the RAISING phrase in interface-1 does not specify the FACTORY phrase.
 - c) If an interface-name is specified in the RAISING phrase in interface-1, the corresponding RAISING phrase in interface-2 specifies the same interface-name or the name of an interface inherited by that interface.
- 10) The entry conventions for interface-1 and interface-2 are the same.

NOTE An entry convention explicitly described as COBOL conforms to one that is implicitly COBOL.

An alphanumeric group item that is not strongly typed is, for the purpose of conformance checking, considered to be equivalent to an elementary alphanumeric data item of the same length.

9.3.7.1.3 Conformance for parameterized classes and parameterized interfaces

When using a parameterized class or interface, the class or interface is treated as if the actual parameter classes or interfaces were substituted for the parameters throughout the class definition or interface definition.

9.3.8 Polymorphism

Polymorphism is a feature that allows a given statement to do different things. In COBOL, the ability for an object reference to contain references to objects of different classes means that a method invocation on that object reference can be bound to one of many possible methods. Sometimes the method can be identified before execution, but in general, the method cannot be identified until runtime.

A data item can be declared to contain references to objects of a given class or any sub-class of that class; it can also be declared to contain references to objects that implement a given interface. When a given interface is used, the classes of the objects may be completely unrelated, as long as they implement the given interface.

9.3.9 Class inheritance

Class inheritance is a mechanism for using the interface and implementation of one or more classes as the basis for another class. The inheriting class, also known as a subclass, inherits from one or more classes, known as superclasses. The subclass has all the methods defined for the inherited class definition or definitions, including any methods that the inherited definition or definitions inherited. The subclass has all the data definitions defined for the inherited class or classes, including any data definitions that the inherited class or classes inherited.

NOTE This does not mean that the actual source code that describes the data is accessible or that the data items described in that source code can be directly referenced in the subclass. It means that the subclasses are treated as if their source code had a copy of the superclass definitions; in other words, the inherited data items are considered to be defined in the subclass.

The inherited data definitions define data for every instance object of the subclass and for its factory object. Each instance object has its own copy of inherited data, distinct from the copy belonging to an instance object of an inherited class. Each factory object has its own copy of inherited data, distinct from the copy belonging to a factory object of an inherited class. Names and attributes of inherited data items are not visible in the inheriting class. The inherited object data is initialized when an object is created. The inherited factory data is allocated independently from the factory data of the inherited class or classes and is initialized when the factory of the subclass is created. The inherited factory data is accessible only via methods and properties specified in the factory definition of the class that describes the data. The inherited object data is accessible only via methods and properties specified in the object definition of the class that describes the data. The subclass inherits all the file definitions in the same way as the data definitions, subject to the same provisions as data definitions. The subclass may define methods in addition to or in place of the inherited methods and may specify data definitions and file definitions in addition to, but not in place of, the inherited data definitions and file definitions.

The interface of a subclass shall always conform to the interface of the inherited classes, although the subclass may override some of the methods of the inherited class to provide different implementations.

If a class is defined with the FINAL clause, that class shall not be used as a superclass. If a method is defined with the FINAL clause, that method shall not be overridden in a subclass.

User-defined words in an inherited class are not visible in the subclass. Any such word may be used as any type of user-defined word in the subclass definition.

9.3.10 Interface inheritance

Interface inheritance is a mechanism for using one or more interface definitions as the basis for another interface. The inheriting interface has all the method specifications defined for the inherited interface definition or definitions, including any method specifications that the inherited definition or definitions inherited. The inheriting interface

may define new methods augmenting the set of inherited method specifications. The inheriting interface shall always conform to each of the inherited interfaces.

9.3.11 Interface implementation

Interface implementation is a mechanism for using one or more interface definitions as the basis for a class. The implementing class shall implement all the method specifications defined for the implemented interface definition or definitions, including any method specifications that the implemented definition or definitions inherited. The interface of the factory object of the implementing class shall conform to the interfaces to be implemented by the factory object, and the interface of the instance objects of the implementing class shall conform to the interfaces to be implemented by the instance object.

9.3.12 Parameterized classes

A parameterized class is a generic or skeleton class that has formal parameters that will be replaced by one or more class-names or interface-names. When it is expanded by substituting specific class-names or interface-names as actual parameters, a class is created that functions as a non-parameterized class.

An expansion of a parameterized class is treated in all respects the same as if it were a class that is not a parameterized class.

When a parameterized class is specified in the REPOSITORY paragraph, a new class (an instance of a parameterized class) is created based on the specification of the parameterized class. This class has its own factory object and is completely separate from any other instance of the same parameterized class.

Within a run unit, two classes with the same externalized class-name that are created by expanding the same parameterized class with the same actual parameters are the same class instance. If two classes expand a parameterized class with different actual parameters, they are not the same class instance and shall not have the same externalized class-name.

9.3.13 Parameterized interfaces

A parameterized interface is a generic or skeleton interface that has formal parameters that will be replaced by one or more class-names or interface-names. When it is expanded by substituting specific class-names or interface-names as actual parameters, an interface is created that functions as a non-parameterized interface.

An expansion of a parameterized interface is treated in all respects as if it were an interface that is not parameterized.

When a parameterized interface is specified in the REPOSITORY paragraph, a new interface (an instance of a parameterized interface) is created based on the specification of the parameterized interface.

Within a run unit, two interfaces with the same externalized interface-name that are created by expanding the same parameterized interface with the same actual parameters are the same interface instance. If two interfaces expand a parameterized interface with different actual parameters, they are not the same interface instance and shall not have the same externalized interface-name.

9.3.14 Object life cycle

The life cycle for an object begins when it is created and ends when it is destroyed.

9.3.14.1 Life cycle for factory objects

A factory object is created before it is first referenced by a run unit.

A factory object is destroyed after it is last referenced by a run unit.

9.3.14.2 Life cycle for instance objects

An instance object is created as the result of the NEW method being invoked on a factory object.

An instance object is destroyed either when it is determined that the object cannot take part in the continued execution of the run unit, or when the run unit terminates, whichever occurs first.

The timing and algorithm for the mechanism that determines whether or not an instance object can take part in the continued execution of the run unit is implementor defined.

NOTE The process of determining whether or not an instance object can take part in continued execution and reclaiming resources unique to the object is generally referred to as garbage collection.

9.4 User-defined functions

A user-defined function is an entity that is defined by the user by specifying a FUNCTION-ID paragraph rather than a PROGRAM-ID paragraph. The rules and behavior of a user-defined function are similar to those for a program except that a user-defined function returns a value as specified by the RETURNING phrase in the procedure division header. Also, arguments and returned values for user-defined functions cannot use the word ALL as a subscript. In addition, a user defined function always possesses the recursive attribute and may call itself. A user-defined function is invoked by specifying a function identifier as described in 8.4.2.2 Function-identifier.

10 Structured compilation group

A structured compilation group consists of zero, one, or more compilation units that have been processed by text manipulation. A structured compilation group may contain compiler directives affecting compilation processing or source listings, as specified in 7, Compiler directing facility. Text manipulation compiler directives may be logically represented in a structured compilation group but have no effect on compilation processing.

10.1 Compilation units and runtime modules

A compilation unit is one of the following:

- a program-prototype definition
- a function-prototype definition
- a program definition for an outermost program
- a class definition
- an interface definition
- a function definition

Successful compilation of each compilation unit that is a program definition, a function definition, or a class definition results in executable code that, when included in a run unit, constitutes a runtime module.

A compilation unit may contain one or more source units, depending on the type of definition.

The compilation units in a compilation group may be all or part of a run unit or may be unrelated compilation units.

10.2 Source units

A source unit begins with an identification division and ends with an end marker or the end of the compilation group. A source unit includes any contained source units. The following are source units:

- an outermost program-definition, including its contained program-definitions
- a contained program-definition, including its contained program-definitions
- a program-prototype-definition
- a function-definition
- a function-prototype-definition
- a class-definition, including its factory definition and instance definition
- a factory definition, including its method definitions
- an instance definition, including its method definitions
- a method definition
- an interface definition, including its method prototypes

A source unit may contain one or more divisions, specified in the following order:

- 1) identification division
- 2) environment division
- 3) data division
- 4) procedure division

The beginning of a division is indicated by its division header or, in the case of the identification division when its header is omitted, by one of the paragraph headers permitted in the identification division.

The end of a division is indicated by the beginning of the next division, an end marker for the source unit, or the end of the compilation group.

10.3 Contained source units

Source units may be contained directly or indirectly.

The factory definition and instance definition in a class definition are directly contained within that class definition. The methods within a factory definition or an instance definition are directly contained within that factory definition or instance definition, respectively.

Program-definitions within another program-definition may be contained directly or indirectly. A program definition directly contains another program-definition that is immediately nested within it. A program-definition indirectly contains another program-definition when there is one or more levels of nesting between the two of them.

When source units are contained within other source units, names of resources described in the containing source unit may be referenced in the contained source unit in accordance with the rules specified in 8.4.5, Scope of names.

The executable code resulting from compilation of a contained source unit is considered inseparable from the executable code resulting from compilation of the containing source unit.

10.4 Source elements and runtime elements

A source element is a source unit excluding any contained source units.

NOTE — In the example:

PROGRAM-ID. A.

...

PROGRAM-ID. B.

...

PROGRAM-ID. C.

...

END PROGRAM C.

END PROGRAM B.

END PROGRAM A.

Program B is directly contained in Program A; Program C is directly contained in Program B; and Program C is indirectly contained in Program A. Program C is a source element; Program B, devoid of Program C, is a source element; and Program A, devoid of programs B and C, is a source element.

A runtime element is the result of successful compilation of a function, a method, or a program containing a procedure division and consists of executable code included in a run unit.

10.5 COBOL compilation group

10.5.1 General format

$\left[\begin{array}{l} \text{program-prototype} \\ \text{function-prototype} \\ \text{program-definition} \\ \text{function-definition} \\ \text{class-definition} \\ \text{interface-definition} \end{array} \right] \dots$	$\left[\dots \right]$

where program-prototype is:

[IDENTIFICATION DIVISION.]
PROGRAM-ID. program-prototype-name-1 [AS literal-1] IS PROTOTYPE.
 [options-paragraph]
 [environment-division]
 [data-division]
 [procedure-division]
END PROGRAM program-prototype-name-1.

where function-prototype is:

[IDENTIFICATION DIVISION.]
FUNCTION-ID. function-prototype-name-1 [AS literal-1] IS PROTOTYPE.
 [options-paragraph]
 [environment-division]
 [data-division]
 [procedure-division]
END FUNCTION function-prototype-name-1.

where program-definition is:

[IDENTIFICATION DIVISION.]
PROGRAM-ID. program-name-1 [AS literal-1] IS $\left\{ \begin{array}{l} \text{COMMON} \\ \left\{ \begin{array}{l} \text{INITIAL} \\ \text{RECURSIVE} \end{array} \right\} \end{array} \right\} \text{PROGRAM} .$
 [options-paragraph]
 [environment-division]
 [data-division]
 [procedure-division [program-definition] ...]
 [END PROGRAM program-name-1.]

where function-definition is:

```
[ IDENTIFICATION DIVISION. ]
FUNCTION-ID. user-function-name-1 [ AS literal-1 ].
[ options-paragraph ]
[ environment-division ]
[ data-division ]
[ procedure-division ]
END FUNCTION user-function-name-1.
```

where class-definition is:

```
[ IDENTIFICATION DIVISION. ]
CLASS-ID. class-name-1 [ AS literal-1 ] [ IS FINAL ]
    [ INHERITS FROM { class-name-2 } ... ]
    [ USING { parameter-name-1 } ... ] .
[ options-paragraph ]
[ environment-division ]
[ factory-definition ]
[ instance-definition ]
END CLASS class-name-1.
```

where factory-definition is:

```
[ IDENTIFICATION DIVISION. ]
FACTORY. [ IMPLEMENTS { interface-name-1 } ... ]
[ options-paragraph ]
[ environment-division ]
[ data-division ]
[ procedure-division ]
END FACTORY.
```

where instance-definition is:

```
[ IDENTIFICATION DIVISION. ]
OBJECT. [ IMPLEMENTS { interface-name-2 } ... ]
[ options-paragraph ]
[ environment-division ]
[ data-division ]
[ procedure-division ]
END OBJECT.
```

where interface-definition is:

```
[ IDENTIFICATION DIVISION. ]
INTERFACE-ID. interface-name-1 [ AS literal-1 ]
    [ INHERITS FROM { interface-name-2 } ... ]
    [ USING { parameter-name-1 } ... ] .

[ options-paragraph ]
[ environment-division ]
[ procedure-division ]
END INTERFACE interface-name-1.
```

where method-definition is:

```
[ IDENTIFICATION DIVISION. ]

METHOD-ID. { method-name-1 [ AS literal-1 ]
             { { GET } { SET } } PROPERTY property-name-1 } [ OVERRIDE ] [ IS FINAL ] .

[ options-paragraph ]
[ environment-division ]
[ data-division ]
[ procedure-division ]
END METHOD [ method-name-1 ] .
```

NOTE Method-definition is included here for completeness, because it is a type of source element. Method-definition is referenced in the general format of 14, Procedure division. A method-definition in a class-definition defines a method. A method-definition in an interface-definition defines a method prototype.

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
data-division	13, Data division
environment-division	12, Environment division
options-paragraph	11.8, OPTIONS paragraph
procedure-division	14, Procedure division

10.5.2 Syntax rules

- 1) Within a compilation group, function-prototypes and program-prototypes shall precede all other types of source units.
- 2) If a compilation group contains both a program definition and a program prototype definition with the same externalized name, the signatures of these two compilation units shall be the same.
- 3) If a compilation group contains both a function definition and a function prototype definition with the same externalized name, the signatures of these two compilation units shall be the same.
- 4) The data division of a method in a class definition shall not contain a communication section.
- 5) The following restrictions apply to program prototypes, function prototypes, and method prototypes:

- a) The identification division shall not contain an ARITHMETIC clause.
 - b) The environment division shall not contain an object-computer paragraph.
 - c) The only clauses that may be specified in the SPECIAL-NAMES paragraph are the LOCALE clause, the CURRENCY clause, and the DECIMAL-POINT clause.
 - d) The environment division shall not contain an input-output section.
 - e) The data division may contain only a linkage section.
 - f) The procedure division shall contain only a procedure division header.
- 6) Compiler directives may appear in a structured compilation group as specified in 7.2, Compiler directives.

10.5.3 General rules

- 1) Compilation of a program prototype definition or a function prototype definition generates information required for the external repository, as specified in 8.13, External repository.

10.6 End markers

End markers indicate the end of a definition.

10.6.1 General format

	PROGRAM	program-prototype-name-1	} .
	PROGRAM	program-name-1	
	CLASS	class-name-1	
	FACTORY		
END	FUNCTION	function-prototype-name-1	
	FUNCTION	user-function-name-1	
	OBJECT		
	METHOD	[method-name-1]	
	INTERFACE	interface-name-1	

10.6.2 Syntax rules

- 1) An end marker shall be present in every source unit that contains, is contained in, or precedes another source unit.
- 2) Program-name-1 shall be identical to the program-name declared in a preceding PROGRAM-ID paragraph.
- 3) If a PROGRAM-ID paragraph declaring a specific program-name is stated between the PROGRAM-ID paragraph and the END PROGRAM marker for program-name-1, then an END PROGRAM marker referencing program-name shall precede the END PROGRAM marker referencing program-name-1.
- 4) Class-name-1 shall be identical to the class-name declared in the corresponding CLASS-ID paragraph.
- 5) Method-name-1 shall be identical to the method-name declared in the corresponding METHOD-ID paragraph. If the PROPERTY phrase is specified in the METHOD-ID paragraph, method-name-1 shall be omitted.
- 6) Interface-name-1 shall be identical to the interface-name declared in the corresponding INTERFACE-ID paragraph.
- 7) User-function-name-1 shall be identical to the user-function-name declared in the corresponding FUNCTION-ID paragraph.
- 8) Program-prototype-name-1 shall be identical to the program-prototype-name declared in the corresponding PROGRAM-ID paragraph.
- 9) Function-prototype-name-1 shall be identical to the function-prototype-name declared in the corresponding FUNCTION-ID paragraph.

10.6.3 General rules

- 1) An end marker indicates the end of the specified source unit.

11 Identification division

The identification division identifies the program, function, class, factory object, object, method, or interface.

The paragraph header identifies the type of information contained in the paragraph.

11.1 Identification division structure

11.1.1 General format

```
[ IDENTIFICATION DIVISION. ]  
  
[  
  program-id-paragraph  
  function-id-paragraph  
  class-id-paragraph  
  factory-paragraph  
  object-paragraph  
  method-id-paragraph  
  interface-id-paragraph  
]  
  
[ options-paragraph ]
```

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
class-id-paragraph	11.2, CLASS-ID paragraph
factory-paragraph	11.3, FACTORY paragraph
function-id-paragraph	11.4, FUNCTION-ID paragraph
interface-id-paragraph	11.5, INTERFACE-ID paragraph
method-id-paragraph	11.6, METHOD-ID paragraph
object-paragraph	11.7, OBJECT paragraph
options-paragraph	11.8, OPTIONS paragraph
program-id-paragraph	11.9, PROGRAM-ID paragraph

11.2 CLASS-ID paragraph

The CLASS-ID paragraph indicates that this identification division is introducing a class definition and specifies the name that identifies the class and assigns class attributes to the class.

11.2.1 General format

```
CLASS-ID. class-name-1 [ AS literal-1 ] [ IS FINAL ]
    [ INHERITS FROM { class-name-2 } ... ]
    [ USING { parameter-name-1 } ... ] .
```

11.2.2 Syntax rules

- 1) Literal-1 shall be an alphanumeric literal or a national literal and shall not be a figurative constant.
- 2) Class-name-2 shall be the name of a class specified in the REPOSITORY paragraph of this source element.
- 3) Class-name-2 shall not be the name of the class declared by this class definition.
- 4) Class-name-2 shall not inherit from class-name-1 directly or indirectly. Class-name-2 shall not be the name of a parameterized class that expands class-name-1 directly or indirectly.
- 5) Class-name-2 shall not be the name of a class defined with the FINAL clause.
- 6) If two or more different methods with the same name are inherited, none of them may be specified with the FINAL clause. If the same method is inherited from one superclass through two or more intermediate superclasses, it may be specified with the FINAL clause.
- 7) If a given method-name is inherited from more than one inherited class, then, if the prototypes for these methods are such that to define a method with the same interface as any one of them in this class would prevent this class from conforming to all the inherited classes, then a method with the same method-name shall be declared in this class. This method shall satisfy 11.6, METHOD-ID paragraph, syntax rule 9.

NOTE If class A inherits method M from two classes, B and C, and the method interface for M is not identical in classes B and C (say M in B returns an object of class X, and M in C returns an object of an unrelated class Y), then the inheritance is invalid, unless a valid method override of M is defined in class A that resolves the method interface conformance problem. It is not always possible to do so (in which case the inheritance is not valid), but there are some cases in which it can be done. For example, if it is possible to define Z as a class that inherits X and Y, then a method override for M could be specified in class A, returning an object of class Z.

- 8) A given class name shall not appear more than once in an INHERITS clause.
- 9) Parameter-name-1 shall be a name specified in a class-specifier or an interface-specifier in the REPOSITORY paragraph of this class definition.

11.2.3 General rules

- 1) Class-name-1 names the class declared by this class definition. However, literal-1, if specified, is the name of the class that is externalized to the operating environment.
- 2) The INHERITS clause specifies the names of classes that are inherited by class-name-1 according to 9.3.9, Class inheritance.
- 3) If the FINAL clause is specified, the class shall not be the superclass for any other class.
- 4) If the same class is inherited more than once, then only one copy of the data for that class is added to class-name-1.

NOTE While the same class cannot be directly inherited more than once, a class may be indirectly inherited multiple times. For example, suppose class D inherits from classes B and C, and classes B and C both inherit from class A. In this example, class D indirectly inherits class A twice, once as a superclass of B, and once as a superclass of C.

- 5) The USING clause specifies that this is a parameterized class. Parameter-name-1 is the name given to the formal parameter. See 9.3.12, Parameterized classes, for details of the behavior of a parameterized class.
- 6) Parameter-name-1 may be specified within this class definition only where a class-name or an interface-name is permitted.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

11.3 FACTORY paragraph

The FACTORY paragraph indicates that this identification division is introducing a factory definition.

11.3.1 General format

FACTORY. [IMPLEMENTS { interface-name-1 }]

11.3.2 Syntax rules

- 1) Interface-name-1 shall be the name of an interface specified in the REPOSITORY paragraph of the containing class definition.
- 2) Each method prototype in each implemented interface shall be such that the factory interface of this class conforms to all implemented interfaces.

11.3.3 General rules

- 1) The IMPLEMENTS clause specifies the names of the interfaces that are implemented by the factory object of the containing class according to 9.3.11, Interface implementation.
- 2) A factory object implements an interface int-1 in the following cases:
 - a) the factory object is defined with an IMPLEMENTS clause specifying int-1,
 - b) the factory object implements an interface that inherits int-1,
 - c) the class containing the factory object inherits a class whose factory object implements int-1.

11.4 FUNCTION-ID paragraph

The FUNCTION-ID paragraph specifies the name by which a function is identified and assigns selected attributes to that function.

11.4.1 General format

Format 1 (definition):

FUNCTION-ID. user-function-name-1 [AS literal-1] .

Format 2 (prototype):

FUNCTION-ID. function-prototype-name-1 [AS literal-1] IS PROTOTYPE.

11.4.2 Syntax rules

- 1) Literal-1 shall be an alphanumeric literal or a national literal and shall not be a figurative constant.

11.4.3 General rules

FORMAT 1

- 1) User-function-name-1 names the function declared by this function definition. However, literal-1, if specified, is the name of the function that is externalized to the operating environment.

FORMAT 2

- 2) Function-prototype-name-1 names the function prototype declared by this definition. However, literal-1, if specified, is the name of the function prototype that is externalized to the operating environment.

11.5 INTERFACE-ID paragraph

The INTERFACE-ID paragraph indicates that this identification division is introducing an interface definition, specifies the name that identifies the interface, and assigns interface attributes to the interface.

11.5.1 General format

```
INTERFACE-ID. interface-name-1 [ AS literal-1 ]  
    [ INHERITS FROM { interface-name-2 } ... ]  
    [ USING { parameter-name-1 } ... ] .
```

11.5.2 Syntax rules

- 1) Literal-1 shall be an alphanumeric literal or a national literal and shall not be a figurative constant.
- 2) Interface-name-2 shall be the name of an interface specified in the REPOSITORY paragraph of this source element.
- 3) Interface-name-2 shall not inherit directly or indirectly from interface-name-1.
- 4) Parameter-name-1 shall be a name specified in a class-specifier or an interface-specifier in the REPOSITORY paragraph of this interface definition.
- 5) If a given method-name is inherited from more than one interface, the method prototype in each inherited interface shall be such that this interface conforms to all inherited interfaces.

11.5.3 General rules

- 1) Interface-name-1 names the interface declared by this interface definition. However, literal-1, if specified, is the name of the interface that is externalized to the operating environment.
- 2) The INHERITS clause specifies the names of interfaces that are inherited by interface-name-1 according to 9.3.10, Interface inheritance.
- 3) The USING clause specifies that this is a parameterized interface. Parameter-name-1 is the name given to the formal parameter.
- 4) Parameter-name-1 shall be specified within this interface definition only where a class-name or an interface-name is permitted.

11.6 METHOD-ID paragraph

The METHOD-ID paragraph indicates that this identification division is introducing a method definition, specifies the name that identifies the method or method prototype, and assigns method attributes to the method.

11.6.1 General format

$$\text{METHOD-ID.} \left\{ \begin{array}{l} \text{method-name-1 [AS literal-1]} \\ \left\{ \begin{array}{l} \text{GET} \\ \text{SET} \end{array} \right\} \text{PROPERTY property-name-1} \end{array} \right\} [\text{OVERRIDE}] [\text{IS FINAL}] .$$

11.6.2 Syntax rules

- 1) Literal-1 shall be an alphanumeric literal or a national literal and shall not be a figurative constant.
- 2) The OVERRIDE phrase shall not be specified in a method prototype.
- 3) If the OVERRIDE phrase is specified, there shall be a method with the same name as the method declared by this method definition defined in a superclass. The method in the superclass shall not be defined with the FINAL clause.
- 4) If the OVERRIDE phrase is not specified:
 - a) if this method definition is contained in a class definition, no inherited method shall have the same name as the method declared by this method definition
 - b) if this method definition is contained in an interface definition, no inherited method prototype shall have the same name as the method prototype declared by this method definition.
- 5) If property-name-1 is specified as a data-name in the working-storage section of the containing object definition, the PROPERTY clause shall not be specified in the data description entry of that data-name.
- 6) If the GET phrase is specified, then the method shall have no USING phrase parameters specified in the procedure division header and shall have a single RETURNING phrase.
- 7) If the SET phrase is specified, then the method shall have a single USING parameter specified in the procedure division header and no RETURNING phrase.
- 8) The FINAL clause shall not be specified in a method prototype.
- 9) If method-name-1 or literal-1 is the same as a method-name inherited or implemented by the containing definition, the parameter declarations, returning item, and exceptions that may be raised on the procedure division header shall obey the rules of conformance according to 9.3.7.1.2, Conformance between interfaces, such that the interface described by the factory or instance definition containing this method definition conforms to the interface described by the factory or instance definition containing the inherited or implemented method definition.

11.6.3 General rules

- 1) The name of the method declared by this method definition is determined as follows:
 - a) If the PROPERTY clause is specified, the name is implementor-defined.

- b) Otherwise, the name is method-name-1. However, literal-1, if specified, is the name of method that is externalized to the operating environment.
- 2) The OVERRIDE phrase indicates that this method overrides the inherited method.
- 3) The FINAL clause indicates that this method shall not be overridden in any subclasses.
- 4) The name of this method may be referenced in the invocation of a method for an object of the class in which this method is defined.
- 5) If a given user-defined word is defined in the data division of this method definition and in the data division of the containing object definition, the use of that word in this method refers to the declaration in this method. The declaration in the containing object definition is inaccessible to this method.
- 6) If the GET phrase is specified, this method is a get property method for property-name-1.
- 7) If the SET phrase is specified, this method is a set property method for property-name-1.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

11.7 OBJECT paragraph

The OBJECT paragraph indicates that this identification division is introducing an instance object definition.

11.7.1 General format

OBJECT. [IMPLEMENTS { interface-name-1 }]

11.7.2 Syntax rules

- 1) Interface-name-1 shall be the name of an interface specified in the REPOSITORY paragraph of the containing class definition.
- 2) Each method prototype in each implemented interface shall be such that the object interface of this class conforms to all implemented interfaces.

11.7.3 General rules

- 1) The IMPLEMENTS clause specifies the names of the interfaces that are implemented by the object of the containing class according to 9.3.11, Interface implementation.
- 2) An instance object implements an interface intf-1 in the following cases:
 - a) the instance object is defined with an IMPLEMENTS clause specifying intf-1,
 - b) the instance object implements an interface that inherits intf-1,
 - c) the class containing the instance object inherits a class whose instance object implements intf-1.

11.8 OPTIONS paragraph

The OPTIONS paragraph specifies information for use by the compiler in generating executable code for a source unit.

11.8.1 General format

OPTIONS.

[arithmetic-clause]
[entry-convention-clause] .

11.8.2 Syntax rules

- 1) One of the separator periods in the general format may be omitted if none of the clauses in the OPTIONS paragraph is specified.

11.8.3 General Rules

- 1) The clauses in the OPTIONS paragraph apply to the source element in which they are specified and to all source elements contained in that source element unless overridden by a clause in an OPTIONS paragraph in a contained source element.

11.8.4 ARITHMETIC clause

The ARITHMETIC clause specifies the method used in developing the intermediate results.

11.8.4.1 General format

ARITHMETIC IS { NATIVE
STANDARD }

11.8.4.2 General rules

- 1) If the NATIVE phrase is specified, the techniques used in handling arithmetic expressions and intrinsic functions shall be those specified by the implementor, and the techniques used in handling arithmetic statements and the SUM clause shall be those specified for native arithmetic in 8.8.1.2, Native arithmetic.
- 2) If the STANDARD phrase is specified, the techniques used in handling arithmetic expressions, arithmetic statements, the SUM clause, and certain integer and numeric functions shall be those specified for standard arithmetic in 8.8.1.3, Standard arithmetic.
- 3) If the ARITHMETIC clause is not specified in this source element or a containing source element, it is as if the ARITHMETIC clause were specified with the NATIVE phrase.

11.8.5 ENTRY-CONVENTION clause

The ENTRY-CONVENTION clause specifies the information to be used for activating with a runtime element.

11.8.5.1 General format

ENTRY-CONVENTION IS entry-convention-name-1

11.8.5.2 Syntax rules

- 1) The ENTRY-CONVENTION clause may be specified only in a class definition, a function definition, a function-prototype definition, an interface definition, a program prototype definition, or a program definition that is not contained within another program.

11.8.5.3 General rules

- 1) The ENTRY-CONVENTION clause specifies the convention to be used for activating the runtime element corresponding to the source element in which this clause is specified.
- 2) The meaning of the entry convention specified by entry-convention-name-1 is implementor-defined.

NOTE All information required to interact successfully with a runtime element should be made available to the compiler via this entry convention association; this includes items such as name case sensitivity, how arguments are passed, and stack management.

The entry convention used when this clause is not specified is implementor-defined, except that the naming convention and mapping of method-names and program-names are as specified in 8.3.1.1.1, User-defined words.

11.9 PROGRAM-ID paragraph

The PROGRAM-ID paragraph specifies the name by which a program is identified and assigns selected program attributes to that program.

The PROGRAM-ID paragraph specifies the name by which a program prototype is identified.

11.9.1 General format

Format 1 (definition):

PROGRAM-ID. program-name-1 [AS literal-1] $\left[\text{IS } \left\{ \begin{array}{c} \text{COMMON} \\ \left\{ \begin{array}{c} \text{INITIAL} \\ \text{RECURSIVE} \end{array} \right\} \end{array} \right\} \text{PROGRAM} \right] .$

Format 2 (prototype):

PROGRAM-ID. program-prototype-name-1 [AS literal-1] IS PROTOTYPE .

11.9.2 Syntax rules

ALL FORMATS

- 1) Literal-1 shall be an alphanumeric literal or a national literal and shall not be a figurative constant.

FORMAT 1

- 2) Literal-1 shall not be specified in a program that is contained within another program.
- 3) A program contained within another program shall not be assigned the same name as that of any other program contained within the outermost program that contains this program.
- 4) The COMMON clause may be specified only if the program is contained within another program.
- 5) The INITIAL clause shall not be specified if any program that directly or indirectly contains this program is a recursive program.
- 6) The RECURSIVE clause shall not be specified if any program that directly or indirectly contains this program is an initial program.

11.9.3 General rules

FORMAT 1

- 1) Program-name-1 names the program declared by this program definition. Literal-1, if specified, is the name of the program that is externalized to the operating environment.
- 2) The COMMON clause specifies that the program is common. A common program is contained within another program but may be called from programs other than that containing it. (See 8.4.5, Scope of names.)
- 3) The INITIAL clause specifies that the program is initial. When an initial program is activated, the data items and file connectors contained in it and any program contained within it are set to their initial states.

- 4) The RECURSIVE clause specifies that the program and any programs contained within it are recursive. The program may be called while it is active and may call itself. If the RECURSIVE clause is not specified in a program or implied for a program, the program shall not be called while it is active.
- 5) Additional rules concerning initial and recursive programs are given in 8.6.5, Common, initial, and recursive attributes.

FORMAT 2

- 6) Program-prototype-name-1 identifies the program prototype. However, literal-1, if specified, is the name of the program prototype that is externalized to the operating environment.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12 Environment division

The environment division specifies those aspects of a data processing problem that are dependent upon the physical characteristics of a specific computer. This division allows specification of the configuration of the compiling computer and the object computer. In addition, information relative to input-output control, special hardware characteristics, and control techniques can be given.

12.1 Environment division structure

12.1.1 General format

ENVIRONMENT DIVISION.

[configuration-section]

[input-output-section]

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12.2 Configuration section

The configuration section specifies aspects of the data processing system that are dependent on the specific system as well as special control techniques and a means of associating a local name with an external resource. This section is divided into paragraphs:

- the SOURCE-COMPUTER paragraph, which describes the computer configuration on which the source element is compiled;
- the OBJECT-COMPUTER paragraph, which describes the computer configuration on which the runtime module produced by the compiler is to be run;
- the SPECIAL-NAMES paragraph, which provides a means for specifying the currency sign, choosing the decimal point, specifying symbolic-characters, relating system-names to user-specified mnemonic-names, relating alphabet-names to character sets or collating sequences, and relating class-names to sets of characters; and
- the REPOSITORY paragraph, which provides a means for associating a local name with an external resource and specifying which intrinsic function names become reserved words for this source unit.

12.2.1 General format

CONFIGURATION SECTION.

[source-computer-paragraph]

[object-computer-paragraph]

[special-names-paragraph]

[repository-paragraph]

12.2.2 Syntax rules

- 1) The configuration section shall not be specified in a program that is contained within another program.
- 2) The configuration section shall not be specified in a method definition.
- 3) The SOURCE-COMPUTER, OBJECT-COMPUTER, and REPOSITORY paragraphs shall not be specified in a factory definition or an instance definition.

12.2.3 General rules

- 1) The entries explicitly or implicitly specified in the configuration section of a source unit that contains other source units apply to each directly or indirectly contained source unit.

12.2.4 SOURCE-COMPUTER paragraph

The SOURCE-COMPUTER paragraph provides a means of describing the computer upon which the compilation unit is to be compiled.

12.2.4.1 General format

SOURCE-COMPUTER. [computer-name-1] [WITH DEBUGGING MODE] .

12.2.4.2 Syntax rules

- 1) If neither computer-name-1 nor the DEBUGGING MODE clause is specified, the second period in the general format may be omitted.

12.2.4.3 General rules

- 1) All clauses of the SOURCE-COMPUTER paragraph apply to the source unit in which they are explicitly or implicitly specified and to any source unit contained within that source unit.
- 2) When the SOURCE-COMPUTER paragraph is not specified and the source unit is not contained within a source unit including a SOURCE-COMPUTER paragraph, the computer on which the source unit is being compiled is the source computer.
- 3) When the SOURCE-COMPUTER paragraph is specified, but computer-name-1 is not specified, the computer upon which the source unit is being compiled is the source computer.
- 4) If the DEBUGGING MODE clause is specified in a source unit, all debugging lines are compiled as if the debugging indicator was replaced by three spaces.

NOTE The DEBUGGING MODE clause is an obsolete element in this International Standard and is to be deleted from the next revision of standard COBOL.


- 5) If the DEBUGGING MODE clause is not specified in a source unit and the source unit is not contained within a source unit including a DEBUGGING MODE clause, any debugging lines are compiled as if they were comment lines.

12.2.5 OBJECT-COMPUTER paragraph


The OBJECT-COMPUTER paragraph provides a means of describing the computer on which the runtime module created by the compiler is to be executed.

12.2.5.1 General format


OBJECT-COMPUTER.

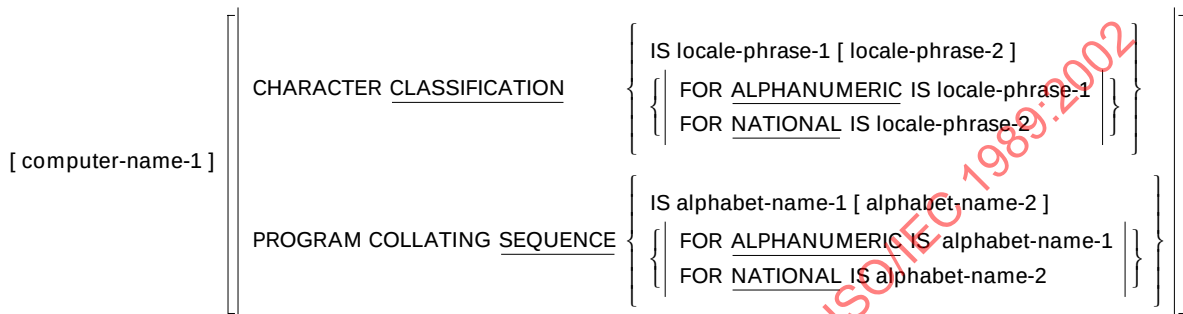

where locale-phrase-1 is:



where locale-phrase-2 is:



12.2.5.2 Syntax rules

- 1) Alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.
- 2) Alphabet-name-2 shall reference an alphabet that defines a national collating sequence.
- 3) Locale-name-1 and locale-name-2 shall be locale names defined in the SPECIAL-NAMES paragraph.
- 4) If neither computer-name-1 nor any of the optional clauses is specified, the second period in the general format may be omitted.

12.2.5.3 General rules

- 1) All clauses of the OBJECT-COMPUTER paragraph apply to the source unit in which they are explicitly or implicitly specified and to any source unit contained within that source unit.
- 2) Computer-name-1 may provide a means for identifying equipment configuration, in which case computer-name-1 and its implied configuration are specified by each implementor.

- 3) When the OBJECT-COMPUTER paragraph is specified, but computer-name-1 is not specified, the object computer is defined by the implementor.
- 4) When the OBJECT-COMPUTER paragraph is not specified and the source unit is not contained within a source unit including an OBJECT-COMPUTER paragraph, the object computer is defined by the implementor.
- 5) When the CHARACTER CLASSIFICATION clause is specified, the initial character classification is as follows:
 - a) If locale-name-1 is specified, the initial alphanumeric character classification is the character classification associated with locale-name-1.
 - b) If LOCALE is specified as locale-phrase-1, the initial alphanumeric character classification is the character classification associated with the current locale.
 - c) If SYSTEM-DEFAULT is specified as locale-phrase-1, the initial alphanumeric character classification is the character classification associated with the system default locale.
 - d) If USER-DEFAULT is specified as locale-phrase-1, the initial alphanumeric character classification is the character classification associated with the user default locale.
 - e) If locale-phrase-1 is not specified, the initial alphanumeric character classification is the character classification associated with the computer's coded character set in effect for alphanumeric characters at runtime.
 - f) If locale-name-2 is specified, the initial national character classification is the character classification associated with locale-name-2.
 - g) If LOCALE is specified as locale-phrase-2, the initial national character classification is the character classification associated with the current locale.
 - h) If SYSTEM-DEFAULT is specified as locale-phrase-2, the initial national character classification is the character classification associated with the system default locale.
 - i) If USER-DEFAULT is specified as locale-phrase-2, the initial national character classification is the character classification associated with the user default locale.
 - j) If locale-phrase-2 is not specified, the initial national character classification is the character classification associated with the computer's coded character set in effect for national characters at runtime.
- 6) When the CHARACTER CLASSIFICATION clause is not specified and the source unit is not contained within a source unit for which a CHARACTER CLASSIFICATION clause is specified, the initial character classifications are the character classifications associated with the computer's coded character set in effect for alphanumeric and national characters at runtime.
- 7) When the CHARACTER CLASSIFICATION clause is specified, the cultural convention specification LC_CTYPE from the specified locales are used for:
 - a) the uppercase and lowercase mappings of characters for the UPPER-CASE and LOWER-CASE intrinsic functions.
 - b) the classification of characters for class tests ALPHABETIC, ALPHABETIC-LOWER, ALPHABETIC-UPPER, and for the class test specifying an alphabet-name that is associated with a locale in the SPECIAL-NAMES paragraph.
- 8) The character classifications explicitly or implicitly established by the OBJECT-COMPUTER paragraph are effective with the initial state of the runtime modules to which they apply. If locale-name-1 or locale-name-2 is specified, the associated character classification is defined by category LC_CTYPE in the locale identified by that locale-name.

- 9) When the PROGRAM COLLATING SEQUENCE clause is specified, the initial alphanumeric program collating sequence is the collating sequence associated with alphabet-name-1 and the initial national program collating sequence is the collating sequence associated with alphabet-name-2. When alphabet-name-1 is not specified, the initial alphanumeric program collating sequence is the native alphanumeric collating sequence; when alphabet-name-2 is not specified, the initial national program collating sequence is the native national collating sequence.
- 10) When the PROGRAM COLLATING SEQUENCE clause is not specified and the source unit is not contained within a source unit for which a PROGRAM COLLATING SEQUENCE clause is specified, the initial program collating sequences are the native alphanumeric collating sequence and the native national collating sequence.
- 11) The alphanumeric program collating sequence and national program collating sequence are used to determine the truth value of any alphanumeric comparisons and national comparisons, respectively, that are:
 - a) Explicitly specified in relation conditions.
 - b) Explicitly specified in condition-name conditions.
 - c) Implicitly specified by the presence of a CONTROL clause in a report description entry.

When alphabet-name-1 or alphabet-name-2, or both, is associated with a locale, locale category LC_COLLATE is used to carry out these comparisons.

- 12) The alphanumeric program collating sequence and national program collating sequence explicitly or implicitly established by the OBJECT-COMPUTER paragraph are effective with the initial state of the runtime modules to which they apply. If alphabet-name-1 or alphabet-name-2 references a locale, the associated collating sequence is defined by category LC_COLLATE in the specific locale associated with that alphabet-name or, if none, in the locale current at the time the collating sequence is used at runtime
- 13) The alphanumeric program collating sequence and national program collating sequence are applied to alphanumeric and national sort or merge keys, respectively, unless the sort or merge collating sequence has been modified by execution of a SET statement or a COLLATING SEQUENCE phrase is specified in the respective SORT or MERGE statement.

12.2.6 SPECIAL-NAMES paragraph

The SPECIAL-NAMES paragraph provides a means for:

- specifying currency signs and symbols,
- choosing the decimal point,
- specifying symbolic-characters,
- relating system-names to user-specified mnemonic-names,
- relating locale-names to the external identification of locales,
- relating alphabet-names to character sets or collating sequences or both,
- relating class-names to a set of characters,
- relating an ordering table name to a standard ordering table,
- relating a data item to the cursor position of a character addressable terminal, and
- relating a data item to the status of a terminal input-output operation.

12.2.6.1 General format

SPECIAL-NAMES.

```

switch-name-1
{
  IS mnemonic-name-1 [ ON STATUS IS condition-name-1
                     OFF STATUS IS condition-name-2 ]
  { ON STATUS IS condition-name-1
    OFF STATUS IS condition-name-2 }
} ...

feature-name-1 IS mnemonic-name-2
device-name-1 IS mnemonic-name-3
[ alphabet-name-clause ] ...
[ symbolic-characters-clause ] ...

[ LOCALE locale-name-1 IS { external-locale-name-1
                           literal-4 } ] ...


[ ORDER TABLE ordering-name-1 IS literal-9 ]

[ CLASS class-name-1 FOR { ALPHANUMERIC
                           NATIONAL } ]
IS { literal-5 [ THROUGH ] literal-6 } ... [ IN alphabet-name-4 ]


[ CURRENCY SIGN IS literal-7 [ WITH PICTURE SYMBOL literal-8 ] ] ...
[ DECIMAL-POINT IS COMMA ]
[ CURSOR IS data-name-1 ]
[ CRT STATUS IS data-name-2 ] .

```

where alphabet-name-clause is:

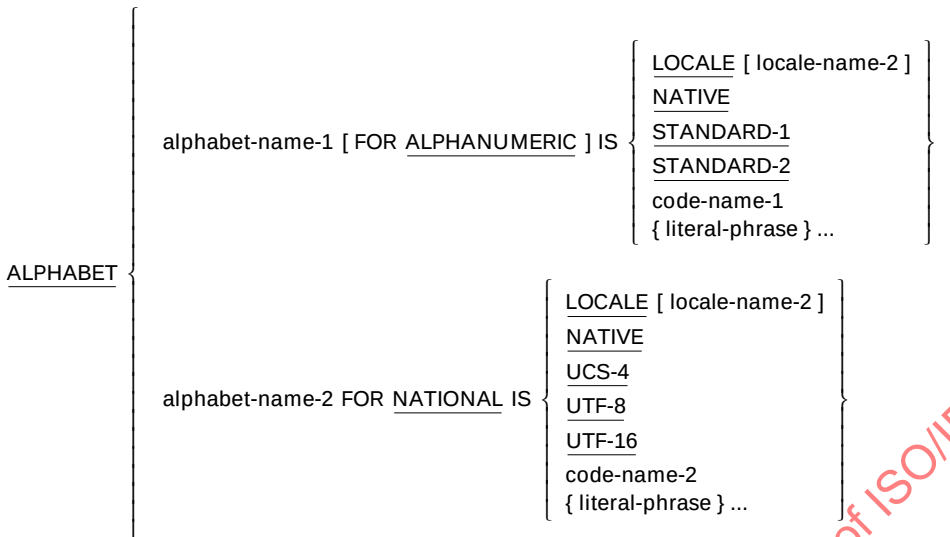


where literal-phrase is:



where symbolic-characters-clause is:

SYMBOLIC CHARACTERS

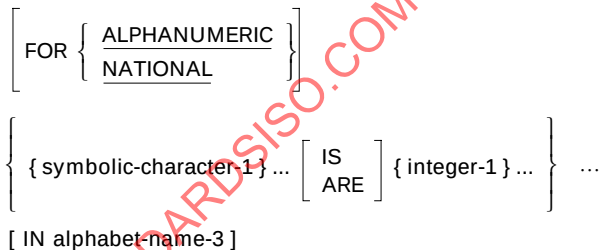

12.2.6.2 Syntax rules

- 1) At the outer level of a source unit that defines a class, the CURSOR and CRT STATUS clauses shall not be specified.
- 2) In a factory definition or instance definition, the only clauses that may be specified are the CURSOR and CRT STATUS clauses.
- 3) In an interface definition, the ALPHABET clause, the CURRENCY clause, the DECIMAL-POINT clause, and the LOCALE clause are the only permitted clauses.
- 4) In a program definition, data-name-1 and data-name-2 shall be described with the GLOBAL clause if the program definition contains one or more program definitions.

- 5) Mnemonic-name-1 may be specified only in a SET statement.
- 6) Mnemonic-name-2 may be specified only in the SEND and WRITE statements. The implementor may specify additional restrictions on the use of mnemonic-names that reference specific feature-names.
- 7) Mnemonic-name-3 may be specified only in the ACCEPT and DISPLAY statements. The implementor may specify additional restrictions on the use of mnemonic-names that reference specific device-names.
- 8) The implementor shall specify the names that are available for switch-name-1, feature-name-1, and device-name-1.
- 9) Ordering-name-1 may be specified only in the STANDARD-COMPARE intrinsic function.
- 10) Literal-4 and literal-9 shall be alphanumeric or national literals.
- 11) Literal-1, literal-2, literal-3, literal-4, literal-5, literal-6, and literal-9 shall not specify a symbolic-character figurative constant.
- 12) The words THROUGH and THRU are equivalent.
- 13) When the ALPHABET clause is specified with neither the ALPHANUMERIC phrase nor the NATIONAL phrase, the ALPHANUMERIC phrase is implied.
- 14) When the ALPHABET clause is specified with a literal-phrase:
 - a) A given character shall not be specified more than once in that ALPHABET clause.
 - b) When the ALPHANUMERIC phrase is specified or implied:
 1. Each numeric literal shall be an unsigned integer and shall have a value within the range of one through the maximum number of characters in the native alphanumeric character set.
 2. Each non-integer literal shall be an alphanumeric literal.
 3. Each alphanumeric literal, when a THROUGH or ALSO phrase is specified, shall be one character in length.
 4. The number of characters specified shall not exceed the number of characters in the native alphanumeric character set.
 - c) When the NATIONAL phrase is specified:
 1. Each numeric literal shall be an unsigned integer and shall have a value within the range of one through the maximum number of characters in the native national character set.
 2. Each non-integer literal shall be a national literal.
 3. Each national literal, when a THROUGH or ALSO phrase is specified, shall be one character in length.
 4. The number of characters specified shall not exceed the number of characters in the native national character set.
- 15) The implementor shall specify the names supported for code-name-1 and code-name-2 in the ALPHABET clause, if any.
- 16) When the SYMBOLIC CHARACTERS clause is specified:

- a) A given symbolic-character-1 may be specified only once within the SYMBOLIC CHARACTER clauses of this SPECIAL-NAMES paragraph.
 - b) The relationship between each symbolic-character-1 and the corresponding integer-1 is by position in the SYMBOLIC CHARACTERS clause. The first symbolic-character-1 is paired with the first integer-1; the second symbolic-character-1 is paired with the second integer-1; and so on.
 - c) There shall be a one-to-one correspondence between occurrences of symbolic-character-1 and occurrences of integer-1.
 - d) When neither the ALPHANUMERIC phrase nor the NATIONAL phrase is specified, the ALPHANUMERIC phrase is implied.
 - e) When the ALPHANUMERIC phrase is specified or implied:
 - 1. When the IN phrase is specified, alphabet-name-3 shall reference an alphabet that defines an alphanumeric character set, and the ordinal position specified by integer-1 shall exist in that character set.
 - 2. When the IN phrase is not specified, the ordinal position specified by integer-1 shall exist in the native alphanumeric character set.
 - f) When the NATIONAL phrase is specified:
 - 1. When the IN phrase is specified, alphabet-name-3 shall reference an alphabet that defines a national character set, and the ordinal position specified by integer-1 shall exist in that character set.
 - 2. When the IN phrase is not specified, the ordinal position specified by integer-1 shall exist in the native national character set.
 - g) Alphabet-name-3 shall not reference an alphabet specified with the LOCALE phrase.
- 17) When the CLASS clause is specified:
- a) When neither the ALPHANUMERIC phrase nor the NATIONAL phrase is specified, the ALPHANUMERIC phrase is implied.
 - b) When the ALPHANUMERIC phrase is specified or implied:
 - 1. When the IN phrase is specified, alphabet-name-4 shall reference an alphabet that defines an alphanumeric character set.
 - 2. Literal-5, if numeric, shall be an unsigned integer and shall have a value within the range of one through the maximum number of characters in the native alphanumeric character set, or, when the IN phrase is specified, the maximum number of characters in the character set referenced by alphabet-name-4.
 - 3. Each non-integer literal shall be an alphanumeric literal.
 - 4. Each alphanumeric literal, when a THROUGH phrase is specified, shall be one character in length.
 - 5. The number of characters specified shall not exceed the number of characters in the native alphanumeric character set or, when the IN phrase is specified, the number of characters in the character set referenced by alphabet-name-4.
 - c) When the NATIONAL phrase is specified:

1. When the IN phrase is specified, alphabet-name-4 shall reference an alphabet that defines a national character set.
 2. Literal-5, if numeric, shall be an unsigned integer and shall have a value within the range of one through the number of characters in the native national character set, or, when the IN phrase is specified, the number of characters in the character set referenced by alphabet-name-4.
 3. Each non-integer literal shall be a national literal.
 4. Each national literal, when a THROUGH phrase is specified, shall be one character in length.
 5. The number of characters specified shall not exceed the number of characters in the native national character set or, when the IN phrase is specified, the number of characters in the character set referenced by alphabet-name-4.
- d) Alphabet-name-4 shall not reference an alphabet specified with the LOCALE phrase.
- 18) Literal-7 shall be an alphanumeric or national literal that is not a figurative constant.
- 19) If the PICTURE SYMBOL phrase is not specified, literal-7 shall consist of a single character that is not one of the following:
- a) digits 0 through 9;
 - b) alphabetic characters A, B, C, D, E, N, P, R, S, V, X, Z, or their lowercase equivalents; or the space;
 - c) characters '+' '-' ',' '*' '/' ';' '(' ')' '""' '='
- 20) If the PICTURE SYMBOL phrase is specified, literal-7 may have any length and:
- a) shall contain at least one nonspace character and
 - b) may consist of any characters from the computer's coded character set except for the digits 0 through 9 and the characters '+' '-' ',' '*' '/' ';' '(' ')' '""' '='.
- 21) Locale-name-2 shall be a locale-name defined by the LOCALE clause.
- 22) Literal-8 shall be an alphanumeric literal consisting of a single character. It shall not be a figurative constant. No two occurrences of literal-8 may be the same value.
- 23) Literal-8 may be any character from the computer's coded character set except for the following:
- a) digits 0 through 9;
 - b) alphabetic characters A, B, C, D, E, N, P, R, S, V, X, Z, or their lowercase equivalents; or the space;
 - c) characters '+' '-' ',' '*' '/' ';' '(' ')' '""' '='
- 24) If literal-7 is of class alphanumeric, the associated currency symbol may be used only to define a numeric-edited item with usage display. If literal-7 is of class national, the associated currency symbol may be used only to define a numeric-edited item with usage national.
- 25) Data-name-1 shall be described in the working-storage or local-storage section as either an elementary unsigned integer of 6 digits described implicitly or explicitly as usage display, or an alphanumeric group item consisting of two elementary unsigned integers of 3 digits described implicitly or explicitly as usage display.
- 26) Data-name-2 shall be described in the working-storage or local-storage section as an alphanumeric data item 4 characters in length.

- 27) One of the separator periods may be omitted if none of the clauses in the SPECIAL-NAMES paragraph is specified.

12.2.6.3 General rules

- 1) All clauses specified in the SPECIAL-NAMES paragraph of a source unit that contains other source units apply to each directly or indirectly contained source unit. The condition-names, mnemonic-names, locale-names, class-names, currency signs and symbols, alphabet-names, and symbolic-characters specified in the SPECIAL-NAMES paragraph of the containing source unit may be referenced from any directly or indirectly contained source unit.
- 2) Switch-name-1 identifies an implementor-defined external switch. The on status and the off status of an external switch may each be associated with a condition-name. The status of that switch can be interrogated by referencing the condition-names as specified in 8.8.4.1.5, Switch-status condition.
- 3) The status of an external switch may be altered by execution of a SET mnemonic-name statement that specifies as its operand the mnemonic-name associated with that switch. The implementor defines which external switches may be referenced by the SET statement.
- 4) The implementor defines the scope (program, run unit, etc.) of each external switch and any facility external to COBOL that may be used to modify the status of an external switch.

NOTE If the scope of an external switch is the run unit, each switch-name of such an external switch refers to one and only one such switch, the status of which is available to each runtime element functioning within that run unit.

- 5) When the LOCALE clause is specified, locale-name-1 references a locale identified by external-locale-name-1 or the value of literal-4. The implementor specifies the allowable external-locale-names and the allowable content of literal-4.
- 6) The implementor shall define the order of characters within the native alphanumeric coded character set and the native national coded character set, associating each character with an ordinal position within the character set.
- 7) The ALPHABET clause provides a means of relating a name to a specified coded character set or collating sequence, or both.

NOTE An alphabet-name referenced in the PROGRAM COLLATING SEQUENCE clause of the OBJECT-COMPUTER paragraph or in the COLLATING SEQUENCE phrase of a SORT or MERGE statement references a collating sequence. An alphabet-name referenced in the class condition, in the CLASS clause in the data division, in a SYMBOLIC CHARACTERS clause, or in the CODE-SET clause of a file description entry references a coded character set.

Table 7, Relationship of alphabet-name to coded character set and collating sequence, indicates for each operand of the ALPHABET clause whether the alphabet-name references a coded character set, a collating sequence, or both.

Table 7 — Relationship of alphabet-name to coded character set and collating sequence

ALPHABET clause operand	Coded character set	Collating sequence
LOCALE		Y
NATIVE	Y	Y
STANDARD-1	Y	Y
STANDARD-2	Y	Y
UCS-4	Y	Y

Table 7 — Relationship of alphabet-name to coded character set and collating sequence

ALPHABET clause operand	Coded character set	Collating sequence
UTF-8	Y	
UTF-16	Y	
code-name-1	Y	Y
code-name-2	Y	Y
literal phrase	Y	Y
Legend: Y in the Coded character set column indicates that the alphabet operand in the left column references a coded character set and a space means it does not. Y in the Collating sequence column indicates that the alphabet operand in the left column references a collating sequence and a space means it does not.		

When the ALPHABET clause is specified:

- a) When the ALPHANUMERIC phrase is specified or implied, a coded character set referenced by alphabet-name-1 is an alphanumeric coded character set and a collating sequence referenced by alphabet-name-1 is an alphanumeric collating sequence.
- b) When the NATIONAL phrase is specified, a coded character set referenced by alphabet-name-2 is a national coded character set and a collating sequence referenced by alphabet-name-2 is a national collating sequence.
- c) When the STANDARD-1 phrase is specified, the referenced coded character set is defined in ISO/IEC 646 International Reference Version. When the STANDARD-2 phrase is specified, the referenced coded character set is defined in ISO/IEC 646; the implementor shall specify whether the International Reference Version or a national version is referenced, and shall specify the circumstances that define which national version is referenced. The collating sequence referenced by both the STANDARD-1 and STANDARD-2 phrases is defined by the order in which characters appear in ISO/IEC 646. Each character of the standard character set is associated with its corresponding character of the native alphanumeric character set. The implementor defines the correspondence between the characters of the standard character set and the characters of the native character set.
- d) When the NATIVE phrase is specified:
 1. If the ALPHANUMERIC phrase is specified or implied, the native alphanumeric coded character set and native alphanumeric collating sequence are referenced;
 2. If the NATIONAL phrase is specified, the native national coded character set and native national collating sequence are referenced.
- e) When the LOCALE phrase is specified, the collating sequence identified is defined by the locale referenced by locale-name-2 when specified, otherwise by the locale that is current at the time the collating sequence is used at runtime. When LOCALE is specified in the ALPHANUMERIC phrase, an alphanumeric collating sequence is identified; when specified in the NATIONAL phrase, a national collating sequence is identified.
- f) When the UCS-4 phrase is specified, the coded character set referenced is that specified in ISO/IEC 10646-1 and ISO/IEC 10646-2 as UCS-4. Each character of UCS-4 is associated with a corresponding character of the native national character set. The implementor shall specify the correspondence between the characters of UCS-4 and the characters of the native national character set. The collating sequence referenced by the UCS-4 phrase is defined by the order in which characters appear in ISO/IEC 10646-1 followed by the order in which characters appear in ISO/IEC 10646-2.

- g) When the UTF-8 phrase is specified, the coded character set referenced is that specified in ISO/IEC 10646-1 as UTF-8. Each character of ISO/IEC 10646-1 UTF-8 is associated with a corresponding character of the native national character set. The association is the same as the association for the UCS-4 character from which the UTF-8 character was transformed.
- h) When the UTF-16 phrase is specified, the coded character set referenced is that specified in ISO/IEC 10646-1 as UTF-16. Each character of ISO/IEC 10646-1 UTF-16 is associated with a corresponding character of the native national character set. The implementor shall specify the correspondence between the characters of ISO/IEC 10646-1 UTF-16 and the characters of the native national character set.
- i) When code-name-1 is specified, the alphanumeric coded character set and collating sequence referenced are defined by the implementor. The implementor shall specify the ordinal number of each character for use when code-name-1 references a coded character set and the collating position of each character for use when code-name-1 references a collating sequence. The implementor also shall specify the correspondence between characters of the alphanumeric coded character set specified by code-name-1 and the characters of the native alphanumeric coded character set.

The coded character set referenced by code-name-1 is statically defined.

- j) When code-name-2 is specified, the national coded character set and collating sequence referenced are defined by the implementor. The implementor shall specify the ordinal number of each character for use when code-name-2 references a coded character set and the collating position of each character for use when code-name-2 references a collating sequence. The implementor also shall specify the correspondence between characters of the national coded character set specified by code-name-2 and the characters of the native national coded character set.

The coded character set referenced by code-name-2 is statically defined.

- k) When literal-phrase is specified, the coded character set and collating sequence are defined according to the following rules, where the native coded character set is the type of coded character set or collating sequence being defined, either alphanumeric or national:

1. The value of each literal specifies:
 - a. The ordinal number of a character within the native character set, if the literal is numeric. This value shall not exceed the value that represents the number of characters in the native character set.
 - b. Otherwise, the actual character within the native character set. If the value of the literal contains multiple characters, each character in the literal, starting with the leftmost character, is assigned successive ascending positions in the collating sequence being specified.
2. The order in which the literals appear in the ALPHABET clause specifies, in ascending sequence, the ordinal number of the character within the collating sequence being specified.
3. Any characters of the native collating sequence that are not specified in the literal phrase shall assume a position in the collating sequence that is greater than that of the highest character specified in this literal phrase. The relative order within the set of these unspecified characters is unchanged from the native collating sequence.
4. If a character code set is being specified, the implementor defines the ordinal number within the character code set being specified for each character within the native character set that is not specified by the literal-1 phrase.
5. If the THROUGH phrase is specified, the set of consecutive characters in the native character set beginning with the character specified by the value of literal-1, and ending with the character specified by the value of literal-2, is assigned a successive ascending position in the collating sequence being

specified. In addition, the set of consecutive characters specified by a given THROUGH phrase may specify characters of the native character set in either ascending or descending sequence.

6. If the ALSO phrase is specified, the characters of the native character set specified by the value of literal-1 and literal-3 are assigned to the same ordinal position in the collating sequence being specified or in the character code set that is used to represent the data. Literal-1 is the first character in the sequence of multiple characters defined at that ordinal position. If alphabet-name-1 is referenced in a SYMBOLIC CHARACTERS clause, only literal-1 is used to represent the character in the native character set.
- 8) The character that has the highest ordinal position in the program collating sequence is associated with the figurative constant HIGH-VALUE, except when this figurative constant is specified as a literal in the SPECIAL-NAMES paragraph. If more than one character has the highest position in the program collating sequence, the last character specified is associated with the figurative constant HIGH-VALUE.
- 9) The character that has the lowest ordinal position in the program collating sequence is associated with the figurative constant LOW-VALUE, except when this figurative constant is specified as a literal in the SPECIAL-NAMES paragraph. If more than one character has the lowest position in the program collating sequence, the first character specified is associated with the figurative constant LOW-VALUE.
- 10) When specified as literals in the SPECIAL-NAMES paragraph, the figurative constants HIGH-VALUE and LOW-VALUE are associated with those characters having the highest and lowest positions, respectively, in the native national collating sequence, when the NATIONAL phrase is specified, or in the native alphanumeric collating sequence otherwise.
- 11) When the SYMBOLIC CHARACTERS clause is specified:
 - a) Symbolic-character-1 defines a figurative constant.
 - b) When ALPHANUMERIC is specified or implied, the value of figurative constant symbolic-character-1 is the representation of the coded character at ordinal position integer-1 in the native alphanumeric character set or, if the IN phrase is specified, in the character set referenced by alphabet-name-3.
 - c) When NATIONAL is specified, the value of figurative constant symbolic-character-1 is the internal representation of the character at ordinal position integer-1 in the native national character set or, if the IN phrase is specified, in the character set referenced by alphabet-name-3.
- 12) The CLASS clause provides a means for relating a name to the specified set of characters listed in that clause. The characters specified by the values of the literals in this clause define the exclusive set of characters of which class-name-1 consists.

The value of each literal specifies:

- a) When the literal is numeric, the ordinal number of a character within the relevant native character set, or, when the IN phrase is specified, within the character set referenced by alphabet-name-4.
- b) Otherwise, the actual character within the relevant native character set or, when the IN phrase is specified, within the character set referenced by alphabet-name-4. If the value of literal-5 contains multiple characters, each character in the literal is included in the set of characters identified by class-name-1.

If the THROUGH phrase is specified, the contiguous characters in the native character set beginning with the character specified by the value of literal-5, and ending with the character specified by the value of literal-6, are included in the set of characters identified by class-name-1. In addition, the contiguous characters specified by a given THROUGH phrase may specify characters of the native character set in either ascending or descending sequence.

- 13) The CURRENCY SIGN clause is used to specify a currency string that is placed into numeric-edited data items when they are used as receiving items and de-edited from the data item when it is used as a sending item that

has a numeric or numeric-edited receiving item. In addition, it is used to determine which symbol shall be used in a character-string of a basic format PICTURE clause to specify the presence of this currency string. This symbol is referred to as the currency symbol.

Literal-7 represents the value of the currency string.

If the CURRENCY SIGN clause is specified with the PICTURE SYMBOL phrase, literal-8 is used as the currency symbol. If the CURRENCY SIGN clause is specified without the PICTURE SYMBOL phrase, literal-7 is used as the currency symbol.

If the currency symbol is a lowercase letter, it is treated as its uppercase equivalent.

- 14) If the DECIMAL-POINT IS COMMA clause is specified, the functionality of the characters used to represent the decimal separator and the grouping separator are exchanged. The rules are as follows:
- a) The character written in numeric literals to represent the decimal separator shall be the comma.
 - b) For the basic format of the PICTURE clause, the character written in character-strings, and inserted in numeric-edited items to represent the decimal separator shall be the comma.

NOTE 1 For the locale format of the PICTURE clause, the character written in character-strings to represent the decimal separator is always the period. The decimal separator to be inserted will be determined from the current locale.

The character written in character-strings, and inserted in numeric-edited items to represent the grouping separator shall be the period.

The DECIMAL-POINT IS COMMA clause has no effect on the editing or de-editing of a data item described with the locale format of the PICTURE clause.

NOTE 2 The DECIMAL-POINT IS COMMA clause is not processed until after the text manipulation stage of the compilation process and therefore does not impact literals specified in compiler directives, COPY statements, or REPLACE statements.

- 15) The content of the data item referenced by data-name-1 specifies the position of the cursor at the beginning of the execution of an ACCEPT screen statement. This content shall be updated by the execution of a successful ACCEPT screen statement to indicate the position of the visible cursor upon termination. (See 9.2.5, Cursor locator.)
- 16) Data-name-2 shall be updated during the execution of an ACCEPT screen statement as described in 9.2.3, CRT status.
- 17) When ORDERING TABLE is specified, ordering-name-1 references an ordering table constructed in accordance with ISO/IEC 14651:2001 and identified by literal-9. The implementor specifies the allowable content of literal-9.

12.2.7 REPOSITORY paragraph

The REPOSITORY paragraph allows specification of program prototype names, function prototype names, property-names, class names, and interface names that may be used within the scope of this environment division. It also allows declaration of intrinsic-function-names that may be used without specifying the word FUNCTION.

12.2.7.1 General format

REPOSITORY.

$$\left[\begin{array}{l} \text{class-specifier} \\ \text{interface-specifier} \\ \text{function-specifier} \\ \text{program-specifier} \\ \text{property-specifier} \end{array} \right\} \dots .$$

where class-specifier is:

$$\underline{\text{CLASS}} \text{ class-name-1 } [\underline{\text{AS}} \text{ literal-1 }] \left[\underline{\text{EXPANDS}} \text{ class-name-2 } \underline{\text{USING}} \left\{ \begin{array}{l} \text{class-name-3} \\ \text{interface-name-1} \end{array} \right\} \dots \right]$$

where interface-specifier is:

$$\underline{\text{INTERFACE}} \text{ interface-name-2 } [\underline{\text{AS}} \text{ literal-2 }] \left[\underline{\text{EXPANDS}} \text{ interface-name-3 } \underline{\text{USING}} \left\{ \begin{array}{l} \text{class-name-4} \\ \text{interface-name-4} \end{array} \right\} \dots \right]$$

where function-specifier is:

Format 1 (user-defined):

$$\underline{\text{FUNCTION}} \text{ function-prototype-name-1 } [\underline{\text{AS}} \text{ literal-3 }]$$

Format 2 (intrinsic):

$$\underline{\text{FUNCTION}} \left\{ \begin{array}{l} \{ \text{intrinsic-function-name-1} \} \dots \\ \text{ALL} \end{array} \right\} \underline{\text{INTRINSIC}}$$

where program-specifier is:

$$\underline{\text{PROGRAM}} \text{ program-prototype-name-1 } [\underline{\text{AS}} \text{ literal-4 }]$$

where property-specifier is:

$$\underline{\text{PROPERTY}} \text{ property-name-1 } [\underline{\text{AS}} \text{ literal-5 }]$$

12.2.7.2 Syntax rules

ALL SPECIFIERS

- 1) If any class-name-1, interface-name-2, program-prototype-name-1, function-prototype-name-1, intrinsic-function-name-1 or property-name-1 is specified more than once in the REPOSITORY paragraph, all the specifications for that name shall be identical.
- 2) Literal-1, literal-2, literal-3, literal-4, and literal-5 shall be alphanumeric literals or national literals and shall not be figurative constants.
- 3) The EXPANDS phrase shall not be specified in the REPOSITORY paragraph of a class definition that contains a USING phrase in its CLASS-ID paragraph or of an interface definition that contains a USING phrase in its INTERFACE-ID paragraph.

CLASS SPECIFIER

- 4) Class-name-2, class-name-3, and interface-name-1 shall be defined in the same REPOSITORY paragraph where class-name-1 is defined.
- 5) If the specified class-name-1 is the name of the class definition in which this REPOSITORY paragraph is specified, references to class-name-1 are to that class definition and this class-specifier is ignored.
- 6) If the CLASS phrase is specified without the EXPANDS phrase:
 - a) If literal-1 is specified, there shall be information in the external repository for the class literal-1.
 - b) If literal-1 is not specified, there shall be information in the external repository for the class class-name-1.

INTERFACE SPECIFIER

- 7) Interface-name-3, class-name-4, and interface-name-4 shall be defined in the same REPOSITORY paragraph where interface-name-2 is defined.
- 8) If the specified interface-name-2 is the name of the interface definition in which this REPOSITORY paragraph is specified, references to interface-name-2 are to that interface definition and this interface-specifier is ignored.
- 9) If the INTERFACE phrase is specified without the EXPANDS phrase:
 - a) If literal-2 is specified, there shall be information in the external repository for the interface literal-2.
 - b) If literal-2 is not specified, there shall be information in the external repository for the interface interface-name-2.

FUNCTION SPECIFIER

- 10) Literal-3, if specified, or function-prototype-name-1, if literal-3 is not specified, shall be one of the following:
 - the name of a function prototype specified in this compilation group
 - the name of a function definition specified previously in this compilation group
 - the name of a function for which information exists in the external repository.
- 11) If the specified function-prototype-name-1 is the name of the function definition in which this REPOSITORY paragraph is specified, references to function-prototype-name-1 are to that function definition and this function-specifier is ignored.

- 12) Intrinsic-function-name-1 shall not be specified as a user-defined word within the scope of this REPOSITORY paragraph.
- 13) If ALL is specified in the intrinsic format of the function-specifier, none of the names of the intrinsic functions may be specified as a user-defined word within the scope of this REPOSITORY paragraph.

PROGRAM SPECIFIER

- 14) Literal-4, if specified, or program-prototype-name-1, if literal-4 is not specified, shall be one of the following:
 - the name of a program prototype specified in this compilation group
 - the name of a program definition specified previously in this compilation group
 - the name of a program for which information exists in the external repository.
- 15) If the specified program-prototype-name-1 is the name of the program definition in which this REPOSITORY paragraph is specified or the name of a containing program definition, references to program-prototype-name-1 are to the named program definition and this program-specifier is ignored.

PROPERTY SPECIFIER

- 16) If the PROPERTY phrase is specified,
 - a) If literal-5 is specified, there shall be information in the external repository for the property literal-5 that is part of one of the classes or interfaces that are declared in this REPOSITORY paragraph.
 - b) If literal-5 is not specified, there shall be information in the external repository for the property property-name-1 that is part of one of the classes or interfaces that are declared in this REPOSITORY paragraph.

12.2.7.3 General rules

- 1) Class-name-1 is the name of a class that may be used throughout the scope of the containing environment division.
- 2) If the AS phrase is specified, literal-1, literal-2, literal-3, or literal-4 is the externalized name by which the class, interface, function, or program, respectively, is known to the operating environment. Literal-5 is the externalized name known to the operating environment for a method that implements the named property. The implementor shall specify when the AS phrase is required.
- 3) Class-name-3 and interface-name-1 are actual parameters for the parameterized class referenced by class-name-2.
- 4) Class-name-4 and interface-name-4 are actual parameters for the parameterized interface referenced by interface-name-3.
- 5) If the EXPANDS phrase is specified in a class-specifier, a class class-name-1 is created from the parameterized class class-name-2. The number of parameters in the USING phrase of the EXPANDS phrase of the class-specifier shall be the same as the number of parameters in the USING phrase of the CLASS-ID paragraph of class-name-2. The interface for class-name-1 is the interface specified for class-name-2 with the parameters of class-name-2 replaced by the parameters specified in the class-specifier.

The class class-name-1 is created from the parameterized class class-name-2 by replacing each specification of the formal parameter by the corresponding actual parameter.

- 6) The compiler shall use the information specified for class-name-1 together with the external repository to determine the details of the class that is to be used. It is implementor-defined how the information in the class specifier and the external repository are used to determine which class is used.

- 7) Interface-name-2 is the name of an interface that may be used throughout the scope of the containing environment division.
- 8) If the EXPANDS phrase is specified in an interface-specifier, an interface interface-name-2 is created from the parameterized interface interface-name-3. The number of parameters in the USING phrase of the EXPANDS phrase of the interface-specifier shall be the same as the number of parameters in the USING phrase of the INTERFACE-ID paragraph of interface-name-3. The interface for interface-name-2 is the interface specified for interface-name-3 with the parameters of interface-name-3 replaced by the parameters specified in the interface-specifier.

The interface interface-name-2 is created from the parameterized interface interface-name-3 by replacing each specification of the formal parameter by the corresponding actual parameter.

- 9) The compiler shall use the information specified for interface-name-2 together with the external repository to determine the details of the interface that is to be used. It is implementor-defined how the information in the interface specifier and the external repository are used to determine which interface is used.
- 10) Program-prototype-name-1 is the name of a program prototype that may be used throughout the scope of the containing environment division. The details for calling a program via this program prototype are obtained as follows:

- a) if the externalized name of the program prototype is the externalized name of a program definition specified previously in the same compilation group, the details are taken from that program definition, which is the program that will be called, and the details in the external repository are ignored; otherwise,

NOTE Literal-4, if specified, is the externalized name of the program prototype; otherwise, the externalized name is program-prototype-name-1.

- b) if the externalized name of the program prototype is the externalized name of a program prototype definition specified in the same compilation group, the details are taken from that program prototype definition and the details in the external repository are ignored. The program that will be called is the one with the same externalized name as the externalized name of the program prototype; otherwise,
 - c) the details are taken from the external repository for the program with the same name as the externalized name of the program prototype. That program is the one that will be called.
- 11) Function-prototype-name-1 is the name of a function prototype that may be used throughout the scope of the containing environment division. The details for activating a function via this function prototype are obtained as follows:

- a) if the externalized name of the function prototype is the externalized name of a function definition specified previously in the same compilation group, the details are taken from that function definition, which is the function that will be activated, and the details in the external repository are ignored; otherwise,

NOTE Literal-3, if specified, is the externalized name of the function prototype; otherwise, the externalized name is function-prototype-name-1.

- b) if the externalized name of the function prototype is the externalized name of a function prototype definition specified in the same compilation group, the details are taken from that function prototype definition and the details in the external repository are ignored. The function that will be activated is the one with the same externalized name as the externalized name of the function prototype; otherwise,
 - c) the details are taken from the external repository for the function with the same name as the externalized name of the function prototype. That function is the one that will be activated.
- 12) Within the scope of the containing environment division, a reference to function-prototype-name-1 is a reference to a user-defined function, and not to an intrinsic function of the same name.

- 13) Within the scope of the containing environment division, intrinsic-function-name-1 may be specified in a function-identifier without being preceded by the word FUNCTION.
- 14) If ALL is specified in the intrinsic format of the function-specifier, it is as if each of the intrinsic-function-names defined in 8.11, Intrinsic function names, were specified.
- 15) Property-name-1 is the name of an object property that may be used throughout the scope of the containing environment division.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12.3 Input-output section

The input-output section deals with the information needed to control transmission and handling of data between external media and a runtime element.

12.3.1 General format

INPUT-OUTPUT SECTION.

[file-control-paragraph]

[i-o-control-paragraph]

12.3.2 Syntax rules

- 1) The input-output section may be specified in a program definition or a function definition. Within a class definition, the input-output section may be specified only in a factory definition or instance definition, but not in a method definition. The input-output section shall not be specified within an interface definition.

12.3.3 FILE-CONTROL paragraph

The FILE-CONTROL paragraph specifies file-related information.

12.3.3.1 General format

FILE-CONTROL. [file-control-entry] ...

12.3.4 File control entry

The file control entry declares the relevant physical attributes of a file.

12.3.4.1 General format

Format 1 (indexed):

SELECT [OPTIONAL] file-name-1

ASSIGN { TO { device-name-1
literal-1 } ... [USING data-name-1]
USING data-name-1 }

[ACCESS MODE IS { DYNAMIC
RANDOM
SEQUENTIAL }]

[ALTERNATE RECORD KEY IS { data-name-2
record-key-name-1 SOURCE IS { data-name-3 } ... } [WITH DUPLICATES]] ...

[collating-sequence-clause] ...

[FILE STATUS IS data-name-4]

[LOCK MODE IS { MANUAL
AUTOMATIC } [WITH LOCK ON [MULTIPLE] { RECORD
RECORDS }]]

[ORGANIZATION IS] INDEXED

RECORD KEY IS { data-name-5
record-key-name-2 SOURCE IS { data-name-6 } ... }

[RESERVE integer-1 [AREA
AREAS]]

[SHARING WITH { ALL OTHER
NO OTHER
READ ONLY }] .

Format 2 (relative):

SELECT [OPTIONAL] file-name-1

ASSIGN { TO { device-name-1
literal-1 } ... [USING data-name-1]
USING data-name-1 }

[ACCESS MODE IS { DYNAMIC
RANDOM
SEQUENTIAL }]

[FILE STATUS IS data-name-4]

[LOCK MODE IS { MANUAL
AUTOMATIC } [WITH LOCK ON [MULTIPLE] { RECORD
RECORDS }]]

[ORGANIZATION IS] RELATIVE

[RELATIVE KEY IS data-name-7]

[RESERVE integer-1 [AREA
AREAS]]

[SHARING WITH { ALL OTHER
NO OTHER
READ ONLY }] .

Format 3 (sequential):

SELECT [OPTIONAL] file-name-1

ASSIGN { TO { device-name-1
literal-1 } ... [USING data-name-1]
USING data-name-1 }

[ACCESS MODE IS SEQUENTIAL]

[FILE STATUS IS data-name-4]

[LOCK MODE IS { MANUAL
AUTOMATIC } [WITH LOCK ON { RECORD
RECORDS }]]

[[ORGANIZATION IS] SEQUENTIAL]

[PADDING CHARACTER IS { data-name-8
literal-2 }]

[RECORD DELIMITER IS { STANDARD-1
feature-name-1 }]

[RESERVE integer-1 [AREA
AREAS]]

[SHARING WITH { ALL OTHER
NO OTHER
READ ONLY }] .

Format 4 (sort-merge):

SELECT [OPTIONAL] file-name-1

ASSIGN { TO { device-name-1
literal-1 } ... [USING data-name-1]
USING data-name-1 }

[[ORGANIZATION IS] SEQUENTIAL] .

where collating-sequence-clause is described in 12.3.4.6, COLLATING SEQUENCE clause.

12.3.4.2 Syntax rules

ALL FORMATS

- 1) The SELECT clause shall be specified first in the file control entry. The clauses that follow the SELECT clause may appear in any order.
- 2) A given file-name may be specified in only one SELECT clause within a factory, function, object, or program.
- 3) For each file-name specified in a SELECT clause, there shall be a file description entry or a sort-merge file description entry in the file section of the factory, function, object, or program in which the SELECT clause is specified.
- 4) Literal-1 shall be an alphanumeric literal and shall not be a figurative constant.
- 5) The meaning and rules for the allowable specification of device-name-1 and the value of literal-1 are defined by the implementor.
- 6) The allowable and required syntactical combinations of data-name-1 with device-name-1 and of data-name-1 with literal-1 are defined by the implementor.
- 7) Data-name-1 shall reference an alphanumeric data item and shall not be subordinate to the file description entry for file-name-1.
- 8) Data-name-1 may be qualified.

FORMAT 1

- 9) Format 1 shall be specified only for an indexed file. The associated file description entry shall not be a sort-merge file description entry.

FORMAT 2

- 10) Format 2 shall be specified only for a relative file. The associated file description entry shall not be a sort-merge file description entry.
- 11) The RELATIVE clause shall be specified if the DYNAMIC or RANDOM phrase of the ACCESS clause is specified.

FORMAT 3

- 12) Format 3 shall be specified only for a sequential file or a report file. The associated file description entry shall not be a sort-merge file description entry.

FORMAT 4

- 13) Format 4 shall be specified only for a sort-merge file. The associated file description entry shall be a sort-merge file description entry.

12.3.4.3 General rules

ALL FORMATS

- 1) If the file connector referenced by file-name-1 is an external file connector (see 13.16.20, EXTERNAL clause), all file control entries in the run unit that reference this file connector shall have:
 - a) The same specification for the OPTIONAL phrase.

- b) A consistent specification for data-name-1, device-name-1, and literal-1 in the ASSIGN clause. The implementor shall specify the consistency rules for data-name-1, device-name-1, and literal-1.
 - c) Either the STANDARD-1 phrase or a consistent value of feature-name-1 in the RECORD DELIMITER clause. The implementor shall specify the consistency rules for feature-name-1.
 - d) The same value for integer-1 in the RESERVE clause.
 - e) The same organization.
 - f) The same access mode.
 - g) The same specification of COLLATING SEQUENCE clauses.
 - h) The same specification of the PADDING CHARACTER clause. If data-name-8 is specified, it shall reference an external data item.
 - i) The same specification of the RELATIVE KEY clause, where data-name-7 references an external data item.
 - j) The same data description entry for data-name-5 and each data-name-6 as well as their relative location within the associated record.
 - k) The same data description entry for data-name-2 and each data-name-3 as well as their relative location within the associated record, the same number of alternate record keys, and the same DUPLICATES phrase.
 - l) The same sharing mode.
 - m) The same lock mode and the same choice of either single record locking or multiple record locking.
- 2) The OPTIONAL phrase applies only to files opened in the input, I-O, or extend mode. Its specification is required for physical files that are not necessarily present each time the runtime element is executed.
- 3) The ASSIGN clause specifies the association of the file connector referenced by file-name-1 to a physical file identified by device-name-1, literal-1, or the content of the data item referenced by data-name-1. The association occurs at the time of execution of an OPEN, SORT, or MERGE statement that referenced file-name-1, according to the following rules:
- a) When the TO phrase of the ASSIGN clause is specified and the USING phrase is omitted, the file connector referenced by file-name-1 is associated with a physical file identified by the specification of device-name-1 or the value of literal-1 in the source unit that specifies the OPEN, SORT, or MERGE statement.
 - b) When the USING phrase of the ASSIGN clause is specified, the file connector referenced by file-name-1 is associated with a physical file identified by the content of the data item referenced by data-name-1 in the runtime element that executes the OPEN, SORT, or MERGE statement.
- If the association cannot be made because the content of the data item referenced by data-name-1 is not consistent with the specification for device-name-1 or literal-1, the OPEN, SORT, or MERGE statement is unsuccessful.
- 4) When the USING phrase is specified, the meaning and rules for the allowable content of the data item referenced by data-name-1 are defined by the implementor. The consistency rules, if any, that apply between the content of the data item referenced by data-name-1 and either the specification of device-name-1 or the value of literal-1 are defined by the implementor.

FORMAT 1

- 5) The indexed format defines a file connector for an indexed file.

- 6) If no COLLATING SEQUENCE clause is specified:
- a) the collating sequence for alphanumeric record keys, both primary and alternate, is the native alphanumeric collating sequence;
 - b) the collating sequence for national record keys, both primary and alternate, is the native national collating sequence.

FORMAT 2

- 7) The relative format defines a file connector for a relative file.

FORMAT 3

- 8) The sequential format defines a file connector for a sequential file.

FORMAT 4

- 9) The sort-merge format defines a file connector for a sort-merge file.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12.3.4.4 ACCESS MODE clause

The ACCESS MODE clause specifies the order in which records are to be accessed in the file.

12.3.4.4.1 General format

$$\text{ACCESS MODE IS } \left\{ \begin{array}{l} \text{SEQUENTIAL} \\ \text{RANDOM} \\ \text{DYNAMIC} \end{array} \right\}$$

12.3.4.4.2 Syntax rules

- 1) The RANDOM clause shall not be specified for file-names specified in the USING or GIVING phrase of a SORT or MERGE statement.
- 2) The DYNAMIC and RANDOM phrases shall not be specified for a sequential file.

12.3.4.4.3 General rules

- 1) If the ACCESS MODE clause is not specified, sequential access is assumed.
- 2) If the access mode is sequential, records in the file are accessed in the sequence dictated by the file organization:
 - a) For sequential files this sequence is specified by predecessor-successor record relationships established by the execution of WRITE statements when the physical file is created or extended.
 - b) For relative files this sequence is the order of ascending relative record numbers of existing records in the physical file.
 - c) For indexed files this sequence is ascending within a given key of reference according to the collating sequence for that key.
- 3) If the access mode is random:
 - a) For a relative file, the value of a relative key data item indicates the record to be accessed.
 - b) For an indexed file, the value of a record key data item indicates the record to be accessed.
- 4) If the access mode is dynamic, records in the file may be accessed sequentially, randomly, or both.

12.3.4.5 ALTERNATE RECORD KEY clause

The ALTERNATE RECORD KEY clause specifies an alternate record key access path to the records in an indexed file.

12.3.4.5.1 General format

$$\text{ALTERNATE RECORD KEY IS } \left\{ \begin{array}{l} \text{data-name-1} \\ \text{record-key-name-1 SOURCE IS } \{ \text{data-name-2} \} \dots \end{array} \right\} \text{ [WITH DUPLICATES]}$$

12.3.4.5.2 Syntax rules

- 1) Data-name-1 and data-name-2 may be qualified.
- 2) Data-name-1 and data-name-2 shall be defined as a data item of category alphanumeric or national within a record description entry associated with the file-name to which the ALTERNATE RECORD KEY clause is subordinate. All occurrences of data-name-2 shall be of the same category.
- 3) Data-name-1 and data-name-2 shall not reference a variable-length data item.
- 4) Data-name-1 shall not reference an item whose leftmost byte position corresponds to the leftmost byte position of the prime record key, or of another alternate record key. This restriction does not apply in the case where either key is specified using the SOURCE phrase.
- 5) If the indexed file contains variable-length records, each data-name-1 and data-name-2 shall be contained within the first x bytes of the record, where x equals the minimum record size specified for the file. (See 13.16.41, RECORD clause.)
- 6) Record-key-name-1 has the class and category of data-name-2.

12.3.4.5.3 General rules

- 1) An ALTERNATE RECORD KEY clause specifies an alternate record key for the file with which this clause is associated.
- 2) Record-key-name-1 defines a record key consisting of the concatenation of all occurrences of data-name-2 in the order specified.
- 3) The data description of data-name-1 or data-name-2 as well as their relative location within a record shall be the same as that used when the physical file was created. The number of alternate record keys for the file shall also be the same as that used when the physical file was created.
- 4) The DUPLICATES phrase specifies that the value of the associated alternate record key may be equal to the value of the same alternate record key in another record in the physical file. If the DUPLICATES phrase is not specified, the value of the associated alternate record key shall not be equal to the value of the same alternate record key in another record in the physical file. The equality or inequality is based on the collating sequence used for the file according to the rules for a relation condition.
- 5) The identical byte positions referenced by data-name-1 or data-name-2 in any one record description entry are implicitly referenced as keys for all other record description entries of that file.

12.3.4.6 COLLATING SEQUENCE clause

The COLLATING SEQUENCE clause specifies the collating sequence to be used for the ordering of record keys and alternate record keys for an indexed file. Multiple collating sequences can be used by specifying a collating sequence clause unique to the primary key or to specific alternate record keys.

12.3.4.6.1 General format**Format 1 (file-level)**

$$\text{COLLATING SEQUENCE} \left\{ \begin{array}{l} \text{IS alphabet-name-1 [alphabet-name-2]} \\ \left\{ \begin{array}{l} \text{FOR ALPHANUMERIC IS alphabet-name-1} \\ \text{FOR NATIONAL IS alphabet-name-2} \end{array} \right\} \end{array} \right\}$$
Format 2 (key-level)

$$\text{COLLATING SEQUENCE OF} \left\{ \begin{array}{l} \text{data-name-1} \\ \text{record-key-name-1} \end{array} \right\} \dots \text{IS alphabet-name-3}$$
12.3.4.6.2 Syntax rules**FORMAT 1**

- 1) Alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.
- 2) Alphabet-name-2 shall reference an alphabet that defines a national collating sequence.
- 3) Only one file-level format COLLATING SEQUENCE clause may be specified in one file control entry.

FORMAT 2

- 4) Data-name-1 shall be a name specified as the data-name in an ALTERNATE RECORD KEY clause or in a RECORD KEY clause in the file control entry.
- 5) Record-key-name-1 shall be a name specified as a record-key-name in an ALTERNATE RECORD KEY clause or in a RECORD KEY clause in the file control entry.
- 6) When the class of data-name-1 or record-key-name-1 is national, alphabet-name-3 shall reference an alphabet that defines a national collating sequence; otherwise, alphabet-name-3 shall reference an alphabet that defines an alphanumeric collating sequence.
- 7) Neither data-name-1 nor record-key-name-1 shall be specified in more than one COLLATING SEQUENCE clause.

12.3.4.6.3 General rules**ALL FORMATS**

- 1) Each collating sequence is a fixed file attribute and the collating sequence is set upon the successful execution of an OPEN statement that creates the physical file. The collating sequence used is the one that applies as specified in the following general rules.

FORMAT 1

- 2) An alphanumeric collating sequence referenced by alphabet-name-1 applies to any record keys of class alphanumeric, whether primary or alternate, not specified in a key-level format of another COLLATING SEQUENCE clause in the file control entry.
- 3) A national collating sequence referenced by alphabet-name-2 applies to any record keys of class national, whether primary or alternate, not specified in a key-level format of another COLLATING SEQUENCE clause in the file control entry.
- 4) If alphabet-name-1 is not specified in the file control entry, the native alphanumeric collating sequence applies to any record keys of class alphanumeric, whether primary or alternate, not specified in a key-level format of another COLLATING SEQUENCE clause.
- 5) If alphabet-name-2 is not specified in the file control entry, the native national collating sequence applies to any record keys of class national, whether primary or alternate, not specified in a key-level format of another COLLATING SEQUENCE clause.

FORMAT 2

- 6) Alphabet-name-3 applies to record keys identified by data-name-1 or record-key-name-1.

12.3.4.7 FILE STATUS clause

The FILE STATUS clause specifies a data item that contains the status of an input-output operation.

12.3.4.7.1 General format

FILE STATUS IS data-name-1

12.3.4.7.2 Syntax rules

- 1) Data-name-1 may be qualified.
- 2) Data-name-1 shall be a two-character data item of the category alphanumeric, defined in the working-storage, local-storage, or linkage section.

12.3.4.7.3 General rules

- 1) If the FILE STATUS clause is specified, the data item referenced by data-name-1 is updated to contain the value of the I-O status for the file connector referenced by the subject of the entry when the I-O status associated with that file connector is updated as a result of an input-output statement.

NOTE In the case where a file-name is global and data-name-1 is not, data-name-1 is updated by references to file-name in contained programs even though data-name-1 is a local name.

12.3.4.8 LOCK MODE clause

The LOCK MODE clause indicates the type of record locking for a shared file.

12.3.4.8.1 General format

$$\text{LOCK MODE IS } \left\{ \begin{array}{c} \text{MANUAL} \\ \text{AUTOMATIC} \end{array} \right\} \left[\text{WITH LOCK ON } [\text{MULTIPLE}] \left\{ \begin{array}{c} \text{RECORD} \\ \text{RECORDS} \end{array} \right\} \right]$$

12.3.4.8.2 Syntax rules

- 1) The MULTIPLE phrase shall not be specified for a file described with sequential organization or sequential access mode.

12.3.4.8.3 General rules

- 1) If the LOCK MODE clause is omitted from a file control entry,
 - a) If there is a SHARING clause in that file control entry, no record locks are set by the execution of I-O statements through the associated file connector.
 - b) If there is no SHARING clause in that file control entry,
 1. If an OPEN statement for the associated file connector has a SHARING phrase, no record locks are set by the execution of I-O statements for that opening of the associated file connector.
 2. If an OPEN statement for the associated file connector has no SHARING phrase, the type of record locking for that opening of a shared file associated with that file connector is defined by the implementor. The implementor may define the default in terms of standard LOCK MODE clause syntax, specify another type of record locking as the default, or specify that the default is no record locking. If the default is defined in terms of standard syntax, then the semantics shall be as if that clause had been specified in the file control entry.
- 2) If the processor does not support record locking, record locks have no effect for the associated file connector.
- 3) If a physical file is open in the sharing with no other mode, the LOCK MODE clause has no effect. Otherwise, the LOCK MODE clause has the effects described in the general rules that follow.
- 4) If the AUTOMATIC phrase is specified, the lock mode is automatic. Records are locked when any READ statement is executed.
- 5) If the MANUAL phrase is specified, the lock mode is manual. Records locks are obtained only when the LOCK phrase is explicitly specified on an I-O statement.
- 6) Single record locking is specified explicitly by the LOCK ON phrase without the MULTIPLE phrase and implicitly when the LOCK MODE clause is specified with the LOCK ON phrase omitted. Single record locking allows only one record of a file to be locked at a given time through a single file connector. Execution of any I-O statement except START releases any previously locked record in that file for that file connector. Details of record locking are specified in 9.1.15, Record locking.
- 7) If the MULTIPLE phrase is specified in the LOCK ON phrase, then multiple record locking is said to have been specified and a file connector is permitted to have more than one record of a file locked. A file connector that has specified multiple record locking for a file may hold a number of record locks for that file simultaneously. This prevents other file connectors from accessing any member of the set of locked records, but will not deny them access to records that are not locked. The implementor shall specify the maximum number of record locks that may be held by a file connector and the maximum number of record locks that may be held by a run

unit. Both of these maximum numbers shall be at least one. Any I-O statement that attempts to obtain a record lock that would exceed either limit is unsuccessful and receives an I-O status that indicates that condition. Details of record locking are specified in 9.1.15, Record locking.

- 8) The setting of a record lock is part of the atomic operation of an I-O statement.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12.3.4.9 ORGANIZATION clause

The ORGANIZATION clause specifies the logical structure of a file.

12.3.4.9.1 General format

$$[\text{ORGANIZATION IS}] \left\{ \begin{array}{l} \text{SEQUENTIAL} \\ \text{RELATIVE} \\ \text{INDEXED} \end{array} \right\}$$

12.3.4.9.2 General rules

- 1) The ORGANIZATION clause specifies the logical structure of a file. The file organization is established at the time a physical file is created and cannot subsequently be changed.
- 2) The SEQUENTIAL phrase specifies that the file organization is sequential. Sequential organization is a permanent logical file structure in which a record is identified by a predecessor-successor relationship established when the record is placed into the file.
- 3) The RELATIVE phrase specifies that the file organization is relative. Relative organization is a permanent logical file structure in which each record is uniquely identified by an integer value greater than zero, that specifies the record's logical ordinal position in the file.
- 4) The INDEXED phrase specifies that the file organization is indexed. Indexed organization is a permanent logical file structure in which each record is identified by the value of one or more keys within that record.
- 5) When the ORGANIZATION clause is not specified, sequential organization is implied.

12.3.4.10 PADDING CHARACTER clause

The PADDING CHARACTER clause specifies the character that is to be used for block padding on sequential files. The PADDING CHARACTER clause is an obsolete element in this International Standard and is to be deleted from the next revision of standard COBOL.

12.3.4.10.1 General format

PADDING CHARACTER IS { data-name-1
literal-1 }

12.3.4.10.2 Syntax rules

- 1) Literal-1 shall be a one-character alphanumeric literal.
- 2) Data-name-1 may be qualified.
- 3) Data-name-1 shall be a one-character data item of category alphanumeric, defined in the working-storage, local-storage, or linkage section.

12.3.4.10.3 General rules

- 1) The PADDING CHARACTER clause specifies the character that is to be used for block padding on sequential files. During input operations, any portion of a block that exists beyond the last logical record and consists entirely of padding characters shall be bypassed. During input operations, a logical record that consists solely of padding characters shall be ignored. During output operations, any portion of a block that exists beyond the last logical record shall be filled entirely with padding characters.
- 2) If the PADDING CHARACTER clause is not applicable to the device type to which the file is assigned, the creation or recognition of padding characters shall not occur.
- 3) Literal-1 or the value of the data item referenced by data-name-1, at the time the OPEN statement that creates the file is executed, is used as the value of the padding character.
- 4) If the CODE-SET clause is specified for the file, conversion of the padding character specified by literal-1 or the content of data-name-1 is established for the file when the file is opened.
- 5) If the PADDING CHARACTER clause is not specified, the value used for the padding character shall be defined by the implementor.

12.3.4.11 RECORD DELIMITER clause

The RECORD DELIMITER clause indicates the method of determining the length of a variable-length record on the external medium.

12.3.4.11.1 General format

$$\text{RECORD DELIMITER IS } \left\{ \begin{array}{l} \text{STANDARD-1} \\ \text{feature-name-1} \end{array} \right\}$$

12.3.4.11.2 Syntax rules

- 1) The RECORD DELIMITER clause may be specified only for variable-length records.

NOTE There are three ways variable-length records may be specified:

- a) The RECORD clause is not specified and the implementor has specified that variable-length records are obtained in this circumstance.
- b) The RECORD IS VARYING clause is specified.
- c) The format 3 RECORD CONTAINS clause is specified and the implementor has specified that variable-length records are obtained in this circumstance.

- 2) The implementor shall specify the names available for use as feature-name-1.

12.3.4.11.3 General rules

- 1) The RECORD DELIMITER clause indicates the method of determining the length of a variable-length record on the external medium. Any method used shall not be reflected in the record area or the record size used within the function, method, or program.
- 2) If STANDARD-1 is specified, the external medium shall be a magnetic tape file.
- 3) If STANDARD-1 is specified, the method used for determining the length of a variable-length record is that specified in ISO 1001:1986, 7.2, Records.
- 4) If feature-name-1 is specified, the method used for determining the length of a variable-length record is that associated with feature-name-1 by the implementor.
- 5) If the RECORD DELIMITER clause is not specified, the method used for determining the length of a variable-length record is specified by the implementor.
- 6) At the time of a successful execution of an OPEN statement, the record delimiter is the one specified in the RECORD DELIMITER clause in the file control entry associated with the file-name specified in the OPEN statement.

12.3.4.12 RECORD KEY clause

The RECORD KEY clause specifies the prime record key access path to the records in an indexed file.

12.3.4.12.1 General format
$$\text{RECORD KEY IS } \left\{ \begin{array}{l} \text{data-name-1} \\ \text{record-key-name-1 SOURCE IS } \{ \text{data-name-2} \} \dots \end{array} \right\}$$
12.3.4.12.2 Syntax rules

- 1) Data-name-1 and data-name-2 may be qualified.
- 2) Data-name-1 and data-name-2 shall reference a data item of category alphanumeric or category national within a record description entry associated with the file-name specified in this file control entry. All occurrences of data-name-2 shall be of the same category.
- 3) Data-name-1 and data-name-2 shall not reference a variable-length data item.
- 4) If the indexed file contains variable-length records, data-name-1 and each data-name-2 shall be contained within the first n bytes of the record, where n equals the minimum record size specified for the file. (See 13.16.41, RECORD clause.)
- 5) Record-key-name-1 has the class and category of data-name-2.

12.3.4.12.3 General rules

- 1) The RECORD KEY clause specifies the prime record key for the file that is the subject of the entry. The value of the associated record key shall not be equal to the value of the same record key in another record in the file. The equality or inequality is based on the collating sequence used for the file according to the rules for a relation condition.
- 2) Record-key-name-1 defines a record key consisting of the concatenation of all occurrences of data-name-2 in the order specified.
- 3) The data description of data-name-1 or data-name-2 as well as their relative location within a record shall be the same as that used when the file was created.
- 4) If the file has more than one record description entry, data-name-1 or data-name-2 need only be described in one of these record description entries. The identical byte positions referenced by data-name-1 or data-name-2 in any one record description entry are implicitly referenced as keys for all other record description entries of that file.

12.3.4.13 RELATIVE KEY clause

The RELATIVE KEY clause identifies the data item that will contain the relative record number for accessing a relative file.

12.3.4.13.1 General format

RELATIVE KEY IS data-name-1

12.3.4.13.2 Syntax rules

- 1) Data-name-1 may be qualified.
- 2) Data-name-1 shall reference an unsigned integer data item whose description does not contain the picture symbol 'P'.
- 3) Data-name-1 shall not be defined in a record description entry subordinate to the associated file-name.

12.3.4.13.3 General rules

- 1) All records stored in a relative file are uniquely identified by relative record numbers. The relative record number of a given record specifies the record's logical ordinal position in the file. The first logical record has a relative record number of 1, and subsequent logical records have relative record numbers of 2, 3, 4, ...
- 2) The relative key data item associated with the execution of an input-output statement is the data item referenced by data-name-1; data-name-1 is used to communicate a relative record number between the user and the mass storage control system (MSCS).

12.3.4.14 RESERVE clause

The RESERVE clause allows the user to specify the number of input-output areas allocated.

12.3.4.14.1 General format

RESERVE integer-1 $\begin{bmatrix} \text{AREA} \\ \text{AREAS} \end{bmatrix}$

12.3.4.14.2 General rules

- 1) If the RESERVE clause is specified, the number of input-output areas allocated is equal to the value of integer-1. If the RESERVE clause is not specified, the number of input-output areas allocated is specified by the implementor.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

12.3.4.15 SHARING clause

The SHARING clause indicates that a file is to participate in file sharing and record locking. It specifies the degree of file sharing (or non-sharing) to be permitted for a file and whether record locks have an effect.

12.3.4.15.1 General format

$$\text{SHARING WITH } \left\{ \begin{array}{l} \text{ALL OTHER} \\ \text{NO OTHER} \\ \text{READ ONLY} \end{array} \right\}$$

12.3.4.15.2 General rules

- 1) The SHARING clause specifies the sharing mode to be used for the file unless it is overridden by the SHARING phrase of the OPEN statement. This clause also specifies whether record locks have an effect. Additional details are specified in 9.1.14, Sharing mode.

12.3.5 I-O-CONTROL paragraph

The I-O-CONTROL paragraph specifies that memory areas associated with different files are to be shared during file processing, record processing, or sort-merge processing.

12.3.5.1 General format

I-O-CONTROL. [[{ same-clause } ...] .]

where same-clause is shown below

12.3.6 SAME clause

The SAME clause specifies files for which memory areas are to be shared during file processing, record processing, or sort-merge processing.

12.3.6.1 General format

Format 1 (file-area):

SAME AREA FOR file-name-1 { file-name-2 } ...

Format 2 (record-area):

SAME RECORD AREA FOR file-name-1 { file-name-2 } ...

Format 3 (sort-merge-area):

SAME { SORT
SORT-MERGE } AREA FOR file-name-1 { file-name-2 } ...

12.3.6.2 Syntax rules

- 1) SORT and SORT-MERGE are equivalent.
- 2) File-name-1 and file-name-2 shall be specified in the FILE-CONTROL paragraph of the source element that contains this SAME clause.
- 3) File-name-1 and file-name-2 shall not reference an external file connector.
- 4) The files specified in a given SAME clause need not all have the same organization or access.
- 5) A given file-name that represents a report file may be specified in one file-area format SAME clause and shall not be specified in a record-area format or sort-merge-area format SAME clause.
- 6) A given file-name that represents a sort or merge file may be specified in one record-area format SAME clause and in one sort-merge-area SAME clause, and shall not be specified in a file-area format SAME clause.
- 7) A given file-name that represents a file other than a report file or a sort or merge file may be specified in one file-area format, in one record-area format, and in one or more sort-merge-area format SAME clauses.
- 8) At least one file-name specified in a sort-merge-area format SAME clause shall represent a sort or merge file.
- 9) If one or more file-names specified in a file-area format SAME clause are also specified in a record-area format SAME clause, all of the file-names specified in the file-area format SAME clause shall also be specified in the

record-area format SAME clause. Additional file-names not specified in the file-area format SAME clause may be specified in the record-area format SAME clause.

- 10) If a file-name that represents a file other than a sort or merge file is specified in a file-area format SAME clause and in one or more sort-merge-area format SAME clauses, all of the file-names specified in that file-area format SAME clause shall also be specified in those sort-merge-area format SAME clause(s).

12.3.6.3 General rules

- 1) A file-area format SAME clause specifies that two or more files referenced by file-name-1, file-name-2 are to use the same memory area during processing. The area being shared includes all storage areas assigned to the files referenced by file-name-1, file-name-2. No more than one of these files may be in the open mode at a given time.
- 2) A record-area format SAME clause specifies that two or more files referenced by file-name-1, file-name-2 are to share a memory area for processing the current logical record. All of these files may be in the open mode at the same time, except that only one file that is also specified in a file-area format SAME clause may be open at that time. A logical record in the shared memory area is a logical record of each file open in the output mode and of the most recently-read file open in the input mode. This is equivalent to an implicit redefinition of the area with records aligned on the leftmost byte position. The record area is available to the runtime element when any file connector referenced by file-name-1, file-name-2, ... is open. When none of the file connectors is open, the record area is not available to the runtime element.
- 3) A sort-merge-area format SAME clause specifies that memory is shared as follows:
 - a) Any storage area allocated for the sorting or merging of a sort or merge file specified in a sort-merge-area format SAME clause is available for reuse in sorting or merging any of the other sort or merge files specified in that sort-merge-area format SAME clause.
 - b) Storage areas assigned to files specified in a sort-merge-area format SAME clause that do not represent sort or merge files may be allocated as needed for sorting or merging the sort or merge files named in that sort-merge-area format SAME clause. The extent of such allocation shall be specified by the implementor.
 - c) Storage areas assigned to files specified in a sort-merge-area format SAME clause other than sort or merge files do not share the same storage area with each other.
- 4) During the processing of a SORT or MERGE statement that refers to a sort or merge file named in a sort-merge-area format SAME clause, any non-sort and non-merge files associated with file-names specified in that clause shall not be in the open mode.

13 Data division

The data division describes the data that the runtime module is to accept as input, to manipulate, to create, or to produce as output. The data division is optional.

The following is the general format of the sections in the data division and defines the order of their presentation in the source element.

13.1 Data division structure

13.1.1 General format

DATA DIVISION.

[<u>FILE SECTION.</u>]	[file-description-entry sort-merge-file-description-entry { constant-entry record-description-entry } ...]	[...]	[...]
[<u>WORKING-STORAGE SECTION.</u>]	[77-level-description-entry constant-entry record-description-entry]	[...]	
[<u>LOCAL-STORAGE SECTION.</u>]	[77-level-description-entry constant-entry record-description-entry]	[...]	
[<u>LINKAGE SECTION.</u>]	[77-level-description-entry constant-entry record-description-entry]	[...]	
[<u>COMMUNICATION SECTION.</u>]	[communication-description-entry constant-entry record-description-entry]	[...]	[...]
[<u>REPORT SECTION.</u>]	[report-description-entry { constant-entry report-group-description-entry } ...]	[...]	
[<u>SCREEN SECTION.</u>]	[constant-entry screen-description-entry]	[...]	


13.2 Explicit and implicit attributes

Attributes may be implicitly or explicitly specified. Any attribute that has been explicitly specified is called an explicit attribute. If an attribute has not been specified explicitly, then the attribute takes on the default specification. Such an attribute is known as an implicit attribute, and is treated as if the attribute had been explicitly specified.

13.3 File section

The purpose of the file section is to describe the structure of data, sort, and merge files.

13.3.1 General format

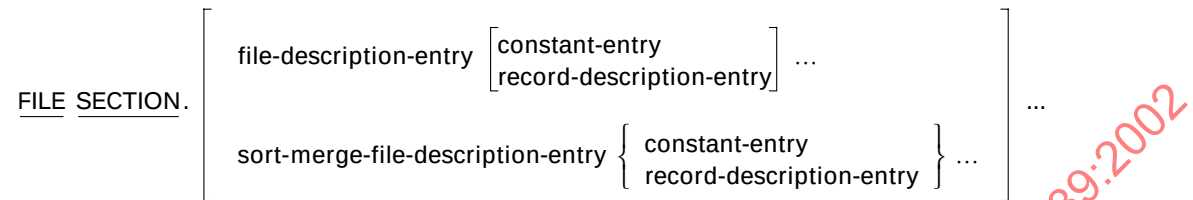

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
constant-entry	13.9, Constant entry
record-description-entry	13.10, Record description entry

13.3.2 Syntax rules

- 1) The file section may be specified in a function definition or a program definition. Within a class definition, the file section may be specified only in a factory definition or an instance definition, but not in a method definition. The file section shall not be specified within an interface definition.

13.3.3 General Rules

- 1) A data-item format or table format VALUE clause specified in the file section is ignored except in the execution of the INITIALIZE statement. The initial value of a data item in the file section is undefined.

13.3.4 File description entry

The file description entry (FD entry) represents the highest level of organization in the file section.

The file description entry furnishes information concerning the physical structure, identification, and the internal or external attributes of a file connector, of the associated records, and of the associated data items. The file description entry also determines whether a file-name is a local name or a global name. In addition, for a report file the file description entry furnishes information concerning the physical structure, identification, and report-names pertaining to a report file.

13.3.4.1 General format

Format 1 (sequential):

FD file-name-1

[IS EXTERNAL [AS literal-1]]

[IS GLOBAL]

[FORMAT { BIT
CHARACTER
NUMERIC } DATA]

[BLOCK CONTAINS [integer-1 TO] integer-2 { CHARACTERS
RECORDS }]

[record-clause]

[LINAGE IS { data-name-2
integer-8 } LINES [WITH FOOTING AT { data-name-3
integer-9 }]
[LINES AT TOP { data-name-4
integer-10 }] [LINES AT BOTTOM { data-name-5
integer-11 }]]

[CODE-SET { IS alphabet-name-1 [alphabet-name-2]
FOR ALPHANUMERIC IS alphabet-name-1
FOR NATIONAL IS alphabet-name-2 } } .]

Format 2 (relative-or-indexed):

FD file-name-1

[IS EXTERNAL [AS literal-1]]
 [IS GLOBAL]
 [BLOCK CONTAINS [integer-1 TO] integer-2 { CHARACTERS
RECORDS }]
 [record-clause] .

Format 3 (report):

FD file-name-1

[IS EXTERNAL [AS literal-1]]
 [IS GLOBAL]
 [BLOCK CONTAINS [integer-1 TO] integer-2 { CHARACTERS
RECORDS }]
 [record-clause]
 [CODE-SET { IS alphabet-name-1 [alphabet-name-2]
 { FOR ALPHANUMERIC IS alphabet-name-1
 FOR NATIONAL IS alphabet-name-2 } }]
 { REPORT IS
REPORTS ARE } { report-name-1 }

where record-clause is described in 13.16.41, RECORD clause

13.3.4.2 Syntax rules**ALL FORMATS**

- 1) File-name-1 shall be specified in a file control entry.
- 2) The clauses that follow file-name-1 may appear in any order.

FORMATS 1 AND 2

- 3) When no record description entries are specified:
 - a) a RECORD clause shall be specified in the file description entry,
 - b) a FILE phrase specifying file-name-1 and the FROM phrase shall be specified on all WRITE and REWRITE statements associated with the file, and
 - c) an INTO phrase shall be specified on all READ statements associated with the file.

FORMAT 1

- 4) Format 1 is the file description entry for a sequential file.
- 5) If the FORMAT clause is specified, variable-length records shall be specified for the file.

FORMAT 2

- 6) Format 2 is the file description entry for a relative file or an indexed file. For an indexed file, one or more record description entries shall be associated with the file description entry.

FORMAT 3

- 7) Format 3 is the file description entry for a report file. No record description entries or constant entries shall be associated with the file description entry for a report file.
- 8) The subject of a file description entry that specifies a REPORT clause may be referenced in the procedure division only by the USE statement, the CLOSE statement, or the OPEN statement with the OUTPUT or EXTEND phrase.

13.3.4.3 General rules

ALL FORMATS

- 1) A file description entry associates file-name-1 with a file connector.
- 2) If the EXTERNAL clause is specified, all file description entries in the run unit that reference the same file connector as file-name shall obey the following rules:
 - a) If any of the file description entries has a BLOCK CONTAINS clause, all shall have a BLOCK CONTAINS clause specifying the same minimum and maximum size of the physical record.
 - b) If any of the file description entries has a CODE-SET clause, all shall have a CODE-SET clause specifying the same character set.
 - c) If any of the file description entries has a LINAGE clause, all shall have a LINAGE clause specifying
 - 1. the same corresponding values for any literals specified
 - 2. the same corresponding external data items.
 - d) All file description entries shall have the same smallest and largest record size.
 - e) If any of the file description entries has a REPORT clause, all shall have a REPORT clause.

FORMAT 1

- 3) If the file description entry for a sequential file contains the LINAGE clause and the EXTERNAL clause, the LINAGE-COUNTER data item is an external data item. If the file description entry for a sequential file contains the LINAGE clause and the GLOBAL clause, LINAGE-COUNTER is a global name.

FORMAT 3


- 4) The report writer logical record structure of the file associated with file-name-1 is defined by the implementor.

13.3.5 Sort-merge file description entry

The sort-merge file description entry (SD entry) represents the highest level of organization in the file section. The sort-merge file description entry furnishes information concerning the physical structure pertaining to a sort or merge file. The clauses of a sort-merge file description entry (SD entry) specify the size and the names of the records associated with a sort file or a merge file. The set of records in the file may reside on external media or in the internal storage of the processor. Storage allocation and record management associated with the file are under control of the SORT/MERGE implementation.

13.3.5.1 General format

SD file-name-1

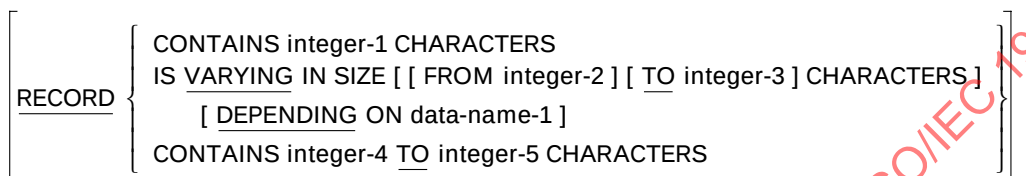

13.3.5.2 Syntax rules

- 1) File-name-1 shall be specified in a file control entry.
- 2) One or more record description entries shall be associated with the sort-merge file description entry.
- 3) File-name-1 shall not be specified in an input-output statement.
- 4) A record description entry associated with file-name-1 shall not be specified in an input-output statement other than following the word FROM or the word INTO.

13.3.5.3 General rules

- 1) The number of characters is specified in terms of bytes.

13.4 Working-storage section

The working-storage section describes records and subordinate data items that are not part of files. Data described in the working-storage section is static or initial data.

13.4.1 General format

WORKING-STORAGE SECTION. $\left[\begin{array}{l} \text{77-level-description-entry} \\ \text{constant-entry} \\ \text{record-description-entry} \end{array} \right] \dots$

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
77-level-entry	13.11, 77-level data description entry
constant-entry	13.9, Constant entry
record-description-entry	13.10, Record description entry

13.4.2 Syntax rules

- 1) The working-storage section may be specified in a function definition or a program definition. Within a class definition, the working-storage section may be specified only in a factory definition or an instance definition, but not in a method definition. The working-storage section shall not be specified within an interface definition.

13.4.3 General rules

- 1) Data items in the working-storage section of a program that does not have the initial attribute, a function, a factory, or an object are static data.
- 2) Data items in the working-storage section of a program that does have the initial attribute are initial data.
- 3) Data items in the working-storage section are initialized as indicated in 13.16.61, VALUE clause.

13.5 Local-storage section

The local-storage section describes automatic data.

13.5.1 General format

LOCAL-STORAGE SECTION. $\left[\begin{array}{l} \text{77-level-description-entry} \\ \text{constant-entry} \\ \text{record-description-entry} \end{array} \right] \dots$

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
77-level-entry	13.11, 77-level data description entry
constant-entry	13.9, Constant entry
record-description-entry	13.10, Record description entry

13.5.2 Syntax rules

- 1) The local-storage section may be specified in a program definition or function definition or in a method definition contained in a class definition.

13.5.3 General rules

- 1) Data items in the local-storage section are automatic data.
- 2) Data items in the local-storage section are initialized as indicated in 13.16.61, VALUE clause.

13.6 Linkage section

The linkage section describes formal parameters and returning items.

Formal parameters and returning items described in the linkage section of a source element are referred to both by that source element, when it is activated, and by the activating source element.

13.6.1 General format

LINKAGE SECTION. $\left[\begin{array}{l} \text{77-level-description-entry} \\ \text{constant-entry} \\ \text{record-description-entry} \end{array} \right] \dots$

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
77-level-entry	13.11, 77-level data description entry
constant-entry	13.9, Constant entry
record-description-entry	13.10, Record description entry

13.6.2 Syntax rules

- 1) The linkage section may be specified in a program definition, function definition, method definition, program prototype definition, or function prototype definition.
- 2) The description of the formal parameters and the returning item that appear in the linkage section of a function prototype or a program prototype shall match the description of the formal parameters and the returning item in the corresponding function definition or program definition, respectively.
- 3) The description of the parameters and the returning item that appear in a linkage section shall follow the rules specified in 14.7, Conformance for parameters and returning items.
- 4) A based data item may be referenced as described in 13.16.5, BASED clause; otherwise, a data item defined in the linkage section of a source element may be referenced within the procedure division of that source element if, and only if, it satisfies one of the following conditions:
 - a) It is an operand of the USING phrase or the RETURNING phrase of the procedure division header.
 - b) It is subordinate to an operand of the USING phrase or the RETURNING phrase of the procedure division header.
 - c) It is defined with a REDEFINES or RENAMES clause, the object of which satisfies one of the above conditions.
 - d) It is subordinate to any item that satisfies the condition in subrule c.
 - e) It is a condition-name or index-name associated with a data item that satisfies one of the above conditions.
- 5) A formal parameter of a function shall not be used as a receiving operand.

13.6.3 General rules

- 1) The access to a based data item is described in 13.16.5, BASED clause.
- 2) The mechanism by which a correspondence is established between the formal parameters and returning items described in the linkage section and data items described in the activating element is described in 14.1.3,

General rules of the procedure division. In the case of index-names, no such correspondence is established and index-names in the activated and activating source elements always refer to separate indices.

- 3) In a program definition, access to formal parameters and the returning item is guaranteed if and only if the program is to execute under the control of a CALL statement, and the CALL statement contains a USING phrase. If a formal parameter or a returning item is accessed in a program that is not a called program, such as a program that is activated by the operating system, the effect is undefined. If a program is activated by a non-COBOL runtime element, the implementor defines whether access to formal parameters and the returning item is guaranteed.
- 4) In a function definition and in a method definition, access to formal parameters and the returning item is always guaranteed.
- 5) A data-item format or table format VALUE clause specified in the linkage section is ignored except in the execution of an explicit or implicit INITIALIZE statement. If the runtime element containing the linkage section is activated by a COBOL runtime element, the initial value of a data item in the linkage section is determined by the value of the corresponding formal parameter in the activating runtime element, as described in 14.1.3, General rules of the procedure division. If the runtime element containing the linkage section is activated by the operating system, the initial value of a linkage section data item is undefined. If the runtime element containing the linkage section is activated by a non-COBOL runtime element, the initial value of a linkage section data item is defined by the implementor.

13.7 Report section

The report section describes the reports to be written to report files. The description of each report begins with a report description (RD) entry and is followed by one or more report group descriptions.

13.7.1 General format

$$\underline{\text{REPORT SECTION.}} \left[\text{report-description-entry} \left\{ \begin{array}{l} \text{constant-entry} \\ \text{report-group-description-entry} \end{array} \right\} \dots \right] \dots$$

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
77-level-entry	13.11, 77-level data description entry
report-group-description-entry	13.7.4, Report group description entry

13.7.2 Syntax rules

- 1) The report section may be specified in a function definition or a program definition. Within a class definition, the report section may be specified only in a factory definition or an instance definition, but not in a method definition. The report section shall not be specified within an interface definition.

13.7.3 Report description entry

The report description (RD) entry gives a name to the report and defines its physical and logical subdivisions. (See 13.7.5.1, Physical subdivisions of a report.)

An RD entry shall be followed by one or more report group description entries. The RD entry and the report group description entries that follow fully describe one report. A report is in the active state after the successful execution of an INITIATE statement referencing that report description entry and before the successful execution of a TERMINATE statement referencing that report description entry. At any other time, it is in the inactive state.

13.7.4 Report group description entry

A report group is a block of zero, one, or more report lines that is treated, both logically and visually, as a single unit. Each report group description shall consist of a level 1 report description entry followed by zero, one, or more subordinate entries, describing the vertical and horizontal layout of the report group and the content or origin of each of its printed data items, known as printable items.

The report groups associated with the report are specified immediately following the report description entry. If several report groups are specified, the order in which they are defined is not significant. The first entry of each report group description has level number 1 and a TYPE clause and, if a data-name is also specified, this may be used subsequently to identify the report group. Further subordinate group and elementary entries may be specified to describe additional elements of the report group.

13.7.5 Report subdivisions

A report has physical and logical subdivisions that interact to determine what is printed on a page.

13.7.5.1 Physical subdivisions of a report

13.7.5.1.1 Pages

Each report is composed of pages of equal size, defined by the PAGE clause, or one page of indefinite size. Each page heading, body group (detail, control heading, or control footing), and page footing appears in a separate

subdivision of the page. Each report heading or report footing may appear in any position on the page. Advancing to a new page is executed automatically for body groups, including the printing of a page footing and page heading.

13.7.5.1.2 Lines

Each report group is divided vertically into zero, one, or more lines. Each line, or multiple line set, is represented in the report group description by a LINE clause. The NEXT GROUP clause, where defined, specifies additional vertical spacing following the report group.

13.7.5.1.3 Report Items

Each line of each report group is divided horizontally into zero, one, or more printable items. Each printable item, or adjacent set of printable items, is defined in the report group description by an elementary entry containing a COLUMN clause. The value that is placed in a printable item is determined solely by a SOURCE, SUM, or VALUE clause in its data description entry. In addition, unprintable items may be specified whose entries contain no COLUMN or LINE clause but from which printable items may be derived.

Report items shall not be accessed or referred to by any clauses in any other section of the data division or by any other procedure division statements, except in the following cases:

- 1) Sum counters may be inspected or altered in the procedure division.
- 2) Report groups of type DETAIL are accessed by the GENERATE statement.

A report item referenced in a function identifier or inline method invocation shall be an elementary report item.

13.7.5.2 Logical Subdivisions of a Report

Report groups of type DETAIL may be structured into a nested set of control groups. Each control group may begin with a control heading and end with a control footing.

A control break occurs when a change of value is detected in a control data item during the execution of a GENERATE statement. The hierarchy of control data items is used to check automatically for any such change in value. The detection of a control break causes the same GENERATE statement to print each defined control footing, in reverse hierarchical order, and each defined control heading, in hierarchical order.

13.8 Screen section

The screen section describes the screens to be displayed during terminal I-O. The screen section describes screen records and subordinate screen items.

13.8.1 General format

SCREEN SECTION. $\left[\begin{array}{l} \text{constant-entry} \\ \text{screen-description-entry} \end{array} \right] \dots$

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
constant-entry	13.9, Constant entry
screen-description-entry	13.15, Screen description entry


13.8.2 Syntax rules

- 1) The screen section may be specified in a function definition or a program definition. Within a class definition, the screen section may be specified only in a factory definition or an instance definition, but not in a method definition. The screen section shall not be specified within an interface definition.

13.9 Constant entry

A constant entry defines a constant. A constant may be used in place of a literal.

13.9.1 General format

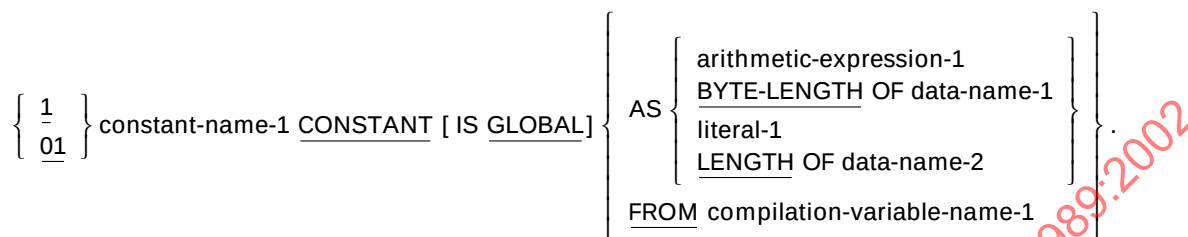

13.9.2 Syntax rules

- 1) If the operand of the constant entry consists of a single numeric literal, that operand is treated as a literal, not as an arithmetic-expression.
- 2) Constant-name-1 may be used anywhere that a format specifies a literal of the class and category of constant-name-1. If constant-name-1 is an integer, it may also be used to specify repetition in a picture character-string, as specified in 13.16.38, PICTURE clause.
- 3) Data-name-1 and data-name-2 may be qualified.
- 4) The length of data-name-1 or data-name-2 shall not be dependent, directly or indirectly, upon the value of constant-name-1.
- 5) Neither the value of literal-1 nor the value of any of the literals in arithmetic-expression-1 shall be dependent, directly or indirectly, upon the value of constant-name-1.
- 6) Neither literal-1 nor any of the literals in arithmetic-expression-1 shall be a figurative constant.
- 7) Arithmetic-expression-1 shall be formed in accordance with 7.2.5, Compile-time arithmetic expressions, with the exception that all of the operands shall be literals and none shall be compilation-variable-names.
- 8) Compilation-variable-name-1 shall be a compilation-variable-name for which the defined condition is currently true.
- 9) If constant-name-1 duplicates another constant-name, the specification of arithmetic-expression-1, literal-1, data-name-1, data-name-2, or compilation-variable-name-1 shall be the same as specified in the other constant-name.
- 10) Data-name-1 and data-name-2 shall not be described with the ANY LENGTH clause.
- 11) Data-name-1 and data-name-2, if defined in the report section, shall reference elementary report items.

13.9.3 General rules

- 1) If literal-1 or compilation-variable-name-1 is specified, the effect of specifying constant-name-1 in other than this entry is as if literal-1 or the text represented by compilation-variable-name-1 were written where constant-name-1 is written.
- 2) If literal-1 or compilation-variable-name-1 is specified, the class and category of constant-name-1 is the same as that of literal-1 or the literal represented by compilation-variable-name-1.

- 3) If arithmetic-expression-1, data-name-1, or data-name-2 is specified, the effect of writing constant-name-1 in other than this entry is as if an integer literal were written where constant-name-1 is written. This integer literal has the value specified in these general rules.
- 4) If arithmetic-expression-1 is specified, it is evaluated in accordance with 7.2.5, Compile-time arithmetic expressions, to determine the value of constant-name-1. The class and category of constant-name-1 is numeric. Constant-name-1 is an integer.
- 5) If the BYTE-LENGTH phrase is specified, the class and category of constant-name-1 is numeric. Constant-name-1 is an integer. The value of constant-name-1 is determined as specified in the BYTE-LENGTH intrinsic function with the exception that when data-name-1 is a variable-length data item, the maximum size of the data item is used.
- 6) If the LENGTH phrase is specified, the class and category of constant-name-1 is numeric. Constant-name-1 is an integer. The value of constant-name-1 is determined as specified in the LENGTH intrinsic function with the exception that when data-name-2 is a variable-length data item, the maximum size of the data item is used.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.10 Record description entry

A record description entry consists of a set of data description entries, the first of which shall have level-number 1, that describe the characteristics of a particular record. Any data item that has been described with level-number 1 is a record.

A record description may have a hierarchical structure. The structure of a record description and the elements allowed in a record description entry are explained in 8.5.1.2, Levels, and in 13.14, Data description entry.

Data elements that bear no hierarchical relationship to any other data item may be described as records that are single elementary items. Alternatively, such data elements when defined in the working-storage section, local-storage section, and linkage section may be described as separate data description entries having level-number 77, as described in 13.11, 77-level data description entry.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.11 77-level data description entry

Items in the linkage section, local-storage, and the working-storage section that bear no hierarchical relationship to one another need not be grouped into records, provided they do not need to be further subdivided. Instead, they are classified and defined as noncontiguous elementary data items. Each of these items is defined in a separate data description entry that begins with the special level-number 77.

13.12 Report description entry

The report description entry names a report and describes its general physical and logical structure.

13.12.1 General format

RD report-name-1

[IS GLOBAL]

[CODE IS { identifier-1
literal-1 }]

[{ CONTROL IS { { data-name-1 } ...
CONTROLS ARE { FINAL [data-name-1] ... } }]

[PAGE [LIMIT IS
LIMITS ARE] { integer-1
[integer-1 { LINE
LINES }] [integer-2 { COLS
COLUMNS }] }]

[[HEADING IS integer-3] [FIRST { DE
DETAIL } IS integer-4]

[[LAST { CH
CONTROL HEADING } IS integer-5]

[[LAST { DE
DETAIL } IS integer-6] [FOOTING IS integer-7]]

13.12.2 Syntax rules

- 1) There shall be one and only one REPORT clause specifying report-name-1 in a given file description entry.
- 2) The clauses that follow report-name-1 may appear in any order.

13.12.3 General rules

- 1) If GLOBAL is specified, report-name-1 and all its constituent report groups, its PAGE-COUNTER and LINE-COUNTER, and any sum counters defined in report-name-1 are global.

13.13 Report group description entry

The report group description entry specifies the characteristics of a report group and of the individual items within a report group.

13.13.1 General format

level-number [entry-name-clause]
 [type-clause]
 [next-group-clause]
 [line-clause]
 [picture-clause]
 [[USAGE IS] { DISPLAY NATIONAL }]
 [sign-clause]
 [justified-clause]
 [column-clause]
 [BLANK WHEN ZERO]
 [source-clause]
 [sum-clause]
 [value-clause]
 [PRESENT WHEN condition-1]
 [GROUP INDICATE]
 [OCCURS [integer-1 TO] integer-2 TIMES [DEPENDING ON data-name-1] [STEP integer-3]]
 [varying-clause] .

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
column-clause	13.16.14, COLUMN clause
entry-name-clause	13.16.18, Entry-name clause
justified-clause	13.16.30, JUSTIFIED clause
line-clause	13.16.33, LINE clause
next-group-clause	13.16.35, NEXT GROUP clause
picture-clause	13.16.38, PICTURE clause
sign-clause	13.16.50, SIGN clause
source-clause	13.16.51, SOURCE clause
sum-clause	13.16.52, SUM clause
type-clause	13.16.55, TYPE clause (report-group format)
value-clause	13.16.61, VALUE clause (report-section format)
varying-clause	13.16.62, VARYING clause

13.13.2 Syntax rules

- 1) Report group description entries may appear only in the report section.
- 2) If the entry-name clause is specified, the data-name format or filler format shall be specified. The entry-name clause shall immediately follow the level-number. All other clauses may be written in any order.
- 3) Level-number shall be any integer from 1 through 49.
- 4) The first entry that follows a report description entry shall be a level 1 entry.

- 5) The TYPE clause may be specified only in a level 1 entry and shall be specified in every level 1 entry.
- 6) The NEXT GROUP clause may be specified only in a level 1 entry.
- 7) The data-name format of the entry-name clause shall be specified when the data-name is referenced in a GENERATE statement, a USE BEFORE REPORTING statement, as a qualifier for a SUM counter, in the UPON phrase of the SUM clause, or as an operand in a SUM clause. The data-name shall not be referenced in any other way.
- 8) No report group description entry with a LINE clause shall be subordinate to another entry with a LINE clause.
- 9) Every elementary entry with a COLUMN clause but no LINE clause shall be subordinate to an entry with a LINE clause.
- 10) Every elementary entry with a COLUMN clause shall also contain either a SOURCE, VALUE or SUM clause.
- 11) The PICTURE, COLUMN, SOURCE, VALUE, SUM, and GROUP INDICATE clauses may be written only in an elementary entry.
- 12) A PICTURE clause shall be specified in every elementary entry that has a SOURCE or SUM clause.
- 13) A COLUMN clause shall be specified in each elementary entry that has a VALUE clause.
- 14) The PICTURE clause may be omitted for an elementary item when an alphanumeric, boolean or national literal is specified in the VALUE clause. A PICTURE clause is implied as follows:
 - a) If the literal is alphanumeric, 'PICTURE X(length)'
 - b) If the literal is boolean, 'PICTURE 1(length)'
 - c) If the literal is national, 'PICTURE N(length)'where length is the length of the literal as specified in 8.3.1.2, Literals.
- 15) If BLANK WHEN ZERO or JUSTIFIED is specified, a COLUMN clause shall also be specified.
- 16) Condition-1 shall not reference any sum counter, LINE-COUNTER, PAGE-COUNTER, or other report section data item.
- 17) The GROUP INDICATE clause shall not be specified in an entry in which the PRESENT WHEN clause is specified.

13.13.3 General rules

- 1) Each level 1 entry identifies a report group. The report group is defined by this entry and all its subordinate entries.
- 2) Except for the additional restrictions defined under syntax rules above, the USAGE, PICTURE, BLANK WHEN ZERO and JUSTIFIED clauses are the same clauses as those that are described under the general format for a data description entry and shall obey the syntax rules and general rules defined for each clause. (See 13.16, Data division clauses.)
- 3) An entry that contains either an OCCURS clause or a LINE or COLUMN clause with more than one operand is said to be a repeating entry, and the number of repetitions is defined to be integer-2 of the OCCURS clause or the number of operands of the LINE or COLUMN clause, whichever is applicable. The number of repetitions of an entry that is not a repeating entry is defined to be 1. A report item is a repeating item if it is defined by a repeating entry or by an entry that is subordinate to a repeating entry.

13.14 Data description entry

A data description entry specifies the characteristics of a particular item of data. A level 1 data description entry within the file, working-storage, local-storage, or linkage section determines whether the record and its subordinate data items have local names or global names.

A level 1 data description entry in the working-storage section determines the internal or external attribute of the record and its subordinate data items.

13.14.1 General format

Format 1 (data-description):

level-number [entry-name-clause]
 [REDEFINES data-name-1]
 [IS TYPED [STRONG]]
 [IS EXTERNAL [AS literal-1]]
 [IS GLOBAL]
 [picture-clause]
 [usage-clause]
 [[SIGN IS] { LEADING
TRAILING } [SEPARATE CHARACTER]]
 [occurs-clause]
 [{ SYNCHRONIZED
SYNC } [{ LEFT
RIGHT }]]
 [{ JUSTIFIED
JUST } RIGHT]
 [BLANK WHEN ZERO]
 [ANY LENGTH]
 [BASED]
 [PROPERTY [WITH NO { GET
SET }] [IS FINAL]]
 [SAME AS data-name-3]
 [select-when-clause]
 [TYPE type-name-1]
 [validation-clauses]
 [value-clause]
 [ALIGNED]
 [GROUP-USAGE IS { BIT
NATIONAL }].

where validation-clauses is:

[class-clause]
 [default-clause]
 [DESTINATION IS { identifier-2 } ...]
 [{ INVALID WHEN condition-2 } ...]
 [PRESENT WHEN condition-3]
 [VARYING { data-name-6 [FROM arithmetic-expression-1] [BY arithmetic-expression-2] } ...]
 [validate-status-clause] ...

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
class-clause	13.16.11, CLASS clause
default-clause	13.16.16, DEFAULT clause
entry-name-clause	13.16.18, Entry-name clause
occurs-clause	13.16.36, OCCURS clause (fixed-table or variable-table format)
picture-clause	13.16.38, PICTURE clause
select-when clause	13.16.49, SELECT WHEN clause
usage-clause	13.16.58, USAGE clause
validate-status-clause	13.16.60, VALIDATE-STATUS clause
value-clause	13.16.61, VALUE clause (data-item or table format)

Format 2 (renames):

66 data-name-1 RENAMES data-name-4 $\left[\begin{array}{c} \text{THROUGH} \\ \text{THRU} \end{array} \right\} \text{data-name-5} \right]$.

Format 3 (condition-name):

88 condition-name-1 value-clause .

where value-clause is described in 13.16.61, VALUE clause (condition-name format).

Format 4 (validation):

88 [condition-name-2] value-clause .

where value-clause is described in 13.16.61, VALUE clause (content-validation-entry format).

13.14.2 Syntax rules

FORMAT 1

- 1) Level-number may be 77 or 1 through 49.
- 2) The data-name format of the entry-name clause shall be specified if level-number is 77.
- 3) The REDEFINES clause shall not be specified in the same data description entry as the TYPEDEF or BASED clause.

- 4) If the entry-name clause is specified, either the data-name format or the filler format may be specified and the entry-name clause shall immediately follow the level-number. If no entry-name clause is specified, it is as though the filler format of the entry-name clause were specified. The REDEFINES clause, if specified, shall immediately follow the entry-name clause, if specified; otherwise, the REDEFINES clause shall immediately follow the level-number. If the TYPEDEF clause is specified, the data-name format of the entry-name clause shall also be specified and the TYPEDEF clause shall immediately follow the entry-name clause. The remaining clauses may be written in any order.
- 5) The EXTERNAL clause shall not be specified in the same data description entry as the REDEFINES, TYPEDEF, or BASED clause.
- 6) The GLOBAL clause may be specified only in data description entries whose level-number is 1.
- 7) The data-name format of the entry-name clause shall be specified for any entry containing the GLOBAL or EXTERNAL clause, or for record descriptions associated with a file description entry that contains the EXTERNAL or GLOBAL clause.
- 8) The PICTURE clause shall not be specified for the subject of a RENAMES clause or for an item whose usage is binary-char, binary-short, binary-long, binary-double, float-short, float-long, float-extended, index, object reference, pointer, or program-pointer. For any other entry describing an elementary item, a PICTURE clause shall be specified except as indicated in syntax rule 9.
- 9) The PICTURE clause may be omitted for an elementary item when an alphanumeric, boolean, or national literal is specified in the data-item format of the VALUE clause. A PICTURE clause is implied as follows:
 - a) if the literal is alphanumeric, 'PICTURE X(length)'
 - b) if the literal is boolean, 'PICTURE 1(length)'
 - c) if the literal is national, 'PICTURE N(length)'

where length is the length of the literal as specified in 8.3.1.2, Literals.
- 10) The VALUE clause shall not be specified for data items of class index, object, or pointer.
- 11) The SYNCHRONIZED, PICTURE, JUSTIFIED, and BLANK WHEN ZERO clauses may be specified only for an elementary data item.
- 12) The SAME AS clause shall not be specified in the same data description entry with any clauses except entry-name, EXTERNAL, GLOBAL, level-number, and OCCURS.
- 13) The TYPE clause shall not be specified in the same data description entry with any clauses except BASED, CLASS, DEFAULT, DESTINATION, entry-name, EXTERNAL, GLOBAL, INVALID, level-number, OCCURS, PRESENT WHEN, PROPERTY, TYPEDEF, VALIDATE-STATUS, VALUE, and VARYING.
- 14) The TYPEDEF clause may be specified only in a data description entry whose level-number is 1 and for which the data-name format of the entry-name clause is specified.
- 15) The BASED clause may be specified only in data description entries in the linkage section, in the working-storage section, and in the local-storage section. The level number of such data description entries shall be 1 or 77.
- 16) If the ANY LENGTH clause is specified, the only other clauses permitted are level-number, entry-name, PICTURE, and USAGE.
- 17) If the LOCALE phrase of the PICTURE clause is specified, the SIGN clause shall not be specified.
- 18) The PRESENT WHEN clause shall not be specified in a data description entry that has a level number of 1 or 77.

19) The PROPERTY clause shall not be specified in the same data description entry as:

- a) a BASED clause,
- b) a TYPEDEF clause.

FORMAT 2

20) The words THROUGH and THRU are equivalent.

FORMATS 3 AND 4

21) Each condition-name is subordinate to the data-name with which it is associated.

22) Format 3 or 4 is used for each condition-name. Each condition-name requires a separate entry with level-number 88. The condition-name entries for a particular conditional variable shall immediately follow the entry describing the item with which the condition-name is associated. A condition-name may be associated with any data description entry that contains a level-number except the following:

- a) Another level 88 entry.
- b) A level 66 entry.
- c) An alphanumeric group containing items with a usage other than display.
- d) A group containing items described with a JUSTIFIED or SYNCHRONIZED clause.
- e) A data item of the class index, object, or pointer.
- f) A data item described with the ANY LENGTH clause.
- g) A type declaration described with the STRONG phrase, or a group item subordinate to such a type declaration.

13.14.3 General rules

- 1) If the subject of the entry is a group item that is subordinate to a bit group and a GROUP-USAGE BIT clause is not specified, a GROUP-USAGE BIT clause is implied for the subject of the entry.
- 2) If the subject of the entry is a group item that is subordinate to a national group and a GROUP-USAGE NATIONAL clause is not specified, a GROUP-USAGE NATIONAL clause is implied for the subject of the entry.
- 3) Format 3 contains the name of the condition and the value, values, or range of values associated with the condition-name.
- 4) Format 4 may contain the name of a condition and the value, values, or range of values associated with the condition-name, in which case the condition-name has the same meaning as in Format 3 and may be used in the same way. During the content validation stage of a VALIDATE statement that references the subject of the entry or a superordinate data item, the value or values specified in this format define the value, values, or range of values that make the subject of the entry valid if VALID is specified or invalid if INVALID is specified.

13.15 Screen description entry

A screen description entry specifies attributes, behavior, size, and location of a screen item so that it can be referenced by an ACCEPT screen or a DISPLAY screen statement. The screen description entry allows data items to be associated with the screen item so that the contents of the data item are displayed within the screen item or the value keyed into a screen item by the operator is placed in the data item.

13.15.1 General format

Format 1 (group):

level-number [entry-name-clause]

[IS GLOBAL]

[LINE NUMBER IS $\left[\begin{array}{c} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-1} \end{array} \right\}]$

[$\left\{ \begin{array}{l} \text{COLUMN} \\ \text{COL} \end{array} \right\} \text{NUMBER IS} \left[\begin{array}{c} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-2} \\ \text{integer-2} \end{array} \right\}]$

[BLANK SCREEN]

[screen-attribute-clauses]

[[SIGN IS] $\left\{ \begin{array}{l} \text{LEADING} \\ \text{TRAILING} \end{array} \right\} [\text{SEPARATE CHARACTER}]]$

[FULL]

[AUTO]

[SECURE]

[REQUIRED]

[OCCURS integer-5 TIMES]

[[USAGE IS] $\left\{ \begin{array}{l} \text{DISPLAY} \\ \text{NATIONAL} \end{array} \right\}]$.

Format 2 (elementary):

level-number [entry-name-clause]

[IS GLOBAL]

[LINE NUMBER IS $\left[\begin{array}{c} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-1} \end{array} \right\}$]

[$\left\{ \begin{array}{l} \text{COLUMN} \\ \text{COL} \end{array} \right\}$ NUMBER IS $\left[\begin{array}{c} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-2} \\ \text{integer-2} \end{array} \right\}$]

[BLANK $\left\{ \begin{array}{l} \text{LINE} \\ \text{SCREEN} \end{array} \right\}$]

[ERASE $\left\{ \begin{array}{l} \text{END OF LINE} \\ \text{END OF SCREEN} \\ \text{EOL} \\ \text{EOS} \end{array} \right\}$]

[screen-attribute-clauses]

[picture-clause]

[source-destination-clauses]

[BLANK WHEN ZERO]

[$\left\{ \begin{array}{l} \text{JUST} \\ \text{JUSTIFIED} \end{array} \right\}$ RIGHT]

[[SIGN IS] $\left\{ \begin{array}{l} \text{LEADING} \\ \text{TRAILING} \end{array} \right\}$ [SEPARATE CHARACTER]]

[FULL]

[AUTO]

[SECURE]

[REQUIRED]

[OCCURS integer-5 TIMES]

[[USAGE IS] $\left\{ \begin{array}{l} \text{DISPLAY} \\ \text{NATIONAL} \end{array} \right\}$] .

where entry-name-clause is described in 13.16.18, Entry-name clause

where screen-attribute-clauses is:

[BELL]
[BLINK]
[HIGHLIGHT
LOWLIGHT]
[REVERSE-VIDEO]
[UNDERLINE]
[FOREGROUND-COLOR IS { identifier-3
integer-3 }]
[BACKGROUND-COLOR IS { identifier-4
integer-4 }]

where picture-clause is described in 13.16.38, PICTURE clause.

where source-destination-clauses is:

[[FROM { identifier-5
literal-1 }]
[TO identifier-6]]
[USING identifier-7]
[VALUE IS literal-2]]

13.15.2 Syntax rules

ALL FORMATS

- 1) The entry-name clause, if specified, shall immediately follow level-number. If the entry-name clause is specified, only the screen-name format or filler format may be specified. If the entry-name clause is not specified, it is as if the FILLER format of the entry-name clause were specified. The remaining clauses may be specified in any order.
- 2) If the GLOBAL clause is specified, the screen-name format of the entry-name clause shall be specified and level-number shall be 1.

FORMAT 1

- 3) Level-number shall be a number from 1 through 48.
- 4) The subject of the entry shall be a group screen item.

FORMAT 2

- 5) Level-number shall be a number from 1 through 49.

- 6) The subject of the entry shall be an elementary screen item.
- 7) For an elementary screen item, the associated screen description entry shall include at least one of the following:
 - a PICTURE clause and a FROM, TO, or USING clause;
 - a PICTURE clause and a VALUE clause with a numeric literal;
 - a VALUE clause specifying an alphanumeric, boolean, or national literal;
 - a BLANK clause;
 - a ERASE clause;
 - a BELL clause.
- 8) If the FULL clause is specified, the JUSTIFIED clause shall not be specified.
- 9) If the LOCALE phrase of the PICTURE clause is specified, the SIGN clause shall not be specified.

13.15.3 General rules

ALL FORMATS

- 1) If the same clause, other than an OCCURS clause, is specified at more than one level in the hierarchy of a screen item, the clause that appears at the lowest level of the hierarchy is the one that takes effect.
- 2) If the HIGHLIGHT and LOWLIGHT clauses are both specified in the hierarchy of a screen item, the clause that appears at the lowest level of the hierarchy is the one that takes effect.

FORMAT 2

- 3) The PICTURE clause may be omitted when an alphanumeric, boolean, or national literal is specified in the VALUE clause. A PICTURE clause is implied as follows:

- a) if the literal is alphanumeric, 'PICTURE X(length)'
- b) if the literal is boolean, 'PICTURE 1(length)'
- c) if the literal is national, 'PICTURE N(length)'

where length is the length of the literal as specified in 8.3.1.2, Literals.

13.16 Data division clauses

13.16.1 ALIGNED clause

The ALIGNED clause specifies that a bit group item or an elementary bit data item is to be aligned at the first bit of the first available byte.

13.16.1.1 General format

ALIGNED

13.16.1.2 Syntax rules

- 1) The ALIGNED clause may be specified only for a bit group item or an elementary bit data item.

13.16.1.3 General rules

- 1) An ALIGNED clause causes the subject of the entry to be aligned on the first bit of the first available byte boundary. Implicit filler bits may be generated to complete the assignment of bits as described in 8.5.1.5.3, Alignment of data items of usage bit.
- 2) An ALIGNED clause specified for a multiple-occurrence data item applies to each occurrence of that item.
- 3) When an ALIGNED clause is not specified, bit data items are aligned in accordance with 8.5.1.5.3, Alignment of data items of usage bit.

13.16.2 ANY LENGTH clause

The ANY LENGTH clause specifies that the length of a linkage section item may vary at runtime and is determined by the length of the argument.

13.16.2.1 General format

ANY LENGTH

13.16.2.2 Syntax rules

- 1) The ANY LENGTH clause may be specified only in an elementary level 1 entry in the linkage section of a function, of a contained program, or of a method that is not a property method.

NOTE The ANY LENGTH clause cannot be specified in an outermost program. This is because an outermost program can be called with or without a program-prototype format CALL statement. For calls without a program-prototype, this International Standard does not require an implementation to determine whether an argument corresponds to a formal parameter described with ANY LENGTH.

- 2) If the source element containing the ANY LENGTH clause is a contained program or is a method, the subject of the entry shall be referenced in its procedure division header as either
 - a) a formal parameter with the BY REFERENCE phrase, or
 - b) the returning item.
- 3) If the source element containing the ANY LENGTH clause is a function, the subject of the entry shall be referenced in its procedure division header as a formal parameter with the BY REFERENCE phrase.
- 4) A PICTURE clause shall be specified for the subject of the entry, and the character-string specified in the PICTURE clause shall be one instance of the picture symbols 'N', 'X', or '1'.

13.16.2.3 General rules

- 1) The ANY LENGTH clause specifies that the subject of the entry shall be:
 - a) a zero-length item when the corresponding argument or returning item of the activating runtime element is a zero-length item, or
 - b) treated as though there were n repetitions of the picture symbol in the character-string in its PICTURE clause, where n is the length of the corresponding argument or returning item of the activating runtime element.

13.16.3 AUTO clause

The AUTO clause causes the cursor to be automatically moved to the next field declared for the screen item during execution of an ACCEPT screen statement.

13.16.3.1 General format

AUTO

13.16.3.2 General rules

- 1) An AUTO clause specified at the group level applies to each input screen item in that group.
- 2) The AUTO clause is ignored for a field that is not an input field.
- 3) The AUTO clause takes effect during the execution of an ACCEPT screen statement that references the screen item for which the AUTO clause is specified.
- 4) The AUTO clause causes the cursor to be automatically moved to the next input field declared for the screen item when the last character of the input field whose definition contains this clause has data entered into it.
- 5) When the AUTO clause is specified for an input field that has no logical next field during input, then when that field is available for input during an ACCEPT screen statement and data is entered into the last character of the screen item, successful completion with normal termination of the ACCEPT statement results.

13.16.4 BACKGROUND-COLOR clause

The BACKGROUND-COLOR clause specifies the background color for the screen item.

13.16.4.1 General format

BACKGROUND-COLOR IS $\left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-1} \end{array} \right\}$

13.16.4.2 Syntax rules

- 1) Identifier-1 shall be described in the file, working-storage, local-storage, or linkage section as an unsigned integer data item.
- 2) Integer-1 shall have a value in the range of 0 to 7.

13.16.4.3 General rules

- 1) When an ACCEPT screen statement or a DISPLAY screen statement referencing the associated screen item is executed, the content of the data item referenced by identifier-1 shall be in the range of 0 to 7.
- 2) Integer-1 or the content of the data-item referenced by identifier-1 specifies the color number of the background color to be used for displaying the screen item. The color associated with the color number is specified in 9.2.7, Color number.
- 3) A BACKGROUND-COLOR clause specified at the group level applies to each elementary screen item in that group.
- 4) When a BACKGROUND-COLOR clause is not specified or the value is not in the range 0 to 7, the background color is implementor-defined.

13.16.5 BASED clause

The BASED clause defines a based entry. A based entry is a template that, when associated with an actual data item or allocated storage, describes a based data item.

13.16.5.1 General format

BASED

13.16.5.2 Syntax rules

- 1) The subject of the entry shall not be of class object.

13.16.5.3 General rules

- 1) The BASED clause specifies that the subject of the entry is a based entry defining a template that is dynamically associated with storage through an implicit data-address pointer.
- 2) An implicit data-address pointer is created and has an initial value of NULL. The life cycle of this implicit data-address pointer is described in 8.6.4, Based entries and based data items.
- 3) If the subject of the entry or any item subordinate to it is referenced directly or indirectly while its address is NULL, the EC-DATA-PTR-NULL exception condition is set to exist.
- 4) If the subject of the entry is referenced while its address is not NULL and not a valid address of storage, the EC-BOUND-PTR exception condition is set to exist.

13.16.6 BELL clause

The BELL clause causes the terminal audio tone to sound.

13.16.6.1 General format

BELL

13.16.6.2 General rules

- 1) The use of this clause results in the audio tone sounding when the screen item in which it is specified is processed during the execution of a DISPLAY screen statement. The audio tone sounds once at the start of the execution of the DISPLAY screen statement regardless of how many entries specify the clause.
- 2) A BELL clause specified at the group level applies to each elementary screen item in that group.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.7 BLANK clause

The BLANK clause clears a screen line or clears the whole screen during the execution of a DISPLAY screen statement before data is transferred to the screen item.

13.16.7.1 General format

$$\underline{\text{BLANK}} \left\{ \begin{array}{l} \underline{\text{LINE}} \\ \underline{\text{SCREEN}} \end{array} \right\}$$

13.16.7.2 General rules

- 1) When the BLANK LINE clause is specified, the entire line specified for the screen item that is the subject of the entry, columns 1 through the end of the line, is cleared during the execution of a DISPLAY screen statement before data is transferred to the screen item.
- 2) When the BLANK SCREEN clause is specified, the screen is cleared and the cursor is placed at line 1, column 1 during the execution of a DISPLAY screen statement before data is transferred to the screen item. Upon clearing the screen, the background color for the entire screen is set to the value applicable at the time.
- 3) The BLANK SCREEN clause in combination with the BACKGROUND-COLOR clause for the same screen item, or for a screen item to which it is subordinate, establishes the default background color to be used until the same combination is encountered specifying another background color.
- 4) The BLANK SCREEN clause in combination with the FOREGROUND-COLOR clause for the same screen item, or for a screen item to which it is subordinate, establishes the default foreground color to be used until the same combination is encountered specifying another foreground color.
- 5) The BLANK clause is ignored during all phases of the execution of an ACCEPT screen statement.

13.16.8 BLANK WHEN ZERO clause

The BLANK WHEN ZERO clause causes the blanking of an item when a value of zero is being stored in it.

13.16.8.1 General format

BLANK WHEN ZERO

13.16.8.2 Syntax rules

- 1) The BLANK WHEN ZERO clause may be specified only for an elementary item described by its picture character-string as category numeric-edited or as numeric without the picture symbol 'S'.
- 2) The subject of the entry shall be implicitly or explicitly described as usage display or usage national.

13.16.8.3 General rules

- 1) When the BLANK WHEN ZERO clause is specified for a data item, the content of the data item is set to all spaces when the item is a receiving operand and the value being stored is zero.
- 2) If the subject of the entry is described by its picture character-string as category numeric, the BLANK WHEN ZERO clause defines the item as numeric-edited.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.9 BLINK clause

The BLINK clause specifies that each character of the field blinks when it is displayed on the screen.

13.16.9.1 General Format

BLINK

13.16.9.2 General Rules

- 1) A BLINK clause specified at the group level applies to each elementary screen item in that group.
- 2) When the BLINK clause is specified, the characters that constitute the screen item will blink when the screen item is referenced in an ACCEPT screen or a DISPLAY screen statement.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.10 BLOCK CONTAINS clause

The BLOCK CONTAINS clause specifies the size of a physical record.

13.16.10.1 General format

BLOCK CONTAINS [integer-1 TO] integer-2 { CHARACTERS
RECORDS }

13.16.10.2 Syntax rules

- 1) If integer-1 is specified, integer-2 shall be greater than integer-1.

13.16.10.3 General rules

- 1) This clause is required except when one or more of the following conditions exist:
 - a) A physical record contains one and only one complete logical record.
 - b) The hardware device assigned to the file has one and only one physical record size.
 - c) The number of records or characters contained in a block is specified in the operating environment.
- 2) The size of a physical record may be stated in terms of records unless one or more of the following situations exists, in which case the RECORDS phrase shall not be used:
 - a) In mass storage files, logical records may extend across physical records.
 - b) The physical record contains padding (area not contained in a logical record).
 - c) Logical records are grouped in such a manner that an inaccurate physical record size would be implied.
- 3) If the CHARACTERS phrase is specified, the physical record size is specified in terms of the number of bytes required to store the physical record, regardless of the types of characters used to represent the items within the physical record.
- 4) If integer-1 is not specified, integer-2 represents the exact size of the physical record. If integer-1 and integer-2 are both specified, they refer to the minimum and maximum size of the physical record, respectively.

13.16.11 CLASS clause

The CLASS clause specifies a range of values for each character of a data item, to be checked during the content validation stage of the execution of a VALIDATE statement.

13.16.11.1 General format

CLASS IS {	NUMERIC	}
	ALPHABETIC	
	ALPHABETIC-LOWER	
	ALPHABETIC-UPPER	
	BOOLEAN	
	alphabet-name-1	
	class-name-1	

13.16.11.2 Syntax rules

- 1) The subject of the entry shall be of class alphabetic, alphanumeric, or national.

13.16.11.3 General rules

- 1) The CLASS clause takes effect during the content validation stage of the execution of a VALIDATE statement. The CLASS clause is ignored during the execution of any statement other than a VALIDATE statement.
- 2) If the subject of the entry is an elementary item, the CLASS clause takes effect only if the item's associated internal indicator is still set to its initial valid value, indicating that the item is valid on format.
- 3) The operand of the CLASS clause is used to check each character of the value of the data item as described in 8.8.4.1.3, Class condition. If the class condition is false, the data item's internal indicator is set to invalid on content.
- 4) If the subject of the entry is an alphanumeric group item or national group item, general rules 2 and 3 are applied to each of its subordinate elementary items, except for any data items that are not processed as a result of a PRESENT WHEN clause or an OCCURS clause with a DEPENDING phrase.

13.16.12 CODE clause

The CODE clause specifies one or more characters that can be used for separating multiple reports written to the same file or for specifying correct functioning of the printer device.

13.16.12.1 General format

$$\underline{\text{CODE}} \text{ IS } \left\{ \begin{array}{l} \text{literal-1} \\ \text{identifier-1} \end{array} \right\}$$

13.16.12.2 Syntax rules

- 1) Literal-1 shall be a alphanumeric literal.
- 2) Identifier-1 shall represent an alphanumeric data item and shall not be a variable-length data item.
- 3) If the CODE clause is specified for any report, it shall be specified for each report associated with the same report file.

13.16.12.3 General rules

- 1) When the CODE clause is specified, literal-1 or identifier-1 is automatically placed in the first characters of each logical record written to the report file for this report.
- 2) The characters occupied by literal-1 or identifier-1 are not included in the descriptions of the lines in the report, but are included in the logical record size.
- 3) If identifier-1 is specified, it is evaluated at the start of the processing for each body group, either during page advance processing, as detailed in the GENERATE statement, or whenever page advance processing is not performed. The resultant value is used until the next evaluation.

13.16.13 CODE-SET clause

The CODE-SET clause specifies the character code convention used to represent data on the external media.

13.16.13.1 General format

$$\text{CODE-SET} \left\{ \begin{array}{l} \text{IS alphabet-name-1 [alphabet-name-2]} \\ \left\{ \begin{array}{l} \text{FOR ALPHANUMERIC IS alphabet-name-1} \\ \text{FOR NATIONAL IS alphabet-name-2} \end{array} \right\} \end{array} \right\}$$
13.16.13.2 Syntax rules

- 1) Alphabet-name-1 shall reference an alphabet that defines an alphanumeric coded character set.
- 2) Alphabet-name-2 shall reference an alphabet that defines a national coded character set.
- 3) If there are record description entries associated with the file and no SELECT WHEN clauses are specified, either alphabet-name-1 or alphabet-name-2 may be specified, but not both; and:
 - a) if alphabet-name-1 is specified, all elementary data items of all record description entries associated with the file shall be described as usage display, and any signed numeric data items shall be described with the SIGN IS SEPARATE clause.
 - b) if alphabet-name-2 is specified, all elementary data items of all record description entries associated with the file shall be described as usage national, and any signed numeric data items shall be described with the SIGN IS SEPARATE clause.

13.16.13.3 General rules

- 1) The CODE-SET clause identifies alphabets to be used for converting data from a coded character set on the storage medium to the native character set during input operations, and from the native character set to the coded character set on the storage medium during output operations.
- 2) Upon successful processing of an OPEN statement for the file referenced in this file description entry, the coded character set used to represent alphanumeric data on the storage medium is the one referenced by alphabet-name-1; the coded character set used to represent national data on the storage medium is the one referenced by alphabet-name-2.
- 3) If the record description entries associated with the file do not contain a SELECT WHEN clause, the specified alphabet is used for code-set conversion of all data items in each record.
- 4) If record description entries associated with the file contain a SELECT WHEN clause, a record description entry is selected by evaluation of those SELECT WHEN clauses. If there are no record description entries associated with the file, the record description used for conversion is the description of the identifier or literal specified in the FROM phrase of a WRITE or REWRITE statement specifying the FILE option.

Alphabet-name-1 is used for code-set conversion of each data item described with usage display in the selected record description entry. Alphabet-name-2 is used for code-set conversion of each data item described with usage national in the selected record description entry.

NOTE There is no conversion of data items described with other usages unless a FORMAT clause applies.

- 5) If a FORMAT clause is also specified for the file, the logical order of processing for each data item is:
 - formatting first, then code-set conversion during output operations;
 - code-set conversion first, then formatting during input operations.
- 6) For each data item to be converted:
 - a) On input, each coded character from the storage medium is replaced with its associated native coded character as defined in the alphabet being used.
 - b) On output, each native coded character in the record is replaced for the storage medium with its associated coded character as defined in the alphabet being used.
- 7) If the CODE-SET clause is not specified, the native character set is assumed for data on the external media.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.14 COLUMN clause

The COLUMN clause identifies a printable item, or a set of printable items, and specifies their horizontal location in a report line, or specifies the horizontal screen coordinate for a screen item.

13.16.14.1 General format**Format 1 (report-writer):**

$$\left\{ \begin{array}{l} \text{COLUMN NUMBER} \\ \text{COLUMN NUMBERS} \\ \text{COLUMNS} \\ \text{COL NUMBER} \\ \text{COL NUMBERS} \\ \text{COLS} \end{array} \right\} \left\{ \begin{array}{l} \text{LEFT} \\ \text{CENTER} \\ \text{RIGHT} \end{array} \right\} \left[\begin{array}{l} \text{IS} \\ \text{ARE} \end{array} \right] \left\{ \begin{array}{l} \text{integer-1} \\ \left\{ \begin{array}{l} \text{PLUS} \\ + \end{array} \right\} \text{integer-2} \end{array} \right\} \dots$$

Format 2 (screen-item):

$$\left\{ \begin{array}{l} \text{COLUMN} \\ \text{COL} \end{array} \right\} \text{NUMBER IS} \left[\begin{array}{l} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-3} \end{array} \right\}$$

13.16.14.2 Syntax rules**ALL FORMATS**

- 1) COLUMN, COL, COLUMNS, and COLS are synonyms.
- 2) PLUS and + are synonyms.

FORMAT 1

- 3) The COLUMN clause may be specified only in an elementary entry. The entry shall also contain a LINE clause or shall be subordinate to an entry containing a LINE clause.
- 4) The keyword ARE may be specified only if COLUMNS, COLS, or NUMBERS is specified.
- 5) The keyword IS shall not be specified if COLUMNS, COLS, or NUMBERS is specified.
- 6) Neither integer-1 nor integer-2 shall exceed the page width. (See 13.16.37, PAGE clause)
- 7) Within a given report line, any two or more absolute items defined using column numbers that are not in increasing numerical order shall be subject to a different PRESENT WHEN clause.
- 8) The set of printable items within a given report line is subject to the following rules:
 - a) If any two or more items overlap each other, they shall each be subject to a different PRESENT WHEN clause.
 - b) The rightmost column positions of all absolute items shall not exceed the page width.

- c) If the report line ends in a set of relative printable items or consists only of such, they shall not cause the page width to be exceeded unless each of them is subject to a different PRESENT WHEN clause, in which case this rule applies only to the largest of them.
- 9) If LEFT, CENTER, or RIGHT is specified, all the operands shall be absolute. If any of the operands is absolute and neither LEFT, CENTER, nor RIGHT is specified, LEFT is assumed.
- 10) If more than one integer-1 or integer-2 operand is specified the clause is referred to as a multiple COLUMN clause and the following additional rules apply:
 - a) No OCCURS clause shall be specified in the same entry.
 - b) All the occurrences of integer-1 shall be in increasing order of magnitude.

FORMAT 2

- 11) MINUS and – are synonyms.
- 12) Identifier-1 shall be described in the file, working-storage, local-storage, or linkage section as an elementary unsigned integer data item.
- 13) Neither the PLUS phrase nor the MINUS phrase shall be specified for the first elementary item in a screen record.

13.16.14.3 General rules

FORMAT 1

- 1) The COLUMN clause defines one or more printable items. If a COLUMN clause is not specified, the items are not printed.
- 2) There is a fixed correspondence, specified by the implementor, between a column and a character in a national character set.
- 3) The printable-size of a printable item is the number of columns required for printing the characters described by the item's PICTURE clause or, in the absence of a PICTURE clause, the literal specified in the VALUE clause. There is a one-to-one correspondence between a column and a character in an alphanumeric character set.

NOTE Columns might not line up in a report if the printable characters are not of a fixed size, such as in the character-set UTF-8.

- 4) Any report line shall be defined in such a way that any given column position is used for only one printable item when the line is printed. If this rule is violated the EC-REPORT-COLUMN-OVERLAP exception condition is set to exist and the results are undefined.
- 5) Any report line shall be defined in such a way that, when printed, the final column position of the last printable item does not exceed the page width. If this rule is violated the EC-REPORT-PAGE-WIDTH exception condition is set to exist, the report line is truncated, and the report line is printed.
- 6) If the integer-1 phrase is specified, the following general rules apply:
 - a) Integer-1 specifies an absolute column number.
 - b) If LEFT is specified, integer-1 is the leftmost column of the printable item. The rightmost column of the printable item is integer-1 + printable-size – 1.
 - c) If RIGHT is specified, integer-1 is the rightmost column of the printable item. The leftmost column of the printable item is integer-1 – printable-size + 1.

d) If CENTER is specified, the printable item is centered, as follows:

1. If the printable-size of the printable item is an odd number of columns, integer-1 identifies the center column of the printable item. The leftmost column is $\text{integer-1} - ((\text{printable-size} - 1) / 2)$; the rightmost column is $\text{integer-1} + (\text{printable-size} / 2)$, truncated to an integer.
 2. If the printable-size of the printable item is an even number of columns, integer-1 identifies the column of the printable item that is to the left of an imaginary line between the two middle columns of the printable item. The leftmost column is $(\text{integer-1} - (\text{printable-size} / 2)) + 1$; the rightmost column is $\text{integer-1} + (\text{printable-size} / 2)$.
- 7) Within any given report line, a horizontal counter, representing the rightmost occupied column, is maintained and updated by each printable item in the line. At the start of the line, the horizontal counter is zero.
- 8) Integer-2 specifies a relative column number. If integer-2 is specified for an item that is the first printable item in the current line, it specifies the leftmost column of that item. Otherwise, the value of integer-2 is the number of column positions between the rightmost column of the preceding printable item and the leftmost column of the item being defined. The position of the item's leftmost character is obtained by adding integer-2 to the current line's horizontal counter.

NOTE The value of integer-2 minus 1 is the number of blank columns, if any, immediately preceding the item.

- 9) The rightmost column position of each printable item becomes the new value of the horizontal counter.
- 10) Any unoccupied columns in each print line are filled with space characters.
- 11) If an entry containing a LINE clause has no subordinate entry defining a printable item, the resultant report line will be blank.
- 12) A multiple COLUMN clause is functionally equivalent to a COLUMN clause with a single operand, together with a simple OCCURS clause whose integer is equal to the number of operands of the COLUMN clause, except that the multiple COLUMN clause allows the printable items to be defined at unequal horizontal intervals.

FORMAT 2

- 13) The COLUMN clause specifies the column in which the leftmost character of the screen item is to appear on the screen during the execution of an ACCEPT screen or a DISPLAY screen statement. Positioning of the screen record and within the screen record appears the same on the terminal display regardless of whether the whole screen record or just a portion of it is referenced in an ACCEPT screen or a DISPLAY screen statement.

NOTE Columns might not line up on a screen if the characters on the screen are not of a fixed size, such as in the character-set UTF-8.

- 14) If the COLUMN clause does not specify PLUS or MINUS, the clause gives the column number relative to the first column of the screen record. A column number of 1 represents the first column of the screen record.
- 15) If the PLUS or MINUS phrase is specified in the COLUMN clause, the column number is relative to the end of the preceding screen item in the same screen record, such that if COLUMN PLUS 1 is specified, the screen item starts immediately following the preceding screen item. PLUS denotes a column position that is increased by the value of identifier-1 or integer-3. MINUS denotes a column position that is decreased by the value of identifier-1 or integer-3.
- 16) A setting of COLUMN 1 is assumed for screen descriptions that specify the LINE clause but omit the COLUMN clause.
- 17) If both the LINE clause and the COLUMN clause are omitted, the following apply:
- a) if no previous screen item has been defined, LINE 1 COLUMN 1 of the screen is assumed.

b) if a previous screen item has been defined, the line of that previous item and COLUMN PLUS 1 is assumed.

18) If a column number of zero is specified, the EC-SCREEN-STARTING-COLUMN exception condition is set to exist and the results are as if 1 were specified for the column number.

19) If the explicit or implicit column number of the first character of the screen item exceeds the number of columns available for a terminal, the EC-SCREEN-STARTING-COLUMN exception condition is set to exist and that screen item does not take part in the execution of the ACCEPT screen or DISPLAY screen statement.

Otherwise, if the starting column and length of a screen item are such that the field would extend beyond the end of the terminal line, the EC-SCREEN-ITEM-TRUNCATED exception condition is set to exist and the field is truncated at the end of the line.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.15 CONTROL clause

The CONTROL clause establishes a hierarchy of control breaks for the report.

13.16.15.1 General format

$$\left\{ \begin{array}{l} \text{CONTROL IS} \\ \text{CONTROLS ARE} \end{array} \right\} \left\{ \begin{array}{l} \{ \text{data-name-1} \} \dots \\ \text{FINAL} [\text{data-name-1}] \dots \end{array} \right\}$$
13.16.15.2 Syntax rules

- 1) CONTROL and CONTROLS are synonyms.
- 2) Data-name-1 shall not be defined in the report section.
- 3) Data-name-1 may be qualified.
- 4) Data-name-1 may be reference modified. If it is, leftmost-position and length shall be integer literals.
- 5) The entry specified by data-name-1 shall not have a variable-occurrence entry subordinate to it.
- 6) Data-name-1 shall be unique in any given CONTROL clause. Two or more instances of data-name-1 in the same clause may, however, refer to the same physical data item or to overlapping data items.

13.16.15.3 General rules

- 1) The order of appearance of the operands of the CONTROL clause establishes the levels of the control hierarchy. The first data-name-1 is the major control; the next recurrence of data-name-1 is an intermediate control, etc. The last recurrence of data-name-1 is the minor control.
- 2) Specifying FINAL is equivalent to specifying a data item whose value does not change throughout the processing of the report. Therefore FINAL, if specified, is associated with the highest level in the hierarchy.
- 3) For each data-name-1 an internal data item, known as a prior control, is implicitly defined, having the same data description as the corresponding data item and a mechanism is established to save each control data item in the corresponding prior control and subsequently to compare these values to sense for control breaks. Execution of the chronologically first GENERATE statement for a given report saves each current control data item in the corresponding prior control. Subsequent executions of any GENERATE statement for that report automatically test the current value of each control data item, in order major to minor, for equality with the corresponding prior control. If a change of value in a control data item is detected, no further control data items are tested for the current GENERATE statement, and control break processing for that level and any lower levels is performed automatically.
- 4) If a control break has been detected during the execution of a GENERATE statement, the control data items are processed as follows:
 - a) If any control footing is defined for the report, the current contents of control data items are saved and the corresponding prior controls are stored in the control data items before any control footing is printed. This ensures that any reference to a control data item in a control footing will always yield the value that the control data item had before the control break. If a USE BEFORE REPORTING declarative procedure is specified for the control footing, any reference to a control data item in this section will similarly yield the prior value. If the printing of the control footing causes a page advance and the page heading or page footing refers to a control data item, the value produced is similarly the prior value. When the printing of each control footing has been accomplished, the control data items are restored from the prior controls to their new current values, with these new current values remaining in the prior controls. All subsequent references to the control data items will obtain the new current values.

- b) If no control footing is defined for the report, the new current values of the control data items are stored in the corresponding prior controls.

(See also 13.16.55, TYPE clause.)

- 5) When a TERMINATE statement is executed, if any control footing is defined for the report, the prior controls are stored in the control data items before each control footing is printed, as though a highest-level control break had been detected. The result is the same as that of a control break detected during the execution of a GENERATE statement.
- 6) Data-name-1 shall not reference a zero-length group item.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.16 DEFAULT clause

The DEFAULT clause specifies an explicit alternative value for a data item that contains all spaces or was found to be invalid on format during the format validation stage of the execution of a VALIDATE statement.

13.16.16.1 General format

$$\text{DEFAULT IS } \left\{ \begin{array}{l} \text{literal-1} \\ \text{identifier-1} \\ \text{NONE} \end{array} \right\}$$
13.16.16.2 Syntax rules

- 1) The subject of the entry shall not be of class index, object, or pointer.
- 2) Literal-1 or the data item referenced by identifier-1 shall be valid as a sending operand for a MOVE statement specifying the subject of the entry as the receiving operand.

13.16.16.3 General rules

- 1) A default value is established during the format validation stage of the execution of a VALIDATE statement if any of the following circumstances apply:
 - a) In the case of an elementary data item, if the item's associated internal indicator is set to invalid on format, or the item is implicitly or explicitly of usage display or national and contains all spaces.
 - b) In the case of an alphanumeric group or strongly-typed group item, if all the item's subordinate elementary data items are implicitly or explicitly of usage display and contain all spaces, and none of their associated internal indicators is set to invalid on format.
 - c) In the case of a national group item, if all the item's subordinate elementary data items contain all spaces.

In these cases, any subsequent reference to that data item during the execution of the current VALIDATE statement uses the default value rather than the actual content of the item. The data item itself remains unchanged. The DEFAULT clause is ignored during the execution of any statement other than a VALIDATE statement.

- 2) Except in the case of DEFAULT NONE, the DEFAULT clause specifies the default value explicitly. If literal-1 is specified, the default value used is the value of literal-1. If identifier-1 is specified, the default value used is the value of the data item referenced by identifier-1.
- 3) If the DEFAULT clause is not specified in the data item's data description entry, or if DEFAULT NONE is specified, the default value is that which would be supplied for the data item by the execution of an implicit INITIALIZE statement without a REPLACING or VALUE phrase.
- 4) If NONE is specified, the effect of the clause is the same as if no DEFAULT clause were specified, except that, if the data item contains all spaces or the data item is elementary and is found to be invalid on format, any DESTINATION clause specified for the data item is ignored.

13.16.17 DESTINATION clause

The DESTINATION clause specifies one or more data items to which data is to be implicitly moved during the execution of the input distribution stage of a VALIDATE statement.

13.16.17.1 General format

DESTINATION IS { identifier-1 } ...

13.16.17.2 Syntax rules

- 1) The description of the data item referenced by identifier-1 shall be such that a syntactically correct MOVE statement results when that data item is the receiving operand and the subject of the entry, qualified and subscripted where necessary, is the sending operand.
- 2) The data description entry for the data item referenced by identifier-1 or any data item subordinate to identifier-1 shall not contain a VALIDATE-STATUS clause.
- 3) If the subject of the entry is a global name, every data-name appearing in identifier-1 shall be a global name.

13.16.17.3 General rules

- 1) The DESTINATION clause causes one or more implicit MOVE statements to be executed during the input distribution phase of the execution of a VALIDATE statement that references a data item whose description contains the DESTINATION clause in the same or in a subordinate entry. The DESTINATION clause is ignored during the execution of any statement other than a VALIDATE statement.
- 2) If a default value has not been assigned to the item, as described in general rule 1 of the DEFAULT clause, the actual content of the item is moved to the data item referenced by identifier-1.
- 3) If a default value has been assigned to the item and DEFAULT NONE is not specified in the entry, the item's default value is moved to the data item referenced by identifier-1.
- 4) If a default value has been assigned to the item and DEFAULT NONE is specified in the entry, the data item referenced by identifier-1 is unchanged.
- 5) If identifier-1 contains subscripts defined in VARYING clauses that are processed at the same time as the DESTINATION clause, these subscripts may be used to store different occurrences of the data item in the same number of different occurrences of the destination item.

NOTE If a VARYING clause is not used, any subscripts specified in the DESTINATION clause are unchanged.

- 6) The sending data determined by the above general rules is moved to the data item referenced by each identifier-1 in the order specified, according to the rules for the MOVE statement.

13.16.18 Entry-name clause

The entry-name clause specifies the name of the item that is being described. A data-name or screen-name may be used to give the item a name.

13.16.18.1 General format

Format 1 (data-name)

data-name-1

Format 2 (screen-name)

screen-name-1

Format 3 (filler)

FILLER

13.16.18.2 Syntax rules

- 1) If the entry-name clause is not specified in a data description entry, a report group description entry, or a screen description entry, the word FILLER is assumed.
- 2) If the entry-name clause is specified in a data description entry or a report group description entry, either data-name-1 or FILLER shall be specified. If the entry-name clause is specified in a screen description entry, either screen-name-1 or FILLER shall be specified.

13.16.18.3 General rules

- 1) The word FILLER may be used to name a data, report, or screen item. Under no circumstances shall a FILLER item be referred to explicitly.

13.16.19 ERASE clause

The ERASE clause clears part of the line or the screen starting at the cursor position.

13.16.19.1 General format

ERASE	{	END OF <u>LINE</u>	}
		END OF <u>SCREEN</u>	
		<u>EOL</u>	
		<u>EOS</u>	

13.16.19.2 Syntax rules

- 1) The word EOL is equivalent to the words END OF LINE.
- 2) The word EOS is equivalent to the words END OF SCREEN.

13.16.19.3 General rules

- 1) When the ERASE clause is specified, a portion of the screen is cleared during the execution of a DISPLAY screen statement before data is transferred to the screen item. The clearing begins at the line and column coordinates specified for the subject of the entry and continues as follows:
 - If LINE is specified, the clearing continues to the end of the line.
 - If SCREEN is specified, the clearing continues to the end of the screen.
- 2) The ERASE clause is ignored during all phases of the execution of an ACCEPT screen statement.

13.16.20 EXTERNAL clause

The EXTERNAL clause specifies that a data item or a file connector is external. The constituent data items and group data items of an external data record are available in a run unit to every runtime element that describes the record as external.

13.16.20.1 General format

IS EXTERNAL [AS literal-1]

13.16.20.2 Syntax rules

- 1) The EXTERNAL clause may be specified only in file description entries or in record description entries in the working-storage section.
- 2) In the same source element, the externalized name of the subject of the entry that includes the EXTERNAL clause shall not be the same as the externalized name of any other entry that includes the EXTERNAL clause.
- 3) Literal-1 shall be an alphanumeric or national literal and shall not be a figurative constant.
- 4) The EXTERNAL clause shall not be specified for a data item of class object or pointer or for a strongly-typed group item.

13.16.20.3 General rules

- 1) If the EXTERNAL clause is specified in a record description entry, the data contained in the record is external and may be accessed within the run unit by any runtime element that describes the same record as external, subject to the following rules.

NOTE Use of the EXTERNAL clause does not imply that the associated file-name or data-name is a global name.

- 2) If the EXTERNAL clause is specified in a file description entry:
 - a) the file connector associated with this file description entry is an external file connector; and
 - b) the data contained in all record description entries subordinate to that file description entry is external and may be accessed by any runtime element in the run unit that describes the same file and records as external, subject to the following rules.
- 3) Literal-1, if specified, is the name of the file connector or record that is externalized to the operating environment. If literal-1 is not specified, the externalized name of the file connector or record is the name specified in the file description entry or the data-name format of the entry-name clause, respectively.
- 4) Within a run unit, if two or more source elements describe the same external data record, each name that is externalized to the operating environment for the record description entries shall be the same; the VALUE clause specification, if any, for each record name of the associated record description entries shall be identical; and the records shall define the same number of bytes. A source element that describes an external record may contain a data description entry including the REDEFINES clause that redefines the complete external record, and this complete redefinition need not occur identically in other source elements in the run unit.

13.16.21 FOREGROUND-COLOR clause

The FOREGROUND clause specifies the foreground color for the screen item.

13.16.21.1 General format

FOREGROUND-COLOR IS $\left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-1} \end{array} \right\}$

13.16.21.2 Syntax rules

- 1) Identifier-1 shall be described in the file, working-storage, local-storage, or linkage section as an unsigned integer data item.
- 2) Integer-1 shall have a value in the range of 0 to 7.

13.16.21.3 General rules

- 1) When an ACCEPT screen statement or a DISPLAY screen statement referencing the associated screen item is executed, the content of the data item referenced by identifier-1 shall be in the range of 0 to 7.
- 2) Integer-1 or the content of the data-item referenced by identifier-1 specifies the color number of the foreground color to be used for displaying the screen item. The color associated with the color number is specified in 9.2.7, Color number.
- 3) A FOREGROUND-COLOR clause specified at the group level applies to each elementary screen item in that group.
- 4) When a FOREGROUND-COLOR clause is not specified or the value is not in the range 0 to 7, the foreground color is implementor-defined.

13.16.22 FORMAT clause

The FORMAT clause specifies that records written to the file are to be formatted to an external representation during the output process and records read from the file are to be converted from the external format into internal representation during the input process. The external representation is suitable for presentation or printing.

13.16.22.1 General format

$$\text{FORMAT} \left\{ \begin{array}{l} \text{BIT} \\ \text{CHARACTER} \\ \text{NUMERIC} \end{array} \right\} \text{DATA}$$
13.16.22.2 Syntax rules

- 1) If more than one record description entry is associated with a file description entry in which the FORMAT clause is specified, each of these record description entries shall contain a SELECT WHEN clause.
- 2) The REDEFINES clause and the RENAMES clause shall not be specified in a record description entry associated with a file description entry in which a FORMAT clause is specified or in the data description entry of the identifier specified in a FROM phrase in a REWRITE or WRITE statement referencing that file description entry.
- 3) Data items of class index, object, and pointer shall not be specified in a record description entry associated with a file description entry in which a FORMAT clause is specified or in the data description entry of the identifier specified in a FROM phrase in a REWRITE or WRITE statement referencing that file description entry.

13.16.22.3 General rules

- 1) The FORMAT clause specifies that external media format is to be used for records written to the file. In external media format, data contains the appropriate encoding for presentation or printing.

NOTE The data in the record area is visible to the runtime module in internal representation.

- 2) A record description entry or a data description entry is selected for use in formatting during an input-output operation referencing a file description entry in which a FORMAT clause is specified as follows:
 - a) If only one record description entry is associated with the file description entry, that record description entry is selected.
 - b) If more than one record description entry is associated with the file description entry, the record description entry identified by the SELECT WHEN clause is selected.
 - c) If there are no record description entries associated with the file description entry, the record description entry or data description entry that is selected depends on the input-output operation as follows:
 1. If the input-output statement is a READ statement, it is the data description entry of the identifier that is specified in the INTO phrase of that READ statement.
 2. If the input-output statement is a WRITE or REWRITE statement and an identifier is specified in the FROM phrase, it is the data description entry of that identifier.
 3. If the input-output statement is a WRITE or REWRITE statement and a literal is specified in the FROM phrase, an implicit data description entry that describes the literal is the data description entry as follows:

- a. If the literal is an alphanumeric literal, the implicit data description entry is

01 PIC X(n).

where n is the number of alphanumeric character positions in the literal.

- b. If the literal is a boolean literal, the implicit data description entry is

01 PIC 1(n).

where n is the number of boolean character positions in the literal.

- c. If the literal is a national literal, the implicit data description entry is

01 PIC N(n).

where n is the number of national character positions in the literal.

- d. If the literal is a fixed-point numeric literal, the implicit data description entry is

01 PIC 9(m).

where m is the number of digit positions in the literal when there is no decimal point in the literal or

01 PIC 9(m)V9(n)

where m is the number of digit positions to the left of the decimal point and n is the number of digit positions to the right of the decimal point in the literal when there is a decimal point in the literal.

- e. If the literal is a floating-point numeric literal, the implicit data description entry is

01 USAGE IS FLOAT-SHORT.

or

01 USAGE IS FLOAT-LONG.

or

01 USAGE IS FLOAT-EXTENDED.

depending on the magnitude of the literal.

- 3) Elementary data description entries of the selected record description entry are used to determine the data items to be formatted.
- 4) If CHARACTER is specified, data items described with the following characteristics are selected for formatting:
 - class alphabetic
 - class alphanumeric
 - class boolean with usage display
 - class national
 - class numeric with usage display
 - class numeric with usage national.
- 5) If BIT is specified, data items described with class boolean and usage bit are selected for formatting.

- 6) If NUMERIC is specified, data items described with class numeric and a usage other than national or display are selected for formatting.
- 7) If a data item is not selected for formatting, it is transferred as is with no conversion or formatting taking place.
- 8) For a WRITE or REWRITE statement, each selected data item is formatted as necessary in a temporary area for output in external media format. Output formatting does not appear in the record area. Signs are presented as SIGN IS LEADING SEPARATE.
- 9) For a READ statement, each selected data item is formatted as necessary to the appropriate internal representation. The record area contains the resultant logical record in internal representation.
- 10) The implementor shall specify the representation produced as a result of processing the FORMAT clause, including any control information that may be necessary for presentation or printing. This representation may be the same as internal representation.
- 11) Data items selected for formatting are restored to the same internal representation when read with the same FORMAT clause on the same implementation, except for exclusions specified by the implementor.
- 12) If the associated file connector is an external file connector, all file description entries in the run unit that are associated with that file connector shall specify the same FORMAT clause.

13.16.23 FROM clause

The FROM clause specifies the source of data for an ACCEPT screen statement and a DISPLAY screen statement.

13.16.23.1 General format

FROM { identifier-1
literal-1 }

13.16.23.2 Syntax rules

- 1) Identifier-1 shall be defined in the file, working-storage, local-storage, or linkage section.
- 2) The category of identifier-1 and literal-1 shall be a permissible category as a sending operand in a MOVE statement where the receiving operand has the same PICTURE clause as the subject of the entry.
- 3) If the subject of this entry is subject to an OCCURS clause, identifier-1 shall be specified without the subscripting normally required. Additional requirements are specified in 13.16.36, OCCURS clause, syntax rule 12.

13.16.23.3 General rules

- 1) The subject of the entry is an output screen item.

13.16.24 FULL clause

The FULL clause specifies that the operator shall either leave the screen item completely empty or fill it entirely with data.

13.16.24.1 General format

FULL

13.16.24.2 General rules

- 1) If a FULL clause is specified at the group level, it applies to each elementary input screen item in that group that does not have the JUSTIFIED clause specified.
- 2) The FULL clause is effective during the execution of any ACCEPT screen statement that causes the screen item to be accepted, provided the cursor enters the screen item at some time during the execution of the ACCEPT statement.
- 3) The effect of the FULL clause is to reject the normal termination key unless that clause is satisfied. To satisfy the clause for a screen item:
 - a) If it is alphanumeric or alphanumeric-edited, either the entire item shall contain spaces, or both the first and last character positions shall contain non-space characters;
 - b) If it is national or national-edited, either the entire item shall contain spaces, or both the first and last character positions shall contain non-space characters;
 - c) If it is numeric or numeric-edited, either the value shall be zero, or there shall be no digit position in which zero suppression has taken effect;
 - d) If it is boolean, the entire item shall contain boolean '0' or '1' characters.
- 4) For fields that are both input and output, the FULL clause may be satisfied by the contents of the literal or identifier referenced in the FROM or USING clause, as well as operator keyed data.
- 5) The FULL clause shall not be effective if a function key is used to terminate the execution of the ACCEPT statement.
- 6) The specification of the FULL and REQUIRED clauses together requires that the field be entirely filled before the normal termination key has any effect.
- 7) The FULL clause is ignored for a field that is not an input field.

13.16.25 GLOBAL clause

The GLOBAL clause specifies that a constant-name, a data-name, a file-name, a report-name, or a screen-name is a global name. A global name is available to every program contained within the program that declares it.

13.16.25.1 General format

IS GLOBAL

13.16.25.2 Syntax rules

- 1) The GLOBAL clause may be specified only in the following entries:
 - a) A constant entry.
 - b) A data description entry whose level-number is 1 that is specified in the file, working-storage, local-storage, or linkage section.
 - c) A screen-description entry whose level-number is 1.
 - d) A file description entry.
 - e) A report description entry.
- 2) If the SAME RECORD AREA clause is specified for several files, the record description entries or the file description entries for these files shall not include the GLOBAL clause.
- 3) If the GLOBAL clause is not specified in the file description entry of a containing program, the file shall not be referenced directly or indirectly by any input-output statements in any contained program.
- 4) The GLOBAL clause shall not be specified in a factory definition, an instance definition, or a method definition.

13.16.25.3 General rules

- 1) A constant-name, data-name, file-name, report-name, or screen-name described using a GLOBAL clause is a global name. All data-names subordinate to a global name are global names. All condition-names associated with a global name are global names.
- 2) A statement in a program contained directly or indirectly within a program that describes a global name may reference that name without describing it again. (See 8.4.5, Scope of names.)
- 3) If the GLOBAL clause is used in a data description entry that contains the REDEFINES clause, it is only the subject of that REDEFINES clause that possesses the global attribute.

13.16.26 GROUP INDICATE clause

The GROUP INDICATE clause specifies that the associated printable item is printed only on the first occurrence of its report group after execution of an INITIATE statement, or after a control break or page advance.

13.16.26.1 General format

GROUP INDICATE

13.16.26.2 Syntax rules

- 1) The GROUP INDICATE clause may be specified only within a detail report group description, in an elementary entry that also contains a COLUMN clause and a SOURCE or VALUE clause.

13.16.26.3 General rules

- 1) The GROUP INDICATE clause has the same effect as a PRESENT WHEN clause where the associated condition is true only on the first occasion that a GENERATE is issued for the current detail group after any of the following events. (See 13.16.39, PRESENT WHEN clause.)
 - a) Execution of an INITIATE for the report.
 - b) A page advance, if the report is divided into pages. (See 13.16.37, PAGE clause.)
 - c) Any control break, if the report description contains a CONTROL clause.

13.16.27 GROUP-USAGE clause

A GROUP-USAGE clause with a BIT phrase specifies that the group item defined by the subject of the entry is to be treated as an elementary item of usage bit and category boolean, unless specified otherwise.

A GROUP-USAGE clause with a NATIONAL phrase specifies that the group item defined by the subject of the entry is to be treated as an elementary item of usage national and category national, unless otherwise specified.

13.16.27.1 General format

GROUP-USAGE IS { BIT
NATIONAL }

13.16.27.2 Syntax rules

- 1) The GROUP-USAGE clause may be specified only if the subject of the entry is a group item that is not strongly typed.
- 2) When the BIT phrase is specified, USAGE BIT is implied for the subject of the entry. A USAGE clause shall not be specified for the subject of the entry. All elementary items subordinate to the subject of the entry shall be explicitly or implicitly described as usage bit, class and category boolean. All subordinate group items shall be explicitly or implicitly described as GROUP-USAGE BIT.
- 3) When the NATIONAL phrase is specified, USAGE NATIONAL is implied for the subject of the entry. A USAGE clause shall not be specified for the subject of the entry. All elementary items subordinate to the subject of the entry shall be explicitly or implicitly described as usage national. Any signed numeric data items shall be described with the SIGN IS SEPARATE clause. All subordinate group items shall be explicitly or implicitly described as GROUP-USAGE NATIONAL.

13.16.27.3 General rules

- 1) When the BIT phrase is specified:
 - a) The subject of the entry is a bit group and also a bit data item; its class and category are boolean.
 - b) Unless stated otherwise, a bit group is treated as though it were an elementary data item of usage bit and class and category boolean described with PICTURE 1(m), where m is the bit length of the group.
 - c) Data items contained within a bit group are allocated in storage in accordance with the rules specified in 8.5.1.5.3, Alignment of data items of usage bit.
- 2) When the NATIONAL phrase is specified:
 - a) The subject of the entry is a national group; its class and category are national.
 - b) Unless stated otherwise, a national group is treated as though it were an elementary data item of usage national and class and category national described with PICTURE N(m), where m is the length of the group.

NOTE The GROUP-USAGE NATIONAL clause is needed so that groups containing only national characters can be properly truncated and padded with national characters and can be correctly processed for operations such as INSPECT. Without the GROUP-USAGE NATIONAL clause, the content of such a group item would be treated as category alphanumeric, possibly leading to corruption or invalid handling of data.

- 3) If a GROUP-USAGE clause is not specified or implied for a group item that is not strongly typed, that group item is an alphanumeric group item.

13.16.28 HIGHLIGHT clause

The HIGHLIGHT clause specifies that the field is to appear on the screen with the highest level of intensity.

13.16.28.1 General format

HIGHLIGHT

13.16.28.2 General rules

- 1) A HIGHLIGHT clause specified at the group level applies to each elementary screen item in that group.
- 2) When the HIGHLIGHT clause is specified, the characters that constitute the screen item will be displayed in the foreground color at the highest intensity when the screen item is referenced in an ACCEPT screen or a DISPLAY screen statement.

13.16.29 INVALID clause

The INVALID clause specifies the circumstances under which a data item fails the relation validation stage of the execution of a VALIDATE statement.

13.16.29.1 General format

INVALID WHEN condition-1

13.16.29.2 Syntax rules

- 1) The subject of the entry shall not be of class index, object, or pointer.

13.16.29.3 General rules

- 1) The INVALID clause takes effect during the relation validation stage of the execution of a VALIDATE statement. The INVALID clause is ignored during the execution of any statement other than a VALIDATE statement.
- 2) The INVALID clause takes effect only if the item's associated internal indicator is still set to its initial valid value.
- 3) Condition-1 is evaluated at the beginning of the execution of the relation validation stage, with the following two possible results:
 - a) If condition-1 is true, the item's associated internal indicator is set to invalid on relation.
 - b) If condition-1 is false, the INVALID clause has no effect.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.30 JUSTIFIED clause

The JUSTIFIED clause specifies right justification of data within a receiving data item or screen item.

13.16.30.1 General format

$$\left\{ \begin{array}{l} \text{JUSTIFIED} \\ \text{JUST} \end{array} \right\} \text{RIGHT}$$
13.16.30.2 Syntax rules

- 1) The JUSTIFIED clause may be specified only at the elementary item level.
- 2) JUST is an abbreviation for JUSTIFIED.
- 3) The JUSTIFIED clause may be specified only for a data item whose category is alphabetic, alphanumeric, boolean, or national.

13.16.30.3 General rules

- 1) When the receiving data item is described with the JUSTIFIED clause and the sending operand is larger than the receiving data item, the leftmost character positions or boolean positions of the sending operand shall be truncated.
- 2) When the receiving data item is described with the JUSTIFIED clause and it is larger than the sending operand, the data is aligned at the rightmost character position or boolean position in the data item with zero fill for the leftmost boolean positions and space fill for the leftmost character positions. For data items implicitly or explicitly described as usage national, national zeros shall be used for zero fill and national spaces shall be used for space fill. For data items implicitly or explicitly described as usage display, alphanumeric zeros shall be used for zero fill and alphanumeric spaces shall be used for space fill. For data items implicitly or explicitly described as usage bit, bit zeros shall be used for zero fill.
- 3) When the JUSTIFIED clause is omitted, the standard rules for aligning data within an elementary item apply (see 14.5.8, Alignment of data within data items).

13.16.31 Level-number

Level numbers 1 through 49 indicate the position of a data item or screen item within the hierarchical structure described by a data description entry, a report group description entry, or a screen description entry. In addition, level numbers 66, 77, and 88 are used to identify special entries.

13.16.31.1 General format

level-number

13.16.31.2 Syntax rules

- 1) A level-number is required as the first element in each data description or screen description entry.
- 2) Data description entries subordinate to a CD, FD, or SD entry shall have level-numbers with the values 66, 88, or 1 through 49.
- 3) A level-number in the range of 1 through 9 may be specified as 01 through 09.
- 4) Report group description entries that are subordinate to an RD entry shall have level-numbers with the values 1 through 49.
- 5) Data description entries in the working-storage section, local-storage section, and linkage section shall have level-numbers 66, 77, 88, or 1 through 49.
- 6) Screen description entries shall have level-numbers 1 through 49.

13.16.31.3 General rules

- 1) The level-number 1 identifies the first entry in each record description or report group.
- 2) Special level-numbers have been assigned to certain entries where there is no real concept of hierarchy:
 - a) Level-number 77 is assigned to identify noncontiguous working storage data items, noncontiguous local storage data items, and noncontiguous linkage data items, and may be used only as described by the data description format of the data description entry.
 - b) Level-number 66 is assigned to identify RENAMES entries and may be used only as described by the renames format of the data description entry.
 - c) Level-number 88 is assigned to entries that define condition-names associated with a conditional variable and to define criteria to be used to validate a data item. Level-number 88 may be used only as described by the condition-name format or the validation format of the data description entry.
- 3) Multiple level 1 entries subordinate to a CD, FD, or SD entry represent implicit redefinitions of the same area. Multiple level 1 entries subordinate to a report description entry do not represent implicit redefinitions of the same area.

13.16.32 LINAGE clause

The LINAGE clause provides a means for specifying the depth of a logical page in terms of number of lines. It also provides for specifying the size of the top and bottom margins on the logical page, and the line number, within the page body, at which the footing area begins.

13.16.32.1 General format

$$\text{LINAGE IS } \left\{ \begin{array}{l} \text{data-name-1} \\ \text{integer-1} \end{array} \right\} \text{ LINES } \left[\text{WITH } \underline{\text{FOOTING}} \text{ AT } \left\{ \begin{array}{l} \text{data-name-2} \\ \text{integer-2} \end{array} \right\} \right]$$

$$\left[\text{LINES AT } \underline{\text{TOP}} \left\{ \begin{array}{l} \text{data-name-3} \\ \text{integer-3} \end{array} \right\} \right] \left[\text{LINES AT } \underline{\text{BOTTOM}} \left\{ \begin{array}{l} \text{data-name-4} \\ \text{integer-4} \end{array} \right\} \right]$$

13.16.32.2 Syntax rules

- 1) Data-name-1, data-name-2, data-name-3, data-name-4 may be qualified and shall reference elementary unsigned numeric integer data items.
- 2) Integer-2 shall not be greater than integer-1.
- 3) Integer-3, integer-4 may be zero.

13.16.32.3 General rules

- 1) The LINAGE clause provides a means for specifying the size of a logical page in terms of number of lines. The logical page size is the sum of the values referenced by each phrase except the FOOTING phrase. If the LINES AT TOP or LINES AT BOTTOM phrases are not specified, the values of these items are zero. If the FOOTING phrase is not specified, no end-of-page condition independent of the page overflow condition exists.

There is not necessarily any relationship between the size of the logical page and the size of a physical page.

- 2) Integer-1 or the value of the data item referenced by data-name-1 specifies the number of lines that may be written or spaced on the logical page. This number is called the page size. That part of the logical page in which these lines may be written or spaced is called the page body.
- 3) Integer-2 or the value of the data item referenced by data-name-2 specifies the line number within the page body at which the footing area begins. The value shall be greater than zero and not greater than integer-1 or the value of the data item referenced by data-name-1.

The footing area is the area of the page body between the footing start and the page size, inclusive.

- 4) Integer-3 or the value of the data item referenced by data-name-3 specifies the number of lines in the top margin on the logical page. This number is called the top margin.
- 5) Integer-4 or the value of the data item referenced by data-name-4 specifies the number of lines in the bottom margin on the logical page. This number is called the bottom margin.
- 6) The values for the page size, top margin, footing start, and bottom margin are determined as follows:
 - a) If a literal is specified, the value is always that literal.
 - b) If a data-name is specified, the value is the content of the data item referenced by the associated data-name at the following times when the indicated statement references the associated file:

1. At the completion of an OPEN statement with the OUTPUT phrase.
2. During the execution of a WRITE statement that is specified with the ADVANCING PAGE phrase. This occurs before the device is positioned and after all positioning on the current page.
3. During the execution of a WRITE statement that causes a page overflow condition. This occurs before the device is positioned and after all positioning on the current page.

When a value is determined for the page size, top margin, footing start, and bottom margin, the value applies to the next logical page.

The value shall conform to the following rules:

1. The page size shall be greater than zero.
2. The footing start shall be greater than zero and not greater than the page size.

If the value does not conform to these two rules, the EC-I-O-LINAGE exception condition is set to exist. If execution continues after processing of this exception condition, it continues with the statement following the WRITE statement; the LINAGE -COUNTER special register is set to 0 and remains at that value until the file is closed; and all subsequent WRITE statements referencing the file cause the EC-I-O-LINAGE exception condition to continue to exist until the file is closed.

- 7) A LINAGE-COUNTER is generated by the presence of a LINAGE clause. The value in the LINAGE-COUNTER at any given time represents the line number at which the device is positioned within the current page body. The rules governing the LINAGE-COUNTER are as follows:
 - a) A separate LINAGE-COUNTER is supplied for each file described in the file section whose file description entry contains a LINAGE clause.
 - b) LINAGE-COUNTER may be referenced only in procedure division statements; however only the input-output control system may change the value of LINAGE-COUNTER. Since more than one LINAGE-COUNTER may exist in a source element, the user shall qualify LINAGE-COUNTER by file-name when necessary.
 - c) LINAGE-COUNTER is automatically modified, according to the following rules, during the execution of a WRITE statement to an associated file:
 1. When the ADVANCING PAGE phrase of the WRITE statement is specified, the LINAGE-COUNTER is automatically reset to one. During the resetting of LINAGE-COUNTER to the value one, the value of LINAGE-COUNTER is implicitly incremented to exceed the value specified by integer-1 or the data item referenced by data-name-1.
 2. When the ADVANCING phrase of the WRITE statement is specified, the LINAGE-COUNTER is incremented by the value of the integer specified in the ADVANCING phrase or the contents of the data item referenced by the identifier specified in the ADVANCING phrase.
 3. When the ADVANCING phrase of the WRITE statement is not specified, the LINAGE-COUNTER is incremented by the value one.
 4. The value of LINAGE-COUNTER is automatically reset to one when the device is repositioned to the first line that may be written on for each of the succeeding logical pages.
 - d) The value of LINAGE-COUNTER is automatically set to one at the time an OPEN statement with the OUTPUT phrase is executed for the associated file.
- 8) Each logical page is contiguous to the next with no additional spacing provided.

13.16.33 LINE clause

The LINE clause introduces a report line, or a set of adjacent report lines, and specifies their vertical positioning.

The LINE clause also specifies vertical positioning for its screen item.

13.16.33.1 General format

Format 1 (report-writer):

$$\left\{ \begin{array}{l} \text{LINE NUMBER IS} \\ \text{LINE NUMBERS ARE} \\ \text{LINES ARE} \end{array} \right\} \left\{ \begin{array}{l} \text{integer-1 [ON NEXT PAGE]} \\ \left\{ \begin{array}{l} \text{PLUS} \\ + \end{array} \right\} \text{integer-2} \\ \text{ON NEXT PAGE} \end{array} \right\} \dots$$

Format 2 (screen):

$$\text{LINE NUMBER IS} \left[\begin{array}{c} \text{PLUS} \\ + \\ \text{MINUS} \\ - \end{array} \right] \left\{ \begin{array}{l} \text{identifier-1} \\ \text{integer-3} \end{array} \right\}$$

13.16.33.2 Syntax rules

ALL FORMATS

- 1) PLUS and + are synonyms.

FORMAT 1

- 2) LINE and LINES are synonyms.
- 3) Integer-1 specifies an absolute line number. Integer-2 specifies a relative line number. Neither integer-1 nor integer-2 shall exceed the page limit, or 9999 if the report is not divided into pages. (See 13.16.37, PAGE clause.) Integer-2 may be zero. Integer-1 and integer-2 shall be unsigned.
- 4) Within a given report group description entry, an entry that contains a LINE clause shall not have a subordinate entry that also contains a LINE clause.
- 5) If the report is not divided into pages, all its LINE clauses shall be relative.
- 6) Within any given report group, the set of report lines, if any, is subject to the following rules:
 - a) If any two or more absolute lines are defined using line numbers that are not in increasing numerical order, they shall each be subject to a different PRESENT WHEN clause.
 - b) If any two or more lines, or groups of lines, overlap each other, they shall each be subject to a different PRESENT WHEN clause.
 - c) Any absolute report lines shall be defined in such a way that no line appears above the upper limit or below the lower limit allowed for the report group. The upper and lower limits for each type of report group are given in the general rules for the TYPE clause. (See 13.16.55, TYPE clause.)

- d) If the report group consists of one or more absolute lines, not subject to any PRESENT WHEN clause, and ends in a set of relative lines, or groups of relative lines, they shall not cause the report group's lower limit to be exceeded unless each of them is subject to a different PRESENT WHEN clause, in which case this rule applies only to the vertically largest of them.
 - e) If the description of any absolute line appears later than that of a relative line, they shall each be subject to a different PRESENT WHEN clause.
- 7) Within a given report group description, a NEXT PAGE phrase, if present, shall be specified only in the first LINE clause.
 - 8) The NEXT PAGE phrase may appear only in the description of a body group or a report footing.
 - 9) If the current report group is a control heading with the OR PAGE phrase, all the LINE clauses in the report group description shall be relative.
 - 10) If more than one integer-1 or integer-2 operand is specified, the clause is referred to as a multiple LINE clause and the following additional rules apply:
 - a) The NEXT PAGE phrase, if specified, shall appear only with the first operand.
 - b) All absolute operands, if present, shall precede all relative operands, if present.
 - c) The occurrences of integer-1, if present, shall be in ascending numerical order.
 - d) An OCCURS clause shall not also be present in the same entry.

FORMAT 2

- 11) MINUS and – are synonyms.
- 12) Identifier-1 shall be described in the file, working-storage, local-storage, or linkage section as an elementary unsigned integer data item.
- 13) Neither the PLUS phrase nor the MINUS phrase shall be specified for the first elementary item in a screen record.

13.16.33.3 General rules

FORMAT 1

- 1) Each LINE clause in a given report group description defines a report line, or set of report lines, that is printed when the report group is printed. The report's LINE-COUNTER identifier contains the line number within the page of the most recent line to have been printed.
- 2) If the report is divided into pages, each report group shall be described such that it may be printed on one page. A report group shall never be split between two pages. If this rule is violated the EC-REPORT-PAGE-LIMIT exception condition is set to exist and the results are undefined.
- 3) Each report group shall be described such that, when it is printed, no lines or groups of lines overlap each other, except that the non-space characters of a relative line specified with an integer-2 of zero will overwrite the corresponding characters of the preceding line. If this rule is violated the EC-REPORT-LINE-OVERLAP exception condition is set to exist and the results are undefined.
- 4) If the report is divided into pages and the report group about to be printed is a body group, other than the chronologically first body group since the execution of an INITIATE statement for the report, a page fit test is performed before any line of the report group is printed. The rules for the page fit test and the location of the first line of the body group are modified if the immediately preceding body group's description contained the

absolute form of a NEXT GROUP clause. (See 13.16.35, NEXT GROUP clause.) The actions described below assume that no such NEXT GROUP clause was present.

The nature of the page fit test depends on the format of the first LINE clause specified in the report group description. Which LINE clause is taken to be the first may depend on the current values of conditions in PRESENT WHEN clauses in the report group description. (See 13.16.39, PRESENT WHEN clause.)

The page fit test takes one of the following forms:

- a) If the first LINE clause has a NEXT PAGE phrase, no page fit test takes place and the page fit is declared unsuccessful.
- b) If the first LINE clause is absolute without the NEXT PAGE phrase, integer-1 (the target position of the first line) is compared with the current value of LINE-COUNTER. If integer-1 is greater than LINE-COUNTER, the page fit is declared successful; otherwise the page fit is declared unsuccessful.
- c) If the first LINE clause is relative (so that all LINE clauses in the report group description are relative) without the NEXT PAGE phrase, the expected position of the last line of the report group is computed in a trial sum. First, the current value of LINE-COUNTER is placed in the trial sum. Next, the trial sum is incremented by integer-2 for each subsequent LINE clause. Wherever there is an OCCURS clause at the level of the LINE clause or above, the vertical interval between successive occurrences is added into the trial sum once for each occurrence beyond the first. (See 13.16.36, OCCURS clause.)

If any of the LINE clauses used in computing the trial sum are subject to a PRESENT WHEN clause or to an OCCURS clause with the DEPENDING phrase, these clauses are taken into account in computing the trial sum. (See 13.16.39, PRESENT WHEN clause.)

If the trial sum is less than or equal to the lower limit for the report group, the page fit is declared successful; otherwise the page fit is declared unsuccessful. The lower limit for body groups is defined in the general rules under 13.16.55, TYPE clause.

If the page fit was declared successful, no page advance takes place and the report group is printed on the current page; otherwise, a page advance takes place before the body group is printed and the body group becomes the first body group on the new page as specified in 14.8.15, GENERATE statement.

- 5) The line number on which the report group's first line is printed depends on the first LINE clause in the report group description. Which LINE clause is taken to be the first may depend on the current values of conditions in PRESENT WHEN clauses in the report group description. (See 13.16.39, PRESENT WHEN clause.)
 - a) If the first LINE clause of the report group is absolute, the report group's first line number is given by integer-1. If in addition the NEXT PAGE phrase is present and the report group is a report footing, the first line is printed beginning on a new page.
 - b) If the first LINE clause of the report group is relative and the report is divided into pages, the report group's first line number is calculated as follows:
 - 1. If the report group is a report heading, the line number is given by (HEADING integer + integer-2 - 1).
 - 2. If the report group is a page heading and no report heading has been printed on the same page, the line number is given by (HEADING integer + integer-2 - 1). If the report group is a page heading and a report heading has been printed on the same page, the line number is given by adding integer-2 to the current value of the report's LINE-COUNTER.
 - 3. When the report group is a body group: if that report group is the first body group to be printed on the current page, the line number is given by the FIRST DETAIL integer; otherwise, the line number is given by adding integer-2 to the current value of the report's LINE-COUNTER.
 - 4. If the report group is a page footing, the line number is given by (FOOTING integer + integer-2).

5. When the report group is a report footing: if no page footing has been printed on the same page, the line number is given by (FOOTING integer + integer-2); otherwise, the line number is given by adding integer-2 to the current value of the report's LINE-COUNTER.
- c) If the first LINE NUMBER clause of the report group is relative and the report is not divided into pages, the report group's first line number is obtained by adding integer-2 to the current value of the report's LINE-COUNTER.
- 6) When the first line number of the report group has been calculated, the report's LINE-COUNTER is set equal to that line number and the line is now printed on the page at that vertical location.
- 7) Any subsequent LINE clauses within the same report group cause the line number to be updated as follows:
 - a) If the LINE clause is absolute, the new line number is given by integer-1.
 - b) If the LINE clause is relative, the new line number is determined by adding integer-2 to the report's LINE-COUNTER.

When each subsequent line number of the report group has been calculated, the report's LINE-COUNTER is set equal to that number and the line is now printed on the page at that vertical location.

Line numbers need not be consecutive. Any unoccupied lines on the page result in a blank line.

- 8) The final line number for the report group is given by the value contained in the report's LINE-COUNTER when the last line of the report group has been printed. Before processing of the report group is concluded, the value of LINE-COUNTER may be further altered as a result of the action of an optional NEXT GROUP clause defined for the report group. (See 13.16.35, NEXT GROUP clause.)
- 9) A multiple LINE clause is functionally equivalent to a LINE clause with a single operand, together with a simple OCCURS clause whose integer is equal to the number of operands of the LINE clause, except that the multiple LINE clause allows the report lines to be defined at unequal vertical intervals.

FORMAT 2

- 10) The LINE clause, in conjunction with the COLUMN clause, establishes the starting coordinates for a screen item within a screen record. The LINE clause specifies the vertical coordinate. Positioning of the screen record and within the screen record appears the same on the terminal display regardless of whether the whole screen record or just a portion of it is referenced in an ACCEPT screen or a DISPLAY screen statement.
- 11) If the LINE clause does not specify PLUS or MINUS, the clause gives the line number relative to the start of the screen record. A line number of 1 represents the first line of the screen record.
- 12) If the PLUS or MINUS phrase is specified in the LINE clause, the line number is relative to the end of the preceding screen item in the same screen record. PLUS denotes a line position that is increased by the value of identifier-1 or integer-3. MINUS denotes a line position that is decreased by the value of identifier-1 or integer-3.
- 13) If the LINE clause is omitted, the following apply:
 - a) if no previous screen item has been defined, LINE 1 of the screen record is assumed.
 - b) if a previous screen item has been defined, the line of that previous item is assumed.
- 14) If the explicit or implicit line number of a screen item is zero or exceeds the number of lines available for a terminal, the EC-SCREEN-LINE-NUMBER exception condition is set to exist and that screen item does not take part in the execution of the ACCEPT screen or DISPLAY screen statement.

13.16.34 LowlighT clause

The LOWLIGHT clause specifies that the field is to appear on the screen with the lowest level of intensity.

13.16.34.1 General format

LOWLIGHT

13.16.34.2 General rules

- 1) A LOWLIGHT clause specified at the group level applies to each elementary screen item in that group.
- 2) When the LOWLIGHT clause is specified, the characters that constitute the screen item will be displayed in the foreground color at the lowest intensity when the screen item is referenced in an ACCEPT screen or a DISPLAY screen statement.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.35 NEXT GROUP clause

The NEXT GROUP clause specifies additional blank lines following the printing of the last line of a report group.

13.16.35.1 General format

$$\text{NEXT GROUP IS } \left\{ \begin{array}{l} \text{integer-1} \\ \left\{ \begin{array}{l} \text{PLUS} \\ + \end{array} \right\} \text{integer-2} \\ \text{NEXT PAGE [WITH RESET]} \end{array} \right\}$$

13.16.35.2 Syntax rules

- 1) Integer-1 specifies an absolute line number. Integer-2 specifies a relative vertical distance. Integer-1 and integer-2 shall not exceed the page limit, or 9999 if the report is not divided into pages. Integer-1 and integer-2 shall be unsigned. (See 13.16.37, PAGE clause.)
- 2) PLUS and + are synonyms.
- 3) If the report is not divided into pages, only the relative form of the clause may be specified.
- 4) The NEXT GROUP clause shall not be specified in a page heading or report footing.
- 5) The NEXT PAGE phrase shall not be specified in a page footing.
- 6) If the absolute form is used, the following checks apply:
 - a) If the current report group is a report heading, integer-1 shall be greater than the minimum last line number of the report group and less than the FIRST DETAIL integer.
 - b) If the current report group is a body group, integer-1 shall lie between the FIRST DETAIL integer and the FOOTING integer, inclusive.
 - c) If the current report group is a page footing, integer-1 shall be greater than the minimum last line number of the report group.
- 7) If the relative form is used, the following checks apply:
 - a) If the current report group is a report heading, the minimum last line number of the report group plus integer-2 shall be less than the FIRST DETAIL integer.
 - b) If the current report group is a page footing, the minimum last line number of the report group plus integer-2 shall not exceed the page limit.

13.16.35.3 General rules

- 1) The NEXT GROUP clause has no effect when it is specified in a control footing that is at a level other than the highest level at which the control break is detected.
- 2) The NEXT GROUP clause modifies the value of the current report's LINE-COUNTER after the printing of the last line, if any, of the report group in whose description the clause appears. The effect of this clause depends on the type of report group whose description contains the clause, as covered in the following general rules.
- 3) If the report group is a report heading, the effect of the absolute and relative forms is to increase the line number on which the immediately next report group is printed, namely the first body group when the report

is not divided into pages, or the first page heading when the page heading consists only of relative lines. The effect on LINE-COUNTER in each case is as follows:

- a) If the NEXT GROUP clause is absolute, LINE-COUNTER is set equal to integer-1.
 - b) If the NEXT GROUP clause is relative, integer-2 is added to LINE-COUNTER.
 - c) If NEXT GROUP NEXT PAGE is specified, the report heading is printed on the first page of the report as the only report group on that page and LINE-COUNTER is then set equal to zero.
- 4) If the report group is a body group:
- a) If the NEXT GROUP clause is absolute, a check is made as to whether LINE-COUNTER is less than integer-1. If so, LINE-COUNTER is set equal to integer-1. Otherwise, integer-1 is placed in a save location and LINE-COUNTER is set equal to the FOOTING integer, causing a page advance to take place just before any other non-dummy body group is printed for the report. The NEXT GROUP clause has no further effect on the current body group and will have no effect at all if a TERMINATE is next executed for the report. But it will affect the location of the next non-dummy body group, at the time that it is printed, in the following way:
 1. If the next body group begins with an absolute LINE clause without the NEXT PAGE phrase, the save location is moved to LINE-COUNTER and the page fit test is re-applied before the first line of the body group is printed.
 2. If the next body group begins with an absolute LINE clause with the NEXT PAGE phrase, a page advance takes place, the save location is moved to LINE-COUNTER and a new page fit test and subsequent processing take place as for an identical report group without the NEXT PAGE phrase.
 3. If the next body group contains only relative LINE clauses, its first line will be printed on the next line following the line number in the save location, unless this will result in some line of this body group being printed beyond its lower permitted limit. In the latter case, a second page advance takes place, resulting in a page devoid of body groups, and the next body group is printed on the following page with no reference to the save location.
 - b) If the NEXT GROUP clause is relative and if the sum of integer-2 and LINE-COUNTER is less than the FOOTING integer, integer-2 is added to LINE-COUNTER; otherwise the FOOTING integer is moved to LINE-COUNTER.
 - c) If NEXT GROUP NEXT PAGE is specified, the FOOTING integer is moved to LINE-COUNTER.
- 5) If the report group is a page footing, the NEXT GROUP clause affects any report footing defined in the current report using only relative LINE clauses, by changing LINE-COUNTER in the following ways:
- a) If the NEXT GROUP clause is absolute, LINE-COUNTER is set equal to integer-1.
 - b) If the NEXT GROUP clause is relative, integer-2 is added to LINE-COUNTER.
- 6) If the WITH RESET phrase is present, the value of PAGE-COUNTER for the report is set to 1 (one) immediately after the page feed caused by the next page advance, chronologically between the printing of any page footing and the printing of any page heading. Whether the current group is a report heading or a body group, this phrase ensures that PAGE-COUNTER will be one, effective from the start of the next page (unless procedurally altered).

13.16.36 OCCURS clause

The OCCURS clause describes repeated data items, report items, and screen items and supplies information required for the application of subscripts.

13.16.36.1 General format

Format 1 (fixed-table):

OCCURS integer-2 TIMES

$$\left[\left\{ \begin{array}{c} \text{ASCENDING} \\ \text{DESCENDING} \end{array} \right\} \text{KEY IS } \{ \text{data-name-2} \} \dots \right] \dots [\text{INDEXED BY } \{ \text{index-name-1} \} \dots]$$

Format 2 (variable-table):

OCCURS integer-1 TO integer-2 TIMES DEPENDING ON data-name-1

$$\left[\left\{ \begin{array}{c} \text{ASCENDING} \\ \text{DESCENDING} \end{array} \right\} \text{KEY IS } \{ \text{data-name-2} \} \dots \right] \dots [\text{INDEXED BY } \{ \text{index-name-1} \} \dots]$$

Format 3 (report-writer):

OCCURS[integer-1 TO] integer-2 TIMES [DEPENDING ON data-name-1] [STEP integer-3]

13.16.36.2 Syntax rules

ALL FORMATS

1) The OCCURS clause shall not be specified in a data description entry that:

- a) Has a level-number of 01, 66, 77, or 88, or
- b) Has a variable-occurrence data item subordinate to it.

2) Data-name-1 and data-name-2 may be qualified.

FORMATS 1 AND 2

3) The first specification of data-name-2 shall be the name of either the entry containing the OCCURS clause or an entry subordinate to the entry containing the OCCURS clause. Subsequent specification of data-name-2 shall be subordinate to the entry containing the OCCURS clause.

4) If data-name-2 is subordinate to an alphanumeric group item, bit group item, national group item, or strongly-typed group item that is subordinate to the entry containing the OCCURS clause, that group item shall not contain an OCCURS clause.

5) Data-name-2 shall be specified without the subscripting normally required.

6) The data item identified by data-name-2 shall not contain an OCCURS clause except when data-name-2 is the subject of the entry.

7) Index-name-1 may be specified only in the following contexts:

- as a subscript;
- in the VARYING phrase of a PERFORM statement;
- in the VARYING phrase of a SEARCH statement;
- in the SET statement;
- as an operand in a relation condition.

8) The KEY phrase shall not be specified for a data item of class boolean, object, or pointer.

FORMATS 1 AND 3

9) If the DEPENDING ON phrase is not specified, an OCCURS clause may be subordinate to a data description entry that contains another OCCURS clause as long as the number of subscripts required does not exceed seven.

FORMAT 1

10) An OCCURS clause specified in a screen description entry shall be a format 1 OCCURS clause without any optional phrases.

11) The maximum number of dimensions for a table described in a screen description entry is two.

12) If a screen description entry includes the OCCURS clause, then if it or any item subordinate to it has a description that includes the TO, FROM, or USING clause, that screen description entry shall be part of a table with the same number of dimensions and number of occurrences in each dimension as the identifier representing the receiving or sending operand. The identifier representing the receiving or sending operand shall not be subordinate to an OCCURS clause with the DEPENDING phrase.

13) If a screen description entry that includes the OCCURS clause also contains the COLUMN clause, then the COLUMN clause shall include the PLUS or MINUS phrase, unless the screen description entry also includes a LINE clause with a PLUS or MINUS phrase.

14) If a screen description entry that includes the OCCURS clause also contains the LINE clause, then the LINE clause shall include the PLUS or MINUS phrase, unless the screen description entry also includes a COLUMN clause with a PLUS or MINUS phrase.

FORMATS 2 AND 3

15) Integer-1 shall be greater than or equal to zero and integer-2 shall be greater than integer-1.

16) Data-name-1 shall describe an integer.

17) If the OCCURS clause is specified in an entry subordinate to one containing the GLOBAL clause, data-name-1, if specified, shall be a global name and shall reference a data item that is described in the same data division.

FORMAT 2

18) The data item defined by data-name-1 shall not occupy a byte position within the range of the first byte position defined by the data description entry containing the OCCURS clause and the last byte position defined by the record description entry containing that OCCURS clause.

19) If the OCCURS clause is specified in a data description entry included in a record description entry containing the EXTERNAL clause, data-name-1 shall reference a data item possessing the external attribute that is described in the same data division.

20) The subject of the entry may be followed within that record description only by data description entries that are subordinate to it.

FORMAT 3

- 21) The TO and DEPENDING phrases shall either be both absent or both present.
- 22) The STEP phrase shall be specified if the entry:
 - a) contains an absolute LINE clause, or
 - b) has an entry with an absolute LINE clause subordinate to it, or
 - c) contains an absolute COLUMN clause, or
 - d) is subordinate to an entry with a LINE clause and has an entry with an absolute COLUMN clause subordinate to it.

In all other cases, the STEP phrase is optional.

- 23) The value of integer-3 shall be sufficient to prevent the overlapping of any line (in the case of vertical repetition) or column (in the case of horizontal repetition) of any two consecutive repetitions of the associated report item.
- 24) A report group description entry that contains an OCCURS clause with a DEPENDING phrase may be followed within that report group only by report group description entries that are subordinate to it.

13.16.36.3 General rules

FORMATS 1 AND 2

- 1) Except for the OCCURS clause itself, all data description clauses associated with an item whose description includes an OCCURS clause apply to each occurrence of the item described.
- 2) The allocation and format of the index defined by index-name-1 are dependent on the implementor and the hardware. The implementor shall specify the rules for the range of values allowed in the index defined by index-name-1. This range shall include at least the value corresponding to the occurrence number (1 - integer-2) through and including the value corresponding to the occurrence number (2 * integer-2). An index may be modified only by a PERFORM VARYING statement, a SEARCH statement, and a SET statement. If the execution of one of these statements creates a value for the index that is outside the range of the values allowed by the implementor, the EC-RANGE-INDEX exception condition is set to exist and the value of the index is undefined.
- 3) The KEY phrase indicates the order of key data items used during execution of a SEARCH statement with the ALL phrase specified, or during the execution of a SORT statement that references a table. If more than one data-name-2 is specified, they are specified in descending order of significance. The data associated with data-name-2 shall be ordered when a SEARCH statement with the ALL phrase is executed if data-name-2 is specified in one of the conditions in the WHEN phrase. At the time of the execution of such a SEARCH statement, the contents of the data items referenced by data-name-2 shall be in ascending order if the ASCENDING phrase is specified or descending order if the DESCENDING phrase is specified. The associated collating sequence for the order is determined by the rules for comparison of operands that apply to the condition specified in the WHEN phrase of the SEARCH statement.

FORMAT 1

- 4) The value of integer-2 represents the fixed number of occurrences of the subject of the entry.
- 5) During a DISPLAY screen or an ACCEPT screen statement that references a screen item whose description includes the OCCURS clause and whose description or whose subordinate's description includes a FROM, TO, or USING clause, the data values for corresponding table elements are moved from the data table element to the screen table element or from the screen table element to the data table element.
- 6) If the description of a screen item includes the OCCURS clause, the positioning within the screen record of each occurrence of that screen item is as follows:

- a) If the description of that screen item contains a COLUMN clause, each occurrence behaves as though it had the same COLUMN clause specified.
- b) If that screen item is a group item with a subordinate screen item whose description contains a COLUMN clause with the PLUS or MINUS phrase and that group screen item is subordinate to a screen item whose description contains a LINE clause, each occurrence behaves as though it had the same subordinate entries with the same COLUMN clause specified.
- c) If the description of that screen item contains a LINE clause with the PLUS or MINUS phrase, each occurrence behaves as though it had the same LINE clause specified.
- d) If that screen item is a group item with a subordinate screen item whose description contains a LINE clause with the PLUS or MINUS phrase, each occurrence behaves as though it had the same subordinate entries with the same LINE clause specified.

FORMAT 2

- 7) The value of the data item referenced by data-name-1 represents the current number of occurrences of the subject of the entry.

The subject of this entry has a variable number of occurrences. The value of integer-2 represents the maximum number of occurrences and the value of integer-1 represents the minimum number of occurrences. This does not imply that the length of the subject of the entry is variable, but that the number of occurrences is variable.

At the time the subject of entry is referenced or any data item subordinate or superordinate to the subject of entry is referenced, the value of the data item referenced by data-name-1 shall fall within the bounds from integer-1 through integer-2. If the value of the data item does not fall within the specified bounds, the EC-BOUND-ODO exception condition is set to exist. The content of a data item whose occurrence number exceeds the value of the data item referenced by data-name-1 is undefined.

- 8) An alphanumeric group item, bit group item, national group item, or strongly-typed group item that has an entry subordinate to it that specifies the variable-table format of the OCCURS clause is a variable-length data item. When a variable-length data item is referenced, the part of the table area used in the operation is determined as follows:
 - a) If the data item referenced by data-name-1 is outside the group, only that part of the table area that is specified by the value of the data item referenced by data-name-1 at the start of the operation will be used. If there are no elementary data items defined between the data description entry of the group data item and the definition of the table specified by format 2 and the value of the data item referenced by data-name-1 at the start of the operation is zero, the group data item is a zero-length item.
 - b) If the data item referenced by data-name-1 is included in the same group and the group data item is referenced as a sending operand, only that part of the table area that is specified by the value of the data item referenced by data-name-1 at the start of the operation will be used in the operation. If the group is a receiving operand, the maximum length of the group will be used.
- 9) If format 2 is specified in a record description entry and the associated file description or sort-merge description entry contains the VARYING phrase of the RECORD clause, the records are variable length. If the DEPENDING ON phrase of the RECORD clause is not specified, the content of the data item referenced by data-name-1 of the OCCURS clause shall be set to the number of occurrences to be written before the execution of any RELEASE, REWRITE, or WRITE statement referencing that record description entry.

FORMAT 3

- 10) If the OCCURS clause is written without any of the optional phrases, it causes the entry to define integer-2 distinct report items. The effect of the OCCURS clause on each repetition depends on the position of the entry containing the clause in the report group definition, as follows:

- a) If the entry also contains a relative COLUMN clause, each repetition behaves as though it had the same relative COLUMN clause.
 - b) If the entry is a group entry having subordinate entries with relative COLUMN clauses, and being itself subordinate to an entry with a LINE clause, each repetition behaves as though it had the same subordinate entries with the same relative COLUMN clauses.
 - c) If the entry also contains a relative LINE clause, each repetition behaves as though it had the same relative LINE clause.
 - d) If the entry is a group entry having subordinate entries with relative LINE clauses, each repetition behaves as though it had the same subordinate entries with the same relative LINE clauses.
- 11) Any PICTURE, USAGE, SIGN, VALUE, JUSTIFIED, BLANK WHEN ZERO, or GROUP INDICATE clauses have the same effect on each repetition as they would on a single data item without the OCCURS clause. This applies also to any SOURCE, SUM, or PRESENT WHEN clauses if no VARYING clause is present. If a VARYING clause is present, the action of these clauses may vary from one repetition to another. (See 13.16.62, VARYING clause.)
- 12) The STEP phrase, if specified, defines the vertical or horizontal interval between successive occurrences of the associated report item after the first occurrence, as follows:
- a) If the entry contains a COLUMN clause, each successive occurrence is printed at a horizontal distance integer-3 columns to the right of the preceding occurrence.
 - b) If the entry is a group entry having subordinate entries with COLUMN clauses and being itself subordinate to an entry with a LINE clause, printable items in each successive occurrence are positioned integer-5 columns to the right of the column they occupy in the preceding occurrence.
 - c) If the entry contains a LINE clause, each successive occurrence is positioned integer-3 lines vertically beneath the preceding occurrence.
 - d) If the entry is a group entry having subordinate entries with LINE clauses, report lines in successive occurrences are positioned integer-3 lines vertically beneath the line they occupy in the preceding occurrence.
- If no STEP phrase is specified, the vertical or horizontal interval between successive occurrences is defined by the relative LINE or COLUMN numbers, respectively, specified in the corresponding report section entries.
- 13) If the DEPENDING phrase is specified, the value of data-name-1 is evaluated just before the processing for the first LINE clause of the report group. If the value of data-name-1 is not in the range integer-1 to (integer-2 - 1), the report group is processed as though the OCCURS clause had been written without the TO and DEPENDING phrases. If the value of data-name-1 is in the range integer-1 to (integer-2 - 1), the OCCURS clause has the same effect as an OCCURS clause with no TO or DEPENDING phrases and with an integer-2 equal to the current value of data-name-1. This same principle is used in the computing of the trial sum used in performing the page fit test. (See 13.16.33, LINE clause, general rule 4c.)

13.16.37 PAGE clause

The PAGE clause defines the maximum length and width of a page of a report and the vertical subdivisions within which its report groups shall be printed.

13.16.37.1 General format

$$\begin{array}{l} \text{PAGE} \left[\begin{array}{l} \text{LIMIT IS} \\ \text{LIMITS ARE} \end{array} \right] \left\{ \begin{array}{l} \text{integer-1} \\ \left[\begin{array}{l} \text{integer-1} \left\{ \begin{array}{l} \text{LINE} \\ \text{LINES} \end{array} \right\} \right] \left[\begin{array}{l} \text{integer-2} \left\{ \begin{array}{l} \text{COLS} \\ \text{COLUMNS} \end{array} \right\} \right] \end{array} \right\} \end{array} \right. \\ \left[\text{HEADING IS integer-3} \right] \left[\begin{array}{l} \text{FIRST} \left\{ \begin{array}{l} \text{DETAIL} \\ \text{DE} \end{array} \right\} \text{IS integer-4} \end{array} \right] \\ \left[\begin{array}{l} \text{LAST} \left\{ \begin{array}{l} \text{CONTROL HEADING} \\ \text{CH} \end{array} \right\} \text{IS integer-5} \end{array} \right] \\ \left[\begin{array}{l} \text{LAST} \left\{ \begin{array}{l} \text{DETAIL} \\ \text{DE} \end{array} \right\} \text{IS integer-6} \end{array} \right] \left[\text{FOOTING IS integer-7} \right] \end{array} \right.$$
13.16.37.2 Syntax rules

- 1) FIRST DE is synonymous with FIRST DETAIL, LAST CH is synonymous with LAST CONTROL HEADING, and LAST DE is synonymous with LAST DETAIL.
- 2) Either integer-1 or integer-2 or both shall be specified.
- 3) The HEADING, FIRST DETAIL, LAST CONTROL HEADING, LAST DETAIL, or FOOTING phrase may be specified only if integer-1 is specified.
- 4) The HEADING, FIRST DETAIL, LAST CONTROL HEADING, LAST DETAIL, and FOOTING phrases may be written in any order.
- 5) Integer-1 shall not exceed 9999.
- 6) Integer-3, integer-4, integer-5, integer-6, integer-7, and integer-1 shall be greater than zero. Wherever specified, they shall be in ascending order, with equality allowed.

13.16.37.3 General rules

- 1) The printed page is regarded as a vertical arrangement of horizontal lines, each line being capable of displaying the content of one report line. On each page these lines are numbered from 1 (representing the first line on the page) in steps of 1. The PAGE clause and its phrases subdivide the printed page into vertical regions. Depending on its type, each report group shall be confined within one or more of these regions.
- 2) The integers specified in the PAGE clause establish the vertical regions of the report page as follows.
 - a) Integer-1 is the page limit. It defines the last line position on each page of the report. No report line will appear below this position on any page. If integer-1 is not specified, the report consists of a single page of indefinite length.

- b) Integer-2 is the page width. It defines the maximum number of print columns that may be accommodated in any line of the report.
 - c) Integer-3 is the HEADING integer. It defines the first line position on which a report heading or page heading may be printed. No report line will appear higher than this position on the page.
 - d) Integer-4 is the FIRST DETAIL integer. It defines the first line position on which any line of a body group may be printed. Any report heading (when not on a page by itself) or page heading shall be defined so that it terminates before this line.
 - e) Integer-5 is the LAST CONTROL HEADING integer. It defines the last line position on which any line of a control heading may be printed.
 - f) Integer-6 is the LAST DETAIL integer. It defines the last line position on which any line of a detail may be printed.
 - g) Integer-7 is the FOOTING integer. It defines the last line position on which any line of a control footing may be printed. Any page footing or report footing (when not on a page by itself) shall be defined so that it begins after this line.
- 3) If integer-1 is specified and any of the following phrases is omitted, a default value for the associated integer is supplied as follows:
- a) If HEADING is omitted, integer-3 will be 1.
 - b) If FIRST DETAIL is omitted, integer-4 will be equal to integer-3.
 - c) If LAST CONTROL HEADING is omitted, integer-5 will be equal to integer-6, if LAST DETAIL is specified, or equal to integer-7, if FOOTING is specified, or otherwise equal to the page limit given by integer-1.
 - d) If LAST DETAIL is omitted, integer-6 will be equal to integer-7, if FOOTING is specified, or otherwise equal to the page limit given by integer-1.
 - e) If FOOTING is omitted, integer-7 will be equal to integer-6, if LAST DETAIL is specified, or otherwise equal to the page limit given by integer-1.
- 4) A report heading or report footing on a page by itself may occupy any region of the page from HEADING integer-3 through the page limit integer-1 or, if not on a page by itself, is constrained in the same way as a page heading or page footing respectively.
- 5) If integer-2 is omitted, a value of 999 is assumed for the page width.

13.16.38 PICTURE clause

The PICTURE clause describes the general characteristics, editing requirements, and format validation profile of an elementary item.

13.16.38.1 General format

Format 1 (basic):

$$\left\{ \begin{array}{l} \text{PICTURE} \\ \text{PIC} \end{array} \right\} \text{ IS character-string-1}$$

Format 2 (locale):

$$\left\{ \begin{array}{l} \text{PICTURE} \\ \text{PIC} \end{array} \right\} \text{ IS character-string-1 } \underline{\text{LOCALE}} \text{ [IS locale-name-1] } \underline{\text{SIZE}} \text{ IS integer-1}$$
13.16.38.2 Syntax rules

ALL FORMATS

- 1) The PICTURE clause may be specified only at the elementary level.
- 2) Character-string-1 shall consist of an allowable combination of characters from the COBOL character repertoire used as symbols.

The allowable combinations of symbols for a PICTURE clause are specified in 13.16.38.5, Precedence rules.

- 3) All lowercase letters in character-string-1 are equivalent to their corresponding uppercase representations.
- 4) The maximum number of characters allowed in character-string-1 is 50.
- 5) PIC is an abbreviation for PICTURE.
- 6) For data items of category numeric and numeric-edited, the number of digit positions described by character-string-1 shall range from 1 through 31.
- 7) An unsigned non-zero integer that is enclosed in parentheses indicates the number of consecutive occurrences of the symbol that immediately precedes the left parenthesis. The integer may be specified by a constant-name, in which case the length of the integer, not the length of the constant-name, is counted toward the maximum number of characters in character-string-1.
- 8) If the symbol ',' or the symbol '.' is the last symbol of character-string-1, the PICTURE clause shall be the last clause of the data description entry and shall be followed immediately by the separator period.

FORMAT 1

- 9) Character-string-1 shall contain
 - at least one of the symbols from the set 'A', 'N', 'X', 'Z', '1', '9', '*'; or
 - at least two occurrences of one of the symbols from the set '+', '-', the currency symbol.
- 10) Each of the symbols from the set 'CR', 'DB', 'E', 'S', 'V', '.' may appear only once in character-string-1.

NOTE The symbols 'CR' and 'DB', although consisting of two characters, are each considered to be a symbol by itself.

- 11) When the DECIMAL-POINT IS COMMA clause is specified, the symbol comma is the decimal separator and the symbol period is the grouping separator. The rules for the symbol period apply to the symbol comma, and the rules for the symbol comma apply to the symbol period.
- 12) The symbol 'P' may appear only as a continuous string of 'P's in the leftmost or rightmost digit positions in character-string-1.
- 13) The symbol 'P' and the symbol '.' are mutually exclusive in character-string-1.
- 14) The symbol 'S', if present, shall be the first symbol in character-string-1.
- 15) When the symbol 'V' and one or more symbols 'P' are used in character-string-1, the symbol 'V' shall either immediately precede the first symbol 'P' or immediately follow the last symbol 'P'.
- 16) The symbol 'V' and the symbol '.' are mutually exclusive in character-string-1.
- 17) The symbol 'Z' and the symbol '*' are mutually exclusive in character-string-1.
- 18) Neither the symbol 'S' nor the symbol '*' shall be specified in character-string-1 when the BLANK WHEN ZERO clause is specified for the subject of the entry.
- 19) The editing sign control symbols '+', '-', 'CR', and 'DB' are mutually exclusive in character-string-1 with the exception of a numeric-edited data item for a floating-point edited result as described in general rule 12b.

NOTE For a floating-point edited result, the significand part of the character-string may contain a '-' symbol and the exponent part always contains a '+' symbol.

- 20) For fixed insertion, only one currency symbol and only one editing sign control symbol may be used in character-string-1.
- 21) The symbol '+' or the symbol '-', when used, shall be either the leftmost or the rightmost symbol in character-string-1.
- 22) The symbol 'CR' or the symbol 'DB', when used, shall be the rightmost symbol in character-string-1.
- 23) The currency symbol, when used, shall be either the leftmost symbol in character-string-1, optionally preceded by one of the symbols '+' or '-', or the rightmost symbol in character-string-1, optionally followed by one of the symbols '+', '-', 'CR', or 'DB'.

NOTE This means that the following are valid picture character-strings:

'\$999+'
'+999\$'
'+\$999'
'999\$+'
'+\$999'
'\$\$99+'
'\$\$99+.'

- 24) No more than one of the following may be specified in character-string-1:

- - a string of two or more symbols '+';
- - a string of two or more symbols '-';
- - a string of two or more currency symbols;
- - a string of one or more symbols '*';
- - a string of one or more symbols 'Z'.

NOTE This means, for example, that the picture character-string +\$\$\$ is valid, but that the picture character-string +++\$\$\$ is invalid.

- 25) For floating insertion, when the currency symbol is used as the floating insertion symbol, all occurrences shall be the same currency symbol.
- 26) For floating insertion, at least one insertion symbol shall be specified to the left of the decimal point position.
- 27) The symbols 'A' and 'X' shall not be specified in character-string-1 when a USAGE NATIONAL clause is specified for the subject of the entry.

FORMAT 2

- 28) Character-string-1 shall contain at least one of the symbols 'Z' or '9'.
- 29) Each of the symbols from the set '+', '.', the currency symbol may appear only once in character-string-1.
- 30) The currency symbol and the symbol '+' may be specified only to the left of the decimal point position.
- 31) Locale-name-1 shall be specified in the LOCALE clause in the SPECIAL-NAMES paragraph.

13.16.38.3 General rules

ALL FORMATS

- 1) When the usage of the subject of the entry is national, each symbol representing a character position defines a national character position. When the usage of the subject of the entry is display, each symbol representing a character position defines an alphanumeric character position.
- 2) The value of insertion and replacement characters in a resultant edited item is the value of those characters in the computer's runtime coded character set. When the usage of the item being edited is national, the value is the national character representation; otherwise, the value is the alphanumeric character representation.

FORMAT 1

- 3) A PICTURE clause defines the subject of the entry to fall into one of the following categories of data:
 - alphabetic
 - alphanumeric
 - alphanumeric-edited
 - boolean
 - national
 - national-edited
 - numeric
 - numeric-edited

A BLANK WHEN ZERO clause specified for the subject of the entry defines the item as numeric-edited.

- 4) The size in boolean positions or character positions of an elementary data item that has been defined with a PICTURE clause is determined by the number of symbols in character-string-1 that represent either boolean positions or character positions.
- 5) To define an item as alphabetic, character-string-1 shall contain only one or more occurrences of the symbol 'A'.
- 6) To define an item as alphanumeric, character-string-1 shall contain a combination of symbols from the set 'A', 'X', and '9', that includes
 - at least one symbol 'X', or
 - at least two different symbols from this set.

7) To define an item as alphanumeric-edited, character-string-1 shall include

- at least one symbol 'A' or one symbol 'X', and
- at least one of the symbols from the set 'B', 'O', '/'.

8) To define an item as boolean, character-string-1 shall contain only one or more occurrences of the symbol '1'.

9) To define an item as national, character-string-1 shall contain only one or more occurrences of the symbol 'N'.

10) To define an item as national-edited, character-string-1 shall include

- at least one symbol 'N', and
- at least one of the symbols from the set 'B', 'O', '/'.

11) To define an item as numeric, character-string-1

- shall include at least one symbol '9', and
- may contain a combination of symbols from the set 'P', 'S', and 'V'.

12) To define an item as numeric-edited, one of the following options shall be specified:

a) To produce a fixed-point edited result, character-string-1 shall include:

- at least one symbol 'Z'; or
- at least one symbol '*'; or
- at least two identical symbols from the set '+', '-', currency symbol; or
- at least one symbol '9' and at least one of the symbols from the set 'B', 'CR', 'DB', 'O', '/', ',', '.', '+', '-', the currency symbol.

b) To produce a floating-point edited result, character-string-1 shall consist of two parts, separated without any spaces, by the symbol 'E'. The first part represents the significand; the second part represents the exponent.

The significand shall be a valid character-string for either a numeric item or a numeric-edited item for a fixed-point result. Neither floating insertion editing nor zero suppression with replacement shall be specified for the significand.

The exponent shall be '+9', '+99', '+999', or '+9(n)' where $n = 1, 2, \text{ or } 3$.

13) The meaning of the symbols used in character-string-1 are as follows:

A Each symbol 'A' represents a character position that shall contain any character from the computer's alphanumeric character set. Each symbol 'A' is counted in the size of the item.

The characters represented may be graphic characters or non-graphic characters.

B Each symbol 'B' represents a character position into which the character space will be inserted during editing. Each symbol 'B' is counted in the size of the item.

E The symbol 'E' represents a character position into which the character 'E' will be inserted during editing. The symbol 'E' is counted in the size of the item.

The symbol 'E' is used to separate the significand and the exponent of a floating-point numeric-edited item.

N Each symbol 'N' represents a national character position that shall contain a character from the computer's national character set. Each symbol 'N' is counted in the size of the item.

P The symbol 'P' specifies the location of an assumed decimal point when that point is not within the number that appears in the data item. The symbol 'P' is not counted in the size of the item, but each symbol 'P' is counted in the maximum number of digit positions.

The symbol 'P' implies an assumed decimal point that is either

- to the left of the string of 'P's if they indicate the leftmost digit positions in character-string-1; or
- to the right of the string of 'P's if they indicate the rightmost digit positions in character-string-1.

In certain operations that reference a data item whose picture character-string contains the symbol 'P', the algebraic value of the data item is used rather than the actual value of the data item. This algebraic value assumes the decimal point in the prescribed position and zero in place of each digit position specified by the symbol 'P'. The size of the value is the number of digit positions represented by the picture character-string.

The operations that use the algebraic value are the following:

- a) Any operation requiring a numeric sending operand.
- b) An elementary move operation where the sending operand is numeric and its picture character-string contains one or more symbols 'P'.
- c) A move operation where the sending operand is numeric-edited, its picture character-string contains one or more symbols 'P', and the receiving operand is numeric or numeric-edited.
- d) A comparison operation where both operands are numeric.

In all other operations, the digit positions specified with the symbol 'P' are ignored and are not counted in the size of the operand.

S The symbol 'S' indicates the presence, but neither the representation nor, necessarily, the position of an operational sign. For usages display and national, the symbol 'S' is counted in the size of the item only when the subject of the entry is described with a SIGN clause with the SEPARATE phrase. For other numeric usages, the effect of the 'S' is described in the rules for the USAGE clause.

V The symbol 'V' indicates the position of the assumed decimal point for alignment purposes. The symbol 'V' is not counted in the size of the item.

When the assumed decimal point position is to the right of the rightmost digit position, the symbol 'V' is redundant.

X Each symbol 'X' represents a character position that shall contain any character from the computer's alphanumeric character set. Each symbol 'X' is counted in the size of the item.

The characters represented may be graphic characters or non-graphic characters.

Z Each symbol 'Z' represents a leading numeric position that during editing will contain a numeric character in the range 0 through 9, or a character space when the content of that position is a leading zero. Each symbol 'Z' is counted in the size of the item.

0 Each symbol '0' (zero) represents a character position into which the character zero will be inserted during editing. Each symbol '0' is counted in the size of the item.

1 Each symbol '1' represents a boolean position that shall contain a boolean character. Each symbol '1' is counted in the size of the item.

9 Each symbol '9' represents a decimal digit position of the value of the item. For usages display and national, each '9' represents a character position that shall contain a numeric character in the range 0 through 9 with the possible inclusion of an operational sign; each '9' is counted in the size of the item. For other numeric usages, the effect of the number of '9's is described in the rules for the USAGE clause.

/ Each symbol '/' (slant) represents a character position into which the character slant will be inserted during editing. Each symbol '/' is counted in the size of the item.

, Each symbol ',' (comma) represents a character position into which the character comma will be inserted during editing. Each symbol ',' is counted in the size of the item.

. The symbol '.' (period) represents a character position into which the character period will be inserted during editing. The symbol '.' is counted in the size of the item.

In addition, the symbol '.' indicates the decimal point position for alignment purposes.

+ – CR DB These symbols represent the character position(s) into which the editing sign control character(s) is (are) placed during editing. Each character used in the symbol is counted in the size of the item.

* Each symbol '*' represents a leading numeric position that during editing will contain a numeric character in the range 0 through 9, or a character asterisk when the content of that position is a leading zero. Each symbol '*' is counted in the size of the item.

cs A currency symbol represents character positions into which the currency string will be placed during editing. A currency symbol is represented in character-string-1 either by the currency sign or by the currency symbol specified in a CURRENCY SIGN clause in the SPECIAL-NAMES paragraph.

The first occurrence of the currency symbol adds the number of characters in the currency string to the size of the item. Each subsequent occurrence of the currency symbol adds one to the size of the item.

- 14) The PICTURE clause takes effect during the format validation stage of the execution of a VALIDATE statement that refers directly or indirectly to the subject of the entry.

If the usage of the subject of the entry is not display or national, character-string-1 is used in combination with the USAGE clause to check, where applicable, that the contents are compatible with character-string-1. The rules for compatibility are implementor defined.

If the usage of the subject of the entry is binary, computational or packed-decimal, and the range of values permitted by character-string-1 is less than that used by the hardware for the representation of the item, the unused portion of the hardware allocation is checked to contain only the value zero.

If the usage is display or national, the effects of each symbol in character-string-1 are explained as follows:

A Each symbol 'A' represents a character position that will be checked to contain an alphabetic character. The classification of characters as alphabetic is determined in accordance with the rules for the ALPHABETIC class condition as specified in 8.8.4.1.3, Class condition.

B Each symbol 'B' represents a character position that will be checked to contain

- the character space if the symbol 'B' is neither part of floating insertion editing nor of zero suppression with replacement editing;
- otherwise, the character space or, if no significant numeric character appears to its left, the corresponding floating insertion character or replacement character respectively.

E The symbol 'E' represents a character position that will be checked to contain the character 'E'.

N Each symbol 'N' represents a character position that will be checked to contain a character from the computer's national character set.

S The symbol 'S' specifies that the data item will be checked for the presence of an operational sign.

- If the subject of the entry is not specified with a SIGN clause, the position and the mode of representation of this operational sign are checked according to the specifications of the implementor;
- If the subject of the entry is specified with a SIGN clause without the SEPARATE phrase, then either the first or the last digit position and the mode of representation of the operational sign are checked according to the specifications of the implementor;
- If the subject of the entry is specified with a SIGN clause with the SEPARATE phrase, then the corresponding position of the data item is checked to contain the character '+' or the character '-'.

Z Each symbol 'Z' represents a character position that will be checked to contain:

- the space character, if the symbol 'Z' is specified to the left of the decimal point position and the content of the character position is a leading zero, or
- the space character, if the symbol 'Z' is specified at the rightmost digit position after the decimal point position and the content of the data item is zero, or
- a numeric character in the range 0 through 9 otherwise.

0 Each symbol '0' (zero) represents a character position that will be checked to contain

- the character zero if the symbol '0' is neither part of floating insertion editing nor of zero suppression with replacement editing;
- otherwise, the character zero or, if no significant numeric character appears to its left, the corresponding floating insertion character or replacement character respectively.

1 Each symbol '1' represents a boolean position that will be checked to contain a boolean character.

9 Each symbol '9' represents a character position that will be checked to contain a numeric character in the range 0 through 9 with the possible inclusion of an operational sign.

/ Each symbol '/' (slant) represents a character position that will be checked to contain

- the character slant if the symbol '/' is neither part of floating insertion editing nor of zero suppression with replacement editing;
- otherwise, the character slant or, if no significant numeric character appears to its left, the corresponding floating insertion character or replacement character respectively.

, Each symbol ',' (comma) represents a character position that will be checked to contain

- the character comma if the symbol ',' is neither part of floating insertion editing nor of zero suppression with replacement editing;
- otherwise, the character comma or, if no significant numeric character appears to its left, the corresponding floating insertion character or replacement character respectively.

. The symbol '.' (period) represents a character position that will be checked to contain the character period.

+ – CR DB These symbols represent character positions that will be checked to contain a valid sign, according to the following:

- the character position corresponding to the symbol '+' or '-' when such a symbol is used as a fixed insertion symbol, will be checked to contain a valid sign character as defined in table 9, Results of fixed insertion editing;

- the character positions corresponding to the symbols '+' or '-' when such symbols are used as floating insertion symbols, will all be checked to contain valid characters, including a valid sign character, as specified in 13.16.38.4, Editing rules, rule 6;
- the character positions corresponding to the symbols 'CR' and 'DB' will be checked to contain valid sign characters as defined in table 9, Results of fixed insertion editing.

* Each symbol '*' represents a character position that will be checked to contain:

- the character asterisk, if the symbol '*' is specified to the left of the decimal point position and the content of the character position is a leading zero, or
- the character asterisk, if the symbol '*' is specified at the rightmost digit position after the decimal point position and the content of the data item is zero, or
- a numeric character in the range 0 through 9 otherwise.

cs The character position(s) corresponding to the currency symbol will be checked as follows:

- when used as a fixed insertion symbol, the character position(s) will be checked to contain the currency string,
- when used as floating insertion symbols, the character position(s) will be checked to contain valid characters, including a valid currency string, as specified in 13.16.38.4, Editing rules, rule 6.

All other symbols have no effect on format validation.

FORMAT 2

15) Format 2 of the PICTURE clause defines the item to be fixed-point numeric-edited.

16) The number of character positions in the item is specified by integer-1.

17) The meaning of the symbols used in character-string-1 are as follows:

- Z Each symbol 'Z' represents a leading numeric position that during editing will contain a numeric character in the range 0 through 9, or a character space when the content of that position is a leading zero.
- 9 Each symbol '9' represents a digit position that shall contain a numeric character in the range 0 through 9.
- .

In addition, the symbol '.' indicates the decimal point position for alignment purposes.

- + The symbol '+' indicates that the item is to be signed in accordance with the specifications in the locale. If the symbol '+' is not specified, the item will be unsigned.

cs The currency symbol indicates that the item is to include a currency string in accordance with the specifications in the locale.

18) The PICTURE clause takes effect during the format validation stage of the execution of a VALIDATE statement that refers directly or indirectly to the subject of the entry. The validation is carried out in accordance with the character classification and monetary specification in the locale.

13.16.38.4 Editing rules

FORMAT 1

1) There are two methods of performing editing: either insertion or suppression with replacement.

There are four types of insertion editing:

- simple insertion
- special insertion
- fixed insertion
- floating insertion

There are two types of suppression with replacement:

- zero suppression with replacement with spaces
- zero suppression with replacement with asterisks

- 2) The type of editing that may be performed upon an item is dependent upon the category to which the item belongs. Table 8, Category and type of editing, specifies which type of editing may be performed upon a given category:

Table 8 — Category and type of editing

Category	Type of editing
Alphabetic	None
Alphanumeric	None
Boolean	None
National	None
Numeric	None
Alphanumeric-edited	Simple insertion
National-edited	Simple insertion
Numeric-edited (fixed-point edited result)	All
Numeric-edited (floating-point edited result)	Simple insertion, special insertion, and fixed insertion for the significand part None for the exponent part

- 3) Simple insertion editing

The symbols 'B', 'O', 'I', and 'J' are used as the simple insertion editing symbols.

Simple insertion editing results in the insertion character occupying the same character position in the edited item as the associated symbol occupies in character-string-1.

- 4) Special insertion editing

The symbol '.' is used as the special insertion editing symbol.

Special insertion editing results in the period character occupying the same character position in the edited item as the symbol '.' occupies in character-string-1.

- 5) Fixed insertion editing

The currency symbol and the editing sign control symbols '+', '-', 'CR' and 'DB' are used as the fixed insertion editing symbols.

Fixed insertion editing results in the insertion character(s) occupying the same character position(s) in the edited item as the associated symbol occupies in character-string-1.

Table 9, Results of fixed insertion editing, shows the character(s) produced by an editing sign control symbol, depending on the value of the data item.

Table 9 — Results of fixed insertion editing

Editing symbol	Result	
	Positive or zero value	Negative value
+	+	—
—	space	—
CR	2 spaces	CR
DB	2 spaces	DB

The uppercase letters CR and DB are the insertion characters for the insertion symbols 'CR' and 'DB'.

6) Floating insertion editing

The currency symbol and the editing sign control symbols '+' and '-' are used as the floating insertion symbols.

Floating insertion editing is indicated by specifying a string of at least two identical floating insertion editing symbols. Any of the simple insertion editing symbols embedded in this string or to the immediate right of this string are part of the string.

The leftmost symbol of the insertion string represents the leftmost limit of the floating characters in the data item. The rightmost symbol of the insertion string represents the rightmost limit of the floating characters in the data item.

The second floating symbol represents the leftmost limit of the numeric data that may be stored in the item. During editing, nonzero numeric characters may replace all the insertion symbols at or to the right of this limit.

If truncation occurs, the value of the data that is used for editing is the value after truncation as specified in 14.5.8, Alignment of data within data items.

NOTE To avoid unwanted truncation of data, the minimum size of character-string-1 should be the number of characters in the sending operand, plus the number of non-floating insertion symbols to be inserted in the item, plus one.

There are two ways of representing floating insertion editing:

- a) one way is to represent any or all of the leading numeric character positions to the left of the decimal point position by the same insertion symbol. The result is that a single occurrence of the replacement character(s) is (are) placed into the character position(s) immediately preceding whichever of the following is encountered first:
 - the first non-zero numeric character in the item
 - the first character position for which no floating insertion editing is specified
 - the decimal point position.

Any character positions preceding this (these) insertion character(s) will contain the space character.

- b) the second way is to represent all of the numeric character positions by the same insertion symbol. The result depends upon the value of the data to be stored. If the value is not zero, the result is the same as if the floating insertion editing were defined only to the left of the decimal point position. If the value is zero, all character positions will contain the space character.

Table 10, Results of floating insertion editing, shows the character produced by the floating editing sign control symbols '+' and '-', depending on the value of the data item.

Table 10 — Results of floating insertion editing

Editing symbol in picture character-string	Result	
	Data item positive or zero	Data item negative
+	+	–
–	space	–

7) Zero suppression with replacement editing

The symbols 'Z' and '*' are used as the symbols for zero suppression with replacement. If the symbol 'Z' is used, the replacement character is the character space; if the symbol '*' is used, the replacement character is the character asterisk.

Zero suppression with replacement is indicated by specifying a string of one or more identical zero-suppression characters. Any of the simple insertion editing symbols embedded in this string or to the immediate right of this string are part of the string.

There are two ways of representing zero suppression with replacement:

- a) one way is to represent any or all of the leading numeric character positions to the left of the decimal point position by the zero-suppression symbol. The result is that the corresponding replacement character is placed into any character position immediately preceding whichever of the following is encountered first:
 - the first non-zero numeric character in the item
 - the first character position for which no zero suppression with replacement is specified
 - the decimal point position.
- b) the second way is to represent all of the numeric character positions by the zero-suppression symbol. The result depends upon the value of the data to be stored. If the value is not zero, the result is the same as if the zero suppression with replacement were defined only to the left of the decimal point position. If the value is zero and the zero-suppression symbol is the symbol 'Z', all character positions of the item will contain the character space. If the value is zero and the zero-suppression symbol is the symbol '*', all character positions of the item will contain the character asterisk, but the decimal separator, when specified, will appear in the item.

8) Zero value of a floating-point edited item

If the value to be edited into a floating-point edited item is zero, then after editing all digit positions of the significand and all digit positions of the exponent shall be zero; the sign of the significand, if present, shall be positive; and the sign of the exponent shall be positive.

FORMAT 2

- 9) The locale category LC_MONETARY is used for locale editing. The position, length, and character(s) used for the currency symbol are determined from that locale category.
- 10) A BLANK WHEN ZERO clause takes precedence over locale editing.
- 11) When locale-name-1 is specified, the locale used in editing and de-editing the item is the one associated with that name by the LOCALE clause in the SPECIAL-NAMES paragraph; otherwise, the current locale is used.

NOTE Switching locales between editing and de-editing of a given data item may result in unpredictable behavior. The programmer is responsible for ensuring that the locale used for de-editing is the same as the one used for editing.

- 12) The decimal separator, the grouping separator, and the number of digits in a group are determined from the locale category LC_MONETARY.
- 13) If the symbol '+' is specified, the manner of representing positive and negative numbers is determined from the locale.
- 14) During editing, the data is aligned on the decimal point position with zero fill or truncation on either end, within a hypothetical data item, with grouping and separators in accordance with the locale specifications.

The hypothetical data item is then moved to the data item being edited. The following rules apply:

- a) If the size of the data item is larger than the size of the hypothetical data item, the data is right justified, with space fill for the leftmost character positions.
- b) If the size of the data item is smaller than the size of the hypothetical data item, the leftmost character positions of the hypothetical data item are truncated. If any truncated character is neither a zero nor a space caused by a suppressed zero, the EC-LOCALE-SIZE exception condition is set to exist.

15) Zero suppression with replacement editing

The symbol 'Z' is used as the symbol for zero suppression with replacement. The replacement character is the character space.

Zero suppression with replacement is indicated by specifying a string of one or more symbols 'Z'.

There are two ways of representing zero suppression with replacement:

- a) one way is to represent any or all of the leading numeric character positions to the left of the decimal point position by the symbol 'Z'. The result is that the space character is placed into any character position immediately preceding whichever of the following is encountered first:
 - the first non-zero numeric character in the item
 - the first character position for which no zero suppression with replacement is specified
 - the decimal point position.
- b) the second way is to represent all of the numeric character positions by the symbol 'Z'. The result depends upon the value of the data to be stored. If the value is not zero, the result is the same as if the zero suppression with replacement were defined only to the left of the decimal point position. If the value is zero, all character positions of the item will contain the character space.

13.16.38.5 Precedence rules

Where an 'x' appears in Table 11 and in Table 12, additional Syntax Rules or General Rules may apply further restrictions.

FORMAT 1

Table 11, Format 1 picture symbol order of precedence, shows the order of precedence of symbols in a Format 1 picture character-string. An 'x' at an intersection indicates that the symbol(s) at the top of the column may precede (but not necessarily immediately) in character-string-1 the symbol(s) at the left of the row. The currency symbol is indicated by the symbol 'cs'.

The currency symbol when used as a fixed insertion symbol appears in two columns and two rows. The leftmost column and the uppermost row for this symbol represent its use as the first or second symbol in character-string-1. The rightmost column and the lowermost row for this symbol represent its use as the last or penultimate symbol in character-string-1.

The symbol '+' that appears in a column and in a row by itself, represents its use in the exponent part of character-string-1 for a floating-point numeric-edited item.

The symbols '+' and '-' when used as a non-floating insertion symbol appear in two columns and two rows. The leftmost column and the uppermost row for these symbols represent their use as the first symbol in character-string-1. The rightmost column and the lowermost row for these symbols represent their use as the last symbol in character-string-1.

The symbol 'P', the currency symbol when used as a floating insertion symbol, the pair of zero-suppression symbols 'Z' and '*', and the pair of floating insertion symbols '+' and '-' appear in two columns and in two rows in this table. The leftmost column and the uppermost row for these symbols represent their use to the left of the decimal point position. The rightmost column and the lowermost row for these symbols represent their use to the right of the decimal point position.

For the purposes of this table, character-string-1 for a numeric-edited item for a floating-point edited result is considered as two separate strings, the first of which begins with the first symbol and ends with the symbol 'E', and the second of which begins with the symbol 'E' and ends with the last symbol. The presence of symbols preceding the symbol 'E' has no effect on the validity of symbols following the symbol 'E'.

When the DECIMAL-POINT IS COMMA clause is specified, the precedence rules for the symbols comma and period are interchanged.

Table 11 — Format 1 picture symbol order of precedence

Second Symbol		First Symbol																							
		Simple, special, and fixed insertion symbols									Zero-suppression and floating insertion symbols							Other symbols							
		B 0 /	,	.	+	+	+	CR DB	cs	cs	Z *	Z *	+	+	cs	cs	9	A X	S	V	P	P	1	N	E
Simple, special, and fixed insertion symbols	B 0 /	x	x	x		x			x		x	x	x	x	x	x	x	x		x		x		x	
	,	x	x	x		x			x		x	x	x	x	x	x	x		x		x				
	.	x	x			x			x		x		x		x		x								
	+																							x	
	+ -																								
	+ -	x	x	x					x	x	x	x				x	x	x			x	x	x		
	CR DB	x	x	x					x	x	x	x				x	x	x			x	x	x		
	cs					x																			
	cs	x	x	x		x					x	x					x			x	x	x			
Zero-suppression and floating insertion symbols	Z *	x	x			x			x		x														
	Z *	x	x	x		x			x		x									x		x			
	+ -	x	x						x			x													
	+ -	x	x	x					x			x	x							x					
	cs	x	x			x										x									
	cs	x	x	x		x										x	x			x					
Other symbols	9	x	x	x	x	x			x		x		x		x		x	x	x	x		x			x
	A X	x															x	x							
	S																								
	V	x	x			x			x		x		x		x		x			x					
	P	x	x			x			x		x		x		x		x			x					
	P					x			x										x	x		x			
	1																						x		
	N	x																						x	
	E	x	x	x		x											x								

FORMAT 2

Table 12, Format 2 picture symbol order of precedence, shows the order of precedence of symbols in a Format 2 picture character-string. An 'x' at an intersection indicates that the symbol at the top of the column may precede (but not necessarily immediately) in character-string-1 the symbol at the left of the row. The currency symbol is indicated by the symbol 'cs'.

Table 12 — Format 2 picture symbol order of precedence

Second Symbol	First Symbol				
	9	cs	.	+	Z
9	X	X	X	X	X
cs				X	
.	X	X		X	X
+					
Z		X	X	X	X

13.16.39 PRESENT WHEN clause

- 1) The PRESENT WHEN clause specifies a condition under which a report section entry will be processed.
- 2) The PRESENT WHEN clause also enables conditional selection of data description entries by the VALIDATE statement.

13.16.39.1 General format

Format 1 (report-writer):

PRESENT WHEN condition-1

Format 2 (validation):

PRESENT WHEN condition-2

13.16.39.2 Syntax rules

FORMAT 2

- 1) The PRESENT WHEN clause shall not be specified for a strongly-typed group item or any item subordinate to a strongly-typed group item.

13.16.39.3 General rules

FORMATS 1 AND 2

- 1) If the PRESENT WHEN clause is specified in a report group description entry, the general rules for format 1 apply, otherwise, the general rules for format 2 apply.

FORMAT 1

- 2) If a report group contains any entries that have a PRESENT WHEN clause, condition-1 of each PRESENT WHEN clause is evaluated before the processing of any LINE clauses for the report group. The effect of the PRESENT WHEN clause depends on the value of condition-1 as follows:
 - a) If condition-1 is true, the corresponding data item is declared to be present and the PRESENT WHEN clause does not affect the processing for this instance of the report group.
 - b) If condition-1 is false, the corresponding data item is declared to be absent and the effect on processing is as though the entry were omitted from the description of the report group. If the data description entry is not an elementary entry, all its subordinate data items are also declared to be absent, irrespective of any PRESENT WHEN clauses they may also contain. Furthermore, if the entry is a level-01 entry, the effect on processing is as though the entire report group description were omitted.
- 3) Within a report group description, any PRESENT WHEN clauses are taken into account when assessing the validity of the arrangement of LINE and COLUMN clauses, the manner in which the report group will be printed and the effect of sum counters, as follows:
 - a) The rules for positioning the first line of the report group ignore any LINE clauses specified at the start of the report group where the LINE clauses are associated with absent data items. (See 13.16.33, LINE clause.)
 - b) The rules forbidding overlap of absolute lines in the report group are not applied to lines associated with absent data items. (See 13.16.33, LINE clause.)

- c) The rules preventing trailing relative lines in the report group from exceeding the report group's lower limit are not applied to lines associated with absent data items. (See 13.16.33, LINE clause.)
- d) The page fit test for body groups disregards all lines associated with absent data items. (See 13.16.33, LINE clause.)
- e) The rules forbidding overlap of absolute printable items in a report line are not applied to items associated with absent data items. (See 13.16.14, COLUMN clause, general rule 4.)
- f) The rules preventing trailing relative printable items in the line from exceeding the page width are not applied to items associated with absent data items. (See 13.16.14, COLUMN clause.)
- g) If an entry with a SUM clause is associated with an absent data item, the sum counter is not printed and is not reset to zero.

FORMAT 2

- 4) The PRESENT WHEN clause takes effect during the execution of a VALIDATE statement that directly or indirectly references the subject of the entry.
- 5) Condition-2 is evaluated at the beginning of the execution of the format validation stage, with the following two possible results:
 - a) If condition-2 is true, the data item that is the subject of the entry is processed during further execution of the VALIDATE statement.
 - b) If condition-2 is false, the data item that is the subject of the entry and all data items subordinate to it are not processed at this and all subsequent stages of the execution of the VALIDATE statement.

NOTE If condition-2 is false, the contents of the data item will not be checked unless the data item is redefined.

- 6) Condition-2 shall not reference any data item that is, or shares any storage with, an operand of a DESTINATION clause appearing later in the description of a data item referred to by the same VALIDATE statement.

13.16.40 PROPERTY clause

The PROPERTY clause indicates that this data item is a property of the object and that GET and/or SET methods are to be generated accordingly.

13.16.40.1 General format

$$\text{PROPERTY} \left[\text{WITH } \underline{\text{NO}} \left\{ \begin{array}{c} \underline{\text{GET}} \\ \underline{\text{SET}} \end{array} \right\} \right] [\text{IS } \underline{\text{FINAL}}]$$

13.16.40.2 Syntax rules

- 1) The PROPERTY clause may be specified only in the working-storage section of a factory definition or an instance definition.
- 2) The PROPERTY clause shall not be specified for data items subject to an OCCURS clause.
- 3) The PROPERTY clause may be specified only for an elementary item, whose name does not require qualification for uniqueness of reference.
- 4) The data-name for the subject of the entry shall not be the same as a property-name defined in a superclass.

NOTE A property-name may be defined in a superclass either by defining a method or a pair of methods with the PROPERTY phrase or by describing a data description entry with the PROPERTY clause.

13.16.40.3 General rules

- 1) If the GET phrase is not specified, the PROPERTY clause causes a method to be defined for the containing object.

If the subject of this entry is of class index, object, or pointer, the implicit definition of this method is as follows:

```
METHOD-ID. GET PROPERTY data-name.
DATA DIVISION.
LINKAGE SECTION.
01 LS-data-name data-description.
PROCEDURE DIVISION RETURNING LS-data-name.
par-name.
    SET LS-data-name TO data-name
    EXIT METHOD.
END METHOD.
```

If the subject of this entry is of category alphanumeric-edited, national-edited, or numeric-edited, the implicit definition of this method is as follows:

```
METHOD-ID. GET PROPERTY data-name.
DATA DIVISION.
LINKAGE SECTION.
01 LS-data-name data-description.
PROCEDURE DIVISION RETURNING LS-data-name.
par-name.
    MOVE data-name TO LS-data-name (1:)
    EXIT METHOD.
END METHOD.
```

NOTE If the subject of the entry is edited, reference modification of the receiving item as the whole of itself prevents the editing rules from being reapplied to the data.

Otherwise, the implicit definition of this method is as follows:

```
METHOD-ID. GET PROPERTY data-name.
DATA DIVISION.
LINKAGE SECTION.
01 LS-data-name data-description.
PROCEDURE DIVISION RETURNING LS-data-name.
par-name.
    MOVE data-name TO LS-data-name
    EXIT METHOD.
END METHOD.
```

Where LS-data-name has the data description of the subject of the entry with the exception of:

- PROPERTY clauses
- VALUE clauses
- a REDEFINES clause in the description of the subject of the entry.

- 2) If the SET phrase is not specified, the PROPERTY clause causes a method to be defined for the containing object.

If the subject of this entry is of class index, object, or pointer, the implicit definition of this method is as follows:

```
METHOD-ID. SET PROPERTY data-name.
DATA DIVISION.
LINKAGE SECTION.
01 LS-data-name data-description.
PROCEDURE DIVISION USING LS-data-name.
par-name.
    SET data-name TO LS-data-name
    EXIT METHOD.
END METHOD.
```

If the subject of this entry is of category alphanumeric-edited, national-edited, or numeric-edited, the implicit definition of this method is as follows:

```
METHOD-ID. SET PROPERTY data-name.
DATA DIVISION.
LINKAGE SECTION.
01 LS-data-name data-description.
PROCEDURE DIVISION USING LS-data-name.
par-name.
    MOVE LS-data-name TO data-name(1:)
    EXIT METHOD.
END METHOD.
```

NOTE If the subject of the entry is edited, reference modification of the receiving item as the whole of itself prevents the editing rules from being reapplied to the data.

Otherwise, the implicit definition of this method is as follows:

```
METHOD-ID. SET PROPERTY data-name.
```

```
DATA DIVISION.  
LINKAGE SECTION.  
01 LS-data-name data-description.  
PROCEDURE DIVISION USING LS-data-name.  
par-name.  
    MOVE LS-data-name TO data-name  
    EXIT METHOD.  
END METHOD.
```

Where LS-data-name has the data description of the subject of the entry with the exception of:

- PROPERTY clauses
- VALUE clauses
- a REDEFINES clause in the description of the subject of the entry.

- 3) If the FINAL phrase is specified, the implicit method definitions generated by the PROPERTY clause shall include the FINAL phrase in their METHOD-ID paragraphs.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.41 RECORD clause

The RECORD clause specifies the number of bytes in a fixed length record, or specifies the range of bytes in a variable-length record. If the number of bytes does vary, the clause specifies the minimum and maximum number of bytes.

13.16.41.1 General format**Format 1 (fixed-length):**

RECORD CONTAINS integer-1 CHARACTERS

Format 2 (variable-length):

RECORD IS VARYING IN SIZE [[FROM integer-2] [TO integer-3] CHARACTERS]
[DEPENDING ON data-name-1]

Format 3 (fixed-or-variable-length):

RECORD CONTAINS integer-4 TO integer-5 CHARACTERS

13.16.41.2 Syntax rules

ALL FORMATS

- 1) If no record description entries are specified in a file description entry for a file that is not a report file, the RECORD clause shall be specified.

FORMAT 1

- 2) No record description entry for the file may specify a number of bytes greater than integer-1.

FORMAT 2

- 3) Record descriptions for the file shall describe neither records that contain a lesser number of bytes than that specified by integer-2 nor records that contain a greater number of bytes than that specified by integer-3.
- 4) Integer-3 shall be greater than integer-2.
- 5) Data-name-1 shall describe an elementary unsigned integer in the working-storage, local-storage, or linkage section.
- 6) Integer-2 shall be greater than or equal to zero.

FORMAT 3

- 7) Integer-4 shall be greater than or equal to zero.
- 8) Integer-5 shall be greater than integer-4.

13.16.41.3 General rules

ALL FORMATS

- 1) Each integer in a RECORD clause specifies a record size in terms of bytes.

- 2) The implicit or explicit RECORD clause specifies the size of records in the record area. The size of records on physical storage media may be different due to control information required by the operating environment. Factors in the source element other than the RECORD clause that may affect the size of records on physical storage medium are the CODE-SET clause and the FORMAT clause. The implementor shall specify the calculations necessary for the user to derive the size for records on the storage medium.
- 3) The size of each record is specified in terms of the number of bytes required to store the logical record, regardless of the types of characters used to represent the items within the logical record. The size of a record is determined by the sum of the number of bytes in all fixed length elementary items plus the sum of the maximum number of bytes in any variable-length data item subordinate to the record. Implicit filler positions, if any, are included in the size.
- 4) If the last data item in the logical record does not end at a byte boundary, the record size includes the entire byte in which that data item ends, and the value of implicit filler bit positions necessary to complete the byte is undefined.
- 5) If the RECORD clause is not specified, an implicit format 1 or format 2 RECORD clause is assumed to be specified. This implicit RECORD clause is defined by the implementor with the following characteristics:
 - a) If format 1 is implied, integer-1 shall be the record size of the largest record description entry in this file description entry.
 - b) If format 2 is implied, integer-2 shall be the record size of the smallest record description entry in this file description entry, and integer-3 shall be the largest record description entry in this file description entry. The DEPENDING ON phrase is not specified.

FORMAT 1

- 6) Format 1 is used to specify fixed-length records. Integer-1 specifies the number of bytes contained in each record in the file.

FORMAT 2

- 7) Format 2 is used to specify variable-length records. Integer-2 specifies the minimum number of bytes to be contained in any record of the file. Integer-3 specifies the maximum number of bytes in any record of the file.
- 8) The number of bytes associated with a record description is determined by the sum of the number of bytes in all elementary data items excluding redefinitions and renamings, plus any implicit FILLER due to synchronization. If a table is specified:
 - a) The minimum number of table elements described in the record is used in the summation above to determine the minimum number of bytes associated with the record description.
 - b) The maximum number of table elements described in the record is used in the summation above to determine the maximum number of bytes associated with the record description.
- 9) If integer-2 is not specified, the minimum number of bytes to be contained in any record of the file is equal to the least number of bytes described for a record in that file.
- 10) If integer-3 is not specified, the maximum number of bytes to be contained in any record of the file is equal to the greatest number of bytes described for a record in that file.
- 11) If data-name-1 is specified, the number of bytes in the record shall be placed into the data item referenced by data-name-1 before any RELEASE, REWRITE, or WRITE statement is executed for the file.
- 12) If data-name-1 is specified, the execution of a DELETE, RELEASE, REWRITE, START, or WRITE statement or the unsuccessful execution of a READ or RETURN statement does not alter the content of the data item referenced by data-name-1.

- 13) During the execution of a RELEASE, REWRITE, or WRITE statement, the number of bytes in the record is determined by the following conditions:
- a) If data-name-1 is specified, by the content of the data item referenced by data-name-1.
 - b) If data-name-1 is not specified and the record does not contain a variable-occurrence data item, by the number of bytes in the record.
 - c) If data-name-1 is not specified and the record does contain a variable-occurrence data item, by the sum of the fixed portion and that portion of the table described by the number of occurrences at the time of execution of the output statement.
- 14) If the number of bytes in the record to be written is less than integer-2 or greater than integer-3, the following occurs:
- a) If a REWRITE or WRITE statement is being executed, the EC-I-O-LOGIC-ERROR exception condition is set to exist, and the execution of the REWRITE or WRITE statement is unsuccessful.
 - b) If a RELEASE statement is being executed, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the RELEASE statement is unsuccessful.
- 15) If data-name-1 is specified, after the successful execution of a READ or RETURN statement for the file, the contents of the data item referenced by data-name-1 will indicate the number of bytes in the record just read.
- 16) If the INTO phrase is specified in the READ or RETURN statement, the number of bytes in the current record that participate as the sending operands in the implicit MOVE statement is determined by the following conditions:
- a) If data-name-1 is specified, by the content of the data item referenced by data-name-1.
 - b) If data-name-1 is not specified, by the value that would have been moved into the data item referenced by data-name-1 had data-name-1 been specified.

If the number of bytes determined as above is zero, the record is a zero-length item.

FORMAT 3

- 17) It is implementor defined whether format 3 of the RECORD clause produces fixed-length records or variable-length records.
- 18) When format 3 of the RECORD clause is used, integer-4 and integer-5 refer to the minimum number of bytes in the smallest size record and the maximum number of bytes in the largest size record, respectively. However, in this case, the size of each record is completely defined in the record description entry.
- 19) If the number of bytes in the logical record to be written is less than integer-4 or greater than integer-5, the following occurs:
- a) If a REWRITE or WRITE statement is being executed, the EC-I-O-LOGIC-ERROR exception condition is set to exist and the execution of the REWRITE or WRITE statement is unsuccessful.
 - b) If a RELEASE statement is being executed, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the RELEASE statement is unsuccessful.

13.16.42 REDEFINES clause

The REDEFINES clause allows the same computer storage area to be described by different data description entries.

13.16.42.1 General format

level-number [entry-name-clause] REDEFINES data-name-2

where entry-name-clause is described in 13.16.18, Entry-name clause

NOTE Level-number and entry-name-clause are shown in the above format to provide context. Level-number and entry-name-clause are not part of the REDEFINES clause.

13.16.42.2 Syntax rules

- 1) The REDEFINES clause shall immediately follow the entry-name clause; if the entry-name clause is not specified, the REDEFINES clause shall immediately follow the level-number.
- 2) The level-numbers of data-name-2 and the subject of the entry shall be identical, but shall not be 66 or 88.
- 3) This clause shall not be specified in level 1 entries in the file section or in any entry subordinate to a file description entry that contains a FORMAT clause.
- 4) This clause shall not be specified in level 1 entries in the communication section.
- 5) No entry having a level-number numerically lower than the level-number of data-name-2 may occur between the data description entries of data-name-2 and the subject of the entry.
- 6) The data description entry for data-name-2 shall not contain an OCCURS clause. However, data-name-2 may be subordinate to an item whose data description entry contains an OCCURS clause. In this case, the reference to data-name-2 in the REDEFINES clause shall not be subscripted. Neither the original definition nor the redefinition shall include a variable-occurrence data item.
- 7) Data-name-2 shall not be qualified.

NOTE If data-name-2 is not unique, no ambiguity of reference exists because of the required placement of the REDEFINES clause.
- 8) Multiple redefinitions of the same storage area shall each specify as data-name-2 the data-name of the entry that originally defined the area.
- 9) The storage area required for the subject of the entry shall not be larger than the storage area required for the data item referenced by data-name-2, unless the data item referenced by data-name-2 has been specified with level number 1 and without the EXTERNAL clause.
- 10) Neither this entry nor any entry subordinate to it shall contain a VALUE clause, unless that VALUE clause is specified in an entry with the level-number 88.
- 11) The entries giving the new descriptions of the storage area shall follow the entries defining the area of data-name-2, without intervening entries that define new storage areas.
- 12) Data-name-2 may be subordinate to an entry that contains a REDEFINES clause.
- 13) The REDEFINES clause shall not be specified for a data item of class object or pointer or a strongly-typed group item.

- 14) Data-name-2 shall not be of class object or pointer, a strongly-typed group item, or an item subordinate to a strongly-typed group item.
- 15) The description of the subject of the entry shall be such that its required alignment is the same as the alignment of the data item referenced by data-name-2.

NOTE This International Standard places requirements on the alignment and an implementation may place additional requirements on the alignment.

- 16) Data-name-2 shall not be described with the ANY LENGTH clause.

13.16.42.3 General rules

- 1) Storage association for the subject of the entry starts at the first bit of the data item referenced by data-name-2 and continues over an area sufficient to contain the number of bits required by the data item referenced by the subject of the entry. If the subject of the entry requires more bits than the data item referenced by data-name-2, the storage area allocated for the data item referenced by data-name-2 and the subject of the entry is the number of bits required by the data item referenced by the subject of the entry. The size used for references to the data item referenced by data-name-2 is not changed.
- 2) When the same storage area is defined by more than one data description entry, the data-name associated with any of those data description entries may be used to reference that storage area.
- 3) If a REDEFINES clause is specified in the data description entry for a data item subordinate to the operand of a VALIDATE statement, each definition is used by the VALIDATE statement independently of the others, subjecting the same data locations to more than one set of checks. The PRESENT WHEN clause may be used to select one or more of a set of redefinitions, according to the specified conditions.

13.16.43 RENAMES clause

The RENAMES clause permits alternative, possibly overlapping, groupings of elementary items.

13.16.43.1 General format

$$66 \text{ data-name-1 } \underline{\text{RENAMES}} \text{ data-name-2 } \left\{ \begin{array}{l} \underline{\text{THROUGH}} \\ \underline{\text{THRU}} \end{array} \right\} \text{ data-name-3 } \left. \vphantom{\left\{ \begin{array}{l} \underline{\text{THROUGH}} \\ \underline{\text{THRU}} \end{array} \right\}} \right] .$$

NOTE Level-number 66 and data-name-1 are shown in the above format to provide context. Level-number and data-name-1 are not part of the RENAMES clause.

13.16.43.2 Syntax rules

- 1) Any number of RENAMES entries may be written for a record.
- 2) All RENAMES entries referring to data items within a given record shall immediately follow the last data description entry of the associated record description entry.
- 3) Data-name-1 shall not be used as a qualifier. Data-name-1 may be qualified only by the names of the associated level 01, FD, CD, or SD entries. Neither data-name-2 nor data-name-3 may have an OCCURS clause in its data description entry nor be subordinate to an item that has an OCCURS clause in its data description entry.
- 4) Data-name-2 and data-name-3 shall be names of elementary items or groups of elementary items in the same record, and shall not be the same data-name.
- 5) Neither data-name-2 nor data-name-3 shall refer to an entry that is described with level-number 1, 66, 77, or 88.
- 6) Data-name-2 and data-name-3 may be qualified.
- 7) None of the items within the range, including data-name-2 and data-name-3, if specified, shall be of class object or pointer, a strongly-typed group item, an item subordinate to a strongly-typed group item, or a variable-occurrence data item.
- 8) The words THROUGH and THRU are equivalent.
- 9) The area described by data-name-2 THROUGH data-name-3 shall define an integral number of bytes.
- 10) The beginning of the storage area described by data-name-3 shall not precede the beginning of the storage area described by data-name-2. The end of the storage area described by data-name-3 shall follow the end of the storage area described by data-name-2.

NOTE Data-name-3, therefore, shall not be subordinate to data-name-2.

13.16.43.3 General rules

- 1) When the THROUGH phrase is not specified, all of the data attributes of data-name-2 become the data attributes of data-name-1 and the storage area occupied by data-name-2 becomes the storage area occupied by data-name-1.
- 2) When the THROUGH phrase is specified, data-name-1 defines an alphanumeric group item that includes all elementary items starting with data-name-2 (if data-name-2 is an elementary item) or the first elementary item in data-name-2 (if data-name-2 is a group item), and concluding with data-name-3 (if data-name-3 is an elementary item) or the last elementary item in data-name-3 (if data-name-3 is a group item).

13.16.44 REPORT clause

The REPORT clause identifies the reports that may be written to a report file.

13.16.44.1 General format

$\left\{ \begin{array}{l} \text{REPORT IS} \\ \text{REPORTS ARE} \end{array} \right\} \{ \text{report-name-1} \} \dots$

13.16.44.2 Syntax rules

- 1) Each report-name-1 shall be the subject of a report description entry in the report section of the same source element. The order of appearance of each report-name-1 is not significant.
- 2) Each report-name-1 may appear in only one REPORT clause.
- 3) The subject of a file description entry that specifies a REPORT clause may be referenced in the procedure division only by the USE statement, the CLOSE statement, or the OPEN statement with the OUTPUT or EXTEND phrase.

13.16.44.3 General rules

- 1) The presence of more than one report-name-1 indicates that more than one report may be written to the file.
- 2) After execution of an INITIATE statement and before the execution of a TERMINATE statement for the same report, no OPEN or CLOSE statements shall be executed that reference the report file.

13.16.45 REQUIRED clause

The REQUIRED clause specifies that in the context of an ACCEPT screen statement, the user shall enter at least one character in the input field.

13.16.45.1 General format

REQUIRED

13.16.45.2 General rules

- 1) The REQUIRED clause has an effect only during the execution of an ACCEPT statement referencing the screen item.
- 2) The REQUIRED clause has no effect until the cursor enters a screen item subject to the REQUIRED clause.
- 3) The effect of the REQUIRED clause is to reject the terminator keystroke and any other cursor-moving keystrokes that would cause the cursor to move to another screen item unless the required termination condition is satisfied. The required termination condition is satisfied:
 - if a screen item is alphanumeric or alphanumeric-edited and contains at least one non-space character;
 - if a screen item is national or national-edited and contains at least one non-space character;
 - if a screen item is numeric or numeric-edited and contains a non-zero value;
 - if a screen item is boolean and contains a non-zero value.
- 4) For fields that are both input and output, the REQUIRED clause may be satisfied by the contents of the identifier or literal referenced in the FROM or USING clause, as well as data keyed by the terminal operator.
- 5) The REQUIRED clause is not effective if a function key is used to terminate the execution of the ACCEPT statement.
- 6) The specification of the FULL and REQUIRED clauses together requires that the field be filled entirely before the normal termination key has any effect.
- 7) If a REQUIRED clause is specified in a group screen item, it applies to each elementary input screen item in that group.

13.16.46 REVERSE-VIDEO clause

The REVERSE-VIDEO clause specifies that the screen item is to be displayed by exchanging the foreground and background colors that would otherwise be in effect.

13.16.46.1 General format

REVERSE-VIDEO

13.16.46.2 General rules

- 1) If the REVERSE-VIDEO clause is specified at group level, it applies to each elementary screen item in that group.
- 2) When the REVERSE-VIDEO clause is specified, the screen item will be displayed so that the characters that constitute the screen item will be shown with the foreground and background colors being exchanged when the screen item is referenced in an ACCEPT screen or a DISPLAY screen statement. For monochrome displays, the reverse-video attribute is used.

13.16.47 SAME AS clause

The SAME AS clause specifies that a data-name has the same description as that specified by another data description entry.

13.16.47.1 General format

SAME AS data-name-1

13.16.47.2 Syntax rules

- 1) Data-name-1 may be qualified.
- 2) A data description entry that specifies the SAME AS clause shall not be immediately followed by a subordinate data description entry or level 88 entry.
- 3) The description of data-name-1, including its subordinate data items, shall not contain a SAME AS clause that references the subject of the entry or any group item to which this entry is subordinate.
- 4) The description of data-name-1, including its subordinate data items, shall not contain a TYPE clause that references the record to which this entry is subordinate.
- 5) The description of data-name-1 shall not contain an OCCURS clause. However, items subordinate to data-name-1 may contain OCCURS clauses.
- 6) When the SAME AS clause is specified in the file section, the description of data-name-1, including its subordinate data items, shall not contain a data item described with a USAGE OBJECT REFERENCE clause.
- 7) Data-name-1 shall reference an elementary item or a level 1 group item described in the file, working-storage, local-storage, or linkage section.
- 8) If the subject of the entry is a level 77 item, data-name-1 shall reference an elementary item.
- 9) A group item to which the subject of the entry is subordinate shall not contain a GROUP-USAGE, SIGN, or USAGE clause.

13.16.47.3 General rules

- 1) The effect of the SAME AS clause is as though the data description identified by data-name-1 had been coded in place of the SAME AS clause, excluding the level-number, name, and the EXTERNAL, GLOBAL, REDEFINES, and SELECT WHEN clauses specified for data-name-1; level numbers of subordinate items may be adjusted as described in general rule 2.

NOTE This rule, in combination with the syntax rules for this clause, prohibits direct or indirect circular reference.

- 2) If data-name-1 describes a group item:
 - a) the subject of the entry is a group whose subordinate elements have the same names, descriptions, and hierarchy as the subordinate elements of data-name-1,
 - b) the level-numbers of items subordinate to that group are adjusted, if necessary, to preserve the hierarchy of data-name-1,
 - c) level-numbers in the resulting hierarchy may exceed 49.

NOTE If alignment according to 8.5.1.5.4, Item alignment for increased object-code efficiency, inserts implicit fillers in either data-name-1 or the subject of the entry, the alignment of the corresponding data items may differ.

- 3) If an alphanumeric group item or strongly-typed group item to which data-name-1 is subordinate contains a USAGE clause, the effect is as though that USAGE clause had been specified for the subject of the entry.
- 4) If a group item to which data-name-1 is subordinate contains a GROUP-USAGE clause and the subject of the entry is a group item, the effect is as if that GROUP-USAGE clause had been specified for the subject of the entry.
- 5) If an alphanumeric group item, national group item, or strongly-typed group item to which data-name-1 is subordinate contains a SIGN clause, the effect is as though that SIGN clause had been specified for the subject of the entry.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.48 SECURE clause

The SECURE clause prevents data entered from the keyboard or contained in the screen item from appearing on the screen at the screen location that corresponds to the screen item for which it is specified.

13.16.48.1 General format

SECURE

13.16.48.2 General rules

- 1) If a SECURE clause is specified at the group level, it applies to each elementary input screen item in that group.
- 2) The SECURE clause has an effect only during the execution of an ACCEPT statement referencing the screen item.
- 3) The effect of the SECURE clause is to prevent data corresponding to a screen item that has been specified with the SECURE clause from being displayed on the screen. During the execution of an ACCEPT statement, the cursor will appear at the screen location that corresponds to an input screen item, but any data keyed by the terminal operator will not be displayed. For fields that are both input and output, the contents of the screen location of the screen item prior to the execution of the ACCEPT screen statement remain unchanged and are unchangeable by the terminal operator.
- 4) It is implementor-defined whether the cursor moves as data is entered into a field for which the SECURE clause is specified.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.49 SELECT WHEN clause

The SELECT WHEN clause specifies a condition-name condition under which a record description entry is associated with a record during input and output operations.

13.16.49.1 General format

$$\text{SELECT WHEN } \left\{ \begin{array}{l} \text{condition-name-1} \\ \text{OTHER} \end{array} \right\}$$
13.16.49.2 Syntax rules

- 1) A SELECT WHEN clause may be specified only at the 01 level of a record description entry in the file, linkage, local-storage, or working-storage section.
- 2) If a SELECT WHEN clause is specified for any record description entry associated with a given file-name, then a SELECT WHEN clause shall be specified for all record description entries associated with that file-name.
- 3) A given condition-name-1 shall be specified in the SELECT WHEN clause of only one record description entry associated with a given file-name.
- 4) For a given file description entry, all instances of condition-name-1 shall be associated with a conditional variable defined at the same position in the record, with the same usage, and with the same size.
- 5) If a FORMAT clause is specified for the file description entry, the conditional variable associated with condition-name-1 shall be the first elementary data item in the record description entry.
- 6) The OTHER phrase may be specified only in the last record description entry associated with a given file.

13.16.49.3 General rules

- 1) Any SELECT WHEN clauses of record description entries specified in the file section are evaluated for READ, REWRITE, and WRITE statements associated with that file when a CODE-SET clause or FORMAT clause is specified for the file. SELECT WHEN clauses in the file section have no effect for other statements.
- 2) SELECT WHEN clauses of record description entries specified in the working-storage section, local-storage section, or the linkage section have no effect.
- 3) The condition-name condition specified in a SELECT WHEN clause is evaluated for each record description entry, in the order the record description entries are written, until the evaluation is true. When the evaluation is true, the associated record description entry is selected for use with the CODE-SET and FORMAT clauses. The evaluation is always true when the OTHER phrase is specified.
- 4) If no record description entry is selected, the input-output operation is unsuccessful and the I-O status is set to a value indicating a record identification failure. (See 9.1.12, I-O status.)
- 5) The implementor shall specify whether a SELECT WHEN clause takes effect for READ, REWRITE, and WRITE statements under circumstances other than the processing of the CODE-SET and FORMAT clauses.

NOTE This permits code-set conversion based on record layout in circumstances that the implementor defines; a CODE-SET clause need not be present in the source element in this case.

13.16.50 SIGN clause

The SIGN clause specifies the position and the mode of representation of the operational sign.

13.16.50.1 General format

[SIGN IS] { LEADING
TRAILING } [SEPARATE CHARACTER]

13.16.50.2 Syntax rules

- 1) The SIGN clause may be specified only for:
 - a numeric data or screen description entry whose picture character-string contains the symbol 'S'
 - a numeric report group description entry whose picture character-string contains the symbol 'S'
 - an alphanumeric group item, national group item, or strongly-typed group item
- 2) The usage of an elementary item for which the SIGN clause is specified shall be display or national.
- 3) If the CODE-SET clause is specified in a file description entry, any signed numeric data description entries associated with that file description entry shall be described with the SIGN IS SEPARATE clause.

13.16.50.3 General rules

- 1) The SIGN clause specifies the position and the mode of representation of the operational sign for the numeric item to which it applies, or for each numeric item subordinate to the group to which it applies. The SIGN clause applies only to numeric items whose picture character-string contains the symbol 'S'.
- 2) If a SIGN clause is specified in a group item subordinate to a group item for which a SIGN clause is specified, the SIGN clause specified in the subordinate group item takes precedence for that subordinate group item.
- 3) If a SIGN clause is specified in an elementary numeric item subordinate to a group item for which a SIGN clause is specified, the SIGN clause specified in that elementary entry takes precedence for that elementary entry.
- 4) A numeric item whose picture character-string contains the symbol 'S', and to which no SIGN clause applies, has an operational sign. Neither the representation nor the position of that operational sign is specified by the symbol 'S'. The implementor shall specify the position and representation of the operational sign. General rules 5 and 6 do not apply to such signed numeric items.
- 5) If the SEPARATE CHARACTER phrase is not specified, then:
 - a) The operational sign is presumed to be associated with the leading (or, respectively, trailing) digit position of the data item to which it applies.
 - b) The implementor defines what constitutes valid signs for data items.
- 6) If the SEPARATE CHARACTER phrase is specified, then:
 - a) The operational sign is presumed to be the leading (or, respectively, trailing) character position of the data item to which it applies; this character position is not a digit position.
 - b) The operational signs for positive and negative are the basic special characters '+' and '-', respectively.
- 7) Each numeric item whose picture character-string contains the symbol 'S' is a signed item. If a SIGN clause applies to such an item and conversion is necessary for purposes of computation or comparisons, conversion takes place automatically.

13.16.51 SOURCE clause

The SOURCE clause identifies a data item or expression to be moved automatically to a printable item.

13.16.51.1 General format

$$\left\{ \begin{array}{l} \text{SOURCE IS} \\ \text{SOURCES ARE} \end{array} \right\} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{arithmetic-expression-1} \end{array} \right\} \dots [\text{ROUNDED}]$$
13.16.51.2 Syntax rules

- 1) SOURCE and SOURCES are synonyms.
- 2) If identifier-1 is specified without the ROUNDED phrase, identifier-1 shall be described such that a MOVE statement is valid with identifier-1 as the sending operand and the printable item as the receiving operand.
- 3) If arithmetic-expression-1 or the ROUNDED phrase is specified, the entry shall define either a numeric data item or a numeric-edited data item.
- 4) Identifier-1 specifies a data item defined in any section of the data division. If identifier-1 specifies a report section item, it shall be a report counter identifier or a sum counter defined in the current report. This same syntax rule applies to any identifier appearing in arithmetic-expression-1.
- 5) If identifier-1 is specified with the ROUNDED phrase, it is considered to be an arithmetic-expression.
- 6) If the SOURCE clause has more than one operand, the entry shall be a repeating entry or shall be subordinate to a repeating entry, and the number of operands of the SOURCE clause shall be equal to the number of repetitions of the repeating entry or the same number multiplied by the number of repetitions of any number of successive repeating entries at higher levels than the repeating entry.
- 7) If the SOURCE clause has more than one operand of which at least one is an arithmetic-expression, each operand shall be enclosed in parentheses.

13.16.51.3 General rules

- 1) If identifier-1 is specified without the ROUNDED phrase, it specifies the sending operand of an implicit MOVE statement in which the data item referenced by identifier-1 is moved to the printable item.
- 2) Arithmetic-expression-1 specifies the operand of an implicit COMPUTE statement that is executed implicitly whenever the associated item is printed. If the ROUNDED phrase is specified, the implicit COMPUTE statement has a ROUNDED phrase.
- 3) If the entry containing the SOURCE clause contains no COLUMN clause and therefore defines an unprintable item, the SOURCE clause causes no action, except where the entry is referred to by means of a SUM clause. In all other cases, a MOVE or COMPUTE statement is implicitly executed before the associated report line is printed. If identifier-1 is specified without the ROUNDED phrase, the statement executed is the MOVE statement defined in general rule 1 above. Otherwise, the statement executed is the COMPUTE statement defined in general rule 2 above.
- 4) If the SOURCE clause has more than one operand, successive operands are assigned to successive repeating printable items, horizontally and then vertically, as applicable, in that hierarchic order. If no further operands remain, assignment begins again from the first operand. If any of the printable items are suppressed as a result of a PRESENT WHEN clause or an OCCURS clause with a DEPENDING phrase, SOURCE operands are nevertheless assigned to them, even though they are not printed.

13.16.52 SUM clause

The SUM clause specifies one or more data items that are to be totalled to provide the value of the associated elementary report item.

13.16.52.1 General format

$$\left\{ \text{SUM OF} \left\{ \begin{array}{l} \text{data-name-1} \\ \text{identifier-1} \\ \text{arithmetic-expression-1} \end{array} \right\} \dots [\text{UPON} \{ \text{data-name-2} \} \dots] \right\} \dots$$

$$\left[\text{RESET ON} \left\{ \begin{array}{l} \text{data-name-3} \\ \text{FINAL} \end{array} \right\} \right] [\text{ROUNDED}]$$

13.16.52.2 Syntax rules

- 1) Each data-name-1, identifier-1 or arithmetic-expression-1 is an addend. The whole clause is referred to as a SUM clause even though the SUM keyword may appear more than once.
- 2) The category of the subject of the entry shall be valid as the category of a receiving operand in a MOVE statement for a sending operand of the category numeric.
- 3) Data-name-1 shall be the name of a numeric data item in the report section. It may be qualified. If it is associated with an OCCURS clause, it shall be specified without the subscripting normally required. When data-name-1 is specified, the following rules also apply:
 - a) The UPON phrase shall not be specified.
 - b) If data-name-1 is specified in the same report group description as the subject of the entry, data-name-1 shall be a repeating item, as defined in 13.13, Report group description entry, general rule 3, and subject to at least one more level of repetition than the subject of the entry.
 - c) If data-name-1 is specified in a different report group description than the subject of the entry, data-name-1 either shall not be a repeating item or shall be a repeating item that is subject to at least the same number of levels of repetition as the subject of the entry.
 - d) The maximum number of repetitions of data-name-1 and the subject of the entry shall be equal at each corresponding level taken in order beginning with the lowest level of nesting. Levels superordinate to those corresponding levels may specify any number of repetitions.
 - e) Any chain of reference shall terminate at an entry that does not contain a SUM clause referring to a data-name-1 defined in the report section.
 - f) If data-name-1 specifies an entry in a report group description other than the current report group description, only the following combinations of report types of each report group are permitted:

The current report group may be a control footing and data-name-1 may be defined in a detail or in a control footing associated with a lower level of control.

The current report group may be a detail and data-name-1 may be defined in a different detail.

The current report group may be a report footing and data-name-1 may be defined in any other report group other than a report heading.

The current report group may be a page footing and data-name-1 may be defined in any body group.

- g) If data-name-1 specifies an entry in a different report description, there are no restrictions on the combinations of report types of each report group.
- 4) If the addend is identifier-1, it shall specify a numeric data item not defined in the report section.
- 5) If the addend is arithmetic-expression-1, any identifiers it contains may reference entries in any section of the data division other than the report section.
- 6) Data-name-2 shall be the name of a detail. It may be qualified by a report-name.
- 7) Data-name-3 may be qualified and reference modified. Data-name-3 or FINAL shall be an operand of the CONTROL clause of the current report description. If data-name-3 is reference modified, leftmost-position and length shall be integer literals. If the current report group is a control footing, its level of control shall be a lower level than that of data-name-3.

13.16.52.3 General rules

- 1) Each entry containing a SUM clause establishes an independent sum counter and size error indicator. The sum counter is an internal register that behaves as a data item of the category numeric. The number of decimal digits in the sum counter, both integral and fractional, is derived from the corresponding number of digits, excluding insertion editing characters, in the PICTURE clause of the entry containing the SUM clause. The sum counter is signed, whether or not the corresponding PICTURE clause has an operational sign.
- 2) The sum counter is set to zero and its associated size error indicator is unset when the INITIATE statement for the current report is executed. Subsequently, the sum counter is reset to zero and the size error indicator is unset at the end of the processing of the report group in which it is printed or, if the RESET phrase is specified, at the end of the processing of the control footing for the specified level of control. If no such control footing is defined, it is assumed to be present and to consist of a 01-level entry alone.
- 3) The current content of each addend is implicitly added into the sum counter during execution of GENERATE and TERMINATE statements at specific times defined below. The adding is consistent with the general rules of the ADD statement with the ON SIZE ERROR phrase or, in the case of an arithmetic expression, the COMPUTE statement with the ON SIZE ERROR phrase. Any algebraic sign of the addend is taken into account. Each addition is tested for size error; if a size error occurs, the associated size error indicator is set. (See 14.6.6, Arithmetic statements.)
- 4) If the entry also contains a COLUMN clause, the sum counter acts as a source data item. If the associated size error indicator is not set, the content of the sum counter is moved, according to the general rules of the MOVE statement, to the printable item for printing. If the associated size error indicator is set, an EC-REPORT-SUM-SIZE exception condition is set to exist and the printable item is filled with spaces.
- 5) If a data-name immediately follows the level number in the entry containing the SUM clause, the data-name is the name of the sum counter, not the name of the associated printable item, if any.
- 6) If data-name-1 specifies an item whose entry contains a SUM clause, the value added is that of the corresponding sum counter. The additions necessary to compute its value are completed before the adding of the operand into the current sum counter. If data-name-1 specifies an item whose entry has a SOURCE or VALUE clause, the value added is that of the operand of the SOURCE or VALUE clause.
- 7) The times at which addition takes place are defined as follows:
 - a) If data-name-1 is the name of an entry in a different report group description, adding takes place when the report group description containing data-name-1 is processed.
 - b) If data-name-1 is the name of an entry in the current report group description, adding takes place during the processing of the current report group before any of the report group's lines are printed.

c) If the addend is identifier-1 or arithmetic-expression-1, adding takes place either:

1. if no UPON phrase is specified, whenever any GENERATE statement is executed for the current report or any detail defined for the current report, or
2. If an UPON phrase is specified, whenever any GENERATE statement is executed for a detail referenced by the UPON phrase.

If two or more instances of data-name-1 or identifier-1 specify the same data item, this data item is added into the sum counter as many times as data-name-1 or identifier-1 is referenced in the SUM clause. It is permissible for the UPON phrase to contain two or more instances of data-name-2 that specify the same detail. When a GENERATE statement for such a detail is executed, the adding takes place as many times as data-name-2 appears in the UPON phrase.

- 8) If the addend is data-name-1 and data-name-1 is a repeating item, repetitions of the addend are either all added into the same sum counter or are each added into a different corresponding occurrence of the sum counter, according to the following rules:
 - a) If the addend and the sum counter are subject to the same number of levels of repetition, each occurrence of the addend is added into the corresponding occurrence of the sum counter.
 - b) If the addend is subject to a greater number of levels of repetition than the sum counter, the number of levels of repetition of the addend is effectively reduced to that of the sum counter by forming the total of a complete table of occurrences of the addend at one or more levels into each occurrence of the sum counter. The levels at which these totals are formed are those of the highest level of repetition of the addend, excluding any OCCURS, multiple LINE, or multiple COLUMN clauses to which the addend and the entry containing the SUM clause are both subject.
- 9) If the SUM clause specifies more than one addend, the result is the same as when all the addends were summed separately according to the above rules and the results added together.
- 10) If the entry is associated with an absent data item as a result of a PRESENT WHEN clause or an OCCURS clause with the DEPENDING phrase, the corresponding sum counter is not printed and is not reset to zero for the current instance of the report group.
- 11) If the operand is data-name-1 and is declared to be absent as a result of a PRESENT WHEN clause or an OCCURS clause with the DEPENDING phrase, data-name-1 is not added into the sum counter during the processing that instance of the report group in which data-name-1 is defined.
- 12) It is permissible for procedure division statements to alter the content of sum counters.

13.16.53 SYNCHRONIZED clause

The SYNCHRONIZED clause specifies the alignment of an elementary item on the natural boundaries of the computer memory (see 8.5.1.5.4, Item alignment for increased object-code efficiency).

13.16.53.1 General format

$$\left\{ \begin{array}{l} \text{SYNCHRONIZED} \\ \text{SYNC} \end{array} \right\} \left[\begin{array}{l} \text{LEFT} \\ \text{RIGHT} \end{array} \right]$$

13.16.53.2 Syntax rules

- 1) The SYNCHRONIZED clause may be specified only for an elementary item.
- 2) SYNC is an abbreviation for SYNCHRONIZED.

13.16.53.3 General rules

- 1) This clause specifies that the subject data item is to be aligned in the computer such that no other data item occupies any of the byte positions between the leftmost and rightmost natural boundaries delimiting this data item. If the number of bytes required to store this data item is less than the number of bytes between those natural boundaries, the unused bytes or portions thereof shall not be used for any other data item. The unused bytes are not included in the bytes redefined when the elementary item is the object of a REDEFINES clause. Such unused bytes, however, are included in:
 - a) The size of any alphanumeric group item, bit group item, national group item, or strongly-typed group item that contains the subject of the entry; and
 - b) The number of bytes allocated when any such group item is the object of a REDEFINES clause.
- 2) SYNCHRONIZED not followed by either RIGHT or LEFT specifies that the elementary item is to be positioned between natural boundaries in such a way as to effect efficient utilization of the elementary data item. The specific positioning is determined by the implementor.
- 3) SYNCHRONIZED LEFT specifies that the elementary item is to be positioned such that it will begin at the left byte of the natural boundary in which the elementary item is placed.
- 4) SYNCHRONIZED RIGHT specifies that the elementary item is to be positioned such that it will terminate on the right byte of the natural boundary in which the elementary item is placed.
- 5) Any adjustment in storage position resulting from the SYNCHRONIZED clause does not affect the size of the synchronized data item.
- 6) If the data description of an item contains an operational sign and any form of the SYNCHRONIZED clause, the sign of the item appears in the sign position explicitly or implicitly specified by the SIGN clause.
- 7) When the SYNCHRONIZED clause is specified in the data description entry that contains an OCCURS clause, or in the data description entry of a data item subordinate to the data description entry that contains an OCCURS clause, then:
 - a) The SYNCHRONIZED clause applies to each occurrence of the data item.
 - b) Any implicit FILLER generated for other data items within that same table is generated for each occurrence of those data items (see general rule 8b).

- 8) The effect of this clause is defined by the implementor and in addition to the other general rules for the SYNCHRONIZED clause, the implementor shall specify how elementary items associated with this clause are handled regarding:
 - a) The format on the external media of records or groups containing elementary items whose data description contains the SYNCHRONIZED clause.
 - b) Any necessary generation of implicit FILLER, if the elementary item immediately preceding an item containing the SYNCHRONIZED clause does not terminate at an appropriate natural boundary. Such automatically generated FILLER positions are included in:
 1. The size of any group item to which the FILLER item belongs; and
 2. The number of bytes allocated when the group item of which the FILLER item is a part appears as the object of a REDEFINES clause.
- 9) An implementor may optionally specify automatic alignment for any internal data representations except for bit data items and, within a record, data items described with usage display or national. A record itself may be automatically synchronized.
- 10) Any rules for synchronization of the records of a file, as this affects the synchronization of elementary items, will be specified by the implementor.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.54 TO clause

The TO clause identifies the destination of the data in an ACCEPT screen statement.

13.16.54.1 General format

TO identifier-1

13.16.54.2 Syntax rules

- 1) The category of identifier-1 shall be a permissible category as a receiving operand in a MOVE statement where the sending operand has the same PICTURE clause as the subject of the entry.
- 2) Identifier-1 shall be defined in the file, working-storage, local-storage, or linkage section.
- 3) If the subject of this entry is subject to an OCCURS clause, identifier-1 shall be specified without the subscripting normally required. Additional requirements are specified in 13.16.36, OCCURS clause, syntax rule 12.

13.16.54.3 General rules

- 1) The subject of the entry is an input screen item.
- 2) The TO clause has an effect only during execution of an ACCEPT screen statement referencing the screen item.

13.16.55 TYPE clause

The TYPE clause in a data description entry specifies that the data description of the entry is specified by a type declaration.


The TYPE clause in a report group description entry identifies the circumstances under which a report group will be printed.

13.16.55.1 General format

Format 1 (type-name):

TYPE TO type-name-1

Format 2 (report-group):

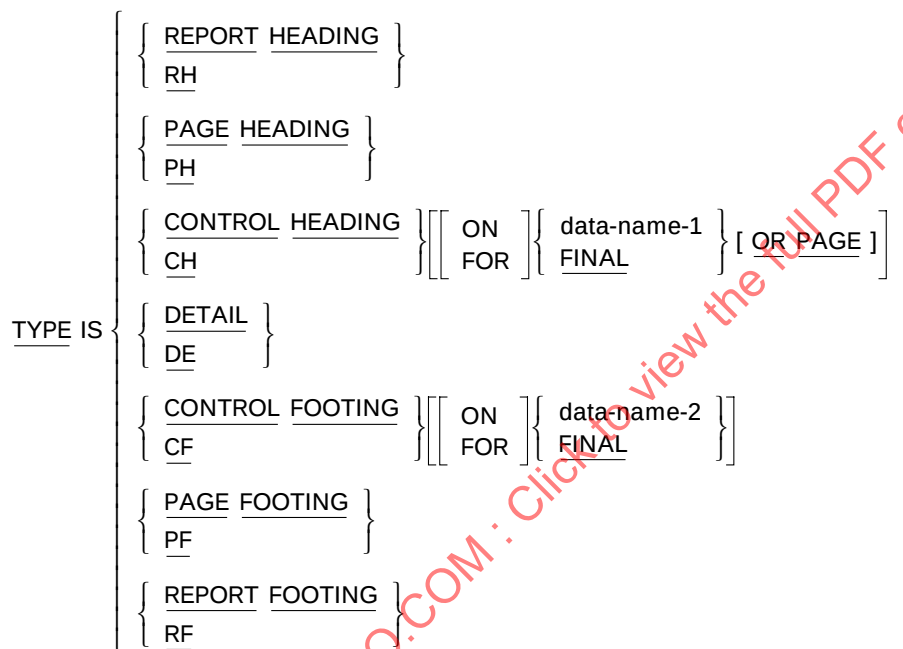

13.16.55.2 Syntax rules

FORMAT 1

- 1) The description of any data item subordinate to type-name-1 shall not contain a SAME AS clause that references the subject of this entry or any group item to which this entry is subordinate.
- 2) A data description entry in which a TYPE clause is specified shall not be followed immediately by a subordinate data description entry or a level 88 entry.
- 3) If type-name-1 is described with the STRONG phrase, the subject of the entry shall not be renamed in whole or in part.
- 4) If type-name-1 is described with the STRONG phrase, the subject of the entry shall not be implicitly or explicitly redefined in whole or in part.
- 5) No group item to which the subject of the entry is subordinate shall contain a GROUP-USAGE, SIGN, or USAGE clause.

- 6) If type-name-1 is described with the STRONG phrase, the subject of the entry shall be specified only with level number 1 or be subordinate to a type declaration that includes the STRONG phrase.
- 7) If the subject of the entry is a level 77 item, type-name-1 shall be an elementary item.
- 8) When the TYPE clause is specified in the file section, the description of type-name-1, including its subordinate data items, shall not contain a data item described with a USAGE OBJECT REFERENCE clause.

FORMAT 2

- 9) RH is an abbreviation for REPORT HEADING.

PH is an abbreviation for PAGE HEADING.

CH is an abbreviation for CONTROL HEADING.

DE is an abbreviation for DETAIL.

CF is an abbreviation for CONTROL FOOTING.

PF is an abbreviation for PAGE FOOTING.

RF is an abbreviation for REPORT FOOTING.

- 10) Data-name-1 and data-name-2 may be qualified and reference modified. If data-name-1 or data-name-2 is reference modified, leftmost-position and length shall be integer literals. Each data-name-1, data-name-2, and FINAL, if specified, shall be the same as one of the operands of the CONTROL clause of the corresponding report description entry.
- 11) Following CONTROL HEADING or CONTROL FOOTING, data-name-1, data-name-2, or FINAL may be omitted only if the CONTROL clause in the corresponding report description entry contains exactly one operand.
- 12) PAGE HEADING and PAGE FOOTING and the OR PAGE phrase are allowed only if a PAGE clause that defines the page limit is specified in the report description entry.
- 13) REPORT HEADING, PAGE HEADING, REPORT FOOTING, and PAGE FOOTING may each appear no more than once in any given report description.
- 14) At most one CONTROL HEADING and at most one CONTROL FOOTING may be defined for each control data item or FINAL of the CONTROL clause for any given report. Either or both of CONTROL HEADING and CONTROL FOOTING may be omitted for any given level of control.
- 15) Groups of type DETAIL, CONTROL HEADING, and CONTROL FOOTING are referred to as body groups. Each report description shall include at least one body group.
- 16) If no GENERATE data-name statements are specified in the procedure division, the report description need not contain a DETAIL.

13.16.55.3 General rules

FORMAT 1

- 1) The TYPE clause specifies that the data description of the subject of the entry is specified by type-name-1. The effect of the TYPE clause is as though the data description identified by type-name-1 had been coded in place of the TYPE clause, excluding the level-number, name, alignment, and the GLOBAL, SELECT WHEN, and TYPEDEF clauses specified for type-name-1; level numbers of subordinate items may be adjusted as described in general rule 2.

NOTE This rule, in combination with the syntax rules for this clause, prohibits direct or indirect circular reference.

- 2) If type-name-1 describes a group item:
 - a) the subject of the entry is a group whose subordinate elements have the same names, descriptions, and hierarchy as the subordinate elements of type-name-1,
 - b) the level-numbers of items subordinate to that group are adjusted, if necessary, to preserve the hierarchy of type-name-1,
 - c) level-numbers in the resulting hierarchy may exceed 49,
 - d) the subject of the entry is aligned as though it were a level 1 item.
- 3) If a VALUE clause is specified in the data description of the subject of the entry, that VALUE clause applies and any VALUE clause specified in the description of type-name-1 is ignored for this entry.
- 4) If a BASED clause is specified in the data description of the subject of the entry, that BASED clause applies and any BASED clause specified in the description of type-name-1 is ignored for this entry.

FORMAT 2

- 5) Report groups are printed only during the execution of a GENERATE or a TERMINATE statement. Detail report groups are printed when referenced explicitly in a GENERATE statement. All other report groups are printed implicitly according to the general rules that follow.
- 6) The conditions under which a given report group is printed depend on its type as follows:
 - a) The report heading, if defined, is printed as the first report group in the report, when the chronologically first GENERATE statement for the report, if any, is executed.
 - b) The page heading, if defined, is printed immediately before, and on the same page as, the chronologically first body group to be printed for the report, and subsequently as the first report group in each new page whenever a page advance takes place, except when the report group about to be printed is a report footing on a page by itself.
 - c) Each control heading without the OR PAGE phrase, wherever defined, is printed automatically, in either of the following events:
 1. when the chronologically first GENERATE statement following an INITIATE statement for the report is executed, in order of control levels from highest to lowest,
 2. immediately preceding any detail printed as the result of the execution of a GENERATE statement when a control break has been detected, in order of control levels from the level of the control break down to the lowest.The OR PAGE phrase causes the associated control heading to be printed in addition after each page advance, following any page heading, provided that the page advance did not take place just before the printing of a control footing at a lower control level.
 - d) A detail is printed as the result of the execution of an explicit GENERATE statement that references it.
 - e) Each control footing, wherever defined, is printed automatically in either of the following events:
 1. when a GENERATE statement is executed where a control break has been detected, preceding any control heading and detail groups, in order of controls from the lowest up to the level of the control break,

2. when the TERMINATE statement is executed for the report, provided that at least one GENERATE statement has been executed after the chronologically last INITIATE statement for the report, in order of controls from lowest to highest.
- f) The page footing, if defined, is printed as the last report group on each page of the current report, except in the following cases:
1. on the first page, if it is occupied only by a report heading group;
 2. on the last page, if it is occupied only by a report footing group;
- If a report footing is defined and is not on a page by itself, the page footing on the last page is immediately followed by the report footing.
- g) The report footing, if defined, is printed, as the very last report group in the report, when a TERMINATE for the report is executed, provided that at least one GENERATE statement has been executed for the report since the chronologically last INITIATE statement was executed for the report.
- 7) The upper limit is defined to be the uppermost permitted line on the page that may be occupied by the report group's first line. It is calculated as follows:
- a) The upper limit for a report heading or a page heading where no report heading appears on the same page is the line given by the HEADING integer.
 - b) The upper limit for a page heading where a report heading appears on the same page is the line following the last line of the report heading.
 - c) The upper limit for a body group, if there is no control heading defined in the report with the OR PAGE phrase, is the line given by the FIRST DETAIL integer.
 - d) If there is at least one control heading defined in the report with the OR PAGE phrase, the upper limit for a body group is determined as follows:
 1. If the body group is a control heading at the same or a higher control level than the highest-level control heading that has an OR PAGE phrase, the upper limit is the line given by the FIRST DETAIL integer.
 2. If the body group is a control heading at a lower control level than the highest-level control heading that has an OR PAGE phrase, the upper limit is the line following the last line of the next higher-level control heading.
 3. If the body group is a detail, the upper limit is the line following the last line of the lowest-level control heading that has an OR PAGE phrase.
 4. If the body group is a control footing, the upper limit is the line following the last line of the lowest-level control heading with an OR PAGE phrase at the same level as the control footing, or higher. If no such control heading is defined, the upper limit is the FIRST DETAIL integer.
 - e) The upper limit for a page footing is the line number obtained by adding 1 to the FOOTING integer.
 - f) The upper limit for a report footing that appears on a page by itself is the line given by the HEADING integer.
 - g) The upper limit for a report footing that does not appear on a page by itself is the line following the last line of the page footing, if specified, or the line number obtained by adding 1 to the FOOTING integer, if no page footing is defined for the report.

- 8) The lower limit is defined to be the lowermost permitted line on the page that may be occupied by the report group's last line. It is calculated as follows:
- a) The lower limit for a report heading that appears on a page by itself is the page limit.
 - b) The lower limit for a report heading that does not appear on a page by itself is the line preceding the first line of the page heading. If no page heading is defined for the report, the lower limit is the value obtained by subtracting 1 from the FIRST DETAIL integer.
 - c) The lower limit for a page heading is the line number obtained by subtracting 1 from the FIRST DETAIL integer.
 - d) The lower limit for a control heading is the line given by the LAST CONTROL HEADING integer.
 - e) The lower limit for a detail is the line given by the LAST DETAIL integer.
 - f) The lower limit for a control footing is the line given by the FOOTING integer.
 - g) The lower limit for a page footing or report footing is the page limit.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.56 TYPEDEF clause

The TYPEDEF clause specifies that the data description entry is a type declaration.

13.16.56.1 General format

IS TYPEDEF [STRONG]

13.16.56.2 Syntax rules

- 1) If the subject of the entry is an elementary item, the STRONG phrase shall not be specified.

13.16.56.3 General rules

- 1) If the TYPEDEF clause is specified, the data description entry is a type declaration. The data-name specified in the entry is the type-name. Subordinate data description entries, condition-name entries, and RENAMES clauses are part of the type declaration of that type. The data-names of the items described in these subordinate entries may be referenced only as subordinate items of groups defined using the type-name. If there is more than one such group, qualification with the name of the group is necessary. If there is no such group, any reference to a name that is the same as a data-name in the subordinate entry is a reference to another resource, if there is another resource with that name, or is an invalid reference.
- 2) A type declaration has no storage associated with it.
- 3) The GLOBAL clause applies to the scope of the type-name. All other data description clauses and subordinate data descriptions are assumed by data defined using the type-name.

13.16.57 UNDERLINE clause

The UNDERLINE clause specifies that each character of the field is underlined when it is displayed on the screen.

13.16.57.1 General format

UNDERLINE

13.16.57.2 General rules

- 1) If the UNDERLINE clause is specified at group level, it applies to each elementary screen item in that group.
- 2) When the UNDERLINE clause is specified, the screen item will be displayed so that the characters that constitute the screen item are underlined when the screen item is referenced in an ACCEPT screen or a DISPLAY screen statement.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

13.16.58 USAGE clause

The USAGE clause specifies the representation of a data item in the computer storage.

13.16.58.1 General format

[<u>USAGE IS</u>]	<u>BINARY</u>	
	<u>BINARY-CHAR</u>	{ <u>SIGNED</u> <u>UNSIGNED</u> }
	<u>BINARY-SHORT</u>	{ <u>SIGNED</u> <u>UNSIGNED</u> }
	<u>BINARY-LONG</u>	{ <u>SIGNED</u> <u>UNSIGNED</u> }
	<u>BINARY-DOUBLE</u>	{ <u>SIGNED</u> <u>UNSIGNED</u> }
	<u>BIT</u>	
	<u>COMPUTATIONAL</u>	
	<u>COMP</u>	
	<u>DISPLAY</u>	
	<u>FLOAT-SHORT</u>	
	<u>FLOAT-LONG</u>	
	<u>FLOAT-EXTENDED</u>	
	<u>INDEX</u>	
	<u>NATIONAL</u>	
	<u>OBJECT REFERENCE</u>	[<u>interface-name-1</u> [<u>FACTORY OF</u>] <u>ACTIVE-CLASS</u> [<u>FACTORY OF</u>] <u>class-name-1</u> [<u>ONLY</u>]
	<u>PACKED-DECIMAL</u>	
	<u>POINTER</u> [<u>TO type-name-1</u>]	
	<u>PROGRAM-POINTER</u> [<u>TO program-prototype-name-1</u>]	

13.16.58.2 Syntax rules

- 1) The USAGE clause shall not be specified in a data description entry that has a level-number of 66 or 88.
- 2) If the USAGE clause is written in the data description entry for a group item, it may also be written in the data description entry for any subordinate elementary item or group item, but the same usage shall be specified in both entries.
- 3) An elementary data item whose declaration contains, or an elementary data item subordinate to a group item whose declaration contains, a USAGE clause specifying BINARY, COMPUTATIONAL, or PACKED-DECIMAL shall be specified only with a picture character-string that describes a numeric item.
- 4) An elementary data item whose declaration contains, or an elementary data item subordinate to a group item whose declaration contains, a USAGE clause specifying BIT shall be specified only with a picture character-string that describes a boolean data item.

- 5) COMP is an abbreviation for COMPUTATIONAL.
- 6) Only the DISPLAY or NATIONAL phrase may be specified in any USAGE clause associated with a report group item.
- 7) A program-pointer data item may be referenced explicitly only in a CALL statement, an INITIALIZE statement, an INVOKE statement, a SET statement, a relation condition, a procedure division header, the argument list of an inline invocation of a method, and as an argument in a function-identifier.
- 8) A data-pointer data item may be referenced explicitly only in a CALL statement, an INITIALIZE statement, an INVOKE statement, a SET statement, a relation condition, a procedure division header, the argument list of an inline invocation of a method, as an argument in a function-identifier, in the RETURNING phrase of an ALLOCATE statement, or in a FREE statement.
- 9) An index data item may be referenced explicitly only in a SEARCH or SET statement, a relation condition, an intrinsic function argument, an inline method invocation argument, the USING phrase of a procedure division header, or the USING phrase of a CALL or INVOKE statement.
- 10) An elementary data item of class index, object, or pointer shall not be a conditional variable.
- 11) An elementary data item whose description contains, or an elementary data item subordinate to a group item whose description contains, a USAGE NATIONAL clause shall be declared with a picture character-string that describes a boolean, national, national-edited, numeric, or numeric-edited data item.
- 12) When a USAGE clause is not specified for an elementary data item or for any group to which the data item belongs:
 - a) if the explicit or implicit picture character-string contains the symbol 'N', a USAGE NATIONAL clause is implied;
 - b) otherwise, a USAGE DISPLAY clause is implied.
- 13) A USAGE clause with the OBJECT REFERENCE, POINTER, or PROGRAM-POINTER phrase may be specified only for an elementary data item with level 1 or subordinate to a type declaration that includes the STRONG phrase.
- 14) The USAGE OBJECT REFERENCE clause shall not be specified in the file section.
- 15) The ACTIVE-CLASS phrase may be specified only in a factory definition, an instance definition, or the linkage or local-storage section of a method definition.
- 16) In a screen description entry, only DISPLAY or NATIONAL may be specified.
- 17) If type-name-1 is specified, the TYPEDEF clause shall be specified for the subject of the entry.
- 18) If program-prototype-name-1 is specified, the TYPEDEF clause shall be specified for the subject of the entry.
- 19) Only the NATIONAL phrase may be specified in a USAGE clause associated with an elementary data item whose explicit or implicit picture character-string contains the symbol 'N'.

13.16.58.3 General rules

- 1) If the USAGE clause is specified or implied at a group level, it applies only to each elementary item in the group and not to the group itself.
- 2) The USAGE clause specifies the manner in which a data item is represented in the storage of a computer. It does not affect the use of the data item, although the specifications for some statements in the procedure

division may restrict the USAGE clause of the operands referred to. The USAGE clause may affect the radix or type of character representation of the item.

- 3) The VALIDATE statement may be used to check that the content of a data item is compatible with any PICTURE, SIGN and USAGE clauses specified in the description of the item. Rules for compatibility are implementor defined. Failure of this check results in the setting of the data item's internal indicator to invalid on format. A data item with usage index, object reference, pointer, or program-pointer is ignored by the VALIDATE statement.
- 4) The USAGE BINARY clause specifies that a radix of 2 is used to represent a numeric item in the storage of the computer. Each implementor specifies the precise effect of the USAGE BINARY clause upon the alignment and representation of the data item in the storage of the computer, including the representation of any algebraic sign. Sufficient computer storage shall be allocated by the implementor to contain the maximum range of values implied by the associated decimal picture character-string.
- 5) The USAGE BIT clause specifies that bits shall be used to represent a boolean data item. A data item described with USAGE BIT is a bit data item. The alignment of a data item described with USAGE BIT is specified in 8.5.1.5.3, Alignment of data items of usage bit.
- 6) The USAGE COMPUTATIONAL clause specifies that a radix and format specified by the implementor is used to represent a numeric item in the storage of the computer. Each implementor specifies the precise effect of the USAGE COMPUTATIONAL clause upon the alignment and representation of the data item in the storage of the computer, including the representation of any algebraic sign, and upon the range of values that the data item may hold.
- 7) The implicit or explicit USAGE DISPLAY clause specifies that an alphanumeric coded character set shall be used to represent a data item in the storage of the computer, and that the data item is aligned on a character boundary. Alphanumeric characters shall be represented in the storage of the computer as characters of uniform size equal to or less than the size of characters in the computer's national character set. Each implementor shall specify the size and representation of characters stored for usage DISPLAY.
- 8) The implicit or explicit USAGE NATIONAL clause specifies that a national coded character set shall be used to represent a data item in the storage of the computer, and that the data item shall be aligned on a character boundary. National characters shall be represented in the storage of the computer as characters of a uniform size equal to or a multiple of the size of characters in the computer's alphanumeric character set. Each implementor shall specify the size and representation of characters stored for usage NATIONAL.
- 9) The USAGE INDEX clause specifies that a data item is an index data item and contains a value that shall correspond to an occurrence number of a table element. The class and category of an index data item are index. Each implementor specifies the precise effect of the USAGE INDEX clause upon the alignment and representation of the data item in the storage of the computer, including the actual value assigned for any given occurrence number.
- 10) The USAGE PACKED-DECIMAL clause specifies that a radix of 10 is used to represent a numeric item in the storage of the computer. Furthermore, this clause specifies that each digit position shall occupy the minimum possible configuration in computer storage. Each implementor specifies the precise effect of the USAGE PACKED-DECIMAL clause upon the alignment and representation of the data item in the storage of the computer, including the representation of any algebraic sign. Sufficient computer storage shall be allocated by the implementor to contain the maximum range of values implied by the associated decimal picture character-string.
- 11) The usages binary-char, binary-short, binary-long, and binary-double define integer numeric data items that are held in a binary format suitable for the machine on which the runtime module is to run. The minimum range requirements for each of these usages are shown below. Any integer value of n within the specified range shall be expressible in the given usage. The implementor may allow a wider range. However, for signed items, any number that may be expressed as BINARY-CHAR shall also be expressible as BINARY-SHORT, any number that may be expressed as BINARY-SHORT shall also be expressible as BINARY-LONG, and any number that may be expressed as BINARY-LONG shall also be expressible as BINARY-DOUBLE.

The minimum ranges are:

BINARY-CHAR SIGNED	-128 [-2**7]	< n < 128 [2**7]
BINARY-CHAR UNSIGNED	0	≤ n < 256 [2**8]
BINARY-SHORT SIGNED	-32768 [-2**15]	< n < 32768 [2**15]
BINARY-SHORT UNSIGNED	0	≤ n < 65536 [2**16]
BINARY-LONG SIGNED	-2147483648 [-2**31]	< n < 2147483648 [2**31]
BINARY-LONG UNSIGNED	0	≤ n < 4294967296 [2**32]
BINARY-DOUBLE SIGNED	-2**63	< n < 2**63
BINARY-DOUBLE UNSIGNED	0	≤ n < 2**64

- 12) The usages float-short, float-long and float-extended define signed numeric data items that are held in a floating-point format suitable for the machine on which the runtime module is to run. The size and permitted range of values for these fields is defined by the implementor. Any value that may be held in a data item of usage float-short shall also be expressible in a data item of usage float-long. Any value that may be held in a data item of usage float-long shall also be expressible in a data item of usage float-extended.
- 13) The representation and length of a data item described with USAGE BINARY-CHAR, BINARY-SHORT, BINARY-LONG, BINARY-DOUBLE, FLOAT-SHORT, FLOAT-LONG, or FLOAT-EXTENDED is implementor-defined. The length and alignment of a data item described with the SIGNED phrase shall be the same as the length and alignment of a data item described with the UNSIGNED phrase.
- 14) A data item described with a USAGE OBJECT REFERENCE clause is called an object reference. An object reference is a data item of class object and category object-reference. It shall contain either null or a reference to an object, subject to the following rules:
- The amount of storage allocated for an object reference data item is implementor-defined and is not necessarily the same for every object reference.
 - If none of the optional phrases is specified, this data item is called a universal object reference. Its content may be a reference to any object.
 - If interface-name-1 is specified, the object referenced by this data item shall implement interface-1.
 - If class-name-1 is specified, the object referenced by this data item shall be an object of class-name-1 or of a subclass of class-name-1, subject to the following rules:
 - If the ONLY phrase is not specified:
 - If the FACTORY phrase is specified, the object referenced by this data item shall be the factory object of the specified class or of a subclass of the specified class.
 - If the FACTORY phrase is not specified, the object referenced by this data item shall be an instance object of the specified class or of a subclass of the specified class.
 - If the ONLY phrase is specified:
 - If the FACTORY phrase is specified, the object referenced by this data item shall be the factory object of the specified class.
 - If the FACTORY phrase is not specified, the object referenced by this data item shall be an instance object of the specified class.

- e) If ACTIVE-CLASS is specified, the object referenced by this data item shall be of the same class as the object that was used to invoke the method in which this data description entry is specified, subject to the following rules:
1. If the FACTORY phrase is specified, the object referenced by this data item shall be the factory object of that class.
 2. If the FACTORY phrase is not specified, the object referenced by this data item shall be an instance object of that class.
- 15) A data description entry that specifies the USAGE POINTER clause specifies a data-pointer data item, also called a data-pointer, that may contain the address of a data item. Each implementor defines the precise effect of the USAGE POINTER clause upon alignment, size, representation, and range of values of the data item in the storage of the computer. If type-name-1 is specified, this data item is a restricted data-pointer. A restricted data-pointer shall contain only the predefined address NULL or the address of a data item of the specified type.
- 16) A data description entry that specifies the USAGE PROGRAM-POINTER clause specifies a program-pointer data item, also called a program-pointer, that may contain the address of a program. Each implementor defines the precise effect of the USAGE PROGRAM-POINTER clause upon alignment, size, and representation of the data item in the storage of the computer.
- The program addressed by a program-pointer data item may be written in COBOL or in another language for which the implementor has declared support for access by program pointers. For a COBOL program, the address is for an outermost program.
- 17) If program-prototype-name-1 is specified, this data item is a restricted program-pointer. A restricted program-pointer shall contain only the predefined address NULL or the address of a program with the same signature as that identified by the specified program-prototype-name.

13.16.59 USING clause

The USING clause identifies data to be used both as the destination in an ACCEPT screen statement and the source for a DISPLAY screen statement.

13.16.59.1 General format

USING identifier-1

13.16.59.2 Syntax rules

- 1) The category of the data item referenced by identifier-1 shall be a permissible category as a receiving operand in a MOVE statement where the sending operand has the same PICTURE clause as the subject of the entry.
- 2) The category of the data item referenced by identifier-1 shall be a permissible category as a sending operand in a MOVE statement where the receiving operand has the same PICTURE clause as the subject of the entry.
- 3) Identifier-1 shall be defined in the file, working-storage, local-storage, or linkage section.
- 4) If the subject of this entry is subject to an OCCURS clause, identifier-1 shall be specified without the subscripting normally required. Additional requirements are specified in 13.16.36, OCCURS clause, syntax rule 12.

13.16.59.3 General rules

- 1) Specifying the USING clause is equivalent to specifying both the TO and FROM clauses, each specifying the same identifier.
- 2) The subject of the entry is both an input screen item and an output screen item.

13.16.60 VALIDATE-STATUS clause

The VALIDATE-STATUS clause enables messages and flags to be generated automatically when a specific error condition arises or does not arise as a result of the execution of a VALIDATE statement.

13.16.60.1 General format

$$\left\{ \begin{array}{l} \text{VALIDATE-STATUS} \\ \text{VAL-STATUS} \end{array} \right\} \text{ IS } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \text{ WHEN } \left\{ \begin{array}{l} \text{ERROR} \\ \text{NO ERROR} \end{array} \right\} \left[\text{ON } \left\{ \begin{array}{l} \text{FORMAT} \\ \text{CONTENT} \\ \text{RELATION} \end{array} \right\} \right] \\ \text{FOR } \{ \text{identifier-2} \} \dots$$

13.16.60.2 Syntax rules

- 1) Literal-1 or the data item referenced by identifier-1 shall be valid as a sending operand for a MOVE statement specifying the subject of the entry as the receiving operand.
- 2) The entry containing the VALIDATE-STATUS clause shall not contain or be subordinate to an OCCURS clause with the DEPENDING phrase.
- 3) The data item referenced by identifier-2 shall be the operand of a VALIDATE statement, or shall be subordinate to such an item.
- 4) Identifier-2 shall not be reference modified.
- 5) Identifier-2 shall not be of class index, object, or pointer.
- 6) If identifier-2 references a data item whose data description entry is not subject to any OCCURS clause, the VALIDATE-STATUS clause shall not be specified in an entry that is subject to any OCCURS clause.

If identifier-2 references a data item whose data description entry is subject to one or more OCCURS clauses, the following rules apply:

- a) If the VALIDATE-STATUS clause is specified in an entry that is not subject to any OCCURS clause, identifier-2 shall be subscripted. The number of subscripts shall be the same as the number of nested OCCURS clauses to which the data item referenced by identifier-2 is subject. Only literal subscripts may be specified.
- b) If the VALIDATE-STATUS clause is specified in an entry that is subject to one or more OCCURS clauses, identifier-2 shall not be subscripted. The data item referenced by identifier-2 and the subject of the entry shall both be subject to the same number of OCCURS clauses and the number of occurrences specified in the corresponding OCCURS clauses shall be equal. If an OCCURS clause associated with identifier-2 has a DEPENDING phrase, the maximum integer of the TO phrase is used in determining the number of occurrences of identifier-2.
- 7) If identifier-2 references a global name, the subject of the entry shall be global.
- 8) The words VAL-STATUS and VALIDATE-STATUS are equivalent.

13.16.60.3 General rules

- 1) The VALIDATE-STATUS clause takes effect during the final, error indication stage of the execution of a VALIDATE statement that directly or indirectly references the data item referenced by identifier-2. The VALIDATE-STATUS clause is ignored during the execution of any statement other than a VALIDATE statement.

- 2) The ERROR phrase takes effect in the following circumstances:
 - a) if ON phrase is not specified, when the associated internal indicator of the data item referenced by identifier-2 is not set to its initial valid value;
 - b) if the ON phrase is specified, when the associated internal indicator of the item referenced by identifier-2 is set to the value or one of the values corresponding to the stage of validation specified in the ON phrase.
- 3) The NO ERROR phrase takes effect in the following circumstances:
 - a) if ON phrase is not specified, when the associated internal indicator of the data item referenced by identifier-2 is still set to its initial valid value;
 - b) if the ON phrase is specified, when the associated internal indicator of the item referenced by identifier-2 is not set to the value or one of the values corresponding to the stage of validation specified in the ON phrase.
- 4) The ERROR and NO ERROR phrases take effect by executing an implicit MOVE statement in which literal-1 or the current content of the data item referenced by identifier-1 is the sending operand and the data item that is the subject of the entry is the receiving operand.
- 5) If a data description entry contains more than one VALIDATE-STATUS clause, these clauses are applied as described above in the order in which they are specified until either the action defined under general rule 4 has occurred or all the clauses have been processed.
- 6) If neither an ERROR phrase nor a NO ERROR phrase for a given entry takes effect during the execution of a given VALIDATE statement, the effect on the data item that is the subject of the entry is as follows: if any VALIDATE-STATUS clause specified in the entry has an identifier-2 that is referenced directly or indirectly as the operand of the VALIDATE statement, the data item is initialized by the execution of an implicit INITIALIZE statement without the VALUE or REPLACING phrases; otherwise, the data item remains unchanged.
- 7) Data items that are subordinate to the operand of a VALIDATE statement and are not processed during the statement's execution, as indicated by a value in their internal indicators signifying not processed, are considered to be neither valid nor invalid by the VALIDATE-STATUS clause but will cause the VALIDATE-STATUS clause's data item to be initialized, where applicable, as described in general rule 6. (See 13.16.36, OCCURS clause, and 13.16.39, PRESENT WHEN clause.)
- 8) If the entry containing the VALIDATE-STATUS clause is subject to one or more OCCURS clauses, the processing defined in the above general rules applies to each occurrence of the subject of the entry and each corresponding occurrence of the data item referenced by identifier-2.

13.16.61 VALUE clause

The VALUE clause specifies the initial value of communication section, local-storage section, and working-storage section data items, the values used by explicit and implicit INITIALIZE statements, the values associated with condition-names, the value of report section printable items and screen section displayable items, and the values used by the VALIDATE statement.

13.16.61.1 General format**Format 1 (data-item):**

VALUE IS literal-1

Format 2 (table):

$$\left\{ \begin{array}{l} \underline{\text{VALUE IS}} \\ \underline{\text{VALUES ARE}} \end{array} \right\} \{ \{ \text{literal-1} \} \dots \underline{\text{FROM}} (\{ \text{subscript-1} \} \dots) [\underline{\text{TO}} (\{ \text{subscript-2} \} \dots)] \} \dots$$
Format 3 (condition-name):

$$\left\{ \begin{array}{l} \underline{\text{VALUE IS}} \\ \underline{\text{VALUES ARE}} \end{array} \right\} \left\{ \text{literal-2} \left[\left\{ \begin{array}{l} \underline{\text{THROUGH}} \\ \underline{\text{THRU}} \end{array} \right\} \text{literal-3} \right] \dots [\text{IN alphabet-name-1}] \right. \\ \left. [\text{WHEN SET TO } \underline{\text{FALSE}} \text{ IS literal-4}] \right\}$$
Format 4 (report-section):

$$\left\{ \begin{array}{l} \underline{\text{VALUE IS}} \\ \underline{\text{VALUES ARE}} \end{array} \right\} \{ \text{literal-1} \} \dots$$
Format 5 (content-validation-entry):

$$\left\{ \begin{array}{l} \underline{\text{VALUE}} \\ \underline{\text{VALUES}} \end{array} \right\} \left\{ \left\{ \text{literal-5} \left[\left\{ \begin{array}{l} \underline{\text{THROUGH}} \\ \underline{\text{THRU}} \end{array} \right\} \text{literal-6} \right] \right\} \dots [\text{IN alphabet-name-1}] \right. \\ \left. \left[\begin{array}{l} \underline{\text{IS}} \\ \underline{\text{ARE}} \end{array} \right] \left\{ \begin{array}{l} \underline{\text{INVALID}} \\ \underline{\text{VALID}} \end{array} \right\} [\underline{\text{WHEN}} \text{ condition-1}] \right\} \right\}$$
13.16.61.2 Syntax rules**ALL FORMATS**

- 1) The subject of the entry shall not be a strongly-typed group item.
- 2) If the category of the subject of the entry is numeric, all literals in the VALUE clause shall be numeric and have a value that is within the range of values indicated by the PICTURE clause or the USAGE clause. If the usage is other than float-short, float-long and float-extended, this value shall not require truncation of non-zero digits. This value shall have the digit zero in each position that corresponds to a picture character symbol 'P'.

- 3) If a signed numeric literal is specified, the subject of the entry shall be a signed numeric data item.
- 4) If the item is of class alphabetic or alphanumeric, literals in the VALUE clause shall be alphanumeric literals. Alphanumeric literals in the VALUE clause of an elementary item shall not exceed the size indicated by an explicit PICTURE clause. Alphanumeric literals in the VALUE clause of an alphanumeric group item shall not exceed the size of the group item.
- 5) If the item is of class national, literals in the VALUE clause shall be national literals. National literals in the VALUE clause of an elementary item shall not exceed the size indicated by an explicit PICTURE clause. National literals in the VALUE clause of a national group item shall not exceed the size of the group item.

FORMATS 1, 2, 3, AND 5

- 6) If the category of the subject of the entry is boolean, literals in the VALUE clause shall be boolean literals. Boolean literals in the VALUE clause of an elementary item shall not exceed the size indicated by an explicit PICTURE clause. Boolean literals in the VALUE clause of a bit group item shall not exceed the size of the group item.

FORMATS 2, 3, 4, AND 5

- 7) The words VALUE and VALUES are equivalent.

FORMATS 1, 2, AND 3

- 8) Editing characters in a picture character-string are included in determining the size of the data item, but do not cause editing of the initial value when the data item is initialized.

NOTE The programmer is responsible for specifying the value of a literal associated with an alphanumeric-edited, numeric-edited, or national-edited item in edited form.

FORMATS 1 AND 2

- 9) Formats 1 and 2 shall not be specified in a condition-name entry.
- 10) The VALUE clause shall not be specified in a data description entry that contains a REDEFINES clause or in an entry that is subordinate to an entry containing a REDEFINES clause.
- 11) If the VALUE clause is specified at the group level, literal-1 shall be of the same category as the group item or shall be a figurative constant that is permitted in a MOVE statement to a receiving item of that category. The VALUE clause shall not be specified at subordinate levels within this group.
- 12) If a VALUE clause is specified at the group level, subordinate items within that group shall not be described with a JUSTIFIED or SYNCHRONIZED clause, and all data items subordinate to an alphanumeric group item shall be explicitly or implicitly described with usage DISPLAY.

FORMAT 1

- 13) In the screen section, literal-1 shall be an alphanumeric literal if usage display is specified or a national literal if usage national is specified. Literal-1 shall not be a figurative constant.

FORMAT 2

- 14) A data description entry that contains the VALUE clause shall contain an OCCURS clause or be subordinate to a data description entry that contains an OCCURS clause.
- 15) Subscript-1 and subscript-2 shall be integer numeric literals.

- 16) In one FROM phrase, there shall be one subscript-1 specified for each OCCURS clause for the subject of the entry or superordinate to that entry, specified in the same order as a subscripted reference to the subject of the entry would be specified. Each instance of subscript-1 shall not exceed the maximum number of occurrences specified in the OCCURS clause associated with that instance.
- 17) If the TO phrase is specified, there shall be one subscript-2 specified for each OCCURS clause for the subject of the entry or superordinate to that entry, specified in the same order as a subscripted reference to the subject of the entry would be specified. Each instance of subscript-2 shall not exceed the maximum number of occurrences specified in the OCCURS clause associated with that instance. The specification of subscript-2 in one TO phrase shall be such that the table element associated with subscript-2 is the same occurrence or a successive occurrence of the table element associated with the corresponding subscript-1.

FORMAT 3

- 18) When the THROUGH phrase is specified:

- a) when literal-2 is of a class other than alphanumeric or national, the value of literal-2 shall be less than the value of literal-3.
- b) when literal-2 is of class alphanumeric or national, and the runtime collating sequence is known, the value of literal-2 shall be less than the value of literal-3. The runtime collating sequence is unknown when the collating sequence is defined by a locale or the collating sequence is otherwise determined at runtime.

NOTE The compiler may know the runtime collating sequence for a variety of reasons; perhaps only one is possible or one is specified by a compiler option. However, this is not a requirement of an implementor, and specifying an alphabet-name for a fixed collating sequence ensures that the range of values will always be the same.

- 19) The value of literal-4 shall not be equal to the value of any occurrence of literal-2. When the THROUGH phrase is specified:
- a) when literal-2 is of a class other than alphanumeric or national, the value of literal-4 shall not be equal to any value in the range of any occurrence of literal-2 through literal-3, inclusive.
 - b) when literal-2 is of class alphanumeric or national, and the runtime collating sequence is known, the value of literal-4 shall not be equal to the value of any literal-2 or any value in the range of any occurrence of literal-2 through literal-3, inclusive.

NOTE When the THROUGH phrase is specified and the runtime collating sequence is not known at compile time, it is possible that the value used in SET condition-name TO FALSE is also a value for which the condition will evaluate TRUE. This can be avoided by specifying a list of values rather than specifying a range in a THROUGH phrase.

FORMATS 3 AND 5

- 20) The words THROUGH and THRU are equivalent.
- 21) If the category of the subject of the entry is boolean, the THROUGH phrase shall not be specified.
- 22) Condition-name and content-validation formats shall not be specified in the report section.
- 23) Alphabet-name-1 may be specified only when the literals specified in the THROUGH phrase are of class alphanumeric or national. If literal-2 and literal-3 or literal-5 and literal-6 are of class national, alphabet-name-1 shall reference an alphabet that defines a national collating sequence; otherwise, alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.
- 24) The manner of determining the range of values specified by the THROUGH phrase is described in 14.6.7, THROUGH phrase.

25) Formats 3 and 5 may be specified only when the level-number of the subject of the entry is 88.

FORMAT 4

26) If the VALUE clause has more than one operand, the entry shall be a repeating entry or shall be subordinate to a repeating entry. The number of operands of the VALUE clause shall be equal to the number of repetitions of the repeating entry or the same number multiplied by the number of repetitions of any number of successive repeating entries at higher levels than the repeating entry.

FORMAT 5

27) The VALID phrase and the INVALID phrase shall not both be specified for the same conditional variable.

28) When the THROUGH phrase is specified:

- a) when literal-6 is of a class other than alphanumeric or national, the value of literal-5 shall be less than the value of literal-6.
- b) when literal-5 is of class alphanumeric or national, and the runtime collating sequence is known, the value of literal-5 shall be less than the value of literal-6. The runtime collating sequence is unknown when the collating sequence is defined by a locale or the collating sequence is otherwise determined at runtime.

NOTE The compiler may know the runtime collating sequence for a variety of reasons; perhaps only one is possible or one is specified by a compiler option. However, this is not a requirement of an implementor, and specifying an alphabet-name for a fixed collating sequence ensures that the range of values will always be the same.

29) If the word VALUE is specified, the word IS may be specified. If the word VALUES is specified, the word ARE may be specified.

13.16.61.3 General rules

FORMATS 1, 2, 3, AND 4

1) If the usage of the subject of the entry is float-short, float-long or float-extended, the actual value given to the item is an approximation of the arithmetic value of the literal.

FORMATS 1 AND 2

2) In the file section, VALUE clauses take effect only during the execution of an INITIALIZE statement. The initial value of the data items in the file section is undefined.

3) In the linkage section, VALUE clauses take effect only during the execution of an explicit or implicit INITIALIZE statement. The initial value of the data items in the linkage section is specified in 13.6, Linkage section.

4) VALUE clauses in the working-storage, local-storage, and communication sections take effect:

- a) for external items, during the execution of an INITIALIZE statement
- b) for based items and their subordinate items, during the execution of an ALLOCATE or an explicit or implicit INITIALIZE statement
- c) for all other items
 - when the object or runtime element is placed in initial state, and
 - during the execution of an INITIALIZE statement.

When VALUE clauses take effect, data items with a VALUE clause are initialized to the specified value and data items of class object and class pointer are initialized to null; the values of other data items and indexes are undefined.

- 5) If a VALUE clause is specified in a data description entry of a group item, the group area is initialized without consideration for the individual elementary or group items contained within this group.
- 6) If a VALUE clause is specified in a data description entry of a data item that is associated with a variable-occurrence data item, the initialization of the data item behaves as if the value of the data item referenced by the DEPENDING ON phrase in the OCCURS clause specified for the variable-occurrence data item is set to the maximum number of occurrences as specified by that OCCURS clause. A data item is associated with a variable-occurrence data item in any of the following cases:
 - a) It is a group data item that contains a variable-occurrence data item.
 - b) It is a variable-occurrence data item.
 - c) It is a data item that is subordinate to a variable-occurrence data item.

If a VALUE clause is associated with the data item referenced by a DEPENDING ON phrase, that value is considered to be placed in the data item after the variable-occurrence data item is initialized. (See 13.16.36, OCCURS clause.)

FORMATS 1, 2, AND 4

- 7) Each literal is aligned in the associated data item in accordance with 14.5.8, Alignment of data within data items, except that initialization is not affected by a JUSTIFIED clause and no editing takes place.
- 8) Initialization is not affected by any BLANK WHEN ZERO clause that may be specified.

FORMAT 1 AND 4

- 9) A VALUE clause specified in a data description entry that contains an OCCURS clause or in an entry that is subordinate to an OCCURS clause causes every occurrence of the associated data item to be assigned the specified value.

FORMATS 3 AND 5

- 10) The manner of determining the range of values specified by the THROUGH phrase is described in 14.6.7, THROUGH phrase.

NOTE The range of values can be determined at compile time only when the runtime collating sequence is known at compile time.

FORMAT 1

- 11) If a VALUE clause is specified for a screen item, literal-1 specifies the value of the screen item that is displayed on the screen when directly or indirectly referenced by an ACCEPT screen statement or a DISPLAY screen statement.

FORMAT 2

- 12) A format 2 VALUE clause initializes a table element to the value of literal-1. The table element initialized is identified by subscript-1. Consecutive table elements are initialized, in turn, to the value of successive occurrences of the literal-1. Consecutive table elements are referenced by incrementing by 1 the subscript that represents the least inclusive dimension of the table. When any reference to a subscript, prior to incrementing it, is equal to the maximum number of occurrences specified by its corresponding OCCURS clause, that subscript is set to 1 and the subscript for the next most inclusive dimension of the table is incremented by 1.

- 13) If the TO phrase is specified, all occurrences of literal-1 are reused, in the order specified, as a source during the initialization described in general rule 12. This repetition is done until the table element identified by subscript-2 is initialized.
- 14) If the TO phrase is not specified, it is as if the TO phrase were specified with each subscript-2 as the maximum number of occurrences of the table associated with each corresponding subscript-1.
- 15) If multiple specifications of the FROM phrase reference the same table element, the value defined by the last specified FROM phrase in the VALUE clause is assigned to the table element.

FORMAT 3

- 16) The characteristics of a condition-name are implicitly those of its conditional variable.
- 17) When a condition-name is referenced in a 'SET condition-name TO FALSE' statement, the value of literal-4 from the FALSE phrase is placed in the associated conditional-variable.

NOTE The true values of a conditional-variable are all the values associated with its condition-names; all other values are false values. The WHEN SET TO FALSE phrase specifies just one of possibly many false values; the purpose is to define a single value to be used by 'SET condition-name TO FALSE'. When a condition-name condition is tested, all the non-true values give a false result, not just the one false value defined by the WHEN SET TO FALSE phrase.

FORMAT 4

- 18) The value of literal-1 is used for the content of the printable item whenever it is printed, except that a GROUP INDICATE, PRESENT WHEN, or OCCURS clause with the DEPENDING phrase may suppress the appearance of the item, as described in 13.16.26, GROUP INDICATE clause; 13.16.39, PRESENT WHEN clause; and 13.16.36, OCCURS clause.
- 19) If the VALUE clause has more than one operand, successive operands are assigned to successive repeating printable items, horizontally and then vertically, as applicable, in that hierarchy. If no further operands remain, assignment begins again from the first operand. If any of the printable items are suppressed as a result of a PRESENT WHEN clause or an OCCURS clause with a DEPENDING phrase, VALUE operands are nevertheless assigned to them, even though they are not printed.

FORMAT 5

- 20) Format 5 entries take effect during the content validation stage of the execution of a VALIDATE statement.
- 21) If the associated conditional variable is an elementary item, the content validation entries take effect only if the conditional variable's associated internal indicator indicates that the item is valid on format.
- 22) If the WHEN phrase is specified, condition-1 is evaluated. If condition-1 is true, the clause takes effect as described in the following general rules; otherwise, that content validation entry is ignored for the purpose of the current VALIDATE statement and the effect is as though that content validation entry had been omitted.
- 23) Each entry with the VALID phrase defines a set of allowable values or ranges of values for the associated data item. If several entries with the VALID phrase are associated with the same data item, the union of all their sets of values defines the allowable set of values. If this check fails, the item's associated internal indicator is set to invalid on content.
- 24) Each entry with the INVALID phrase defines a set of forbidden values or ranges of values for the associated data item. If several entries with the INVALID phrase are associated with the same data item, the union of all their sets of values defines the forbidden set of values. If this check fails, the item's associated internal indicator is set to invalid on content.

13.16.62 VARYING clause

The VARYING clause establishes counters to enable different source items to be placed in each occurrence of a repeated printable item in report writer.

The VARYING clause also establishes counters to enable a VALIDATE statement to store different occurrences of a data item in different occurrences of a destination data item, or to compare different occurrences of a data item during content or relation validation.

13.16.62.1 General format

VARYING { data-name-1 [FROM arithmetic-expression-1] [BY arithmetic-expression-2] } ...

13.16.62.2 Syntax rules

- 1) The entry containing the VARYING clause shall also contain an OCCURS clause or, if the VARYING clause appears in a report group description entry, a multiple LINE or multiple COLUMN clause.
- 2) Data-name-1 shall not be defined elsewhere in the source element, except as data-name-1 in another VARYING clause of an entry not subordinate to the subject of the current entry.

NOTE Such a reuse refers to a completely independent data item.

This definition of data-name-1 may be referenced only within the current entry or a subordinate entry.

- 3) Data-name-1 shall not be referenced in arithmetic-expression-1 of the same VARYING clause, but may be referenced in arithmetic-expression-2 of the same VARYING clause or in arithmetic-expression-1 or arithmetic-expression-2 of a VARYING clause in a subordinate entry.

13.16.62.3 General rules

- 1) Each entry containing a VARYING clause establishes an independent temporary integer data item that shall be large enough to contain the maximum expected value.
- 2) If the VARYING clause is not specified in a report description entry, it is ignored during the execution of any statement other than a VALIDATE statement.
- 3) When the data item that is the subject of the entry is processed by the VALIDATE statement or the report item that is the subject of the entry is processed, the content of data-name-1 is established for each repetition of the associated data item during each stage of execution of the VALIDATE statement or each repetition of the report item, as follows:
 - a) For the first occurrence, the value of arithmetic-expression-1 is moved to data-name-1. If the FROM phrase is absent, 1 is moved to data-name-1.
 - b) For the second and subsequent occurrences, the value of arithmetic-expression-2 is added to data-name-1. If the BY phrase is absent, 1 is added to data-name-1.
- 4) Each value of data-name-1, established in this way, persists throughout the processing of the associated occurrence of the data item or report item.

NOTE For example, this allows data-name-1 to be used as a source data item, as a subscript to a source data item or as part of the identifier in the DEFAULT clause.

- 5) If the evaluation of arithmetic-expression-1 or arithmetic-expression-2 produces a non-integer value and the VARYING clause was specified in a report description entry, the EC-REPORT-VARYING exception condition is set to exist, the execution of the GENERATE statement is unsuccessful, and the content of the print line is undefined.

- 6) If the evaluation of arithmetic-expression-1 or arithmetic-expression-2 produces a non-integer value and the VARYING clause was not specified in a report description entry, the EC-VALIDATE-VARYING exception condition is set to exist, the execution of the VALIDATE statement is unsuccessful, and the content of the receiving items is undefined.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14 Procedure division

The procedure division in a function, a method, or a program contains procedures to be executed.

The procedure division in an instance definition and a factory definition contains the methods that may be invoked on the instance object or factory object.

The procedure division in an interface contains method prototypes.

The procedure division in a function prototype, method prototype, or program prototype specifies the parameters, any returning item, and any exceptions that may be raised.

14.1 Procedure division structure

14.1.1 General format

Format 1 (with-sections):

```

procedure-division-header
[ DECLARATIVES.
{ section-name-1 SECTION.
  use-statement.
  [ sentence ] ... [ paragraph-name-1. [ sentence ] ... ] ... }...
END DECLARATIVES. ]
[ { section-name-1 SECTION.
  [ sentence ] ... [ paragraph-name-1. ] [ sentence ] ... } ... ]

```

Format 2 (without-sections):

```

procedure-division-header
[ sentence ] ... [ { paragraph-name-1. [ sentence ] ... } ... ]

```

Format 3 (object-oriented):

```

PROCEDURE DIVISION.
[ { method-definition } ... ]

```

where procedure-division-header is:

```

PROCEDURE DIVISION [ using-phrase ] [ RETURNING data-name-2 ]

```

$$\left[\begin{array}{l} \text{RAISING} \left\{ \begin{array}{l} \text{exception-name-1} \\ \text{[FACTORY OF] class-name-1} \\ \text{interface-name-1} \end{array} \right\} \dots \end{array} \right] .$$

where using-phrase is:

USING { [BY REFERENCE] { [OPTIONAL] data-name-1 } ... }
BY VALUE { data-name-1 } ... }

where the following meta-language terms are described in the indicated subclauses:

Term	Subclause
method-definition	10.5, COBOL compilation group
sentence	14.4, Procedural statements and sentences
use-statement	14.8.45, USE statement

14.1.2 Syntax rules

FORMATS 1 AND 2

- 1) Data-name-1 shall be defined as a level 01 entry or a level 77 entry in the linkage section. A particular user-defined word shall not appear more than once as data-name-1. The data description entry for data-name-1 shall not contain a BASED clause or a REDEFINES clause.

NOTES

- 1 This restriction for based items does not prohibit passing based items as arguments.
- 2 A data item defined subsequently in the linkage section may specify REDEFINES data-name-1.

- 2) Each data-name-1 specified in a BY VALUE phrase shall be defined as a data item of class numeric, object, or pointer.
- 3) The RETURNING phrase shall be specified in a function definition and in a function prototype definition.
- 4) The RETURNING phrase may be specified in a method definition, a program definition, or a program prototype.
- 5) Data-name-2 shall be defined as a level 01 entry or level 77 entry in the linkage section. The data description entry for data-name-2 shall not contain a BASED clause or a REDEFINES clause.

NOTES

- 1 This restriction for based items does not prohibit specifying a based item as the returning item in the activating element.
- 2 A data item defined subsequently in the linkage section may specify REDEFINES data-name-2.

- 6) Data-name-2 shall not be the same as data-name-1.
- 7) Exception-name-1 shall be a level-3 exception-name for EC-USER.
- 8) Class-name-1 shall be the name of a class specified in the REPOSITORY paragraph.
- 9) Interface-name-1 shall be the name of an interface specified in the REPOSITORY paragraph.
- 10) Formats 1 and 2 may be specified in a source element if and only if that source element is a function definition, a function prototype definition, a method definition, a program definition, or a program prototype definition.
- 11) A procedure division in a method prototype shall contain only a procedure division header.

FORMAT 3

- 12) Format 3 may be specified in a source element if and only if that source element is a factory definition, an instance definition, or an interface definition, but not in a method definition.
- 13) A procedure division in an interface definition, an instance definition, or a factory definition that is not in a method definition shall be an object-oriented format procedure division.

14.1.3 General rules

FORMATS 1 AND 2

- 1) Execution begins with the first statement of the procedure division, excluding declaratives. Statements are then executed in the order in which they are presented for compilation, except where the rules indicate some other order.
- 2) The USING phrase identifies the formal parameters used by the function, method, or program for any arguments passed to it. The arguments passed from the activating element are:
 - the arguments specified in the USING phrase of a CALL statement
 - the arguments specified in the USING phrase of an INVOKE statement
 - the arguments specified in an inline invocation of a method
 - the arguments specified in a function reference
 - the argument defined by the rules of an object-property for invocation of an implicit SET property method.

The correspondence between the arguments and the formal parameters is established on a positional basis.

The conformance requirements for formal parameters and returning items are specified in 14.7, Conformance for parameters and returning items.

- 3) If the OPTIONAL phrase is specified for data-name-1, the OMITTED phrase may be specified as the corresponding argument; otherwise, the OMITTED phrase shall not be specified as the corresponding argument.
- 4) Both the BY REFERENCE and the BY VALUE phrases are transitive across the parameters that follow them until another BY REFERENCE or BY VALUE phrase is encountered. If neither the BY REFERENCE nor the BY VALUE phrase is specified prior to the first parameter, the BY REFERENCE phrase is assumed.
- 5) Data-name-1 is a formal parameter for the function, method, or program.
- 6) Data-name-2 is the name used in the function, method, or program for the result that is returned to the activating element according to 14.5.5, Results of runtime element execution.

NOTE In COBOL, the storage for the returning item is allocated in the activating source unit. The activated element contains only a formal description in its linkage section.

- 7) The initial value of the returning item, data-name-2, is undefined.
- 8) If the argument is passed by reference, the activated runtime element operates as if the formal parameter occupies the same storage area as the argument.
- 9) If the argument is passed by content, the activated runtime element operates as if the record in the linkage section were allocated by the activating runtime element during the process of initiating the activation and as if this record does not occupy the same storage area as the argument in the activating runtime element.

If the activated runtime element is a program for which there is no program-specifier in the REPOSITORY paragraph of the activating runtime element and there is no NESTED phrase specified on the CALL statement, this allocated record is of the same length as the argument, where the maximum length is used if the argument

is described as a variable-occurrence data item. That argument is moved to this allocated record without conversion. This record is then treated by the activated runtime element as if it were the argument and as if it were passed by reference.

If the activated runtime element is one of the following:

- a program for which there is a program-specifier in the REPOSITORY paragraph of the activating runtime element
- a program and the NESTED phrase is specified on the CALL statement
- a method
- a function

then this allocated record is

- a data item of the same category, usage, and length as the argument, if the formal parameter is described with the ANY LENGTH clause,
- otherwise, a data item with the same description and the same number of bytes as the formal parameter, where the maximum length is used if the formal parameter is described as a variable-occurrence data item.

The argument is used as the sending operand and the allocated record as the receiving operand in the following:

- if the formal parameter is numeric, a COMPUTE statement without the ROUNDED phrase
- if the formal parameter is of class index, object, or pointer, a SET statement
- otherwise, a MOVE statement.

The allocated record is then treated as if it were the argument and it were passed by reference.

- 10) If the argument is passed by value, the activated runtime element operates as if the record in the linkage section were allocated by the activating runtime element during the process of initiating the activation.

The allocated record is a data item of the same description as the formal parameter. The argument is used as the sending operand and the allocated record, whose description is specified in the linkage section, is used as the receiving operand in the following:

- if the formal parameter is numeric, a COMPUTE statement without the ROUNDED phrase
- if the formal parameter is of class object or pointer, a SET statement.

The activated runtime element is given access to the allocated record.

- 11) At all times in the activated element, references to data-name-1 and to data-name-2 are resolved in accordance with their description in the linkage section.
- 12) Exception-name-1 specifies an exception that this runtime element may raise in an EXIT or GOBACK statement, in addition to the exception-names defined in table 14, Exception-names and exception conditions. If class-name-1 is specified, an object of class-name-1 or from a subclass of class-name-1 may be raised by EXIT or GOBACK statements within this runtime element. If interface-name-1 is specified, an object that implements interface-1 may be raised by EXIT or GOBACK statements within this runtime element.
- 13) When either the activating or the activated runtime element is other than a COBOL runtime element, the implementor shall specify the restrictions and mechanisms for all supported language products.

NOTE The details of these restrictions and mechanisms might include parameter matching, representation of a data type, return of a value, and omission of parameters.

14.2 Declaratives

A Declarative is a procedure that is to be executed when a specific exception or condition occurs based on the USE statement. Declarative sections shall be grouped at the beginning of the procedure division preceded by the keyword DECLARATIVES and followed by the keywords END DECLARATIVES.

The sections specified between the keywords DECLARATIVES and END DECLARATIVES constitute the declarative portion of a source element. All other sections in a source element constitute the nondeclarative portion.

14.3 Procedures

A procedure is composed of a paragraph, or a group of successive paragraphs, or a section, or a group of successive sections within the procedure division. If one paragraph is in a section, all paragraphs shall be in sections. A procedure-name is a word used to refer to a paragraph or section in the source element in which it occurs. It consists of a paragraph-name (that may be qualified) or a section-name.

14.3.1 Sections

A section consists of a section header followed by zero, one, or more successive paragraphs. A section ends immediately before the next section or at the end of the procedure division or, in the declaratives portion of the procedure division, at the keywords END DECLARATIVES.

14.3.2 Paragraphs

A paragraph consists of a paragraph-name followed by a separator period and by zero, one, or more successive sentences or, if the paragraph-name is omitted, one or more successive sentences following the procedure division header or a section header. A paragraph ends immediately before the next paragraph-name or section-name or at the end of the procedure division or, in the declaratives portion of the procedure division, at the keywords END DECLARATIVES.

14.4 Procedural statements and sentences

A procedural statement is a unit of the COBOL language that specifies an action to be taken. Statement names are identified in table 13, Procedural statements.

Within the procedure division, there are the following types of statements:

- declarative statements, which specify actions that may be taken during the processing of other statements
- imperative statements, which specify unconditional actions
- conditional statements, which specify, or contain one or more phrases that specify, actions that depend on the truth value of a condition.

A declarative statement begins with the statement name USE and directs that actions be taken in response to specified conditions encountered during the processing of other statements.

An imperative statement specifies an unconditional action to be taken by the runtime element or is a conditional statement that is delimited by its explicit scope terminator, as specified in table 13, Procedural statements.

A conditional statement specifies that the truth value of a condition is evaluated and used to determine subsequent flow of control. Any statement with a conditional phrase that is not terminated by its explicit scope terminator is a conditional statement.

A sentence is a sequence of one or more procedural statements, the last of which is terminated by a separator period.

Wherever 'imperative-statement' appears in the general format of a statement, 'imperative-statement' refers to one or more imperative statements ended either by a separator period or by any phrase associated with that general format.

Table 13 — Procedural statements

Statement name	Conditional phrase	Explicit scope terminator
ACCEPT	[NOT] ON EXCEPTION	END-ACCEPT
ADD	[NOT] ON SIZE ERROR	END-ADD
ALLOCATE		
CALL	ON OVERFLOW [NOT] ON EXCEPTION	END-CALL
CANCEL		
CLOSE		
COMPUTE	[NOT] ON SIZE ERROR	END-COMPUTE
CONTINUE		
DELETE	[NOT] INVALID KEY	END-DELETE
DISABLE		
DISPLAY	[NOT] ON EXCEPTION	END-DISPLAY
DIVIDE	[NOT] ON SIZE ERROR	END-DIVIDE
ENABLE		
EVALUATE	WHEN	END-EVALUATE
EXIT		

Table 13 — Procedural statements (Continued)

Statement name	Conditional phrase	Explicit scope terminator
FREE		
GENERATE		
GOBACK		
GO TO		
IF	THEN ELSE	END-IF
INITIALIZE		
INITIATE		
INSPECT		
INVOKE		
MERGE		
MOVE		
MULTIPLY	[NOT] ON SIZE ERROR	END-MULTIPLY
OPEN		
PERFORM		END-PERFORM
PURGE		
RAISE		
READ	[NOT] AT END [NOT] INVALID KEY	END-READ
RECEIVE	NO DATA WITH DATA	END-RECEIVE
RELEASE		
RESUME		
RETURN	[NOT] AT END	END-RETURN
REWRITE	[NOT] INVALID KEY	END-REWRITE
SEARCH	WHEN AT END	END-SEARCH
SEND		
SET		
SORT		
START	[NOT] INVALID KEY	END-START
STOP		
STRING	[NOT] ON OVERFLOW	END-STRING
SUBTRACT	[NOT] ON SIZE ERROR	END-SUBTRACT
SUPPRESS		
TERMINATE		

Table 13 — Procedural statements (Continued)

Statement name	Conditional phrase	Explicit scope terminator
UNLOCK		
UNSTRING	[NOT] ON OVERFLOW	END-UNSTRING
VALIDATE		
WRITE	[NOT] INVALID KEY [NOT] END-OF-PAGE	END-WRITE

14.4.1 Conditional phrase

A conditional phrase specifies the action to be taken upon determination of the truth value of a condition resulting from the execution of a conditional statement.

The conditional phrases are specified in table 13, Procedural statements.

14.4.2 Scope of statements

A procedure division statement's scope is the range of words and separators that constitute the statement. The scope of a statement begins with the first word of the statement name and continues until the statement is either explicitly or implicitly terminated, and includes any procedural statements occurring syntactically between the start and termination of that statement.

14.4.2.1 Explicit scope termination

The scope of a statement may be explicitly terminated by using its associated scope terminator as specified in table 13, Procedural statements. A statement written with its explicit scope terminator is a subset of imperative statements and is termed a delimited scope statement.

An explicit scope terminator terminates the scope of:

- 1) the most-recently preceding unterminated statement having the statement-name for which that scope terminator is defined, and
- 2) any unterminated statements that appear between that statement-name and the explicit scope terminator.

14.4.2.2 Implicit scope termination

The scope of a statement that is not explicitly terminated is implicitly terminated as follows:

- 1) for a single imperative statement not contained within another statement, by
 - a) any element that follows the exhaustion of the statement's syntax, or
 - b) the next-encountered statement-name, or
 - c) a separator period.
- 2) for a single imperative statement contained within another statement, by
 - a) any element that terminates an imperative statement not contained within another statement,
 - b) the termination of the scope of any containing statement, or
 - c) the next phrase of any containing statement.

- 3) for a conditional statement not contained within another statement, by a separator period.
- 4) for a conditional statement contained within another statement, by
 - a) the termination of any containing statement, or
 - b) the next phrase of any containing statement.

Any phrase encountered is the next phrase of the most-recently preceding unterminated statement with which that phrase may be syntactically associated. If all permitted occurrences of a phrase have already been specified for a given statement, a subsequent occurrence of that phrase is not syntactically associated with that statement. An unterminated statement is any statement that has begun but has not yet been either explicitly or implicitly terminated.

A contained statement is also referred to as a nested statement.

14.5 Execution

14.5.1 Run unit organization

At runtime, the highest-level unit of a COBOL application is the run unit. A run unit is an independent entity that may be executed without communicating with, or being coordinated with, any other run unit except that it may process files and messages or set and test switches that were written or will be read by other run units. A run unit contains one or more runtime modules.

A runtime module results from compiling a compilation unit. Each runtime module contains one or more runtime elements.

A runtime element results from the compilation of a function, method, or program. When a runtime element is activated, parameters upon which it is to operate may be passed to it by the runtime element that calls it.

A run unit and each of its contained runtime modules may also contain resources and data storage areas needed for the execution and intercommunication of the runtime elements contained in the run unit.

A run unit may additionally contain runtime modules and data storage areas derived from the compilation of compilation units written in languages other than COBOL; in this case the requirements for the relationship and interaction between the COBOL and the non-COBOL modules are defined by the implementor.

14.5.2 State of a function, method, object, or program

14.5.2.1 State of a function, method, or program

The state of a function, method, or program at any point in time in a run unit may be active or inactive. When a function, method, or program is activated, its state may also be initial or last-used.

14.5.2.1.1 Active state

A function, method, or program may be activated recursively. Therefore, several instances of a function, method, or program may be active at once. When a rule indicates that the active state of a runtime element is tested, it is in the active state if any instance of the element is active.

An instance of a function is placed in an active state when it is successfully activated and remains active until the execution of a GOBACK or STOP statement or an implicit or explicit function format of the EXIT statement within this instance of this function.

An instance of a method is placed in an active state when it is successfully activated and remains active until the execution of a GOBACK or STOP statement or implicit or explicit method format of the EXIT statement within this instance of this method.

An instance of a program is placed in an active state when it is successfully activated by the operating system or successfully called from a runtime element. An instance of a program remains active until the execution of one of the following:

- a STOP statement
- in a called program, an implicit or explicit program format of an EXIT statement within that program
- a GOBACK statement within either that same called program or a program that is not under the control of a calling runtime element.

Whenever an instance of a function, method, or program is activated, the control mechanisms for all PERFORM statements contained in that instance of the function, method, or program are set to their initial states and the initial program collating sequences are in effect.

14.5.2.1.2 Initial and last-used states of data

When a function, method, or program is activated, the data within is in either the initial state or the last-used state.

14.5.2.1.2.1 Initial state

Automatic data and initial data is placed in the initial state every time the function, method, or program in which it is described is activated.

Static data is placed in the initial state:

- 1) The first time the function, method, or program in which it is described is activated in a run unit.
- 2) The first time the program in which it is described is activated after the execution of an activating statement referencing a program that possesses the initial attribute and directly or indirectly contains the program.
- 3) The first time the program in which it is described is activated after the execution of a CANCEL statement referencing the program or CANCEL statement referencing a program that directly or indirectly contains the program.

When data in a function, method, or program is placed in the initial state, the following occurs:

- 1) The internal data described in the working-storage section, local-storage section, and communication section is initialized as described in 13.16.61, VALUE clause.
- 2) The function, method, or program's internal file connectors are initialized by setting them to not be in any open mode.
- 3) The attributes of screen items are set as specified in the screen description entry.
- 4) The address of each based item is set to null.

Before data is placed in the initial state, the initial alphanumeric and national program collating sequences are determined as specified in 12.2.5, OBJECT-COMPUTER paragraph.

14.5.2.1.2.2 Last-used state

Static and external data are the only data that are in the last-used state. External data is always in the last-used state except when the run unit is activated. Static data is in the last-used state except when it is in the initial state as defined above.

14.5.2.2 Initial state of object data

The initial state of an object is the state of the object immediately after it is created. Internal data, internal file connectors, and the attributes of screen items are initialized in the same manner as when data in a function, method, or program is placed in the initial state, in accordance with 14.5.2.1.2.1, Initial state.

Before object data is placed in the initial state, the initial alphanumeric and national program collating sequences are determined as specified in 12.2.5, OBJECT-COMPUTER paragraph.

14.5.3 Explicit and implicit transfers of control

The flow of control mechanism transfers control from statement to statement in the sequence in which they were written unless an explicit transfer of control overrides this sequence or there is no next executable statement to which control may be passed. The transfer of control from statement to statement occurs without the writing of an explicit procedure division statement, and, therefore, is an implicit transfer of control.

COBOL provides both explicit and implicit means of altering the implicit control transfer mechanism.

In addition to the implicit transfer of control between consecutive statements, implicit transfer of control also occurs when the normal flow is altered without the execution of a procedure branching statement. COBOL provides the following types of implicit control flow alterations that override the statement-to-statement transfers of control:

- 1) If a paragraph is being executed under control of another COBOL statement such as PERFORM, USE, SORT, and MERGE, and the paragraph is the last paragraph in the range of the controlling statement, then an implied transfer of control occurs from the last statement in the paragraph to the control mechanism of the last executed controlling statement. Further, if a paragraph is being executed under the control of a PERFORM statement that causes iterative execution, and that paragraph is the first paragraph in the range of that PERFORM statement, an implicit transfer of control occurs between the control mechanism associated with that PERFORM statement and the first statement in that paragraph for each iterative execution of the paragraph.
- 2) When a SORT or MERGE statement is executed, an implicit transfer of control occurs to any associated input or output procedures.
- 3) When any COBOL statement is executed that results in the execution of a declarative section, an implicit transfer of control to the declarative section occurs.

NOTE Another implicit transfer of control occurs after execution of the declarative section, as described in rule 1 above.

An explicit transfer of control consists of an alteration of the implicit control transfer mechanism by the execution of a procedure branching or conditional statement. An explicit transfer of control may be caused only by the execution of a procedure branching or conditional statement. The procedure branching statement EXIT PROGRAM causes an explicit transfer of control only when the statement is executed in a called program.

If control is transferred either implicitly or explicitly to a paragraph containing no statements, execution proceeds as if the paragraph contained only a single sentence consisting of a CONTINUE statement.

In this document, the term 'next executable statement' is used to refer to the next COBOL statement to which control is transferred according to the rules above and the rules associated with each language element.

There is no next executable statement when the execution of an EXIT FUNCTION, EXIT METHOD, EXIT PROGRAM, GOBACK, or STOP statement transfers control outside the COBOL source element.

In the declarative section, there is no next executable statement after either the last statement when the paragraph in which it appears is not being executed under the control of some other COBOL statement, or the last statement when the statement is in the range of an active PERFORM statement executed in a different section and this last

statement of the declarative section is not also the last statement of the procedure that is the exit of the active PERFORM statement. In these cases the flow of control is undefined.

There is also no next executable statement after the last statement in a source element when the paragraph in which it appears is not being executed under the control of some other COBOL statement in that source element, after the end marker, and if there are no procedure division statements in a program, function, or method. In these cases, an implicit GOBACK statement without any optional phrases is executed.

14.5.4 Item identification

Item identification is the process of identifying a specific data item referenced by an identifier by evaluating all of that identifier's references. If a step in the evaluation of an identifier requires evaluation of another identifier or an arithmetic expression, that evaluation is done in full before proceeding to the next step. The item identification steps that are applicable to that identifier are evaluated in the following order:

- 1) locale identification
- 2) function evaluation
- 3) inline method invocation
- 4) subscript evaluation
- 5) object property evaluation
- 6) length evaluation for a variable-length data item
- 7) reference modification

Unless otherwise specified, item identification is done for an identifier as the first step in the evaluation of that identifier and the identifiers within a statement are evaluated in left to right order as the first operation of the execution of that statement.

14.5.5 Results of runtime element execution

The result of the execution of a program, function, or method that specifies a RETURNING phrase in its procedure division header, is the content of the data item referenced by that RETURNING phrase.

The result becomes available to the activating element after the activated element returns as follows:

- If the runtime element is activated by a CALL or INVOKE statement, the result is placed in the data item referenced by that RETURNING phrase of that activating statement.
- If the runtime element is activated by a function-identifier or an inline method invocation, the result is placed in the temporary data item referenced by that identifier.

14.5.6 Locale identification

Locale identification is the process of identifying a specific locale for use in locale-based processing. Locale identification occurs as follows:

- 1) At run unit activation, the user default locale becomes the current locale for the run unit for all locale categories.

NOTE The implementor specifies whether a locale set by COBOL is recognized in a non-COBOL runtime module, and whether a locale set by a non-COBOL runtime module is recognized in COBOL. In order to use a locale set by a non-COBOL runtime module, it is necessary to execute a SET statement specifying the USER-DEFAULT phrase.

- 2) On activation of a runtime element, if the CHARACTER CLASSIFICATION clause is specified in the OBJECT-COMPUTER paragraph, category LC_CTYPE in the specified locale is used for character classification in the class test and the UPPER-CASE and LOWER-CASE intrinsic functions.
- 3) When execution of a set-locale format SET statement switches the locale for one or more locale categories, the new locale becomes the current locale for the run unit for the switched categories; the current locale remains unchanged for categories that are not switched.
- 4) If an alphabet-name specified in the PROGRAM COLLATING SEQUENCE clause of the OBJECT-COMPUTER paragraph is associated with a locale, category LC_COLLATE in the associated locale is used for comparisons and ordering as specified in 12.2.5, OBJECT-COMPUTER paragraph.
- 5) For a SORT or MERGE statement specifying an alphabet-name associated with a locale in the COLLATING SEQUENCE phrase, category LC_COLLATE in the associated locale is used for that statement. A locale switch during execution of a SORT or MERGE statement has no effect on the processing of that SORT or MERGE statement.
- 6) For a data item described with a LOCALE phrase, if a locale-name is specified, locale category LC_MONETARY in that locale is used for editing and de-editing of the data item. If a locale-name is not specified, category LC_MONETARY in the locale current at the time of editing or de-editing is used.
- 7) For a LOCALE-COMPARE intrinsic function specifying a locale as an argument, category LC_COLLATE from the specified locale is used for evaluation of that function-identifier; if a locale is not specified as an argument, category LC_COLLATE from the current locale is used.
- 8) For a LOCALE-DATE or LOCALE-TIME intrinsic function specifying a locale as an argument, category LC_TIME from the specified locale is used for evaluation of that function-identifier; if a locale is not specified as an argument, category LC_TIME from the current locale is used.
- 9) Upon return of control from another COBOL runtime element, the locale in effect for each locale category at the time of exit from the returning runtime element becomes the current locale for that category.

NOTE The intended behavior might be that the invoked program, function, or method switches locale for its caller; if not, the invoked program, function, or method is responsible for saving the locale on entry and restoring it before returning.

14.5.7 Sending and receiving operands

An operand is a sending operand if its contents prior to the execution of a statement may be used by the execution of the statement. An operand is a receiving operand if its contents may be changed by the execution of the statement. Operands may be referenced either explicitly or implicitly by a statement. For some statements, an operand is both a sending operand and a receiving operand. The rules for a statement specify whether operands are sending operands, receiving operands, or both when this is not clear from the context of the statement.

14.5.8 Alignment of data within data items

The standard rules for positioning data within an elementary item depend on the category of the receiving item. These rules are:

- 1) If the receiving data item is described as a fixed-point numeric item:
 - a) The data is aligned by decimal point and is moved to the receiving digit positions with zero fill or truncation on either end as required.
 - b) When an assumed decimal point is not explicitly specified, the data item is treated as if it has an assumed decimal point immediately following its rightmost digit and is aligned as in rule 1a.
- 2) If the receiving data item is described as a floating-point numeric item, the alignment of the data is specified by the implementor.

- 3) If the receiving data item is a fixed-point numeric-edited data item and the LOCALE phrase of the PICTURE clause is not specified in its data description entry, the data moved to the edited data item is aligned by decimal point with zero fill or truncation at either end as required within the receiving character positions of the data item, except where editing requirements cause replacement of the leading zeros.

If the receiving data item is a numeric-edited data item and the LOCALE phrase of the PICTURE clause is specified in its data description entry, alignment and zero fill or truncation take place as described in 13.16.38.4, Editing rules.

- 4) If the receiving data item is a floating-point numeric-edited data item and the value to be edited is not zero, the data moved to the edited data item is aligned so that the leftmost digit is not zero.
- 5) If the receiving data item is alphabetic, alphanumeric, alphanumeric-edited, national, or national-edited, the sending data shall be moved, after any specified conversion, to the receiving character positions and aligned at the leftmost character position in the data item with space fill or truncation to the right, as required. If the JUSTIFIED clause is specified for the receiving item, alignment differs as specified in 13.16.30, JUSTIFIED clause.
- 6) If the receiving data item is boolean, the sending data is placed, after any conversion, in the receiving boolean positions and aligned at the leftmost boolean position in the data item with zero fill or truncation to the right, as required. If the JUSTIFIED clause is specified for the receiving item, alignment differs as specified in 13.16.30, JUSTIFIED clause.

NOTE When an item is of usage bit, the item is not necessarily aligned on a byte boundary and the item need not occupy an integral number of bytes.

14.5.9 Overlapping operands

When a sending and a receiving data item in any statement share a part or all of their storage areas, yet are not defined by the same data description entry, the result of the execution of such a statement is undefined. For statements in which the sending and receiving data items are defined by the same data description entry, the results of the execution of the statement may be defined or undefined depending on the general rules associated with the applicable statement. If there are no specific rules addressing such overlapping operands, the results are undefined.

In the case of reference modification, the unique data item produced by reference modification is not considered to be the same data description entry as any other data description entry. Therefore, if an overlapping situation exists, the results of the operation are undefined.

14.5.10 Normal run unit termination

When normal run unit termination occurs, the runtime system performs the following:

- 1) An implicit CLOSE statement without any phrases is executed for each file that is in the open mode. These implicit close statements shall be executed for all open files in the run unit, even when an error occurs during the execution of one or more of the CLOSE statements. Any declaratives associated with these files are not executed.
- 2) If the run unit has been accessing messages with the message control system (MCS), remaining portions of any partially-received messages are eliminated from the queue. Any portions of messages transferred from the run unit by a SEND statement, and not terminated by an EMI or EGI, are purged from the system.
- 3) Any storage obtained with an ALLOCATE statement and not yet released by a FREE statement is released.
- 4) All instance objects are destroyed.

NOTE Any open files in an object are closed before the object is deleted.

- 5) If a locale was in use in the run unit, the implementor specifies whether the locale is reset to the locale in effect when the run unit was activated.

14.5.11 Abnormal run unit termination

When abnormal run unit termination occurs, the runtime system attempts to perform the operations of normal termination as specified in 14.5.10, Normal run unit termination. The circumstances of abnormal termination may be such that execution of some or all of these operations is not possible. The runtime system performs all operations that are possible.

The operating system shall indicate an abnormal termination of the run unit if such a capability exists within the operating system.

14.5.12 Condition handling

14.5.12.1 Exception conditions

An exception condition is either a condition associated with a specific exception status indicator or an exception object. An exception object is any object that is raised by the execution of either a RAISE statement or an EXIT or a GOBACK statement in which the object is specified in the RAISING phrase. An exception status indicator is a conceptual entity that exists for each function, method, or program for each exception condition and has two states, set or cleared. The initial state of all exception status indicators is cleared. An exception status indicator is set when the associated exception exists. Associated with each exception status indicator are one or more exception-names. These exception names, together with the interface-names and class-names of exception objects are used to enable checking for the exception condition, to specify the action to be taken when the exception is raised, and to determine which exception condition caused an exception declarative to be executed.

In addition to exception status indicators, a last exception status exists for the entire run unit. It is a conceptual entity that is set to indicate the last level-3 exception condition that was raised in the run unit, the fact that an exception object was raised, or that no exception condition exists. The SET statement can be used to set the indicator to no exception condition exists. The last exception status can be interrogated with the EXCEPTION-STATUS function. Associated with this last exception status is information that is accessed by the EXCEPTION-FILE, EXCEPTION-FILE-N, EXCEPTION-LOCATION, EXCEPTION-LOCATION-N, and EXCEPTION-STATEMENT functions.

Exception conditions differ from exception processing that exists for specific facilities or statements. Input-output statements have an I-O status associated with file connectors. I-O status is not an exception condition. When checking for EC-I-O exception conditions is enabled, the associated exception conditions are raised based on the resulting I-O status value, but if checking for EC-I-O exception conditions is not enabled, there is no link between EC-I-O exception conditions and I-O status values.

If checking for an exception condition is enabled and an exception status indicator is set as a result of an exception detected during the execution of a statement, the associated exception condition is raised, the last exception status is set to indicate that exception condition, and the predefined object reference EXCEPTION-OBJECT is set to null. Unless otherwise specified, if more than one exception is detected during the execution of a statement, the one that is set to exist is undefined. The execution of the statement may be successful or unsuccessful, depending on the rules for the statement, the fatality of the exception condition as specified in the table of exception-names, and implementor-defined actions. If no exception is detected during the execution of a statement or if checking for an exception that occurs is not enabled, no exception condition is raised. If an exception condition is raised and an associated exception declarative is executed, a reference to the EXCEPTION-STATUS function within that declarative returns identifying information associated with the exception condition that caused the declarative to be executed. All exception status indicators are cleared at the beginning of the execution of any statement.

NOTE 1 While I-O status indicators correspond to exception conditions, I-O status indicators are independent from this condition handling facility. I-O status indicators are always enabled and cannot be turned off.

The fatality of an exception condition is either fatal or non-fatal. Exception conditions that would cause corrupted data, undefined execution paths, and incorrect results are specified as fatal. Other exception conditions are specified as non-fatal.

Exception-names are organized into a hierarchy of three levels for purposes of enabling checking, selecting a declarative, and reporting the exception that occurred. The highest level, level-1, is the exception-name EC-ALL. Level-2 consists of the exception-names EC-ARGUMENT, EC-BOUND, EC-DATA, EC-FLOW, EC-I-O, EC-IMP, EC-LOCALE, EC-OO, EC-ORDER, EC-OVERFLOW, EC-PROGRAM, EC-RANGE, EC-RAISING, EC-REPORT, EC-SCREEN, EC-SIZE, EC-SORT-MERGE, EC-STORAGE, EC-USER, and EC-VALIDATE. The lowest level, level-3, consists of the level-2 names suffixed by a hyphen and additional characters. Only the lowest level exception-names are associated with exception status indicators.

NOTE 2 Exception-names are not provided for MCS exceptions because the facility is obsolete.

The level-3 exception-names for implementor-defined exceptions are defined by the implementor by creating an exception-name starting with the characters 'EC-IMP-' and ending with a suffix containing only basic letters, basic digits, and the hyphen and underscore basic special characters. The implementor defines the action to be taken, the fatality, and when the exception is raised.

The level-3 exceptions-names for user-defined exceptions shall start with the characters 'EC-USER-' and end with a suffix containing only characters selected from the set of basic letters, basic digits, and the hyphen and underscore basic special characters. The hyphen or underscore shall not appear as the last character of the suffix. The name is defined by specifying it anywhere that an exception-name may be specified. All user-defined exception conditions shall be non-fatal. Checking is not enabled unless the TURN directive is used to enable checking for the exception. A user-defined exception condition may be raised only by a RAISE statement or an EXIT or GOBACK statement with the RAISING phrase.

All exception-names may be specified in TURN compiler directives to enable or disable checking for a specific exception condition or exception conditions subordinate to the exception condition that is specified. By default, checking is not enabled for any exception condition. During the execution of any statement, if checking for an exception condition is not enabled, the exception condition will not be raised, even if the events that normally raise the exception condition occur. Therefore, when the general rules for a statement indicate that a specific exception condition exists, it is raised only if checking for that exception condition is enabled.

An exception object is a non-fatal exception condition; other exception conditions are either fatal or non-fatal as indicated in table 14, Exception-names and exception conditions.

14.5.12.1.1 Normal completion of a declarative procedure

A declarative procedure is said to complete normally if, during execution of the declarative procedure, none of the following occur:

- 1) An EXIT FUNCTION, EXIT METHOD, EXIT PROGRAM, GOBACK, RESUME, or STOP statement that is specified in this function, method, or program is executed within the scope of the declarative.
- 2) Any directly or indirectly activated runtime element terminates the run unit.

14.5.12.1.2 Fatal exception conditions

If a fatal exception condition exists, processing of the statement is interrupted and one of the following occurs in the order specified:

- 1) If a conditional phrase without the NOT phrase is specified in the interrupted statement and the rules for that statement indicate that the fatal exception condition is to be processed by the conditional phrase, the procedures for non-fatal exceptions as specified in 14.5.12.1.3, Non-fatal exception conditions, apply.
- 2) If checking for the exception condition is enabled and there is an applicable USE statement in the source unit that specifies the exception-name associated with the exception condition or an exception-name of a higher level in the same hierarchy, the associated declarative is executed. If execution of the declarative completes normally the execution of the run unit is terminated abnormally as specified in 14.5.11, Abnormal run unit termination.

- 3) If checking for the exception condition is enabled, and the exception condition is neither EC-FLOW-GLOBAL-EXIT nor EC-FLOW-GLOBAL-GOBACK, and there is an applicable PROPAGATE ON directive, the exception condition is propagated as if a GOBACK statement with the RAISING LAST EXCEPTION phrase were executed.
- 4) If checking for the exception condition is enabled, execution of the run unit is terminated abnormally as specified in 14.5.11, Abnormal run unit termination.
- 5) If checking for the exception condition is not enabled, the implementor defines whether or not execution will continue, how it will continue, and how any receiving operands are affected.

If checking is not enabled for a fatal exception condition and the exception condition is detected by the compiler, the implementor is not required to produce executable code. It is implementor-defined which fatal exception conditions, if any, are detected at compile time, and the circumstances under which they are detected.

14.5.12.1.3 Non-fatal exception conditions

If a non-fatal exception condition other than an exception object is set to exist, processing depends on whether or not checking for that exception condition is enabled. If it is not enabled, processing proceeds as indicated for the statement in which the exception condition was set to exist. If there are no specific rules, the exception condition is ignored and processing is as if the exception condition was not set to exist. If checking for that exception condition is enabled, processing of the statement is interrupted and one of the following occurs in the order specified:

- 1) If a conditional phrase without the NOT phrase is specified in the interrupted statement, the imperative statement associated with that conditional phrase is executed as specified in the rules for the specific statement.
- 2) If there is an applicable USE statement in the source unit that specifies the exception-name associated with the exception condition or an exception-name of a higher level in the same hierarchy, the associated declarative is executed. If execution of the declarative completes normally, execution continues as specified in the statement for normal execution. If a conditional phrase with a NOT phrase is specified in the interrupted statement, imperative-statement in that phrase is not executed.
- 3) Execution of the statement continues as specified in the rules for that statement.

14.5.12.1.4 Exception objects

When an exception object is raised, the following occurs:

- 1) The predefined object reference EXCEPTION-OBJECT is set to the content of the object reference specified in the RAISE statement or the RAISING phrase of the EXIT or GOBACK statement that caused the exception object to be raised.
- 2) The last exception status is set to indicate that an exception object has been raised.

If an exception object is raised by a RAISE statement, the associated declarative is executed. If execution of the declarative completes normally, execution continues with the statement following the RAISE statement.

If an exception object is raised by an EXIT or GOBACK statement, one of the following occurs:

- 1) If the exception object is neither of the following:
 - a) an object whose class is specified or whose class is a subclass of a class specified in the RAISING phrase of the procedure division header of the source element containing this EXIT or GOBACK statement and the presence or absence of the FACTORY phrase is the same in the description of the object reference raised by the EXIT or GOBACK statement as in the RAISING phrase of the procedure division header of the containing source element, or

- b) an object that implements an interface specified in the RAISING phrase of the procedure division header of the source element containing this EXIT or GOBACK statement;

execution of the EXIT or GOBACK statement is as if EXCEPTION EC-OO-EXCEPTION were specified in the RAISING phrase of the EXIT or GOBACK statement instead of an exception object and processing continues as specified in 14.5.12.1.2, Fatal exception conditions.

- 2) Otherwise, if a USE statement in the activating runtime element specifies an applicable class or interface, the associated declarative is executed. If execution of the declarative completes normally, execution continues as specified in the activating statement for normal execution.
- 3) Otherwise, if a PROPAGATE ON directive is in effect for the activating runtime element, the exception is propagated as if a GOBACK statement with the RAISING LAST EXCEPTION phrase were specified in this activating runtime element. However, if no applicable class or interface is specified in the RAISING phrase of the procedure division header in the activating element, the RAISING phrase is EXCEPTION EC-OO-EXCEPTION, instead of LAST EXCEPTION.
- 4) Otherwise, execution of the EXIT or GOBACK statement in the activated element is as if EXCEPTION EC-OO-EXCEPTION were specified in the RAISING phrase, instead of an exception object.

14.5.12.1.5 Exception-names and exception conditions

Table 14, Exception-names and exception conditions, is a list of the exception-names and their attributes. The meaning of the columns in the table are:

Exception-name - The exception-name associated with an exception condition or a hierarchy of exception-names.

Cat - The category of the exception condition: non-fatal (NF), fatal (Fatal), or implementor-defined (Imp). The category of a level-1 or level-2 exception condition is that of the level-3 exception condition that was raised.

Description - A brief description of what the exception condition means.

Table 14 — Exception-names and exception conditions

Exception-name	Cat	Description
EC-ALL		Any exception
EC-ARGUMENT		Argument error
EC-ARGUMENT-FUNCTION	Fatal	Function argument error
EC-ARGUMENT-IMP	Imp	Implementor-defined argument error
EC-BOUND		Boundary violation
EC-BOUND-IMP	Imp	Implementor-defined boundary violation
EC-BOUND-ODO	Fatal	OCCURS ... DEPENDING ON data item out of bounds
EC-BOUND-PTR	Fatal	Data-pointer contains an address that is out of bounds
EC-BOUND-REF-MOD	Fatal	Reference modifier out of bounds
EC-BOUND-SUBSCRIPT	Fatal	Subscript out of bounds
EC-DATA		Data exception
EC-DATA-CONVERSION	NF	Conversion failed because of incomplete character correspondence
EC-DATA-IMP	Imp	Implementor-defined data exception

Table 14 — Exception-names and exception conditions (Continued)

Exception-name	Cat	Description
EC-DATA-INCOMPATIBLE	Fatal	Incompatible data exception
EC-DATA-PTR-NULL	Fatal	Based item data-pointer is set to NULL when referenced
EC-FLOW		Execution control flow violation
EC-FLOW-GLOBAL-EXIT	Fatal	EXIT PROGRAM in a global Declarative
EC-FLOW-GLOBAL-GOBACK	Fatal	GOBACK in a global declarative
EC-FLOW-IMP	Imp	Implementor-defined control flow violation
EC-FLOW-RELEASE	Fatal	RELEASE not in range of SORT
EC-FLOW-REPORT	Fatal	GENERATE, INITIATE, or TERMINATE during USE BEFORE REPORTING declarative
EC-FLOW-RETURN	Fatal	RETURN not in range of MERGE or SORT
EC-FLOW-USE	Fatal	A USE statement caused another to be executed
EC-I-O		Input-output exception
EC-I-O-AT-END	NF	I-O status "1x"
EC-I-O-EOP	NF	An end of page condition occurred
EC-I-O-EOP-OVERFLOW	NF	A page overflow condition occurred
EC-I-O-FILE-SHARING	NF	I-O status "6x"
EC-I-O-IMP	Imp	I-O status "9x"
EC-I-O-INVALID-KEY	NF	I-O status "2x"
EC-I-O-LINAGE	Fatal	The value of a LINAGE data-item is not within the required range
EC-I-O-LOGIC-ERROR	Fatal	I-O status "4x"
EC-I-O-PERMANENT-ERROR	Fatal	I-O status "3x"
EC-I-O-RECORD-OPERATION	NF	I-O status "5x"
EC-IMP		Implementor-defined exception condition
EC-IMP-suffix (implementor specifies suffix)	Imp	Level-3 implementor-defined exception condition
EC-LOCALE		Any locale related exception
EC-LOCALE-IMP	Imp	Implementor-defined locale related exception
EC-LOCALE-INCOMPATIBLE	Fatal	The referenced locale does not specify the expected characters in LC_COLLATE
EC-LOCALE-INVALID	Fatal	Locale content is invalid or incomplete
EC-LOCALE-INVALID-PTR	Fatal	Pointer does not reference a saved locale
EC-LOCALE-MISSING	Fatal	The specified locale is not available
EC-LOCALE-SIZE	Fatal	Digits were truncated in locale editing
EC-OO		Any predefined OO related exception
EC-OO-CONFORMANCE	Fatal	Failure for an object-view
EC-OO-EXCEPTION	Fatal	An exception object was not handled

Table 14 — Exception-names and exception conditions (Continued)

Exception-name	Cat	Description
EC-OO-IMP	Imp	Implementor-defined OO exception
EC-OO-METHOD	Fatal	Requested method is not available
EC-OO-NULL	Fatal	Method invocation was attempted with a null object reference
EC-OO-RESOURCE	Fatal	Insufficient system resources to create the object or expand the object
EC-OO-UNIVERSAL	Fatal	A runtime type check failed
EC-ORDER		Ordering exception
EC-ORDER-IMP	Imp	Implementor-defined ordering exception
EC-ORDER-NOT-SUPPORTED	Fatal	ISO/IEC 14651:2001 ordering table or ordering level not supported
EC-OVERFLOW		Overflow condition
EC-OVERFLOW-IMP	Imp	Implementor-defined overflow condition
EC-OVERFLOW-STRING	NF	STRING overflow condition
EC-OVERFLOW-UNSTRING	NF	UNSTRING overflow condition
EC-PROGRAM		Inter-program communication exception
EC-PROGRAM-ARG-MISMATCH	Fatal	Parameter mismatch
EC-PROGRAM-ARG-OMITTED	Fatal	A reference to an omitted argument
EC-PROGRAM-CANCEL-ACTIVE	Fatal	Canceled program active
EC-PROGRAM-IMP	Imp	Implementor-defined inter-program communication exception
EC-PROGRAM-NOT-FOUND	Fatal	Called program not found
EC-PROGRAM-PTR-NULL	Fatal	Program-pointer used in CALL is set to NULL
EC-PROGRAM-RECURSIVE-CALL	Fatal	Called program active
EC-PROGRAM-RESOURCES	Fatal	Resources not available for called program
EC-RAISING		EXIT ... RAISING or GOBACK RAISING exception
EC-RAISING-IMP	Imp	Implementor-defined EXIT ... RAISING or GOBACK RAISING exception
EC-RAISING-NOT-SPECIFIED	Fatal	EXIT ... RAISING or GOBACK RAISING an EC-IMP or EC-USER exception condition not specified in RAISING phrase of procedure division header
EC-RANGE		Range exception
EC-RANGE-IMP	Imp	Implementor-defined range exception
EC-RANGE-INDEX	Fatal	Index made negative or too large for container
EC-RANGE-INSPECT-SIZE	Fatal	Size of replace items in INSPECT differs
EC-RANGE-INVALID	NF	Starting value of THROUGH range greater than ending value
EC-RANGE-PERFORM-VARYING	Fatal	Setting of varied item in PERFORM is negative

Table 14 — Exception-names and exception conditions (Continued)

Exception-name	Cat	Description
EC-RANGE-PTR	Fatal	Pointer SET UP or DOWN is outside range
EC-RANGE-SEARCH-INDEX	NF	No table entry found in SEARCH because initial index out of range
EC-RANGE-SEARCH-NO-MATCH	NF	No table entry found in SEARCH because no entry matched criteria
EC-REPORT		Report writer exception
EC-REPORT-ACTIVE	Fatal	INITIATE on an active report
EC-REPORT-COLUMN-OVERLAP	NF	Overlapping report items
EC-REPORT-FILE-MODE	Fatal	An INITIATE statement was executed for a file connector that was not open in the extend or output mode
EC-REPORT-IMP	Imp	Implementor-defined report writer exception
EC-REPORT-INACTIVE	Fatal	GENERATE or TERMINATE on an inactive report
EC-REPORT-LINE-OVERLAP	NF	Overlapping report lines
EC-REPORT-NOT-TERMINATED	NF	Report file closed with active report
EC-REPORT-PAGE-LIMIT	NF	Vertical page limit exceeded
EC-REPORT-PAGE-WIDTH	NF	Page width exceeded
EC-REPORT-SUM-SIZE	Fatal	Overflow of sum counter
EC-REPORT-VARYING	Fatal	VARYING clause expression non-integer
EC-SCREEN		Screen handling exception
EC-SCREEN-FIELD-OVERLAP	NF	Screen fields overlap
EC-SCREEN-IMP	Imp	Implementor-defined screen handling exception
EC-SCREEN-ITEM-TRUNCATED	NF	Screen field too long for line
EC-SCREEN-LINE-NUMBER	NF	Screen item line number exceeds terminal size
EC-SCREEN-STARTING-COLUMN	NF	Screen item starting column exceeds line size
EC-SIZE		Size error exception
EC-SIZE-ADDRESS	Fatal	Invalid pointer arithmetic
EC-SIZE-EXPONENTIATION	Fatal	Exponentiation rules violated
EC-SIZE-IMP	Imp	Implementor-defined size error exception
EC-SIZE-OVERFLOW	Fatal	Arithmetic overflow in calculation
EC-SIZE-TRUNCATION	Fatal	Significant digits truncated in store
EC-SIZE-UNDERFLOW	Fatal	Floating-point underflow
EC-SIZE-ZERO-DIVIDE	Fatal	Division by zero
EC-SORT-MERGE		SORT or MERGE exception
EC-SORT-MERGE-ACTIVE	Fatal	File SORT or MERGE executed when one is already active
EC-SORT-MERGE-FILE-OPEN	Fatal	A USING or GIVING file is open upon execution of a SORT or MERGE

Table 14 — Exception-names and exception conditions (Continued)

Exception-name	Cat	Description
EC-SORT-MERGE-IMP	Imp	Implementor-defined SORT or MERGE exception
EC-SORT-MERGE-RELEASE	Fatal	RELEASE record too long or too short
EC-SORT-MERGE-RETURN	Fatal	RETURN executed when at end condition exists
EC-SORT-MERGE-SEQUENCE	Fatal	Sequence error on MERGE USING file
EC-STORAGE		Storage allocation exception
EC-STORAGE-IMP	Imp	Implementor-defined storage allocation exception
EC-STORAGE-NOT-ALLOC	NF	The data-pointer specified in a FREE statement does not identify currently allocated storage
EC-STORAGE-NOT-AVAIL	NF	The amount of storage requested by an ALLOCATE statement is not available
EC-USER		User-defined exception condition
EC-USER-suffix (user specifies suffix)	NF	Level-3 user-defined exception condition
EC-VALIDATE		VALIDATE exception
EC-VALIDATE-CONTENT	NF	VALIDATE content error
EC-VALIDATE-FORMAT	NF	VALIDATE format error
EC-VALIDATE-IMP	Imp	Implementor-defined VALIDATE exception
EC-VALIDATE-RELATION	NF	VALIDATE relation error
EC-VALIDATE-VARYING	Fatal	VARYING clause expression non-integer

14.5.12.2 Incompatible data

Incompatible data exists when the content of a sending operand is not valid only in the following cases:

- 1) When the content of a boolean or numeric sending operand is referenced during the execution of a statement and the content of that sending operand would evaluate to false in a boolean or numeric class condition, respectively, the result of the reference is undefined and an EC-DATA-INCOMPATIBLE exception condition is set to exist, except in the following circumstances:

- a sending item is referenced in a class condition, or
- a sending item is processed in a VALIDATE statement.

The EC-DATA-INCOMPATIBLE exception condition is set to exist for a class condition and a VALIDATE statement when invalid data is detected during item identification.

NOTE For example, a subscript reference during a class test could cause the EC-DATA-INCOMPATIBLE exception condition to exist.

- 2) When a numeric-edited data item is the sending operand of a de-editing MOVE statement and the content of that data item is not a possible result for any editing operation in that data item, the result of the MOVE operation is undefined and an EC-DATA-INCOMPATIBLE exception condition is set to exist.

If the content of a sending operand is not referenced by a given execution of a statement, any incompatible data in that operand is not detected. If part of a sending operand's content is referenced by a given execution of a statement, it is undefined whether any incompatible data in the unreferenced content is detected.

NOTE The content of a data item is not referenced when the data item is a receiving operand, unless that data item is also a sending data item.

14.6 Common phrases and features for statements

This clause provides a description of the common phrases and features that pertain to or appear in several different statements.

14.6.1 At end condition

The at end condition is associated with a sort-merge file or the I-O status for a file connector. For sort-merge files, the at end condition is set to exist when the sort or merge operation has returned all of the records that were sent to it and there are no more records to be sorted or merged. It no longer exists when the execution of the SORT or MERGE operation referencing the sort-merge file terminates. For other files, the at end condition exists when the first character of the I-O status value for the associated file connector is a '1'.

14.6.2 Invalid key condition

The invalid key condition is associated with the I-O status for file connectors that are not associated with a sort-merge file. It exists when the first character of the I-O status value for the associated file connector is a '2'.

14.6.3 ROUNDED phrase

If, after decimal point alignment, the number of places in the fractional part of the result of an arithmetic operation is greater than the number of places provided for the fraction of the resultant identifier, truncation is relative to the size provided for the resultant identifier. When rounding is requested, the absolute value of the resultant identifier is increased by one in the low-order position whenever the most significant digit of the excess is greater than or equal to five.

When the low-order integer positions in a resultant identifier are represented by the symbol P in the picture character-string for that resultant identifier, rounding or truncation occurs relative to the rightmost integer position for which storage is allocated.

14.6.4 SIZE ERROR phrase and size error condition

The size error condition may occur as a result of the execution of an ADD, COMPUTE, DIVIDE, MULTIPLY, and SUBTRACT statement or of the evaluation of an arithmetic expression. Checking of a size error condition may be enabled by:

- specifying the SIZE ERROR phrase of an arithmetic statement, or by
- using a TURN directive to turn on checking of the EC-SIZE exception condition.

When the SIZE ERROR phrase is specified for an arithmetic statement, checking for the size error condition is enabled for the arithmetic operations that take place in developing and storing the result of that arithmetic statement. Any exception condition, including EC-SIZE, that is raised during item identification for the operands used during the execution of the arithmetic statement is processed as defined for that exception condition and execution of the arithmetic statement ceases. Execution resumes as indicated for that exception condition. If an EC-SIZE exception condition exists during the execution of the arithmetic statement other than during item identification and a SIZE ERROR phrase is specified for the statement, processing of the size error condition occurs as described below for the SIZE ERROR phrase, and no EC-SIZE exception declaratives are performed.

The size error condition exists in the following cases:

- 1) if the rules for evaluation of exponentiation are violated;
- 2) if the divisor in a divide operation or in a DIVIDE statement is zero;

- 3) if, after radix point alignment and any rounding specified by the **ROUNDED** phrase, the absolute value of the result of an arithmetic statement exceeds the largest value that may be contained in the associated resultant data item;
- 4) if standard arithmetic is specified for the source unit or the implementor defines that the range of values allowed for the intermediate data item is to be checked, when an arithmetic operation on the intermediate data item would cause the new value to be outside of the allowed range;
- 5) if the rules for a statement or an expression explicitly specify that an **EC-SIZE** exception condition is set to exist.

If the size error condition exists and the **SIZE ERROR** phrase is specified, the following occurs:

- 1) If the size error condition occurred during the arithmetic operations specified by the arithmetic statement, the values of all of the resultant data items remain unchanged from the values they had at the start of the execution of the arithmetic statement. Execution proceeds as indicated in rule 3, below.
- 2) If the absolute value of the result of the arithmetic operation exceeds the maximum value allowed for any resultant identifier, the content of that resultant identifier is not changed from the content that existed at the start of the execution of the arithmetic statement. The values of resultant identifiers for which the size error condition did not occur are the same as they would have been if the size error condition had not existed for any of the resultant identifiers. Execution proceeds as indicated in rule 3, below.
- 3) After completion of the arithmetic operations, and possibly the storing of values into resultant data items as specified in rule 2, control is transferred to the imperative-statement specified in the **SIZE ERROR** phrase and execution continues according to the rules for each statement specified in that imperative-statement. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of the imperative-statement specified in the **SIZE ERROR** phrase, control is transferred to the end of the arithmetic statement and the **NOT SIZE ERROR** phrase, if specified, is ignored.

If the size error condition exists and a **SIZE ERROR** phrase is not specified:

- 1) if the rules for evaluation of exponentiation are violated, the **EC-SIZE-EXPONENTIATION** exception condition is set to exist,
- 2) if the divisor in a divide operation or the **DIVIDE** statement is zero, the **EC-SIZE-ZERO-DIVIDE** exception condition is set to exist,
- 3) if the absolute value of the result of an arithmetic statement exceeds the largest value that may be contained in the associated resultant data item, the **EC-SIZE-TRUNCATION** exception condition is set to exist,
- 4) if an arithmetic operation on a standard intermediate data item would cause the new value to be outside of the allowed range, the applicable **EC-SIZE** exception condition, either **EC-SIZE-OVERFLOW** or **EC-SIZE-UNDERFLOW**, is set to exist,

and processing proceeds as specified in 14.5.12.1.2, Fatal exception conditions. If a **NOT SIZE ERROR** phrase is specified, it is ignored.

If no size error condition occurs during the execution of the arithmetic operations specified by an arithmetic statement or expression or while storing into the resultant identifiers, the **SIZE ERROR** phrase, if specified, is ignored and control is transferred to the end of the arithmetic statement or expression or to the imperative-statement specified in the **NOT SIZE ERROR** phrase if it is specified. In the latter case, execution continues according to the rules for each statement specified in that imperative-statement. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of the imperative-statement specified in the **NOT SIZE ERROR** phrase, control is transferred to the end of the arithmetic statement.

14.6.5 CORRESPONDING phrase

For the purpose of this discussion, D1 and D2 are identifiers that refer to alphanumeric group items, bit group items, national group items, or strongly-typed group items.

NOTE When D1 and D2 refer to national groups or bit groups, D1 and D2 are processed as group items and not as elementary items. Alphanumeric groups and strongly-typed group items are processed as group items as usual.

A pair of data items correspond if:

- 1) A data item in D1 and a data item in D2 are not implicitly or explicitly described with the keyword FILLER and have the same data-name and the same qualifiers, if any, up to, but not including, D1 and D2.
- 2) In a MOVE statement, at least one of the data items is an elementary data item and the resulting move is valid according to the rules for the MOVE statement.
- 3) In an ADD or SUBTRACT statement, both of the data items are numeric data items.
- 4) Neither data item contains an OCCURS, REDEFINES, or RENAMES clause or is of class index, object, or pointer.
- 5) Neither data item is subordinate to a group item that is subordinate to D1 or D2 when the group item contains an OCCURS or REDEFINES clause.
- 6) The name of each data item that satisfies the above conditions is unique after application of the implied qualifiers.

Any item identification associated with a corresponding pair of operands is done at the start of the execution of the statement containing the CORRESPONDING phrase, not at the start of the implied statement used for the pair of operands. The implied statements are executed in the order in which the elements in the group data item immediately following CORRESPONDING are specified.

For the arithmetic statements with the CORRESPONDING phrase, if the SIZE ERROR phrase is specified and one or more of the implied statements raises a size error condition, the imperative-statement in the SIZE ERROR phrase is executed after all of the implied statements are completed and the NOT SIZE ERROR phrase, if specified, is ignored.

For the arithmetic statements with the CORRESPONDING phrase, if the SIZE ERROR phrase is not specified and any of the implied statements raises a size error condition, the level-3 EC-SIZE exception condition for the last of the implied statements that raised a size error condition is set to exist after all of the implied statements are completed.

For any statement with the CORRESPONDING phrase, if any of the implied statements would set the EC-DATA-INCOMPATIBLE exception condition to exist, the EC-DATA-INCOMPATIBLE exception condition is set to exist after all of the implied statements are completed.

14.6.6 Arithmetic statements

The arithmetic statements are the ADD, COMPUTE, DIVIDE, MULTIPLY, and SUBTRACT statements. They have several common features.

- 1) The data descriptions of the operands need not be the same; any necessary conversion and decimal point alignment is supplied throughout the calculation.
- 2) For ADD, DIVIDE, MULTIPLY, and SUBTRACT statements when native arithmetic is in effect:
 - a) When none of the operands is an intrinsic function or a data item described with usage binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended, the composite of operands shall not contain more than 31 digits.

- b) When any of the operands is an intrinsic function or a data item described with usage binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended, the composite of the operands that are not intrinsic functions or data items described with usage binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended shall not contain more than 31 digits.

The composite of operands is a hypothetical data item resulting from the superimposition of specified operands in a statement aligned on their decimal points.

- 3) When standard arithmetic is in effect, each arithmetic statement is defined in terms of one or more arithmetic expressions. Storing of a standard intermediate data item in a resultant-identifier shall be according to the rules for the MOVE statement. The ROUNDED phrase applies only to this move.

NOTE When standard arithmetic is in effect, a size error condition may occur during the execution of arithmetic operations used to compute the result as well as during the final move.

- 4) The arithmetic statements may have single or multiple resultant identifiers. These statements have common rules for storing in the resultant identifiers. The execution of these statements proceeds in the following order:
 - a) The initial evaluation of the statement is done and the result of this operation is placed in an intermediate data item. If standard arithmetic is in effect, a standard intermediate data item is used. Otherwise, an implementor-defined intermediate data item is used. The rules indicating which data items or literals are part of this evaluation are given in the rules for the individual statements. All item identification for the data items involved in the initial evaluation is done at the start of the execution of the statement. If the size error condition is raised during the initial evaluation, none of the resultant data items are changed and execution proceeds as indicated in 14.6.4, SIZE ERROR phrase and size error condition.
 - b) If the size error condition was not raised during the initial evaluation, the intermediate data item is stored in or combined with and then stored in each single resulting data item in the left-to-right order in which the receiving data items are specified in the statement. Item identification for the receiving data items is done as each data item is accessed unless it was already done in step a. If the size error condition is raised when attempting to store in a resulting data item, only that data item remains unchanged and processing proceeds to the next resulting data item to the right.

14.6.7 THROUGH phrase

This specification applies to THROUGH phrases specified in the VALUE clause and the EVALUATE statement.

A THROUGH phrase specifies a range of values, literal-1 through literal-2. The set of values included in the range is determined by the following rules.

- 1) When the range of values is defined by numeric literals, the range of values includes literal-1, literal-2, and all algebraic values between literal-1 and literal-2.
- 2) When the range of values is defined by alphanumeric or national literals, the range of values depends on the collating sequence used for evaluation of the range.

When there is no IN alphabet-name phrase specified for the range, the collating sequence is defined by the implementor.

NOTE The intent is to allow an implementor to define the collating sequence in a manner compatible with previous COBOL implementations.

When the IN alphabet-name phrase is specified, the collating sequence used for range evaluation is the collating sequence defined by that alphabet. When the alphabet-name is associated with a locale, the range of values is determined from locale category LC_COLLATE in the specific locale associated with that alphabet-name or, if none, in the current locale. When the alphabet-name is associated with the native collating sequence, the computer's runtime collating sequence is used at the time the values are used in execution.

The range of values includes all values collating at the starting value and all successive ascending values in the applicable collating sequence up to and including all values collating at the ending value.

When the value of literal-1 is greater than the value of literal-2 in the collating sequence in effect at runtime, the EC-RANGE-INVALID exception condition is set to exist, and, upon completion of any exception processing, execution proceeds as if the range of values were empty.

14.6.8 RETRY phrase

The RETRY phrase is specified in an input-output statement to indicate whether the MSCS is to continue to attempt to obtain access in the event that a file or record is locked.

14.6.8.1 General format

RETRY { arithmetic-expression-1 TIMES
FOR arithmetic-expression-2 SECONDS
FOREVER }

14.6.8.2 General rules

- 1) Arithmetic-expression-1 specifies the number of times after the initial failure that the MSCS shall attempt to gain access to the locked resource and complete the requested input-output operation. The implementor determines the interval between these attempts. If arithmetic-expression-1 does not evaluate to an integer, the value of arithmetic-expression-1 is rounded up to the next whole number.
- 2) Arithmetic-expression-2 specifies the number of seconds in the timeout period. The I-O statement behaves as though the length of the timeout period were stored in a temporary data item whose picture is 9(n)V9(m), in the manner specified by this rule. The implementor shall specify the value of m, which may be zero, and the value of n, which shall be greater than zero. The implementor shall specify the maximum meaningful value of arithmetic-expression-2. If arithmetic-expression-2 is greater than this maximum meaningful value, the maximum meaningful value is placed into the temporary data item; otherwise, arithmetic-expression-2 is used as the sending item and the temporary data item as the receiving item in an implicit COMPUTE statement without the ROUNDED phrase. During the timeout period, the MSCS shall attempt to gain access to the locked resource and complete the requested input-output operation. The implementor shall specify the techniques used to determine the frequency of retries during the timeout period.
- 3) If the FOREVER phrase is specified, the MSCS shall attempt to gain access to a locked resource until the input-output operation has been completed.
- 4) If the I/O operation is unsuccessful on the first attempt because of a file sharing conflict condition or a record operation conflict condition, the following apply:
 - a) If the RETRY phrase is not specified or the result of the evaluation of arithmetic-expression-1 or arithmetic-expression-2 is negative or zero, the statement is unsuccessful, the appropriate value is placed in the I-O status associated with the file connector, and execution proceeds as indicated for unsuccessful execution in the applicable statement; otherwise,
 - b) The MSCS attempts to complete the input-output operation as specified in general rules 1, 2, or 3.

If the MSCS permits the requested access on one of these attempts, the statement is successful and the results are as if the file sharing or record operation conflict had never occurred.

Otherwise, the statement is unsuccessful, the appropriate value is placed in the I-O status associated with the file connector, and execution proceeds as indicated for unsuccessful execution in the applicable statement.

14.7 Conformance for parameters and returning items

The conformance rules for parameters and returning items apply at compile time when an explicit reference is made to them from a syntax rule.

NOTE 1 Conformance rules for parameters and returning items are checked at compile time for:

- an INVOKE statement on an object reference that is not a universal object reference,
- a reference to a user-defined function,
- a program-prototype format of the CALL statement.

The conformance rules for parameters and returning items apply at runtime when an explicit reference is made to them from a general rule.

NOTE 2 Conformance rules for parameters and returning items are checked at runtime for:

- a universal object reference, if exception condition EC-OO-UNIVERSAL is enabled
- the on-overflow and on-exception formats of the CALL statement, if exception condition EC-PROGRAM-ARG-MISMATCH is enabled.

NOTE 3 Conformance rules for parameters and returning items are checked for an object-view at compile time. Additional conformance rules for the object referenced by the object view are given in the rules of object-view; these are checked at runtime if exception condition EC-OO-CONFORMANCE is enabled.

14.7.1 Parameters

The number of arguments in the activating element shall be equal to the number of formal parameters in the activated element, with the exception of trailing formal parameters that are specified with an OPTIONAL phrase in the procedure division header of the activated element and omitted from the list of arguments of the activating element.

If both an argument and its corresponding formal parameters are elementary items, the conformance rules for elementary items apply; otherwise, the conformance rules for group items apply.

NOTE A bit group or national group is treated as an elementary item.

14.7.1.1 Group items

If either the formal parameter or the argument is an alphanumeric group item and neither of them is strongly typed:

- 1) If the argument is passed by reference, that argument or the formal parameter corresponding to that argument shall be an alphanumeric group item or an elementary item of category alphanumeric, and the formal parameter shall be described with the same number or a smaller number of bytes as the corresponding argument.
- 2) If the argument is passed by content, the conformance rules are the same as for a MOVE statement with the argument as the sending operand and the corresponding formal parameter as the receiving operand.

NOTE If an argument is a group with a level number other than 1 and its subordinate items are described such that the implementation inserts slack bits or bytes, the alignment of the subordinate elementary items might not correspond between the argument and the formal parameter.

If either the formal parameter or the corresponding argument is a strongly-typed group item, both shall be of the same type.

For an argument or formal parameter that is described as a variable-occurrence data item passed by reference, the maximum length is used. For a variable-occurrence data item passed by content, the length of the argument is determined by the rules of the OCCURS clause for a sending data item.

14.7.1.2 Elementary items

The conformance rules for elementary items depend on whether the argument is passed by reference, by content, or by value.

14.7.1.2.1 Elementary items passed by reference

If either the formal parameter or the corresponding argument is an object reference, the corresponding argument or formal parameter shall be an object reference following these rules:

- 1) If either the argument or the formal parameter is a universal object reference, the corresponding formal parameter or argument shall be a universal object reference.
- 2) If either the argument or the formal parameter is described with an interface-name, the corresponding formal parameter or argument shall be described with the same interface-name.
- 3) If either the argument or the formal parameter is described with a class-name, the corresponding formal parameter or argument shall be described with the same class-name, and the FACTORY and ONLY phrases shall be the same.
- 4) If the formal parameter is described with the ACTIVE-CLASS phrase, one of the following conditions shall be true:
 - a) The argument shall be an object reference described with the ACTIVE-CLASS phrase, where the presence or absence of the FACTORY phrase is the same as in the formal parameter, and the method to be activated shall be invoked with the predefined object references SELF or SUPER, or with an object reference described with the ACTIVE-CLASS phrase.
 - b) The argument shall be an object reference described with a class-name and the ONLY phrase, where the presence or absence of the FACTORY phrase is the same as in the formal parameter, and the method to be activated shall be invoked with that class-name or with an object reference described with that class-name and the ONLY phrase.

If either the argument or the formal parameter is of class pointer, the corresponding formal parameter or argument shall be of class pointer and the corresponding items shall be of the same category. If either is a restricted pointer, both shall be restricted and of the same type.

If neither the formal parameter nor the argument is of class object or pointer, the conformance rules are the following:

- 1) If the activated element is a program for which there is no program-specifier in the REPOSITORY paragraph of the activating element and there is no NESTED phrase specified on the CALL statement, the formal parameter shall be of the same length as the corresponding argument.
- 2) If the activated element is one of the following:
 - a program for which there is a program-specifier in the REPOSITORY paragraph of the activating element
 - a program and the NESTED phrase is specified on the CALL statement
 - a method
 - a function

then the definition of the formal parameter and the definition of the argument shall have the same BLANK WHEN ZERO, JUSTIFIED, PICTURE, USAGE, and SIGN clauses, with the following exceptions:

- a) Currency symbols match if and only if the corresponding currency strings are the same.
- b) Period picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both the activating and the activated runtime elements or for neither of them. Comma picture symbols match if and

only if the DECIMAL-POINT IS COMMA clause is in effect for both the activating and the activated runtime elements or for neither of them.

Additionally:

- a) Locale specifications in the PICTURE clauses match if and only if:
 - both specify the same SIZE phrase in the LOCALE phrase of the PICTURE clause, and
 - both specify the LOCALE phrase without a locale-name or both specify the LOCALE phrase with the same external identification, where the external identification is the external-locale-name or literal value associated with a locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph.
- b) A bit group item matches an elementary bit data item described with the same number of boolean positions.
- c) A national group item matches an elementary data item of usage national described with the same number of national character positions.
- d) If the formal parameter is described with the ANY LENGTH clause, its length is considered to match the length of the corresponding argument.
- e) If the argument is described with the ANY LENGTH clause, the corresponding formal parameter shall be described with the ANY LENGTH clause.

14.7.1.2.2 Elementary items passed by content or by value

If the formal parameter is an object reference described with the ACTIVE-CLASS phrase, one of the following conditions shall be true:

- 1) The method to be activated shall be invoked with the predefined object references SELF or SUPER, or with an object reference described with the ACTIVE-CLASS phrase, and a SET statement shall be valid in the activating unit with the argument as the sending operand and an object reference described with the ACTIVE-CLASS phrase, where the presence or absence of the FACTORY phrase is the same as in the formal parameter, as the receiving operand.
- 2) The method to be activated shall be invoked with a class-name or with an object reference described with a class-name and the ONLY phrase, and a SET statement shall be valid in the activating unit with the argument as the sending operand and an object reference described with that class-name and the ONLY phrase, where the presence or absence of the FACTORY phrase is the same as in the formal parameter, as the receiving operand.

If the formal parameter is of class pointer or an object reference described without the ACTIVE-CLASS phrase, the conformance rules shall be the same as if a SET statement were performed in the activating runtime element with the argument as the sending operand and the corresponding formal parameter as the receiving operand.

If the formal parameter is not of class object or pointer, the conformance rules are the following:

- 1) If the activated element is a program for which there is no program-specifier in the REPOSITORY paragraph of the activating element and there is no NESTED phrase specified on the CALL statement, the formal parameter shall be of the same length as the corresponding argument.
- 2) If the activated element is one of the following:
 - a program for which there is a program-specifier in the REPOSITORY paragraph of the activating element
 - a program and the NESTED phrase is specified on the CALL statement
 - a method
 - a function

then the conformance rules depend on the type of the formal parameter as specified in the following rules:

- a) If the formal parameter is numeric, the conformance rules are the same as for a COMPUTE statement with the argument as the sending operand and the corresponding formal parameter as the receiving operand.
- b) If the formal parameter is an index data item, the conformance rules are the same as for a SET statement with the argument as the sending operand and the corresponding formal parameter as the receiving operand.
- c) If the formal parameter is described with the ANY LENGTH clause, its length is considered to match the length of the corresponding argument.
- d) Otherwise, the conformance rules are the same as for a MOVE statement with the argument as the sending operand and the corresponding formal parameter as the receiving operand.

14.7.2 Returning items

A returning item shall be specified in the activating statement if and only if a returning item is specified in the procedure division header of the activated element. A returning item is implicitly specified in the activating element when a function or inline method invocation is referenced.

The returning item in the activated element is the sending operand, the corresponding returning item in the activating element is the receiving operand.

The rules for conformance between the sending operand and the receiving operand depend on whether at least one of the operands is an alphanumeric group item or both operands are elementary items.

NOTE A bit group or national group is treated as an elementary item.

14.7.2.1 Group items

If either the sending or the receiving operand is an alphanumeric group item, and neither of them is strongly typed, the corresponding returning item shall be an alphanumeric group item or an elementary item of category alphanumeric, and the receiving operand shall be of the same length as the sending operand.

NOTE If a returning item in an activating element is a group with a level number other than 1 and its subordinate items are described such that the implementation inserts slack bits or bytes, the alignment of the subordinate elementary items might not correspond between the returning item in the activating runtime element and the returning item in the activated runtime element.

If either of the operands is a strongly-typed group item, both shall be of the same type.

For an operand that is described as a variable-occurrence data item, the maximum length is used.

14.7.2.2 Elementary items

If either of the operands is an object reference, the corresponding item shall be an object reference, and the following rules apply:

- 1) If the returning item in the activated element is not described with an ACTIVE-CLASS phrase, the conformance rules are the same as if a SET statement were performed in the activated runtime element with the returning item in the activated element as the sending operand and the corresponding returning item in the activating element as the receiving operand.
- 2) If the returning item in the activated element is described with an ACTIVE-CLASS phrase, the conformance rules are the same as if a SET statement were performed in the activating runtime element with the returning item in the activating element as the receiving operand and a sending operand described with USAGE OBJECT REFERENCE as determined by the following rules:

- a) If the activated method is invoked with a class-name, the sending operand is described with the same class-name and an ONLY phrase.
- b) If the activated method is invoked with the predefined object references SELF or SUPER, the sending operand is described with an ACTIVE-CLASS phrase.
- c) If the activated method is invoked with an object reference described with an interface-name, the sending operand is a universal object reference.
- d) If the activated method is invoked with any other object reference, this identifier is used as the sending operand, including the ONLY phrase if specified.
- e) If the sending operand selected by applying the above rules is described with a class-name or an ACTIVE-CLASS phrase, the presence or absence of the FACTORY phrase is the same as in the returning item of the activated element.

If the sending operand is not an object reference, the receiving operand shall have the same BLANK WHEN ZERO, JUSTIFIED, PICTURE, USAGE, and SIGN clauses, with the following exceptions:

- 1) Currency symbols match if and only if the corresponding currency strings are the same.
- 2) Period picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both the activating and the activated runtime elements or for neither of them.
- 3) Comma picture symbols match if and only if the DECIMAL-POINT IS COMMA clause is in effect for both the activating and the activated runtime elements or for neither of them.

Additionally, if the sending operand is not an object reference:

- 1) Locale specifications in the PICTURE clauses match if and only if:
 - both specify the same SIZE phrase in the LOCALE phrase of the PICTURE clause, and
 - both specify the LOCALE phrase without a locale-name or both specify the LOCALE phrase with the same external identification, where the external identification is the external-locale-name or literal value associated with a locale-name in the LOCALE clause of the SPECIAL-NAMES paragraph.
- 2) A bit group item matches an elementary boolean data item of usage bit described with the same number of boolean positions.
- 3) A national group item matches an elementary data item of usage national described with the same number of national character positions.
- 4) If the receiving operand is described with the ANY LENGTH clause, the sending operand shall also be described with the ANY LENGTH clause.
- 5) If the sending operand is described with the ANY LENGTH clause, the length of the sending operand is considered to match the length of the receiving operand.

14.8 Statements

14.8.1 ACCEPT statement

The ACCEPT statement causes data to be made available to the specified data item.

The execution of an ACCEPT screen statement causes the following sequence of events:

- Specified or default initial values are moved to the input fields of the screen.
- The screen is displayed with the specified attributes on the terminal display screen at the specified or default location.
- The cursor is positioned to the specified or default input field.
- The operator is given the opportunity to modify the elementary input screen items.
- If inconsistent data is entered by the operator, the implementation may prompt the operator to correct the data or it may set an exception condition to exist.
- The contents of the screen items that are consistent with their descriptions are moved to the specified destination fields.
- The line and column of the cursor when input terminates are placed into the data item referenced in the CURSOR clause, if any.
- Appropriate statements in the ON EXCEPTION or NOT ON EXCEPTION clauses, if any, are executed.

14.8.1.1 General format

Format 1 (hardware):

ACCEPT identifier-1 [FROM mnemonic-name-1] [END-ACCEPT]

Format 2 (chronological):

ACCEPT identifier-2 FROM { DATE [YYYYMMDD]
 { DAY [YYYYDDD]
 { DAY-OF-WEEK
 { TIME } } [END-ACCEPT]

Format 3 (screen):

ACCEPT screen-name-1
 [AT { LINE NUMBER { identifier-3 }
 { COLUMN } NUMBER { identifier-4 }
 { COL } { integer-1 } { integer-2 } }]
 [ON EXCEPTION imperative-statement-1
 NOT ON EXCEPTION imperative-statement-2]
 [END-ACCEPT]

14.8.1.2 Syntax rules

- 1) Identifier-1 shall reference neither a strongly-typed group item nor a data item of class index, object, or pointer.

- 2) Mnemonic-name-1 shall be specified in the SPECIAL-NAMES paragraph of the environment division and shall be associated with a hardware device.
- 3) Identifier-2 shall not reference a data item of class alphabetic, boolean, index, object, or pointer.
- 4) Screen-name-1 may reference a group item containing screen items with FROM or VALUE clauses only if the group also contains screen items with TO or USING clauses.
- 5) Identifier-3 and identifier-4 shall be unsigned integer data items.

14.8.1.3 General rules**FORMAT 1**

- 1) The ACCEPT statement causes the transfer of data from the hardware device. This data replaces the content of the data item referenced by identifier-1. Any conversion of data required between the hardware device and the data item referenced by identifier-1 is defined by the implementor.
- 2) The implementor shall define, for each hardware device, the size of a data transfer.
- 3) If a hardware device is capable of transferring data of the same size as the receiving data item, the transferred data is stored in the receiving data item.
- 4) If a hardware device is not capable of transferring data of the same size as the receiving data item, then:
 - a) If the size of the receiving data item (or of the portion of the receiving data item not yet currently occupied by transferred data) exceeds the size of the transferred data, the transferred data is stored aligned to the left in the receiving data item (or the portion of the receiving data item not yet occupied), and additional data is requested.
 - b) If the size of the transferred data exceeds the size of the receiving data item (or the portion of the receiving data item not yet occupied by transferred data), only the leftmost characters of the transferred data are stored in the receiving data item (or in the portion remaining). The remaining characters of the transferred data that do not fit into the receiving data item are ignored. If identifier-1 references a zero-length item, all the characters of the transferred data are ignored.
- 5) The implementor shall specify the device that is used if the FROM option is not specified.

FORMAT 2

- 6) The ACCEPT statement causes the information requested to be transferred to the data item specified by identifier-2 according to the rules for the MOVE statement. DATE, DAY, DAY-OF-WEEK, and TIME reference the current date and time provided by the system on which the ACCEPT statement is executed. DATE, DAY, DAY-OF-WEEK, and TIME are conceptual data items and, therefore, are not described in the COBOL source unit.
- 7) DATE without the phrase YYYYMMDD behaves as if it had been described as an unsigned elementary integer data item of usage display six digits in length, the character positions of which, numbered from left to right, are:

Character Positions	Contents
1-2	The two low-order digits of the year in the Gregorian calendar.
3-4	Two numeric characters of the month of the year in the range 01 through 12.
5-6	Two numeric characters of the day of the month in the range 01 through 31.

- 8) DATE with the phrase YYYYMMDD behaves as if it had been described as an unsigned elementary integer data item of usage display eight digits in length, the character positions of which, numbered from left to right, are:

Character Positions	Contents
1-4	Four numeric characters of the year in the Gregorian calendar.
5-6	Two numeric characters of the month of the year in the range 01 through 12.
7-8	Two numeric characters of the day of the month in the range 01 through 31.

- 9) DAY without the phrase YYYYDDD behaves as if it had been described as an unsigned elementary integer data item of usage display five digits in length, the character positions of which, numbered from left to right, are:

Character Positions	Contents
1-2	The two low-order digits of the year in the Gregorian calendar.
3-5	Three numeric characters of the day of the year in the range 001 through 366.

- 10) DAY with the phrase YYYYDDD behaves as if it had been described as an unsigned elementary integer data item of usage display seven digits in length, the character positions of which, numbered from left to right, are:

Character Positions	Contents
1-4	Four numeric characters of the year in the Gregorian calendar.
5-7	Three numeric characters of the day of the year in the range 001 through 366.

- 11) TIME is based on the elapsed time since midnight on a 24-hour clock. If the system does not have the facility to provide fractional parts of a second the value zero is returned for those parts that are not available. TIME behaves as if it had been described as an unsigned elementary integer data item of usage display eight digits in length, the characters positions of which, numbered from left to right, are:

Character Positions	Contents
1-2	Two numeric characters of the hours past midnight in the range 00 through 23.
3-4	Two numeric characters of the minutes past the hour in the range 00 through 59.
5-6	Two numeric characters of the seconds past the minute in the range: a) 00 through 59 when a LEAP-SECOND directive with the OFF phrase is in effect b) 00 through nn, where nn is defined by the implementor, when a LEAP-SECOND directive with the ON phrase is in effect.
7-8	Two numeric characters of the hundredths of a second past the second in the range 00 through 99. 00 is returned if the system on which the ACCEPT statement is executed does not have the facility to provide the fractional part of a second.

- 12) DAY-OF-WEEK behaves as if it had been described as an unsigned elementary numeric integer data item one digit in length and of usage display. In DAY-OF-WEEK, the value 1 represents Monday, 2 represents Tuesday, 3 represents Wednesday, ... , 7 represents Sunday.

FORMAT 3

- 13) Identifiers specified in FROM or USING clauses or literals specified in FROM or VALUE clauses provide the initial values displayed for the associated screen item during execution of an ACCEPT screen statement. For elementary screen items that have no FROM, USING, or VALUE clause, the initial value is as if a MOVE statement were executed with the screen item as the receiving field. The sending item of the MOVE statement is a figurative constant that depends on the category of the screen item as follows:

Screen item	Figurative constant
Alphabetic	Alphanumeric SPACES
Alphanumeric	Alphanumeric SPACES
Alphanumeric-edited	Alphanumeric SPACES
Boolean	ZEROS
National	National SPACES
National-edited	National SPACES
Numeric	ZEROS
Numeric-edited	ZEROS

- 14) Any conversion of data required between the hardware device and the data items referenced in screen-name-1 is defined by the implementor.
- 15) The LINE and COLUMN phrases give the position on the terminal display screen at which the screen record associated with screen-name-1 is to start. Column and line number positions are specified in terms of alphanumeric character positions. The position is relative to the leftmost character column in the topmost line of the display that is identified as column 1 of line 1. Each subordinate elementary screen item is located relative to the start of the containing screen record. Identifier-3 and identifier-4 are evaluated once at the start of execution of the statement.
- 16) If the LINE phrase is not specified, the screen record starts on line 1.
- 17) If the COLUMN phrase is not specified, the screen record starts in column 1.
- 18) The initial position of the cursor is determined by the CURSOR clause in the SPECIAL-NAMES paragraph.
 - a) If the CURSOR clause is not specified, the initial cursor position during the execution of an ACCEPT screen statement is the start of the first input field declared within screen-name-1.
 - b) If the CURSOR clause is specified, the initial cursor position is that represented by the value of the cursor locator at the beginning of the execution of the ACCEPT screen statement. If the cursor locator does not indicate a position within an input field, the cursor shall be positioned as if the CURSOR clause had not been specified.
- 19) During the period while the operator is able to modify each elementary screen item, each screen item is displayed on the terminal screen in accordance with any attributes specified in its screen description entry. The display may be modified as the operator selects or deselects each screen item as being the current screen item. The display of the current screen item may be modified as the operator keys data.
- 20) Data entered by the terminal operator in the current screen item shall be consistent with the PICTURE clause of that item. If the screen item is numeric, the entered data shall be acceptable as an argument to the NUMVAL function. If the screen item is numeric-edited, the entered data shall be acceptable as an argument to the NUMVAL-C function. It is implementor-defined when the entered data is verified. It is implementor-defined whether inconsistent data causes the EC-DATA-INCOMPATIBLE exception condition to exist or whether the system indicates an error until consistent data is entered or until execution of the ACCEPT statement is terminated.
- 21) If inconsistent data is entered into a screen item and allowed by the implementor to remain there, the EC-DATA-INCOMPATIBLE exception condition is set to exist. If consistent data was entered into one or more screen fields, these fields are transferred as specified in general rule 22, but the fields with inconsistent data are not transferred. The ACCEPT statement results in an unsuccessful completion, and execution proceeds as specified in general rule 25.
- 22) The ACCEPT screen statement causes the transfer of data from each elementary screen item that is subordinate to screen-name-1 and is specified with the TO or USING clause to the data item referenced in the TO or USING clause. For the purpose of these specifications, all such screen items are considered to be referenced by the ACCEPT screen statement. If two or more of these elementary screen items overlap, the EC-

SCREEN-FIELD-OVERLAP exception condition is set to exist and the result of the transfer of data from the elementary screen items is defined by the implementor.

The transfer occurs after the terminal operator has been given the opportunity to modify the elementary screen items and the operator has pressed a terminator key or a user-defined or context-dependent function key. This transfer occurs in the following manner:

- a) If the screen item is numeric, the data is transferred as though the following statement were executed:

COMPUTE receiving-field = FUNCTION NUMVAL (screen-item)

- b) If the screen item is numeric-edited, the data is transferred as though the following statement were executed:

COMPUTE receiving-field = FUNCTION NUMVAL-C (screen-item)

- c) Otherwise, the data is transferred as if the following statement were executed:

MOVE screen-item TO receiving-field

where:

receiving-field is the data item referenced in the TO or USING clause, and screen-item is the screen item.

- 23) If the CURSOR clause is specified in the special-names paragraph, the data item referenced in the CURSOR clause shall be updated during the execution of an ACCEPT screen statement and prior to the execution of any imperative statement associated with any ON EXCEPTION or NOT ON EXCEPTION clauses for that ACCEPT statement. It shall be updated to give the line and column position of the cursor when the ACCEPT terminates.
- 24) If the execution of the ACCEPT statement results in a successful completion with normal termination, the ON EXCEPTION phrase, if specified, is ignored and control is transferred to the end of the ACCEPT statement or, if the NOT ON EXCEPTION phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the ACCEPT statement.
- 25) If the execution of the ACCEPT statement results in an unsuccessful completion, is terminated by a function key stroke, or causes an EC-SCREEN exception condition to exist, then:
- a) If the ON EXCEPTION phrase is specified in the ACCEPT statement, control is transferred to imperative-statement-1. Execution then continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the ACCEPT statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
- b) If the ON EXCEPTION phrase is not specified in the ACCEPT statement and an applicable Declarative exists, control is transferred to that Declarative and, if control is returned from that Declarative control is transferred to the end of the ACCEPT statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
- c) If the ON EXCEPTION phrase is not specified in the ACCEPT statement and there is no applicable Declarative,
1. If the EC-DATA-INCOMPATIBLE exception condition exists, execution continues as specified in 14.5.12.1.2, Fatal exception conditions.

2. If the EC-DATA-INCOMPATIBLE exception condition does not exist, control is transferred to the end of the ACCEPT statement and the NOT ON EXCEPTION phrase, if specified, is ignored.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.2 ADD statement

The ADD statement causes two or more numeric operands to be summed and the result to be stored.

14.8.2.1 General format

Format 1 (simple):

$$\text{ADD } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \dots \text{TO } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \end{array} \right\} \text{ [} \underline{\text{ROUNDED}} \text{] } \dots$$

$$\left[\begin{array}{l} \text{ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-1} \\ \text{NOT ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-2} \end{array} \right]$$

$$\text{[} \underline{\text{END-ADD}} \text{]}$$

Format 2 (giving):

$$\text{ADD } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \dots \text{TO } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \end{array} \right\}$$

$$\text{GIVING } \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-3} \end{array} \right\} \text{ [} \underline{\text{ROUNDED}} \text{] } \dots$$

$$\left[\begin{array}{l} \text{ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-1} \\ \text{NOT ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-2} \end{array} \right]$$

$$\text{[} \underline{\text{END-ADD}} \text{]}$$

Format 3 (corresponding):

$$\text{ADD } \left\{ \begin{array}{l} \underline{\text{CORRESPONDING}} \\ \underline{\text{CORR}} \end{array} \right\} \text{ identifier-4 } \text{TO } \text{identifier-5 [} \underline{\text{ROUNDED}} \text{]}$$

$$\left[\begin{array}{l} \text{ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-1} \\ \text{NOT ON } \underline{\text{SIZE ERROR}} \text{ imperative-statement-2} \end{array} \right]$$

$$\text{[} \underline{\text{END-ADD}} \text{]}$$

14.8.2.2 Syntax rules

- 1) When native arithmetic is in effect, the composite of operands described in 14.6.6, Arithmetic statements, is determined as follows:
 - a) In format 1, by using all of the operands in the statement.
 - b) In format 2, by using all of the operands in the statement excluding the data items that follow the word GIVING.
 - c) In format 3, by using the two corresponding operands for each separate pair of corresponding data items.
- 2) Identifier-1 and identifier-2 shall reference a numeric data item.
- 3) Literal-1 and literal-2 shall be numeric literals.

- 4) Identifier-3 shall reference a numeric data item or a numeric-edited data item.
- 5) The words CORR and CORRESPONDING are equivalent.
- 6) Identifier-4 and identifier-5 shall be alphanumeric group items, national group items, or strongly-typed group items and shall not be described with level-number 66.

14.8.2.3 General rules

- 1) When format 1 is used, the initial evaluation consists of determining the value to be added, that is literal-1 or the value of the data item referenced by identifier-1, or if more than one operand is specified, the sum of such operands. The sum of the initial evaluation and the value of the data item referenced by identifier-2 is stored as the new value of the data item referenced by identifier-2.

When standard arithmetic is in effect, the result of the initial evaluation is equivalent to the result of the arithmetic expression

$$(\text{operand-1}_1 + \text{operand-1}_2 + \dots + \text{operand-1}_n)$$

where the values of operand-1 are the values of literal-1 and the data items referenced by identifier-1 in the order in which they are specified in the ADD statement. The result of the sum of the initial evaluation and the value of the data item referenced by identifier-2 is equivalent to the result of the arithmetic expression

$$(\text{initial-evaluation} + \text{identifier-2})$$

where initial-evaluation represents the result of the initial evaluation.

- 2) When format 2 is used, the initial evaluation consists of determining the sum of the operands preceding the word GIVING, that is literal-1 or the value of the data item referenced by identifier-1, and literal-2 or the value of the data item referenced by identifier-2. This value is stored as the new value of each data item referenced by identifier-3.

When standard arithmetic is in effect, the result of the initial evaluation is equivalent to the result of the arithmetic expression

$$(\text{operand-1}_1 + \text{operand-1}_2 + \dots + \text{operand-1}_n + \text{operand-2})$$

where the values of operand-1 are the values of literal-1 and the data items referenced by identifier-1 in the order in which they are specified in the ADD statement and the value of operand-2 is the value of either literal-2 or the data item referenced by identifier-2 in the ADD statement.

- 3) When format 3 is used, data items in identifier-4 is added to and stored in corresponding items in identifier-5.

When standard arithmetic is in effect, the result of the addition is equivalent to

$$(\text{operand-1} + \text{operand-2})$$

where the value of operand-1 is the value of the data item in identifier-4 and the value of operand-2 is the value of the corresponding data item in identifier-5.

- 4) When native arithmetic is in effect and none of the operands is described with usage binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended, enough places shall be carried so as not to lose any significant digits during execution.
- 5) Data items within identifier-4 are selected to be added to selected data items within identifier-5 according to the rules specified in 14.6.5, CORRESPONDING phrase. The results are the same as if the user had referred to each pair of corresponding identifiers in separate ADD statements.

- 6) Additional rules and explanations relative to this statement are given in 14.5.9, Overlapping operands; 14.5.12.2, Incompatible data; 14.6.3, **ROUNDED** phrase; 14.6.4, **SIZE ERROR** phrase and size error condition; 14.6.5, **CORRESPONDING** phrase; and 14.6.6, Arithmetic statements.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.3 ALLOCATE statement

The ALLOCATE statement obtains dynamic storage.

If storage is being requested for a based item, the based item is assigned the address of the obtained storage and a data-pointer, if specified, is returned containing that address.

If a specified number of characters of memory is being requested, a data-pointer addressing the obtained storage is returned.

14.8.3.1 General format

ALLOCATE { arithmetic-expression-1 CHARACTERS } [INITIALIZED] [RETURNING data-name-2]
data-name-1

14.8.3.2 Syntax rules

- 1) The data item referenced by data-name-1 shall be described with the BASED clause.
- 2) If data-name-1 is specified, the RETURNING phrase may be omitted; otherwise, the RETURNING phrase shall be specified.
- 3) Data-name-2 shall reference a data item of category data-pointer.
- 4) If data-name-2 references a restricted data-pointer, data-name-1 shall be specified and shall reference a typed data item, and the data item referenced by data-name-2 shall be restricted to the type of data-name-1.
- 5) If both data-name-1 and data-name-2 are specified and data-name-1 references a strongly-typed group item, the data item referenced by data-name-2 shall be restricted to the type of data-name-1.

14.8.3.3 General rules

- 1) Arithmetic-expression-1 specifies a number of bytes of storage to be allocated. If arithmetic-expression-1 does not evaluate to an integer, the result is rounded up to the next whole number.
- 2) If arithmetic-expression-1 evaluates to 0 or a negative value, the data item referenced by data-name-2 is set to the predefined address NULL.
- 3) If data-name-1 is specified, the amount of storage to be allocated is the number of bytes required to hold an item as described by data-name-1. If a data description entry subordinate to data-name-1 contains an OCCURS DEPENDING ON clause, the maximum length of the record is allocated.
- 4) If the specified amount of storage is available for allocation, it shall be obtained and:
 - a) if the RETURNING phrase is specified, the data item referenced by data-name-2 is set to the address of that storage,
 - b) if data-name-1 is specified, the address of the based data item referenced by data-name-1 is set to the address of that storage.
- 5) If the specified amount of storage is not available for allocation:
 - a) if the RETURNING phrase is specified, the data item referenced by data-name-2 is set to the predefined address NULL,

- b) if data-name-1 is specified, the address of the based data item referenced by data-name-1 is set to the predefined address NULL,
 - c) the EC-STORAGE-NOT-AVAIL exception condition is set to exist.
- 6) If both the INITIALIZED phrase and arithmetic-expression-1 are specified, all bytes of the allocated storage are initialized to binary zeros.
 - 7) If both the INITIALIZED phrase and data-name-1 are specified, the allocated storage is initialized as if an INITIALIZE data-name-1 WITH FILLER ALL TO VALUE THEN TO DEFAULT statement were executed.
 - 8) If the INITIALIZED phrase is not specified and arithmetic-expression-1 is specified, the content of the allocated storage is undefined.
 - 9) If the INITIALIZED phrase is not specified and data-name-1 is specified, data items of class object or class pointer in the allocated storage are initialized to null and the content of the other data items in the allocated storage is undefined.
 - 10) The allocated storage persists until explicitly released with a FREE statement or the run unit is terminated, whichever occurs first.

14.8.4 CALL statement

The CALL statement causes control to be transferred to a specific program within the run unit.

14.8.4.1 General format

Format 1 (on-overflow):

$$\text{CALL} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \left[\text{USING} \left\{ \begin{array}{l} [\text{BY REFERENCE}] \{ \text{identifier-2} \} \dots \\ \text{BY CONTENT} \{ \text{identifier-2} \} \dots \end{array} \right\} \dots \right]$$

[RETURNING identifier-3]
 [ON OVERFLOW imperative-statement-1]
 [END-CALL]

NOTE ON OVERFLOW is an archaic feature and its use should be avoided.

Format 2 (on-exception):

$$\text{CALL} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \left[\text{USING} \left\{ \begin{array}{l} [\text{BY REFERENCE}] \{ \text{identifier-2} \} \dots \\ \text{BY CONTENT} \{ \text{identifier-2} \} \dots \end{array} \right\} \dots \right]$$

[RETURNING identifier-3]
 [ON EXCEPTION imperative-statement-1
 NOT ON EXCEPTION imperative-statement-2]
 [END-CALL]

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

Format 3 (program-prototype):

$$\begin{array}{l}
 \text{CALL} \left[\left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \text{AS} \left\{ \begin{array}{l} \text{NESTED} \\ \text{program-prototype-name-1} \end{array} \right\} \right. \\
 \left. \left[\begin{array}{l} \text{USING} \left\{ \begin{array}{l} \text{[BY REFERENCE] } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{OMITTED} \end{array} \right\} \\ \text{[BY CONTENT] } \left\{ \begin{array}{l} \text{arithmetic-expression-1} \\ \text{boolean-expression-1} \\ \text{identifier-4} \\ \text{literal-2} \end{array} \right\} \\ \text{[BY VALUE] } \left\{ \begin{array}{l} \text{arithmetic-expression-1} \\ \text{identifier-4} \\ \text{literal-2} \end{array} \right\} \end{array} \right\} \dots \right. \\
 \left. \left[\text{RETURNING identifier-3} \right] \right. \\
 \left. \left[\begin{array}{l} \text{ON EXCEPTION imperative-statement-1} \\ \text{NOT ON EXCEPTION imperative-statement-2} \end{array} \right] \right. \\
 \left. \left[\text{END-CALL} \right] \right.
 \end{array}$$
14.8.4.2 Syntax rules**ALL FORMATS**

- 1) Identifier-1 shall be defined as an alphanumeric, national, or program-pointer data item.
- 2) Literal-1 shall be an alphanumeric or national literal.
- 3) Identifier-2 shall reference an address-identifier or a data item defined in the file, working-storage, local-storage, linkage, or communication section. If the BY REFERENCE phrase is specified or implied, identifier-2 shall not be defined in the working-storage or file section of a factory or an instance object.
- 4) If the BY REFERENCE phrase is not specified or implied for an identifier-2 or if identifier-2 is an address-identifier, identifier-2 is a sending operand.
- 5) If the BY REFERENCE phrase is specified or implied for an identifier-2 and identifier-2 is not an address-identifier, it is a receiving operand.
- 6) If the BY REFERENCE phrase is specified or implied for an identifier-2 that is a bit data item, identifier-2 shall be described such that:
 - a) subscripting and reference modification in identifier-2 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 7) Identifier-3 shall reference a data item defined in the file, working-storage, local-storage, linkage, or communication section.

- 8) If identifier-3 is a bit data item, identifier-3 shall be described such that:
- a) subscripting and reference modification in identifier-3 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 9) Identifier-3 is a receiving operand.
- 10) Identifier-2, identifier-3, and identifier-4 shall not be described with the ANY LENGTH clause.

FORMATS 1 AND 2

- 11) If the BY REFERENCE phrase is specified or implied for an identifier-2, that identifier shall be neither a strongly-typed group item nor a data item of class object or pointer.

FORMAT 3

- 12) The NESTED phrase may be specified only in a program definition.
- 13) If the NESTED phrase is specified, literal-1 shall be specified. Literal-1 shall be the same as the program-name specified in a PROGRAM-ID paragraph of a common program as specified in 8.4.5.2, Scope of program-names, or of a program that is directly contained in the calling program.
- 14) Program-prototype-name-1 shall be specified in a program-specifier in the REPOSITORY paragraph.
- 15) Identifier-4 and any identifier specified in arithmetic-expression-1 or boolean-expression-1 is a sending operand.
- 16) If the BY CONTENT or BY REFERENCE phrase is specified or implied for an argument, the BY REFERENCE phrase shall be specified for the corresponding formal parameter in the procedure division header.
- 17) BY CONTENT shall not be omitted when identifier-4 is an identifier that is permitted as a receiving operand, except that BY CONTENT may be omitted when identifier-4 is an object property.
- 18) If the BY VALUE phrase is specified for an argument, the BY VALUE phrase shall be specified for the corresponding formal parameter in the procedure division header.
- 19) If identifier-4 or its corresponding formal parameter is specified with a BY VALUE phrase, identifier-4 shall be of class numeric, object, or pointer.
- 20) If literal-2 or its corresponding formal parameter is specified with the BY VALUE phrase, literal-2 shall be a numeric literal.
- 21) If the OMITTED phrase is specified, the OPTIONAL phrase shall be specified for the corresponding formal parameter in the procedure division header.
- 22) The rules for conformance specified in 14.7, Conformance for parameters and returning items, apply.

14.8.4.3 General rules

ALL FORMATS

- 1) The instance of the program, function, or method that executes the CALL statement is the activating runtime element.

- 2) The sequence of arguments in the USING phrase of the CALL statement and the sequence of formal parameters in the USING phrase of the called program's procedure division header determine the correspondence between arguments and formal parameters. This correspondence is positional and not by name equivalence.

NOTE The first argument corresponds to the first formal parameter, the second to the second, and the nth to the nth.

The effect of the USING phrase on the activated runtime element is described in 14.3, Procedure division, general rules.

- 3) Execution of the CALL statement proceeds as follows:

- a) Arithmetic-expression-1, boolean-expression-1, identifier-1, identifier-2, and identifier-4 are evaluated and item identification is done for identifier-3 at the beginning of the execution of the CALL statement. If an exception condition exists, no program is called and execution proceeds as specified in general rule 3g. If an exception condition does not exist, the values of identifier-2, identifier-4, arithmetic-expression-1, boolean-expression-1, or literal-2 are made available to the called program at the time control is transferred to that program.
- b) The program being called is identified by its program-name or its location, which are determined as follows:
 - If identifier-1 references an alphanumeric or national data item or literal-1 is specified, the value of literal-1 or the content of the data item referenced by identifier-1 is the program-name of the program being called, as described in 8.3.1.1.1, User-defined words.
 - If identifier-1 references a program-pointer data item, the data item referenced by identifier-1 contains the location of the program being called.
 - If neither identifier-1 nor literal-1 is specified, program-prototype-name-1 determines the externalized program-name of the program being called, according to the rules specified in 12.2.7, REPOSITORY paragraph.

If the program being called is a COBOL program, the runtime system attempts to locate the program being called. When the program-name is used for locating the program, the rules specified in 8.4.5, Scope of names and 8.4.5.2, Scope of program-names, apply. If the program being called is not a COBOL program, the rules for program-name formation and for locating the program are defined by the implementor.

If the data item referenced by identifier-1 contains the predefined address NULL, the EC-PROGRAM-PTR-NULL exception condition is set to exist. If the program cannot be located or identifier-1 references a zero-length item, the EC-PROGRAM-NOT-FOUND exception condition is set to exist. If either the EC-PROGRAM-NOT-FOUND or the EC-PROGRAM-PTR-NULL exception condition exists, the program is not called, and execution continues as specified in general rule 3g.

- c) If the program is located but the resources necessary to execute the program are not available, the EC-PROGRAM-RESOURCES exception condition is set to exist, the program is not called, and execution continues as specified in general rule 3g. The runtime resources that are checked in order to determine the availability of the called program for execution are defined by the implementor.
- d) If the resources are available and the program being called is a COBOL program, the rules for conformance specified in 14.7, Conformance for parameters and returning items, apply. If a violation of these rules is detected, the EC-PROGRAM-ARG-MISMATCH exception condition is set to exist if checking for it is enabled in both the called program and calling runtime element, the program is not called, and execution continues as specified in general rule 3g.
- e) If the program being called is in the active state and that program does not have the recursive attribute, the EC-PROGRAM-RECURSIVE-CALL exception condition is set to exist, the program is not called, and execution continues as specified in general rule 3g.

- f) If a fatal exception condition has not been raised, the program specified by the CALL statement is made available for execution and control is transferred to the called program. If identifier-1 is defined as a program-pointer data item and contains an invalid program address, execution of the CALL statement is undefined. If the called program is a COBOL program, its execution is described in 14.1, Procedure division structure; otherwise the execution is defined by the implementor.
 - g) If the program was not successfully called and an exception condition was set to exist, one of the following actions occurs:
 - 1. If the exception condition is any of the EC-PROGRAM exception conditions and an ON OVERFLOW or ON EXCEPTION phrase is specified in the CALL statement, control is transferred to imperative-statement-1. Execution then continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the CALL statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
 - 2. If checking for the exception condition is enabled, and if the exception condition is one of the EC-PROGRAM exception conditions and neither an ON OVERFLOW nor an ON EXCEPTION phrase is specified or if the exception condition is not one of the EC-PROGRAM exception conditions, any declarative that is associated with that exception condition is executed. Execution then proceeds as defined for the exception condition and execution of the declarative. If control is returned from the declarative, the ON OVERFLOW, ON EXCEPTION, and NOT ON EXCEPTION phrases, if specified, are ignored. All other effects of the CALL statement are defined by the implementor.
 - 3. If checking for the exception condition is not enabled, subsequent behavior is as specified in 14.5.12.1, Exception conditions.
 - h) If the program was successfully called, after control is returned from the called program the ON OVERFLOW or ON EXCEPTION phrase, if specified, is ignored. If an exception condition is propagated from the called program, execution continues as specified in 14.5.12.1, Exception conditions; otherwise, control is transferred to the end of the CALL statement or, if the NOT ON EXCEPTION phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the CALL statement.
- 4) If a RETURNING phrase is specified, the result of the activated program is placed into identifier-3.

FORMATS 1 AND 2

- 5) Both the BY CONTENT and BY REFERENCE phrases are transitive across the parameters that follow them until another BY CONTENT or BY REFERENCE phrase is encountered. If neither the BY CONTENT nor the BY REFERENCE phrase is specified prior to the first parameter, the BY REFERENCE phrase is assumed.

FORMAT 3

- 6) If the NESTED phrase is specified, the common or contained program that has literal-1 specified in the PROGRAM-ID paragraph is used to determine the characteristics of the called program.
- 7) If the NESTED phrase is not specified, program-prototype-name-1, or the program prototype specified in the definition of identifier-1 if it is defined as a restricted program-pointer, is used to determine the characteristics of the called program.
- 8) An argument that consists merely of a single identifier or literal is regarded as an identifier or literal rather than an arithmetic or boolean expression.

- 9) If an argument is specified without any of the keywords BY REFERENCE, BY CONTENT, or BY VALUE, the manner used for passing this argument is determined as follows:
 - a) When the BY REFERENCE phrase is specified or implied for the corresponding formal parameter:
 1. if the argument meets the requirements of syntax rule 3, BY REFERENCE is assumed;
 2. if the argument does not meet the requirements of syntax rule 3, BY CONTENT is assumed.
 - b) When the BY VALUE phrase is specified or implied for the corresponding formal parameter, BY VALUE is assumed.
- 10) Control is transferred to the called program in a manner consistent with the entry convention specified for the program.
- 11) If an OMITTED phrase is specified or a trailing argument is omitted, the omitted-argument condition for that parameter evaluates to true in the called program. (8.8.4.1.7, Omitted-argument condition.)
- 12) If a parameter for which the omitted-argument condition is true is referenced in a called program, except as an argument or in the omitted-argument condition, the EC-PROGRAM-ARG-OMITTED exception condition is set to exist.

14.8.5 CANCEL statement

The CANCEL statement ensures that the next time the referenced program is called it will be in its initial state.

14.8.5.1 General format

$$\text{CANCEL} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \\ \text{program-prototype-name-1} \end{array} \right\} \dots$$

14.8.5.2 Syntax rules

- 1) Identifier-1 shall be defined as an alphanumeric or national data item.
- 2) Literal-1 shall be an alphanumeric or national literal.
- 3) Program-prototype-name-1 shall be a program prototype specified in the REPOSITORY paragraph.

14.8.5.3 General rules

- 1) The program to be canceled is identified by one of the following:

- a) the content of the data item referenced by identifier-1,
- b) the value of literal-1,
- c) program-prototype-name-1.

If identifier-1 or literal-1 is specified, 8.3.1.1.1, User-defined words, describes how this value is used to identify the program to be canceled.

- 2) The program-name is used by the runtime system to locate the program according to the rules specified in 8.4.5, Scope of names, and 8.4.5.2, Scope of program-names.
- 3) Subsequent to the execution of a CANCEL statement, the program referred to therein ceases to have any logical relationship to the run unit in which the CANCEL statement appears. If the program referenced by a successfully executed CANCEL statement in a run unit is subsequently called in that run unit, that program is in its initial state. (See 14.5.2, State of a function, method, object, or program.)

NOTE It is neither prohibited nor required that the storage of the specified program be freed by the execution of a CANCEL statement.

- 4) When a CANCEL statement is executed, all programs contained within the program referenced by the CANCEL statement are also canceled. The result is the same as if an explicit CANCEL statement were executed for each contained program in the reverse order in which the programs appear in the outermost program.
- 5) The program to be canceled shall not be in the active state or contain a program in the active state. If a program in the active state is explicitly or implicitly referenced in a CANCEL statement and checking for EC-PROGRAM-CANCEL-ACTIVE is enabled in both the program to be canceled and the runtime element containing the CANCEL statement, the EC-PROGRAM-CANCEL-ACTIVE exception condition is raised in the runtime element containing the CANCEL statement and the referenced program is not canceled. If checking for EC-PROGRAM-CANCEL-ACTIVE is not enabled, the results of such a reference are defined by the implementor.
- 6) A logical relationship to a canceled program is established only by execution of a subsequent CALL statement referencing that program.

- 7) No action is taken when a CANCEL statement is executed referencing a program that has not been called in this run unit or has been called and is at present canceled. Control is transferred to the next executable statement following the explicit CANCEL statement.
- 8) The contents of data items in external data records described by a program are not changed when that program is canceled.
- 9) During execution of a CANCEL statement, an implicit CLOSE statement without any optional phrases is executed for each file-name associated with an internal file connector that is open in the program referenced in the CANCEL statement. These implicit CLOSE statements are executed for all such files, even when an error occurs during the execution of such CLOSE statements. Any USE procedures associated with any of these files are not executed.
- 10) If the program to be canceled is other than a COBOL program, the effects of the CANCEL statement are implementor-defined.
- 11) If a program-pointer has been set to point to the program to be canceled, the result of referencing the program-pointer in a subsequent CALL statement is undefined.
- 12) If identifier-1 references a zero-length item, the CANCEL statement has no effect.

14.8.6 CLOSE statement

The CLOSE statement terminates the processing of reels/units and files with rewind, lock, or removal where applicable.

14.8.6.1 General format

$$\text{CLOSE} \left\{ \text{file-name-1} \left[\begin{array}{l} \left\{ \begin{array}{l} \text{REEL} \\ \text{UNIT} \end{array} \right\} [\text{FOR REMOVAL}] \\ \text{WITH} \left\{ \begin{array}{l} \text{NO REWIND} \\ \text{LOCK} \end{array} \right\} \end{array} \right] \right\} \dots$$

14.8.6.2 Syntax rules

- 1) The NO REWIND, REEL, and UNIT phrases may be used only with files that are of sequential organization.
- 2) The words REEL and UNIT are equivalent.

14.8.6.3 General rules

- 1) The file connector referenced by file-name-1 shall be open. If the file connector is not open, the CLOSE statement is unsuccessful and the I-O status indicator for the file connector is set to '42'.
- 2) For the purpose of showing the effect of various types of CLOSE statements as applied to various storage media, all files are divided into the following categories, where the term 'file' means the physical file:
 - a) Non-unit. A file whose input or output medium is such that the concepts of rewind and units have no meaning.
 - b) Sequential single-unit. A sequential file that is entirely contained on one unit.
 - c) Sequential multi-unit. A sequential file that is contained on more than one unit.
 - d) Non-sequential single/multi-unit. A file with organization other than sequential, that resides on a mass storage device.
- 3) The results of executing each type of CLOSE for each category of physical file are summarized in table 15, Relationship of categories of physical files and the format of the CLOSE statement.

Table 15 — Relationship of categories of physical files and the format of the CLOSE statement

CLOSE statement format	File category			
	Non-unit	Sequential single-unit	Sequential multi-unit	Non-sequential single/multi-unit
CLOSE	c	c,g	a,c,g	c
CLOSE WITH LOCK	c,e	c,e,g	a,c,e,g	c,e
CLOSE WITH NO REWIND	c,h	b,c	a,b,c	N/A
CLOSE UNIT	f	f,g	f,g	N/A
CLOSE UNIT FOR REMOVAL	f	d,f,g	d,f,g	N/A

The definitions of the symbols in table 15, Relationship of categories of physical files and the format of the CLOSE statement, are given below. The notation 'N/A' means that the combination is not applicable. The other symbols apply to the rules below. Where the definition depends on whether the file is an input, output, or input-output file, alternate definitions are given; otherwise, a definition applies to input, output, and input-output files.

a) Effect on previous units

Input files and input-output files:

All units in the physical file prior to the current unit are closed except those units controlled by a prior CLOSE UNIT statement. If the current unit is not the last in the physical file, the units in the physical file following the current one are not processed.

Output files:

All units in the physical file prior to the current unit are closed except those units controlled by a prior CLOSE UNIT statement.

b) No rewind of current reel

The current unit is left in its current position.

c) Close file

Closing operations specified by the implementor are executed.

d) Unit removal

The current unit is rewound, when applicable, and the unit is logically removed from the run unit; however, the unit may be accessed again, in its proper order of units within the physical file, if a CLOSE statement without the UNIT phrase is subsequently executed for this file followed by the execution of an OPEN statement for the file.

NOTE This International Standard does not address when the unit is unloaded or left loaded.

e) Close lock

When the LOCK phrase is specified, the file connector referenced by file-name-1 shall not be opened again during the execution of this run unit.

f) Close unit

Input files and input-output files (unit media):

1. If the current unit is the last or only unit for the physical file, there is no unit swap, the current volume pointer remains unchanged, and the file position indicator is set to indicate that no next or previous logical record exists.
2. If another unit exists for the physical file, a unit swap occurs, the current volume pointer is updated to point to the next unit existing in the physical file, and the file position indicator is set to one less than the number of the first record existing on the new current volume. If no records exist for the current volume, another unit swap occurs.

Output files (unit media):

A unit swap occurs and the current volume pointer is updated to point to the new unit.

Input files, input-output files, and output files (non-unit media):

Execution of this statement is considered successful. The file remains in the open mode, the file position indicator is unchanged, and no action takes place except as specified in general rule 4.

g) Rewind

The current reel or analogous device is positioned at its physical beginning.

h) Optional phrases ignored

The CLOSE statement is executed as if none of the optional phrases were present.

- 4) The execution of the CLOSE statement causes the value of the I-O status associated with file-name-1 to be updated. (See 9.1.12, I-O status.)
- 5) No report associated with a report file that is referenced in the CLOSE statement shall be in the active state. If any report is in the active state, the CLOSE statement for that file is completed and the EC-REPORT-NOT-TERMINATED exception condition is set to exist.
- 6) If the file position indicator of the file connector referenced by file-name-1 is set to indicate that an optional input file is not present, no end-of-file or unit processing is performed for the file and the file position indicator and the current volume pointer are unchanged.
- 7) The availability of the record area associated with file-name-1 to the runtime element depends on the successful or unsuccessful execution of the CLOSE statement without the UNIT phrase and whether file-name-1 is referenced in a SAME RECORD AREA clause. If file-name-1 is specified in a SAME RECORD AREA clause, the record area is available to the runtime element if any of the file connectors referenced by the other file-names in that SAME RECORD AREA clause are open. If none of these file connectors is open or if file-name-1 is not specified in a SAME RECORD AREA clause, the successful execution of a CLOSE statement makes the record area unavailable to the runtime element and the unsuccessful execution of the CLOSE statement makes the availability of the record area undefined.
- 8) Following the successful execution of a CLOSE statement without the UNIT phrase, the physical file is no longer associated with the file connector referenced by file-name-1 and the open mode of that file connector is set to not in an open mode.
- 9) The file lock and any record locks associated with the file connector referenced by file-name-1 are released by the execution of the CLOSE statement.
- 10) If more than one file-name-1 is specified in a CLOSE statement, the result of executing this CLOSE statement is the same as if a separate CLOSE statement had been written for each file-name-1 in the same order as specified in the CLOSE statement. If an implicit CLOSE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit CLOSE statement, if any.

14.8.7 COMPUTE statement

The COMPUTE statement assigns to one or more data items the value of an arithmetic or boolean expression.

14.8.7.1 General format

Format 1 (arithmetic-compute):

```
COMPUTE { identifier-1 [ ROUNDED ] } ... = arithmetic-expression-1
      [ ON SIZE ERROR imperative-statement-1
        NOT ON SIZE ERROR imperative-statement-2 ]
      [ END-COMPUTE ]
```

Format 2 (boolean-compute):

```
COMPUTE { identifier-2 } ... = boolean-expression-1 [ END-COMPUTE ]
```

14.8.7.2 Syntax rules

FORMAT 1

- 1) Identifier-1 shall reference either an elementary numeric item or an elementary numeric-edited item.

FORMAT 2

- 2) Identifier-2 shall reference an elementary boolean data item.
- 3) Boolean-expression-1 shall not consist solely of the figurative constant ALL literal.

14.8.7.3 General rules

- 1) An arithmetic expression consisting of a single fixed-point numeric literal or a single fixed-point numeric data item evaluates to the exact value of that literal or identifier, before the application of any rounding, truncation, or decimal point alignment applicable for the COMPUTE statement and mode of arithmetic in effect.
- 2) Evaluation consists of determining the value of the arithmetic or boolean expression.
- 3) The number of boolean positions in the value resulting from the evaluation of boolean-expression-1 is the number of boolean positions in the largest boolean item referenced in the expression. The resulting value is moved to the data item referenced by identifier-2 according to the rules of the MOVE statement.
- 4) Additional rules and explanations relative to this statement are given in 8.8.1, Arithmetic expressions; 8.8.2, Boolean expressions; 14.5.12.2, Incompatible data; 14.6.3, ROUNDED phrase; 14.6.4, SIZE ERROR phrase and size error condition; 14.6.6, Arithmetic statements; and 14.5.9, Overlapping operands.

14.8.8 CONTINUE statement

The CONTINUE statement is a no-operation statement. It indicates that no executable statement is present.

14.8.8.1 General format

CONTINUE

14.8.8.2 Syntax rules

- 1) The CONTINUE statement may be used anywhere a conditional statement or an imperative-statement may be used.

14.8.8.3 General rules

- 1) The CONTINUE statement has no effect on the execution of the runtime element.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.9 DELETE statement

The DELETE statement logically removes a record from a mass storage file.

14.8.9.1 General format

DELETE file-name-1 RECORD

[retry-phrase]

INVALID KEY imperative-statement-1 NOT INVALID KEY imperative-statement-2

[END-DELETE]

where retry-phrase is described in 14.6.8, RETRY phrase

14.8.9.2 Syntax rules

- 1) The DELETE statement shall not be specified for a file with sequential organization.
- 2) The INVALID KEY and the NOT INVALID KEY phrases shall not be specified for a DELETE statement that references a file that is in sequential access mode.

14.8.9.3 General rules

- 1) The open mode of the file connector referenced by file-name-1 shall be I-O and the physical file associated with that file connector shall be a mass storage file.
- 2) For a file that is in the sequential access mode, the last input-output statement executed for file-name-1 prior to the execution of the DELETE statement shall have been a successfully executed READ statement. The mass storage control system (MSCS) logically removes from the physical file the record that was accessed by that READ statement.
- 3) If the file is indexed and the access mode is random or dynamic, the mass storage control system (MSCS) logically removes from the physical file the record identified by the content of the prime record key data item associated with file-name-1. If the physical file does not contain the record specified by the key, the invalid key condition exists. (See 9.1.13, Invalid key condition.)
- 4) If the file is relative and the access mode is random or dynamic, the mass storage control system (MSCS) logically removes from the physical file that record identified by the content of the relative key data item associated with file-name-1. If the physical file does not contain the record specified by the key, the invalid key condition exists. (See 9.1.13, Invalid key condition.)
- 5) After the successful execution of a DELETE statement, the identified record has been logically removed from the physical file and can no longer be accessed.
- 6) If record locking is enabled for the file connector referenced by file-name-1 and the record identified for deletion is locked by another file connector, the result of the operation depends on the presence or absence of the RETRY phrase. If the RETRY phrase is specified, additional attempts may be made to delete the record as specified in the rules in 14.6.8, RETRY phrase. If the RETRY phrase is not specified or the record is not successfully removed as specified by the RETRY phrase, the record operation conflict condition exists. The I-O status is set in accordance with the rules for the RETRY phrase.

When the record operation conflict condition exists as a result of the DELETE statement:

- a) The record is not logically removed, and may be accessed.

- b) A value is placed into the I-O status associated with file-name-1 to indicate the record operation conflict condition.
 - c) The DELETE statement is unsuccessful.
- 7) If record locks are in effect, the following actions take place:
- a) If single record locking is specified for the file connector associated with filename-1:
 - 1. A lock held by that file connector on the deleted record is released at the completion of the successful execution of the DELETE statement.
 - 2. A lock held by that file connector on another record is released at the beginning of the execution of the DELETE statement.
 - b) If multiple record locking is specified for the file connector associated with file-name-1, all locks held on the deleted record are released at the completion of the successful execution of the DELETE statement.
- 8) The execution of a DELETE statement does not affect the content of the record area or the content of the data item referenced by the data-name specified in the DEPENDING ON phrase of the RECORD clause associated with file-name-1.
- 9) The file position indicator is not affected by the execution of a DELETE statement.
- 10) The execution of the DELETE statement causes the value of the I-O status associated with file-name-1 to be updated. (See 9.1.12, I-O status.)
- 11) Transfer of control following the successful or unsuccessful execution of the DELETE operation depends on the presence or absence of the optional INVALID KEY and NOT INVALID KEY phrases in the DELETE statement. (See 9.1.13, Invalid key condition.)

14.8.10 DISPLAY statement

The DISPLAY statement causes data to be transferred to an appropriate hardware device.

The DISPLAY screen statement causes data associated with a literal or data item that is referenced in a screen item to be made available to the specified screen item and to be displayed on the terminal screen with specified attributes and at the specified position.

14.8.10.1 General format

Format 1 (line):

DISPLAY { identifier-1
literal-1 } ... [UPON mnemonic-name-1] [WITH NO ADVANCING] [END-DISPLAY]

Format 2 (screen):

DISPLAY screen-name-1

[AT {
[LINE NUMBER { identifier-2
integer-1 }
[{ COLUMN }
[COL] } NUMBER { identifier-3
integer-2 }
ON EXCEPTION imperative-statement-1
NOT ON EXCEPTION imperative-statement-2
[END-DISPLAY]

14.8.10.2 Syntax rules

FORMAT 1

- 1) Identifier-1 shall not reference a data item of class object or class pointer.
- 2) Mnemonic-name-1 shall be associated with a hardware device in the SPECIAL-NAMES paragraph in the environment division.

FORMAT 2

- 3) Identifier-2 and identifier-3 shall be unsigned integer data items.

14.8.10.3 General rules

FORMAT 1

- 1) The DISPLAY statement causes the content of each operand to be transferred to the hardware device in the order listed. If an operand is a zero-length data item, no data is transferred for that operand. Any conversion of data required between literal-1 or the data item referenced by identifier-1 and the hardware device is defined by the implementor.
- 2) The implementor shall define, for each hardware device, the size of a data transfer.

- 3) If a figurative constant is specified as one of the operands, only a single occurrence of the figurative constant is displayed. A figurative constant other than ALL national literal shall be the alphanumeric representation of that figurative constant.
- 4) If the hardware device is capable of receiving data of the same size as the data item being transferred, then the data item is transferred.
- 5) If a hardware device is not capable of receiving data of the same size as the data item being transferred, then one of the following applies:
 - a) If the size of the data item being transferred exceeds the size of the data that the hardware device is capable of receiving in a single transfer, the data beginning with the leftmost character is stored aligned to the left in the receiving hardware device, and the remaining data is then transferred according to general rules 4 and 5 until all the data has been transferred.
 - b) If the size of the data item that the hardware device is capable of receiving exceeds the size of the data being transferred, the transferred data is stored aligned to the left in the receiving hardware device.
- 6) When a DISPLAY statement contains more than one operand, the size of the sending item is the sum of the sizes associated with the operands, and the values of the operands are transferred in the sequence in which the operands are encountered without modifying the positioning of the hardware device between the successive operands.
- 7) If the UPON phrase is not specified, the implementor's standard display device is used.
- 8) If the WITH NO ADVANCING phrase is specified, then the positioning of the hardware device shall not be reset to the next line or changed in any other way following the display of the last operand. If the hardware device is capable of positioning to a specific character position, it will remain positioned at the character position immediately following the last character of the last operand displayed. If the hardware device is not capable of positioning to a specific character position, only the vertical position, if applicable, is affected. This may cause overprinting if the hardware device supports overprinting.
- 9) If the WITH NO ADVANCING phrase is not specified, then after the last operand has been transferred to the hardware device, the positioning of the hardware device shall be reset to the leftmost position of the next line of the device.
- 10) If vertical positioning is not applicable on the hardware device, the vertical positioning shall be ignored.

FORMAT 2

- 11) Column and line number positions are specified in terms of alphanumeric character positions.
- 12) The DISPLAY statement causes the transfer of data in accordance with the MOVE statement rules to each elementary screen item that is subordinate to screen-name-1 and is specified with the FROM, USING, or VALUE clause, from the data item or literal referenced in the FROM, USING, or VALUE clause. For the purpose of these specifications, all such screen items are considered to be referenced by the DISPLAY screen statement. If two or more of these elementary screen items overlap, the EC-SCREEN-FIELD-OVERLAP exception condition is set to exist. The transfer of data to the elementary screen items is done in the order that the screen items are specified within screen-name-1.

NOTE When two screen items overlap, the display on the screen for the common character positions is determined by the second screen item specified within screen-name-1.

The transfer takes place and each elementary screen item is displayed on the terminal display subject to any editing implied in the character-string specified in the PICTURE clause of each elementary screen description entry.

- 13) The LINE and COLUMN phrases give the position on the terminal display screen at which the screen record associated with screen-name-1 is to start. The position is relative to the leftmost character column in the topmost line of the display that is identified as column 1 of line 1. Each subordinate elementary screen item is located relative to the start of the containing screen record. Identifier-2 and identifier-3 are evaluated once at the start of execution of the statement.
- 14) If the LINE phrase is not specified, the screen record starts on line 1.
- 15) If the COLUMN phrase is not specified, the screen record starts in column 1.
- 16) If the execution of the DISPLAY statement is successful, the ON EXCEPTION phrase, if specified, is ignored and control is transferred to the end of the DISPLAY statement or, if the NOT ON EXCEPTION phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the DISPLAY statement.
- 17) If the execution of the DISPLAY statement is unsuccessful, then:
 - a) If the ON EXCEPTION phrase is specified in the DISPLAY statement, control is transferred to imperative-statement-1. Execution then continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the DISPLAY statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
 - b) If the ON EXCEPTION phrase is not specified in the DISPLAY statement and an applicable declarative exists, control is transferred to that declarative and, if control is returned from that declarative control is transferred to the end of the DISPLAY statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
 - c) If the ON EXCEPTION phrase is not specified in the DISPLAY statement and there is no applicable declarative, control is transferred to the end of the DISPLAY statement and the NOT ON EXCEPTION phrase, if specified, is ignored.
- 18) If one or more of the exception conditions EC-SCREEN-FIELD-OVERLAP, EC-SCREEN-ITEM-TRUNCATED, EC-SCREEN-LINE-NUMBER, or EC-SCREEN-STARTING-COLUMN exists during the execution of the DISPLAY statement, the execution of the DISPLAY statement continues as described for that exception condition and upon completion, the execution of the DISPLAY statement is considered unsuccessful.

14.8.11 DIVIDE statement

The DIVIDE statement divides one numeric data item into others and sets the values of data items equal to the quotient and remainder.

14.8.11.1 General format

Format 1 (into):

$$\text{DIVIDE } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \text{ INTO } \{ \text{identifier-2 [ROUNDED] } \} \dots$$

$$\left[\begin{array}{l} \text{ON SIZE ERROR imperative-statement-1} \\ \text{NOT ON SIZE ERROR imperative-statement-2} \end{array} \right]$$

$$[\text{END-DIVIDE}]$$

Format 2 (into-giving):

$$\text{DIVIDE } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \text{ INTO } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \end{array} \right\}$$

$$\text{GIVING } \{ \text{identifier-3 [ROUNDED] } \} \dots$$

$$\left[\begin{array}{l} \text{ON SIZE ERROR imperative-statement-1} \\ \text{NOT ON SIZE ERROR imperative-statement-2} \end{array} \right]$$

$$[\text{END-DIVIDE}]$$

Format 3 (by-giving):

$$\text{DIVIDE } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \end{array} \right\} \text{ BY } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\}$$

$$\text{GIVING } \{ \text{identifier-3 [ROUNDED] } \} \dots$$

$$\left[\begin{array}{l} \text{ON SIZE ERROR imperative-statement-1} \\ \text{NOT ON SIZE ERROR imperative-statement-2} \end{array} \right]$$

$$[\text{END-DIVIDE}]$$

Format 4 (into-remainder):

$$\text{DIVIDE } \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \text{ INTO } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \end{array} \right\}$$

$$\text{GIVING identifier-3 [ROUNDED]}$$

$$\text{REMAINDER identifier-4}$$

$$\left[\begin{array}{l} \text{ON SIZE ERROR imperative-statement-1} \\ \text{NOT ON SIZE ERROR imperative-statement-2} \end{array} \right]$$

$$[\text{END-DIVIDE}]$$

Format 5 (by-remainder):

DIVIDE { identifier-2 } BY { identifier-1 }
 literal-2 literal-1
GIVING identifier-3 [ROUNDED]
REMAINDER identifier-4
 [ON SIZE ERROR imperative-statement-1
 NOT ON SIZE ERROR imperative-statement-2]
 [END-DIVIDE]

14.8.11.2 Syntax rules

- 1) Identifier-1 and identifier-2 shall reference an elementary data item of category numeric.
- 2) Identifier-3 and identifier-4 shall reference an elementary data item of category numeric or numeric-edited.
- 3) Literal-1 and literal-2 shall be numeric literals.
- 4) When native arithmetic is in effect, the composite of operands described in 14.6.6, Arithmetic statements, is determined by using all of the operands in the statement excluding the data item that follows the word REMAINDER.

14.8.11.3 General rules**ALL FORMATS**

- 1) When native arithmetic is in effect, the quotient is the result of dividing the dividend by the divisor. When standard arithmetic is in effect, the quotient is the result of the arithmetic expression

(dividend / divisor)

where the values of dividend and divisor are defined in the following general rules.

- 2) The process of determining the dividend and determining the divisor consists of the following:
 - a) The dividend is identifier-2 or literal-2. The divisor is identifier-1 or literal-1.
 - b) If an identifier is specified, item identification is done and the content of the resulting data item is the dividend or divisor.
 - c) If a literal is specified, the value of the literal is the dividend or divisor.
- 3) Additional rules and explanations relative to this statement are given in 14.5.9, Overlapping operands; 14.5.12.2, Incompatible data; 14.6.3, ROUNDED phrase; 14.6.4, SIZE ERROR phrase and size error condition; and 14.6.6, Arithmetic statements.

FORMAT 1

- 4) The evaluation proceeds in the following order:
 - a) The initial evaluation consists of determining the divisor.

- b) This divisor is used with each dividend, which is each identifier-2 proceeding from left to right. Item identification for identifier-2 is done as each dividend is determined. The quotient is then formed as specified in general rule 1 and stored in the corresponding identifier-2 as indicated in 14.6.6, Arithmetic statements.

FORMATS 2 AND 3

- 5) The evaluation proceeds in the following order:

- a) The initial evaluation is determining the divisor and determining the dividend.
- b) The quotient is then formed as specified in general rule 1 and stored in each identifier-3 as specified in 14.6.6, Arithmetic statements.

FORMATS 4 AND 5

- 6) The evaluation proceeds in the following order:

- a) The initial evaluation is determining the divisor and determining the dividend.
- b) The quotient is then formed as specified in general rule 1 and stored in identifier-3 as specified in 14.6.6, Arithmetic statements.
- c) If the size error condition is not raised, a subsidiary quotient is developed that is signed and derived from the quotient by truncation of digits at the least significant end and that has the same number of digits and the same decimal point location as the data item referenced by identifier-3. The remainder is calculated as indicated in general rule 7 and is stored in the data item referenced by identifier-4 unless storing the value would cause a size error condition, in which case the content of identifier-4 is unchanged and execution proceeds as indicated in 14.6.4, SIZE ERROR phrase and size error condition. Item identification of the data item referenced by identifier-4 is done after the quotient is stored in the data item referenced by identifier-3.

- 7) When native arithmetic is in effect, the remainder is the result of multiplying the subsidiary quotient and the divisor and subtracting the product from the dividend. When standard arithmetic is in effect, the remainder is the result of the arithmetic expression:

$$(\text{dividend} - (\text{subsidiary-quotient} * \text{divisor}))$$

where the values of dividend and divisor are defined in general rule 2 and where subsidiary-quotient represents the subsidiary quotient as defined in general rule 6.

14.8.12 EVALUATE statement

The EVALUATE statement describes a multi-branch, multi-join structure. It may cause multiple conditions to be evaluated. The subsequent action of the runtime element depends on the results of these evaluations.

14.8.12.1 General format

```
EVALUATE selection-subject [ ALSO selection-subject ] ...
  { { WHEN selection-object [ ALSO selection-object ] ... } ... imperative-statement-1 } ...
  [ WHEN OTHER imperative-statement-2 ]
  [ END-EVALUATE ]
```

where selection-subject is:

{	identifier-1 literal-1 arithmetic-expression-1 boolean-expression-1 condition-1 TRUE FALSE	}

where selection-object is:

{	[NOT] identifier-2 [NOT] literal-2 [NOT] arithmetic-expression-2 [NOT] boolean-expression-2 [NOT] range-expression condition-2 partial-expression-1 TRUE FALSE ANY	}

where range-expression is:

{	identifier-3 literal-3 arithmetic-expression-3	}	{	THROUGH THRU	}	{	identifier-4 literal-4 arithmetic-expression-4	}	[IN alphabet-name-1]

14.8.12.2 Syntax rules

- 1) The words THROUGH and THRU are equivalent.
- 2) The number of selection objects within each set of selection objects shall be equal to the number of selection subjects.

- 3) Alphabet-name-1 may be specified only when the literals or identifiers specified in the THROUGH phrase are of class alphabetic, alphanumeric, or national. If literal-3 or identifier-3 is of class national, alphabet-name-1 shall reference an alphabet that defines a national collating sequence; otherwise, alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.
- 4) The two operands in a range-expression shall be of the same class and shall not be of class boolean, object or pointer.
- 5) A selection object is a partial-expression if the leftmost portion of the selection object is a relational operator, a class condition without the identifier, a sign condition without the identifier, or a sign condition without the arithmetic expression.
- 6) The classification of some selection subjects or selection objects is changed for a particular WHEN phrase as follows:
 - a) If the selection subject is TRUE or FALSE and the selection object is a boolean expression that results in one boolean character, the selection object is treated as a boolean condition and therefore condition-2.
 - b) If the selection object is TRUE or FALSE and the selection subject is a boolean expression that results in one boolean character, the selection subject is treated as a boolean condition and therefore condition-1.
 - c) If the selection subject is other than TRUE or FALSE and the selection object is a boolean expression that results in one boolean character, the selection object is treated as a boolean expression and therefore boolean-expression-2.
 - d) If the selection object is other than TRUE or FALSE and the selection subject is a boolean expression that results in one boolean character, the selection subject is treated as a boolean expression and therefore boolean-expression-1.
 - e) If the selection object is a partial expression and the selection subject is a data item of the class boolean or numeric, the selection subject is treated as an identifier.
- 7) Each selection object within a set of selection objects shall correspond to the selection subject having the same ordinal position within the set of selection subjects according to the following rules:
 - a) Identifiers, literals, or expressions appearing within a selection object shall be valid operands for comparison to the corresponding operand in the set of selection subjects in accordance with 8.8.4.1.1, Relation conditions.
 - b) Condition-2 or the words TRUE or FALSE appearing as a selection object shall correspond to condition-1 or the words TRUE or FALSE in the set of selection subjects.
 - c) The word ANY may correspond to a selection subject of any type.
 - d) Partial-expression-1 shall correspond to a selection subject that is an identifier, a literal, an arithmetic expression, or a boolean expression. Partial-expression-1 shall be a sequence of COBOL words such that, were it preceded by the corresponding selection subject, a conditional expression would result.
- 8) If a selection object is specified by partial-expression-1, that selection object is treated as though it were specified as condition-2, where condition-2 is the conditional expression that results from preceding partial-expression-1 by the selection subject. The corresponding selection subject is treated as though it were specified by the word TRUE.
- 9) The permissible combinations of selection subject and selection object operands are indicated in table 16, Combination of operands in the EVALUATE statement.

Table 16 — Combination of operands in the EVALUATE statement

Selection object	Selection subject					
	Identifier	Literal	Arithmetic expression	Boolean expression	Condition	TRUE or FALSE
[NOT] identifier	Y	Y	Y	Y		
[NOT] literal	Y		Y	Y		
[NOT] arithmetic-expression	Y	Y	Y			
[NOT] boolean-expression	Y	Y		Y		
[NOT] range-expression	Y	Y	Y			
Condition					Y	Y
Partial-expression	Y	Y	Y	Y		
TRUE or FALSE					Y	Y
ANY	Y	Y	Y	Y	Y	Y
The letter 'Y' indicates a permissible combination. A space indicates an invalid combination.						

14.8.12.3 General rules

- 1) If an operand of the EVALUATE statement consists of a single literal, that operand is treated as a literal, not as an expression.
- 2) The manner of determining the range of values specified by the THROUGH phrase is described in 14.6.7, THROUGH phrase.
- 3) At the beginning of the execution of the EVALUATE statement, each selection subject is evaluated and assigned a value, a range of values, or a truth value as follows:
 - a) Any selection subject specified by identifier-1 is assigned the value and class of the data item referenced by the identifier. If the selection subject is a numeric data item or a boolean data item whose length is one boolean position, the selection subject for this evaluation is treated as identifier-1 and not an arithmetic or boolean expression.
 - b) Any selection subject specified by literal-1 is assigned the value and class of the specified literal.
 - c) Any selection subject specified by arithmetic-expression-1 is assigned a numeric value according to the rules for evaluating an arithmetic expression.
 - d) Any selection subject in which boolean-expression-1 is specified is assigned a boolean value according to the rules for evaluating boolean expressions.
 - e) Any selection subject specified by condition-1 is assigned a truth value according to the rules for evaluating conditional expressions.
 - f) Any selection subject specified by the words TRUE or FALSE is assigned a truth value. The truth value 'true' is assigned to those items specified with the word TRUE, and the truth value 'false' is assigned to those items specified with the word FALSE.
- 4) The execution of the EVALUATE statement proceeds by processing each WHEN phrase from left to right in the following manner:

- a) Each selection object within the set of selection objects for each WHEN phrase is paired with the selection subject having the same ordinal position within the set of selection subjects. The result of the analysis of this set of selection subjects and objects is either true or false as follows:

1. If the selection object is the word ANY, the result is true.
2. If the selection object is partial-expression-1, the selection subject is placed to the left of the leading relational operator and the resulting conditional expression is evaluated. The result of the evaluation is the truth value of the expression.
3. If the selection object is condition-2, the selection subject is either TRUE or FALSE. If the truth value of the selection subject and selection object match, the result of the analysis is true. If they do not match, the result is false.
4. If the selection object is either TRUE or FALSE, the selection subject is condition-1. If the truth value of the selection subject and selection object match, the result of the analysis is true. If they do not match, the result is false.
5. If the selection object is a range-expression, the pair is considered to be a conditional expression of one of the following forms:

when 'NOT' is not specified in the selection object;

selection-subject $\geq$ left-part AND selection-subject $\leq$ right-part

when 'NOT' is specified in the selection object

selection-subject $<$ left-part OR selection-subject $>$ right-part

where left-part is identifier-3, literal-3, or arithmetic-expression-3 and right-part is identifier-4, literal-4, or arithmetic-expression-4. The result of the analysis is the truth value of the resulting conditional expression.

6. If the selection object is identifier-2, literal-2, arithmetic-expression-2, or boolean-expression-2, the pair is considered to be a conditional expression of the following form:

selection-subject [NOT] = selection-object

where 'NOT' is present if it is present in the selection object. The result of the analysis is the truth value of the resulting conditional expression.

- b) If the result of the analysis is true for every pair in a WHEN phrase, that WHEN phrase satisfies the set of selection subjects and no more WHEN phrases are analyzed.
- c) If the result of the analysis is false for any pair in a WHEN phrase, no more pairs in that WHEN phrase are evaluated and the WHEN phrase does not match the set of selection subjects.
- d) This procedure is repeated for subsequent WHEN phrases, in the order of their appearance in the source element, until either a WHEN phrase satisfying the set of selection subjects is selected or until all sets of selection objects are exhausted.

- 5) The execution of the EVALUATE statement then proceeds as follows:

- a) If a WHEN phrase is selected, execution continues with the first imperative-statement-1 following the selected WHEN phrase.
- b) If no WHEN phrase is selected and a WHEN OTHER phrase is specified, execution continues with imperative-statement-2.

- c) The execution of the EVALUATE statement is terminated when execution reaches the end of imperative-statement-1 of the selected WHEN phrase or the end of imperative-statement-2, or when no WHEN phrase is selected and no WHEN OTHER phrase is specified.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.13 EXIT statement

The EXIT statement provides a common end point for a series of procedures.

The EXIT PROGRAM statement marks the logical end of a called program.

The EXIT METHOD statement marks the logical end of an invoked method.

The EXIT FUNCTION statement marks the logical end of the execution of a function.

The EXIT PERFORM statement provides a means of exiting an inline PERFORM (with or without returning to any specified test).

The EXIT PARAGRAPH and EXIT SECTION statements provide a means of exiting a structured procedure without executing any of the following statements within the procedure.

14.8.13.1 General format

Format 1 (simple):

EXIT

Format 2 (program):

EXIT PROGRAM $\left[\text{RAISING} \left\{ \begin{array}{l} \text{EXCEPTION exception-name-1} \\ \text{identifier-1} \\ \text{LAST EXCEPTION} \end{array} \right\} \right]$

Format 3 (method):

EXIT METHOD $\left[\text{RAISING} \left\{ \begin{array}{l} \text{EXCEPTION exception-name-1} \\ \text{identifier-1} \\ \text{LAST EXCEPTION} \end{array} \right\} \right]$

Format 4 (function):

EXIT FUNCTION $\left[\text{RAISING} \left\{ \begin{array}{l} \text{EXCEPTION exception-name-1} \\ \text{identifier-1} \\ \text{LAST EXCEPTION} \end{array} \right\} \right]$

Format 5 (inline-perform):

EXIT PERFORM [CYCLE]

Format 6 (procedure):

EXIT $\left\{ \begin{array}{l} \text{PARAGRAPH} \\ \text{SECTION} \end{array} \right\}$

14.8.13.2 Syntax rules**FORMAT 1**

- 1) The EXIT statement shall appear in a sentence by itself that shall be the only sentence in the paragraph.

FORMATS 2, 3, AND 4

- 2) The EXIT statement shall not be specified in a declarative procedure for which the GLOBAL phrase is specified in the associated USE statement.
- 3) Exception-name-1 shall be a level-3 exception-name as specified in the rules for exception conditions. (See 14.5.12.1, Exception conditions.)

If exception-name-1 is a level-3 exception-name for EC-USER, exception-name-1 shall be specified in the RAISING phrase of the procedure division header of the source element in which this EXIT statement is contained.

- 4) Identifier-1 is a sending operand.
- 5) Identifier-1 shall be an object reference, subject to the following constraints:
 - a) If the data description entry of identifier-1 specifies a class-name, the class identified by that class-name or one of the superclasses of that class is specified in the RAISING phrase of the procedure division header of the source element containing this EXIT statement and the presence or absence of the FACTORY phrase is the same in the data description entry of identifier-1 as in the RAISING phrase of the procedure division header of the containing source element.
 - b) If the data description entry of identifier-1 specifies an interface-name, the interface referenced by that interface-name shall conform to an interface specified in the RAISING phrase of the procedure division header of the source element containing this EXIT statement and the presence or absence of the FACTORY phrase is the same in the data description entry of identifier-1 as in the RAISING phrase of the procedure division header of the containing source element.
 - c) If the data description entry of identifier-1 specifies an ACTIVE-CLASS phrase, the class of the object containing the EXIT statement or one of the superclasses of that class is specified in the RAISING phrase of the procedure division header of the source element containing this EXIT statement.
 - d) Identifier-1 shall not be a universal object reference.
- 6) The LAST phrase may be specified only in a declarative procedure.

FORMAT 2

- 7) An EXIT PROGRAM statement may be specified only in a program procedure division.

FORMAT 3

- 8) An EXIT METHOD statement may be specified only in a method procedure division.

FORMAT 4

- 9) An EXIT FUNCTION statement may be specified only in a function procedure division.

FORMAT 5

- 10) The EXIT PERFORM statement may be specified only in an inline PERFORM statement.

FORMAT 6

- 11) The EXIT statement with the SECTION phrase may be specified only in a section.

14.8.13.3 General rules

FORMAT 1

- 1) An EXIT statement serves only to enable the user to assign a procedure-name to a given point in a procedure division. Such an EXIT statement has no other effect on the compilation or execution.

FORMATS 2, 3, AND 4

- 2) If an EXIT statement is executed within the range of a declarative procedure whose USE statement contains the GLOBAL phrase and that USE statement is specified in the same function, method, or program as the function format, method format, or program format EXIT statement respectively, the EC-FLOW-GLOBAL-EXIT exception condition is set to exist.
- 3) If the RAISING phrase is specified, an exception condition is raised in the activating runtime element if checking for that exception condition is enabled in the activating runtime element, and execution continues in that runtime element as specified in the rules for the activating statement after the result, if any, of the activated element is returned to the activating element. The exception condition that exists is determined as follows:
- a) If exception-name-1 is specified, it is that exception condition.
 - b) If identifier-1 is specified, the object referenced by identifier-1 becomes the current exception object in the activating runtime element. Additional rules are specified in 14.5.12.1.4, Exception objects.
 - c) If the LAST phrase is specified one of the following occurs:
 - 1. If an exception condition is currently raised, that exception condition is set to exist in the activating runtime element. If the exception condition is an exception object, additional rules are specified in 14.5.12.1.4, Exception objects. If the exception condition is a level-3 exception for EC-USER and that exception condition is not specified in the RAISING phrase of the procedure division header of the source element in which this EXIT statement is contained, the EC-RAISING-NOT-SPECIFIED exception condition is set to exist in the activating runtime element instead of the EC-USER exception condition.
 - 2. If no exception condition is raised, the RAISING phrase is ignored and no exception condition is set to exist in the activating runtime element.
- 4) If the activating runtime element is a non-COBOL element, execution continues in the activating element in an implementor-defined fashion.

FORMAT 2

- 5) If the EXIT PROGRAM statement is executed in a program that is not under the control of a calling runtime element, the EXIT PROGRAM statement is treated as if it were a CONTINUE statement. No exception condition is raised even if the RAISING phrase is specified.
- 6) The execution of an EXIT PROGRAM statement causes the executing program to terminate, and control to return to the calling statement. If a RETURNING phrase is specified in the procedure division header of the program containing the EXIT statement, the value in the data item referenced by that RETURNING phrase becomes the result of the program activation.

If the calling runtime element is a COBOL element, execution continues in the calling element as specified in the rules for the CALL statement. The state of the calling runtime element is not altered and is identical to that which existed at the time it executed the CALL statement except that the contents of data items and the contents of files shared between the calling runtime element and the called program may have been changed.

If the program in which the EXIT PROGRAM statement is specified is an initial program, an implicit CANCEL statement referencing that program is executed upon return to the calling runtime element. That implicit CANCEL statement will not raise any exception conditions in the calling runtime element. If the RAISING phrase is specified in the EXIT statement, the exception condition that is specified in the RAISING phrase exists after the execution of that implicit CANCEL statement.

FORMAT 3

- 7) The execution of an EXIT METHOD statement causes the executing method to terminate, and control to return to the invoking statement. If a RETURNING phrase is present in the containing method definition, the value in the data item referenced by the RETURNING phrase becomes the result of the method invocation.

FORMAT 4

- 8) The execution of an EXIT FUNCTION statement causes the executing function to terminate, and control to return to the activating statement. The value in the data item referenced by the RETURNING phrase in the containing function definition becomes the result of the function activation.

FORMAT 5

- 9) The execution of an EXIT PERFORM statement without the CYCLE phrase causes control to be passed to an implicit CONTINUE statement immediately following the END-PERFORM phrase that matches the most closely preceding, and as yet unterminated, inline PERFORM statement.
- 10) The execution of an EXIT PERFORM statement with the CYCLE phrase causes control to be passed to an implicit CONTINUE statement immediately preceding the END-PERFORM phrase that matches the most closely preceding, and as yet unterminated, inline PERFORM statement.

FORMAT 6

- 11) The execution of an EXIT PARAGRAPH statement causes control to be passed to an implicit CONTINUE statement immediately following the last explicit statement of the current paragraph, preceding any return mechanisms for that paragraph.

NOTE The return mechanisms mentioned in the rules for EXIT PARAGRAPH and EXIT SECTION are those associated with language elements such as PERFORM, SORT and USE.

- 12) The execution of an EXIT SECTION statement causes control to be passed to an unnamed empty paragraph immediately following the last paragraph of the current section, preceding any return mechanisms for that section.

14.8.14 FREE statement

The FREE statement releases dynamic storage previously obtained with an ALLOCATE statement.

14.8.14.1 General format

FREE { data-name-1 } ...

14.8.14.2 Syntax rules

- 1) The data item referenced by data-name-1 shall be of category data-pointer.

14.8.14.3 General rules

- 1) The FREE statement is processed as follows:
 - a) If the data-pointer referenced by data-name-1 identifies the start of storage that is currently allocated by an ALLOCATE statement, that storage is released and the data-pointer referenced by data-name-1 is set to NULL, the length of the released storage is the length of the storage obtained by the ALLOCATE statement, and the contents of any data items located within the released storage area become undefined;
 - b) otherwise, if the data-pointer referenced by data-name-1 contains the predefined address NULL, no action is taken for that operand;
 - c) otherwise, the EC-STORAGE-NOT-ALLOC exception condition is set to exist.
- 2) If more than one data-name-1 is specified in a FREE statement, the result of executing this FREE statement is the same as if a separate FREE statement had been written for each data-name-1 in the same order as specified in the FREE statement. If an implicit FREE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit FREE statement, if any.

14.8.15 GENERATE statement

The GENERATE statement performs control break processing and, unless a report-name is specified, prints one instance of the specified detail.

14.8.15.1 General format

GENERATE { data-name-1
report-name-1 }

14.8.15.2 Syntax rules

- 1) Data-name-1 shall name a detail report group. It may be qualified by a report-name.
- 2) Report-name-1 may be used only if the referenced report description entry contains a CONTROL clause.
- 3) If data-name-1 is defined in a containing program, the report description entry in which data-name-1 is specified and the file description entry associated with that report description entry shall contain a GLOBAL clause.
- 4) If report-name-1 is defined in a containing program, the file description entry associated with report-name-1 shall contain a GLOBAL clause.

14.8.15.3 General rules

- 1) Execution of a GENERATE data-name statement causes one instance of the specified detail to be printed, following any necessary control break and page fit processing, as detailed below.
- 2) Execution of a GENERATE report-name-1 statement results in the same processing as for a GENERATE data-name statement for the same report, except that no detail is printed. This process is called summary reporting. If all the GENERATE statements executed for a report between the execution of the INITIATE and TERMINATE statements are of this form, the report that is produced is called a summary report.
- 3) If a CONTROL clause is specified in the report description entry, each execution of the GENERATE statement causes the specified control data items to be saved and subsequently compared so as to sense for control breaks. This processing is described by the CONTROL clause.
- 4) Execution of the chronologically first GENERATE statement following an INITIATE causes the following actions to take place in order:
 - a) The report heading is printed if defined. If the report heading appears on a page by itself, an advance is made to the next physical page, and PAGE-COUNTER is either incremented by 1 or, if the report heading's NEXT GROUP clause has the WITH RESET phrase, set to 1. (See 13.16.55, TYPE clause; and 13.16.35, NEXT GROUP clause.)
 - b) A page heading is printed if defined. (See 13.16.55, TYPE clause.)
 - c) If a CONTROL clause is defined for the report, each control heading is printed, wherever defined, in order from major to minor. (See 13.16.15, CONTROL clause; and 13.16.55, TYPE clause.)
 - d) The specified detail is printed, unless summary reporting is specified.
- 5) Execution of any chronologically second and subsequent GENERATE statements following an INITIATE causes the following actions to take place in order:

- a) If a CONTROL clause is defined for the report, and a control break has been detected, each control footing and control heading is printed, if defined, up to the level of the control break. (See 13.16.15, CONTROL clause; and 13.16.55, TYPE clause.)
 - b) The specified detail is printed, unless summary reporting is specified.
- 6) If the associated report is divided into pages, the chronologically first body group since the INITIATE is preceded by a page heading, if defined, and the printing of any subsequent body groups is preceded by a page fit test which, if unsuccessful, results in a page advance, consisting of the following actions in this order:
- a) If a page footing is defined it is printed.
 - b) An advance is made to the next physical page.
 - c) If the associated report description entry contains a CODE clause with an identifier operand, the identifier is evaluated.
 - d) If the page advance was preceded by the printing of a group whose description has a NEXT GROUP clause with the NEXT PAGE and WITH RESET phrases, PAGE-COUNTER is set to 1; otherwise PAGE-COUNTER is incremented by 1.
 - e) LINE-COUNTER is set to zero.
 - f) If a page heading is defined it is printed.
- 7) The report associated with data-name-1 or report-name-1 shall be in the active state. If it is not, the EC-REPORT-INACTIVE exception condition is set to exist.
- 8) If a non-fatal exception condition is raised during the execution of a GENERATE statement, execution resumes at the next report item, line, or report group, whichever follows in logical order.

14.8.16 GO TO statement

The GO TO statement causes control to be transferred from one part of the procedure division to another.

14.8.16.1 General format

Format 1 (unconditional):

GO TO procedure-name-1

Format 2 (depending):

GO TO { procedure-name-1 } ... DEPENDING ON identifier-1

14.8.16.2 Syntax rules

- 1) Identifier-1 shall reference a numeric elementary data item that is an integer.
- 2) If a GO TO statement represented by format 1 appears in a consecutive sequence of imperative statements within a sentence, it shall appear as the last statement in that sequence.

14.8.16.3 General rules

- 1) When a GO TO statement represented by format 1 is executed, control is transferred to procedure-name-1.
- 2) When a GO TO statement represented by format 2 is executed, control is transferred to procedure-name-1, etc., depending on the value of identifier-1 being 1, 2, ... , n. If the content of identifier-1 is not numeric, the EC-DATA-INCOMPATIBLE exception condition is set to exist. If checking for EC-DATA-INCOMPATIBLE is enabled, processing occurs as specified for that exception condition. If checking for EC-DATA-INCOMPATIBLE is not enabled or the value of identifier-1 is anything other than the positive or unsigned integers 1, 2, ... , n, then no transfer occurs and control passes to the next statement in the normal sequence for execution.

14.8.17 GOBACK statement

The GOBACK statement marks the logical end of a function, a method, or a program.

14.8.17.1 General format

$$\text{GOBACK} \left[\text{RAISING} \left\{ \begin{array}{l} \text{EXCEPTION exception-name-1} \\ \text{identifier-1} \\ \text{LAST EXCEPTION} \end{array} \right\} \right]$$

14.8.17.2 Syntax rules

- 1) The GOBACK statement shall not be specified in a declarative procedure for which the GLOBAL phrase is specified in the associated USE statement.

14.8.17.3 General rules

- 1) If a GOBACK statement is executed in a program that is under the control of a calling runtime element, the program operates as if executing an EXIT PROGRAM statement with the RAISING phrase, if any, that is specified in the GOBACK statement.
- 2) If a GOBACK statement is executed in a program that is not under the control of a calling runtime element, the program operates as if executing a STOP statement without any optional phrases. A RAISING phrase, if specified, is ignored.
- 3) If a GOBACK statement is executed in a function, the function operates as if executing an EXIT FUNCTION statement with the RAISING phrase, if any, that is specified in the GOBACK statement.
- 4) If a GOBACK statement is executed in a method, the method operates as if executing an EXIT METHOD statement with the RAISING phrase, if any, that is specified in the GOBACK statement.
- 5) If a GOBACK statement is executed within the range of a declarative procedure whose USE statement contains the GLOBAL phrase and that USE statement is specified in the same program as the GOBACK statement, the EC-FLOW-GLOBAL-GOBACK exception condition is set to exist.

14.8.18 IF statement

The IF statement causes a condition to be evaluated. The subsequent action of the runtime element depends on whether the value of the condition is true or false.

14.8.18.1 General format**Format 1 (delimited):**

IF condition-1 THEN statement-1 [ELSE statement-2] END-IF

Format 2 (historic):

$$\text{IF condition-1 THEN } \left\{ \begin{array}{l} \text{statement-1} \\ \text{NEXT SENTENCE} \end{array} \right\} \left[\text{ELSE } \left\{ \begin{array}{l} \text{statement-2} \\ \text{NEXT SENTENCE} \end{array} \right\} \right]$$

NOTE NEXT SENTENCE is an archaic feature and its use should be avoided.

14.8.18.2 Syntax rules

ALL FORMATS

- 1) Statement-1 and statement-2 represent either one or more imperative statements or a conditional statement optionally preceded by one or more imperative statements. A further description of the rules governing statement-1 and statement-2 is given in 14.4.2, Scope of statements.
- 2) Statement-1 and statement-2 may each contain an IF statement. In this case, the IF statement is said to be nested. More detailed rules on nesting are given in 14.4.2, Scope of statements.

IF statements within IF statements are considered matched IF, ELSE, and END-IF ordered combinations, proceeding from left to right. Any ELSE encountered is matched with the nearest preceding IF that either has not been already matched with an ELSE or has not been implicitly or explicitly terminated. Any END-IF encountered is matched with the nearest preceding IF that has not been implicitly or explicitly terminated.

FORMAT 2

- 3) The ELSE NEXT SENTENCE phrase may be omitted if it immediately precedes the terminal separator period of the sentence.

14.8.18.3 General rules

FORMAT 1

- 1) If condition-1 is true, control is transferred to the first statement of statement-1 and execution continues according to the rules for each statement specified in statement-1. The ELSE phrase, if specified, is ignored.
- 2) If condition-1 is false, the THEN phrase is ignored. If the ELSE phrase is specified, control is transferred to the first statement of statement-2 and execution continues according to the rules for each statement specified in statement-2.

FORMAT 2

- 3) If condition-1 is true and statement-1 is specified, control is transferred to the first statement of statement-1 and execution continues according to the rules for each statement specified in statement-1. The ELSE phrase, if specified, is ignored.

- 4) If condition-1 is true and NEXT SENTENCE is specified in the THEN phrase, the ELSE phrase, if specified, is ignored and control is transferred to an implicit CONTINUE statement immediately preceding the next separator period.
- 5) If condition-1 is false and statement-2 is specified, the THEN phrase is ignored, control is transferred to the first statement of statement-2, and execution continues according to the rules for each statement specified in statement-2.
- 6) If condition-1 is false and NEXT SENTENCE is specified in the ELSE phrase, the THEN phrase is ignored and control is transferred to an implicit CONTINUE statement immediately preceding the next separator period.
- 7) If condition-1 is false and the ELSE phrase is not specified, the THEN phrase is ignored.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.19 INITIALIZE statement

The INITIALIZE statement provides the ability to set selected data items to specified values.

14.8.19.1 General format

INITIALIZE { identifier-1 } ... [WITH FILLER]

$$\left[\begin{array}{l} \left\{ \begin{array}{l} \text{ALL} \\ \text{category-name} \end{array} \right\} \text{ TO } \underline{\text{VALUE}} \\ \text{THEN } \underline{\text{REPLACING}} \left\{ \begin{array}{l} \text{category-name DATA BY } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-1} \end{array} \right\} \end{array} \right\} \dots \\ \text{[THEN TO } \underline{\text{DEFAULT}} \text{]} \end{array} \right]$$

where category-name is:

ALPHABETIC
ALPHANUMERIC
ALPHANUMERIC-EDITED
BOOLEAN
DATA-POINTER
NATIONAL
NATIONAL-EDITED
NUMERIC
NUMERIC-EDITED
OBJECT-REFERENCE
PROGRAM-POINTER

14.8.19.2 Syntax rules

- 1) Identifier-1 shall be strongly typed or of class alphabetic, alphanumeric, boolean, national, numeric, object, or pointer.
- 2) For each DATA-POINTER, OBJECT-REFERENCE, or PROGRAM-POINTER phrase specified as the category-name in the REPLACING phrase, identifier-2 shall be specified.
- 3) For each of the categories data-pointer, object-reference, and program-pointer specified in the REPLACING phrase, a SET statement with identifier-2 as the sending operand and an item of the specified category as the receiving operand shall be valid.

For each of the other categories specified in the REPLACING phrase, a MOVE statement with identifier-2 or literal-1 as the sending item and an item of the specified category as the receiving operand shall be valid.

- 4) The data description entry for the data item referenced by identifier-1 shall not contain a RENAMES clause.
- 5) The same category shall not be repeated in a REPLACING phrase.
- 6) The data item referenced by identifier-1 is the receiving operand.

- 7) If the REPLACING phrase is specified, literal-1 or the data item referenced by identifier-2 is the sending operand. If the REPLACING phrase is not specified, the sending operand is determined according to the general rules of the INITIALIZE statement.

14.8.19.3 General rules

- 1) When identifier-1 references a bit group item or a national group item, identifier-1 is processed as a group item. When identifier-2 references a bit group item or a national group item, identifier-2 is processed as an elementary data item.
- 2) The keywords in category-name correspond to a category of data as specified in 8.5.2, Class and category of data items and literals. If ALL is specified in the VALUE phrase it is as if all of the categories listed in category-name were specified.
- 3) If more than one identifier-1 is specified in an INITIALIZE statement, the result of executing this INITIALIZE statement is the same as if a separate INITIALIZE statement had been written for each identifier-1 in the same order as specified in the INITIALIZE statement. If an implicit INITIALIZE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit INITIALIZE statement, if any.
- 4) Whether identifier-1 references an elementary item or a group item, the effect of the execution of the INITIALIZE statement is as though a series of implicit MOVE or SET statements, each of which has an elementary data item as its receiving operand, were executed. The sending-operands of these implicit statements are defined in general rule 6 and the receiving-operands are defined in general rule 5.

If the category of a receiving-operand is data-pointer, object-reference, or program-pointer, the implicit statement is:

SET receiving-operand TO sending-operand

Otherwise, the implicit statement is:

MOVE sending-operand TO receiving-operand.

- 5) The receiving-operand in each implicit MOVE or SET statement is determined by applying the following steps in order:
 - a) First, the following data items are excluded as receiving-operands:
 1. Any identifiers that are not valid receiving operands of a MOVE statement, except data items of category data-pointer, object-reference, or program-pointer.
 2. If the FILLER phrase is not specified, elementary data items with an explicit or implicit FILLER clause.
 3. Any elementary data item subordinate to identifier-1 whose data description entry contains a REDEFINES or RENAMES clause or is subordinate to a data item whose data description entry contains a REDEFINES clause. However, identifier-1 may itself have a REDEFINES clause or be subordinate to a data item with a REDEFINES clause.
 - b) Second, an elementary data item is a possible receiving item if:
 1. It is explicitly referenced by identifier-1; or
 2. It is contained within the group data item referenced by identifier-1. If the elementary data item is a table element, each occurrence of the elementary data item is a possible receiving-operand.
 - c) Finally, each possible receiving-operand is a receiving-operand if at least one of the following is true:

1. The VALUE phrase is specified, the category of the elementary data item is one of the categories specified or implied in the VALUE phrase, and one of the following is true:
 - a. Either the category of the elementary data item is data-pointer, object-reference, or program-pointer, or
 - b. A data-item format or table format VALUE clause is specified in the data description entry of the elementary data item.
 2. The REPLACING phrase is specified and the category of the elementary data item is one of the categories specified in the REPLACING phrase; or
 3. The DEFAULT phrase is specified; or
 4. Neither the REPLACING phrase nor the VALUE phrase is specified.
- 6) The sending-operand in each implicit MOVE and SET statement is determined as follows:
- a) If the data item qualifies as a receiving-operand because of the VALUE phrase:
 1. If the category of the receiving-operand is data-pointer or program-pointer, the sending-operand is the predefined address NULL;
 2. If the category of the receiving-operand is object-reference, the sending-operand is the predefined object reference NULL;
 3. Otherwise, the sending-operand is determined by the literal in the VALUE clause specified in the data description entry of the data item. If the data item is a table element, the literal in the VALUE clause that corresponds to the occurrence being initialized determines the sending-operand. The actual sending-operand is a literal that, when moved to the receiving-operand with a MOVE statement, produces the same result as the initial value of the data item as produced by the application of the VALUE clause.
 - b) If the data item does not qualify as a receiving-operand because of the VALUE phrase, but does qualify because of the REPLACING phrase, the sending-operand is the literal-1 or identifier-2 associated with the category specified in the REPLACING phrase.
 - c) If the data item does not qualify in accordance with general rules 6a and 6b, the sending-operand used depends on the category of the receiving-operand as follows:

Receiving operand	Figurative constant
Alphabetic	Figurative constant alphanumeric SPACES
Alphanumeric	Figurative constant alphanumeric SPACES
Alphanumeric-edited	Figurative constant alphanumeric SPACES
Boolean	Figurative constant ZEROES
Data-pointer	Predefined address NULL
National	Figurative constant national SPACES
National-edited	Figurative constant national SPACES
Numeric	Figurative constant ZEROES
Numeric-edited	Figurative constant ZEROES
Object-reference	Predefined object reference NULL
Program-pointer	Predefined address NULL

- 7) If identifier-1 references a group data item, affected elementary data items are initialized in the sequence of their definition within the group data item. For a variable-occurrence data item, the number of occurrences initialized is determined by the rules of the OCCURS clause for a receiving data item.

- 8) If identifier-1 occupies the same storage area as identifier-2, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.20 INITIATE statement

The INITIATE statement initializes any internal storage locations used by the specified reports before any printing begins for these reports.

14.8.20.1 General format

INITIATE { report-name-1 } ...

14.8.20.2 Syntax rules

- 1) Report-name-1 shall be defined by a report description entry in the report section.
- 2) If report-name-1 is defined in a containing program, the file description entry associated with report-name-1 shall contain a GLOBAL clause.

14.8.20.3 General rules

- 1) The INITIATE statement performs the following initialization functions for each specified report:
 - a) All sum counters and all size error indicators are set to zero.
 - b) LINE-COUNTER is set to zero.
 - c) PAGE-COUNTER is set to 1.
- 2) An INITIATE statement shall not be executed if report-name-1 is in the active state. If it is in the active state, the EC-REPORT-ACTIVE exception condition is set to exist and the execution of the INITIATE statement has no other effect.
- 3) The INITIATE statement does not open any file connector with which report-name-1 is associated. Therefore, the INITIATE statement may be executed only if the corresponding file connector is open in the extend mode or the output mode. If the file connector is not open in the output or extend mode, the EC-REPORT-FILE-MODE exception condition is set to exist and no action is taken on the report.
- 4) A successful INITIATE statement places the report in the active state.
- 5) The results of executing an INITIATE statement in which more than one report-name-1 is specified is the same as if a separate INITIATE statement had been executed for each report-name-1 in the same order as specified in the statement. If an implicit INITIATE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit INITIATE statement, if any.

14.8.21 INSPECT statement

The INSPECT statement provides the ability to tally or replace occurrences of single characters or sequences of characters in a data item.

14.8.21.1 General format

Format 1 (tallying):

INSPECT identifier-1 TALLYING tallying-phrase

Format 2 (replacing):

INSPECT identifier-1 REPLACING replacing-phrase

Format 3 (tallying-and-replacing):

INSPECT identifier-1 TALLYING tallying-phrase REPLACING replacing-phrase

Format 4 (converting):

INSPECT identifier-1 CONVERTING { identifier-6
literal-4 } TO { identifier-7
literal-5 } [after-before-phrase]

where tallying-phrase is:

$$\left\{ \begin{array}{l} \text{identifier-2 } \underline{\text{FOR}} \left\{ \begin{array}{l} \underline{\text{CHARACTERS}} \text{ [after-before-phrase]} \\ \underline{\text{ALL}} \left\{ \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-1} \end{array} \right\} \text{ [after-before-phrase] } \right\} \dots \\ \underline{\text{LEADING}} \left\{ \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-1} \end{array} \right\} \text{ [after-before-phrase] } \right\} \dots \end{array} \right. \end{array} \right\} \dots \left\{ \dots \right\} \dots$$

where after-before-phrase is:

$$\left\{ \begin{array}{l} \underline{\text{AFTER}} \text{ INITIAL } \left\{ \begin{array}{l} \text{identifier-4} \\ \text{literal-2} \end{array} \right\} \\ \underline{\text{BEFORE}} \text{ INITIAL } \left\{ \begin{array}{l} \text{identifier-4} \\ \text{literal-2} \end{array} \right\} \end{array} \right\}$$

where replacing-phrase is:

$$\left\{ \begin{array}{l} \text{CHARACTERS BY replacement-item [after-before-phrase]} \\ \\ \text{ALL } \left\{ \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-1} \end{array} \right\} \text{BY replacement-item [after-before-phrase]} \right\} \dots \\ \\ \text{LEADING } \left\{ \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-1} \end{array} \right\} \text{BY replacement-item [after-before-phrase]} \right\} \dots \\ \\ \text{FIRST } \left\{ \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-1} \end{array} \right\} \text{BY replacement-item [after-before-phrase]} \right\} \dots \end{array} \right\} \dots$$

where replacement-item is:

$$\left\{ \begin{array}{l} \text{identifier-5} \\ \text{literal-3} \end{array} \right\}$$

14.8.21.2 Syntax rules

ALL FORMATS

- 1) Identifier-1 shall reference either an alphanumeric or national group item or an elementary item described implicitly or explicitly as usage display or national.
- 2) Identifier-3, ..., identifier-n shall reference an elementary item described implicitly or explicitly as usage display or national.
- 3) Each literal shall be an alphanumeric, boolean, or national literal. Literal-1, literal-2, literal-3, literal-4 shall not be a figurative constant that begins with the word ALL. If literal-1, literal-2, or literal-4 is a figurative constant, it refers to an implicit one character data item. When identifier-1 is of class national, the class of the figurative constant is national; when identifier-1 is of class boolean, the figurative constant is of class boolean and only the figurative constant ZERO may be specified; otherwise, the class of the figurative constant is alphanumeric.
- 4) If any of identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, identifier-7, literal-1, literal-2, literal-3, literal-4, or literal-5 references an elementary data item or literal of class boolean or national, then all shall reference a data item or literal of class boolean or national, respectively.

FORMATS 1 AND 3

- 5) Identifier-2 shall reference an elementary numeric data item.

FORMATS 2 AND 3

- 6) When both literal-1 and literal-3 are specified, they shall be the same size except when literal-3 is a figurative constant, in which case it is expanded or contracted to be the size of literal-1.
- 7) When the CHARACTERS phrase is specified, literal-3 shall be one character in length.

FORMAT 1

- 8) Identifier-1 is a sending operand.

FORMAT 4

- 9) When both literal-4 and literal-5 are specified they shall be the same size except when literal-5 is a figurative constant.

14.8.21.3 General rules

ALL FORMATS

- 1) For the purpose of determining its length, identifier-1 is treated as if it were a sending data item. If the data item referenced by identifier-1 is a zero-length item, execution of the INSPECT statement terminates immediately. (See 13.16.36, OCCURS clause).
- 2) Inspection (which includes the comparison cycle, the establishment of boundaries for the BEFORE or AFTER phrase, and the mechanism for tallying and/or replacing) begins at the leftmost character position of the data item referenced by identifier-1, regardless of its class, and proceeds from left to right to the rightmost character position as described in general rules 6 through 8.
- 3) For use in the INSPECT statement, the content of the data item referenced by identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 shall be treated as follows:
 - a) If any of identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 references an alphabetic, alphanumeric, boolean, or national data item, the INSPECT statement shall treat the content of each such identifier as a character-string of the category associated with that identifier.
 - b) If any of identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 references an alphanumeric-edited data item, or a numeric-edited or unsigned numeric data item described explicitly or implicitly with usage display, the data item is inspected as though it had been redefined as alphanumeric (see general rule 3a) and the INSPECT statement had been written to reference the redefined data item.
 - c) If any of identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 references a national-edited data item, or a numeric-edited or unsigned numeric data item described explicitly or implicitly with usage national, the data item is inspected as though it had been redefined as category national and the INSPECT statement has been written to reference the redefined data item.
 - d) If any of identifier-1, identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 references a signed numeric data item, the data item is inspected as though it had been moved to an unsigned numeric data item with length equal to the length of the signed item excluding any separate sign position, and then the rules in general rule 3b or 3c had been applied. If identifier-1 is a signed numeric item, the original value of the sign is retained upon completion of the INSPECT statement.
- 4) In general rules 6 through 21, all references to literal-1, literal-2, literal-3, literal-4, or literal-5 apply equally to the content of the data item referenced by identifier-3, identifier-4, identifier-5, identifier-6, or identifier-7 respectively.
- 5) Item identification for any identifier is done only once as the first operation in the execution of the INSPECT statement.

FORMATS 1 AND 2

- 6) During inspection of the content of the data item referenced by identifier-1, each properly matched occurrence of literal-1 is tallied (format 1) or replaced by literal-3 (format 2).

- 7) The comparison operation to determine the occurrence of literal-1 to be tallied or to be replaced, occurs as follows:
- a) The operands of the TALLYING or REPLACING phrase are considered in the order they are specified in the INSPECT statement from left to right. The first literal-1 is compared to an equal number of contiguous characters, starting with the leftmost character position in the data item referenced by identifier-1. Literal-1 matches that portion of the content of the data item referenced by identifier-1 if they are equal, character for character and:
 1. If neither LEADING nor FIRST is specified; or
 2. If the LEADING adjective applies to literal-1 and literal-1 is a leading occurrence as defined in general rules 11 and 16; or
 3. If the FIRST adjective applies to literal-1 and literal-1 is the first occurrence as defined in general rule 16.
 - b) If no match occurs in the comparison of the first literal-1, the comparison is repeated with each successive literal-1, if any, until either a match is found or there is no next successive literal-1. When there is no next successive literal-1, the character position in the data item referenced by identifier-1 immediately to the right of the leftmost character position considered in the last comparison cycle is considered as the leftmost character position, and the comparison cycle begins again with the first literal-1.
 - c) Whenever a match occurs, tallying or replacing takes place as described in general rules 12 and 15. The character position in the data item referenced by identifier-1 immediately to the right of the rightmost character position that participated in the match is now considered to be the leftmost character position of the data item referenced by identifier-1, and the comparison cycle starts again with the first literal-1.
 - d) The comparison operation continues until the rightmost character position of the data item referenced by identifier-1 has participated in a match or has been considered as the leftmost character position. When this occurs, inspection is terminated.
 - e) If the CHARACTERS phrase is specified, an implied one character operand participates in the cycle described in general rules 7a through 7d above as if it had been specified by literal-1, except that no comparison to the content of the data item referenced by identifier-1 takes place. This implied character is considered always to match the leftmost character of the content of the data item referenced by identifier-1 participating in the current comparison cycle.
- 8) The comparison operation defined in general rule 7 is restricted by the BEFORE and AFTER phrase as follows:
- a) If neither the BEFORE nor AFTER phrase is specified or identifier-4 references a zero-length item, literal-1 or the implied operand of the CHARACTERS phrase participates in the comparison operation as described in general rule 7. Literal-1 or the implied operand of the CHARACTERS phrase is first eligible to participate in matching at the leftmost character position of identifier-1.
 - b) If the BEFORE phrase is specified, the associated literal-1 or the implied operand of the CHARACTERS phrase participates only in those comparison cycles that involve that portion of the content of the data item referenced by identifier-1 from its leftmost character position up to, but not including, the first occurrence of literal-2 within the content of the data item referenced by identifier-1. The position of this first occurrence is determined before the first cycle of the comparison operation described in general rule 7 is begun. If, on any comparison cycle, literal-1 or the implied operand of the CHARACTERS phrase is not eligible to participate, it is considered not to match the content of the data item referenced by identifier-1. If there is no occurrence of literal-2 within the content of the data item referenced by identifier-1, its associated literal-1 or the implied operand of the CHARACTERS phrase participates in the comparison operation as though the BEFORE phrase had not been specified.
 - c) If the AFTER phrase is specified, the associated literal-1 or the implied operand of the CHARACTERS phrase participate only in those comparison cycles that involve that portion of the content of the data item

referenced by identifier-1 from the character position immediately to the right of the rightmost character position of the first occurrence of literal-2 within the content of the data item referenced by identifier-1 to the rightmost character position of the data item referenced by identifier-1. This is the character position at which literal-1 or the implied operand of the CHARACTERS phrase is first eligible to participate in matching. The position of this first occurrence is determined before the first cycle of the comparison operation described in general rule 7 is begun. If, on any comparison cycle, literal-1 or the implied operand of the CHARACTERS phrase is not eligible to participate, it is considered not to match the content of the data item referenced by identifier-1. If there is no occurrence of literal-2 within the content of the data item referenced by identifier-1, its associated literal-1 or the implied operand of the CHARACTERS phrase is never eligible to participate in the comparison operation.

FORMAT 1

- 9) Both the ALL and LEADING phrases are transitive across the operands that follow them until another ALL or LEADING phrase is encountered.
- 10) The content of the data item referenced by identifier-2 is not initialized by the execution of the INSPECT statement.
- 11) The rules for tallying are as follows:
 - a) If the ALL phrase is specified, the content of the data item referenced by identifier-2 is incremented by one for each occurrence of literal-1 matched within the content of the data item referenced by identifier-1.
 - b) If the LEADING phrase is specified, the content of the data item referenced by identifier-2 is incremented by one for the first and each subsequent contiguous occurrence of literal-1 matched within the content of the data item referenced by identifier-1, provided that the leftmost such occurrence is at the point where comparison began in the first comparison cycle in which literal-1 was eligible to participate.
 - c) If the CHARACTERS phrase is specified, the content of the data item referenced by identifier-2 is incremented by one for each character matched, in the sense of general rule 7e, within the content of the data item referenced by identifier-1.
- 12) If identifier-1, identifier-3, or identifier-4 occupies the same storage area as identifier-2, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)

FORMATS 2 AND 3

- 13) The size of literal-3 or the data item referenced by identifier-5 shall be equal to the size of literal-1 or the data item referenced by identifier-3. If these sizes are not equal, the EC-RANGE-INSPECT-SIZE exception condition is set to exist and the results of the execution of the INSPECT statement are undefined. When a figurative constant is used as literal-3, the size of the figurative constant is equal to the size of literal-1 or the size of the data item referenced by identifier-3.
- 14) When the CHARACTERS phrase is used, the data item referenced by identifier-5 shall be one character in length. If it is not, the EC-RANGE-INSPECT-SIZE exception condition is set to exist and the results of the execution of the INSPECT statement are undefined.

FORMAT 2

- 15) The ALL, FIRST, and LEADING phrases are transitive across the operands that follow them until another ALL, FIRST, or LEADING phrase is encountered.
- 16) The rules for replacement are as follows:
 - a) When the CHARACTERS phrase is specified, each character matched, in the sense of general rule 7e, in the content of the data item referenced by identifier-1 is replaced by literal-3.

- b) When the adjective ALL is specified, each occurrence of literal-1 matched in the content of the data item referenced by identifier-1 is replaced by literal-3.
 - c) When the adjective LEADING is specified, the first and each successive contiguous occurrence of literal-1 matched in the content of the data item referenced by identifier-1 is replaced by literal-3, provided that the leftmost occurrence is at the point where comparison began in the first comparison cycle in which literal-1 was eligible to participate.
 - d) When the adjective FIRST is specified, the leftmost occurrence of literal-1 matched within the content of the data item referenced by identifier-1 is replaced by literal-3. This rule applies to each successive specification of the FIRST phrase regardless of the value of literal-1.
- 17) If identifier-3, identifier-4, or identifier-5 occupies the same storage area as identifier-1, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)

FORMAT 3


- 18) A format 3 INSPECT statement is interpreted and executed as though two successive INSPECT statements specifying the same identifier-1 had been written with one statement being a format 1 statement with TALLYING phrases identical to those specified in the format 3 statement, and the other statement being a format 2 statement with REPLACING phrases identical to those specified in the format 3 statement. The general rules given for matching and counting apply to the format 1 statement and the general rules given for matching and replacing apply to the format 2 statement. Item identification of any identifier in the format 2 statement is done only once before executing the format 1 statement.

FORMAT 4

- 19) A format 4 INSPECT statement is interpreted and executed as though a format 2 INSPECT statement specifying the same identifier-1 had been written with a series of ALL phrases, one for each character of literal-4. The effect is as if each of these ALL phrases referenced, as literal-1, a single character of literal-4 and referenced, as literal-3, the corresponding single character of literal-5. Correspondence between the characters of literal-4 and the characters of literal-5 is by ordinal position within the data item.
- 20) If identifier-4, identifier-6, or identifier-7 occupies the same storage area as identifier-1, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)
- 21) The size of literal-5 or the data item referenced by identifier-7 shall be equal to the size of literal-4 or the data item referenced by identifier-6. If these sizes are not equal, the EC-RANGE-INSPECT-SIZE exception condition is set to exist and the results of the execution of the INSPECT statement are undefined. When a figurative constant is used as literal-5, the size of the figurative constant is equal to the size of literal-4 or the size of the data item referenced by identifier-6.
- 22) If the same character appears more than once in the data item referenced by identifier-6 or in literal-4, the first occurrence of the character is used for replacement.

14.8.22 INVOKE statement

The INVOKE statement causes a method to be invoked.

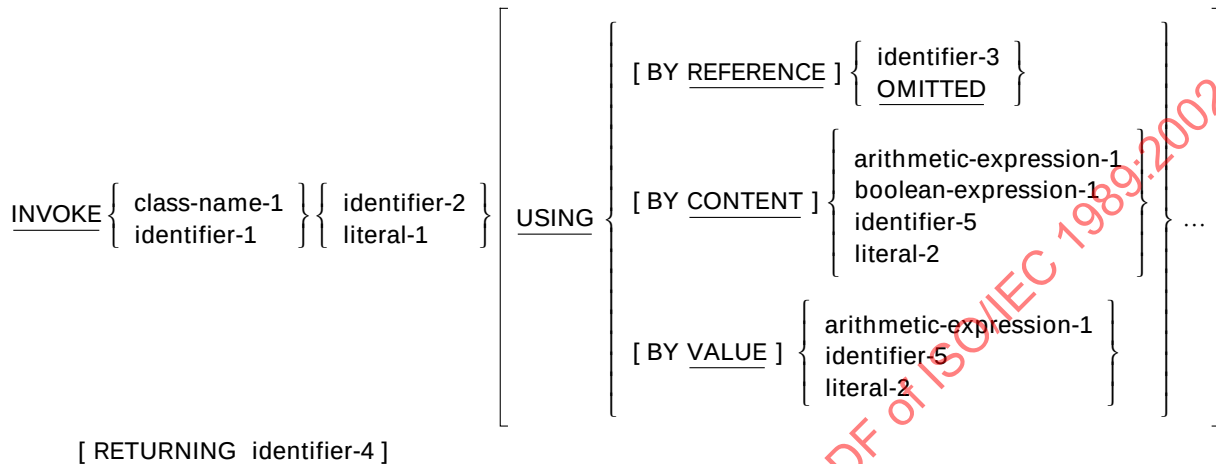14.8.22.1 General format**14.8.22.2 Syntax Rules**

- 1) Identifier-1 shall be an object reference.
- 2) Literal-1 shall be of class alphanumeric or national.
- 3) If class-name-1 is specified, literal-1 shall be specified. The value of literal-1 shall be the name of a method defined in the factory interface of class-name-1.
- 4) If identifier-1 is specified and it does not reference a universal object reference, literal-1 shall be specified. The value of literal-1 shall be the name of a method, subject to the following conditions:
 - a) If identifier-1 references an object reference described with a class-name and the FACTORY phrase, literal-1 shall be the name of a method contained in the factory interface of that class-name.
 - b) If identifier-1 references an object reference described with a class-name without the FACTORY phrase, literal-1 shall be the name of a method contained in the instance interface of that class-name.
 - c) If identifier-1 references an object reference described with the ACTIVE-CLASS and the FACTORY phrases, literal-1 shall be the name of a method contained in the factory interface of the class containing the INVOKE statement.
 - d) If identifier-1 references an object reference described with the ACTIVE-CLASS phrase and without the FACTORY phrase, literal-1 shall be the name of a method contained in the instance interface of the class containing the INVOKE statement.
 - e) If identifier-1 references an object reference described with an interface-name, literal-1 shall be the name of a method contained in the interface referenced by that interface-name.
 - f) If identifier-1 references the predefined object reference SELF and the method containing the INVOKE statement is a factory method, literal-1 shall be the name of a method contained in the factory interface of the class containing the INVOKE statement.

- g) If identifier-1 references the predefined object reference SELF and the method containing the INVOKE statement is an instance method, literal-1 shall be the name of a method contained in the instance interface of the class containing the INVOKE statement.
 - h) If identifier-1 references the predefined object reference SUPER and the method containing the INVOKE statement is a factory method, literal-1 shall be the name of a method contained in the factory interface of a class inherited by the class containing the INVOKE statement.
 - i) If identifier-1 references the predefined object reference SUPER and the method containing the INVOKE statement is an instance method, literal-1 shall be the name of a method contained in the instance interface of a class inherited by the class containing the INVOKE statement.
- 5) If class-name-1 is specified or the data item referenced by identifier-1 is not a universal object reference, the following applies:
- a) If a BY CONTENT or BY REFERENCE phrase is specified for an argument, a BY REFERENCE phrase shall be specified or implied for the corresponding formal parameter in the procedure division header.
 - b) If a BY VALUE phrase is specified for an argument, a BY VALUE phrase shall be specified for the corresponding formal parameter in the procedure division header.
 - c) The rules for conformance as specified in 14.7, Conformance for parameters and returning items, apply.
- 6) If identifier-1 references a universal object reference, neither the BY CONTENT nor the BY VALUE phrase shall be specified and the BY REFERENCE phrase, if not specified explicitly, is assumed implicitly.
- 7) Identifier-2 may be specified only when identifier-1 is a universal object reference.
- 8) Identifier-2 shall reference an alphanumeric or national data item.
- 9) Identifier-3 shall be an address-identifier or shall reference a data item defined in the file, working-storage, local-storage, linkage, or communication section.
- 10) Identifier-3 shall not reference a data item defined in the file or working-storage section of a factory or instance object.
- 11) Identifier-4 shall reference a data item defined in the file, working-storage, local-storage, linkage, or communication section.
- 12) If identifier-3 or identifier-4 references a bit data item, it shall be described such that:
- a) subscripting and reference modification in that identifier consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 13) If identifier-3, identifier-4, or identifier-5 references a group item, there shall not be an item subordinate to that group item that is an object reference described with the ACTIVE-CLASS phrase.
- 14) If an argument is specified without any BY phrase, BY REFERENCE is implied for that argument when:
- a) that argument is valid for being passed by reference, and
 - b) the corresponding formal parameter is not specified with the BY VALUE phrase.
- 15) If identifier-5 or its corresponding formal parameter is specified with the BY VALUE phrase, identifier-5 shall be of class numeric, object or pointer.

- 16) If literal-2 or its corresponding formal parameter is specified with the BY VALUE phrase, literal-2 shall be a numeric literal.
- 17) If an OMITTED phrase is specified, an OPTIONAL phrase shall be specified for the corresponding formal parameter in the procedure division header.
- 18) If identifier-3 references an address-identifier, identifier-3 is a sending operand.
- 19) If identifier-3 does not reference an address-identifier, identifier-3 is a receiving operand.
- 20) Identifier-5 and any identifier specified in arithmetic-expression-1 or boolean-expression-1 is a sending operand.
- 21) Identifier-4 is a receiving operand.

14.8.22.3 General Rules

- 1) The instance of the program, function, or method that executes the INVOKE statement is the activating runtime element.
- 2) Identifier-1 identifies an instance object. If class-name-1 is specified, it identifies the factory object of the class referenced by that class-name. Literal-1 or the content of the data item referenced by identifier-2 identifies a method of that object that will act upon that instance object:
 - a) If the method to be invoked is a COBOL method, literal-1 or the content of the data item referenced by identifier-2 is the name of the method to be invoked as described in 8.3.1.1.1, User-defined words.
 - b) If the method to be invoked is a non-COBOL method, the behavior of the INVOKE statement is implementor-defined.
- 3) The sequence of arguments in the USING phrase of the INVOKE statement and the corresponding formal parameters in the USING phrase of the invoked method's procedure division header determines the correspondence between arguments and formal parameters. This correspondence is positional and not by name equivalence.

NOTE The first argument corresponds to the first formal parameter, the second to the second, and the nth to the nth.

The effect of the USING phrase on the activated runtime element is described in 14.3, Procedure division, general rules.

- 4) An argument that consists merely of a single identifier or literal is regarded as an identifier or literal rather than an arithmetic or boolean expression.
- 5) If identifier-1 is null, the EC-OO-NUL exception condition is set to exist and execution of the INVOKE statement is terminated.
- 6) If class-name-1 is specified or the data item referenced by identifier-1 is not a universal object reference, the following applies: If an argument is specified without any of the keywords BY REFERENCE, BY CONTENT, or BY VALUE, the manner used for passing that argument is determined as follows:
 - a) When the BY REFERENCE phrase is specified or implied for the corresponding formal parameter:
 1. if the argument meets the requirements of syntax rules 9 and 10, BY REFERENCE is assumed;
 2. if the argument does not meet the requirements of syntax rules 9 and 10, BY CONTENT is assumed.
 - b) When the BY VALUE phrase is specified or implied for the corresponding formal parameter, BY VALUE is assumed.

7) Execution of the INVOKE statement proceeds as follows:

- a) Arithmetic-expression-1, boolean-expression-1, identifier-1, identifier-2, identifier-3, and identifier-5 are evaluated and item identification is done for identifier-4 at the beginning of the execution of the INVOKE statement. If an exception condition exists, no method is invoked and execution proceeds as specified in general rule 7f. If an exception condition does not exist, the values of identifier-3, identifier-5, arithmetic-expression-1, boolean-expression-1, or literal-2 are made available to the invoked method at the time control is transferred to that method.
 - b) The runtime system attempts to locate the method being invoked using the rules specified in 8.4.5, Scope of names; 8.4.5.4, Scope of method-names; 9.3.5, Method invocation; and 12.2.7, REPOSITORY paragraph. If the method is not found or the resources necessary to execute the method are not available, the EC-OO-METHOD exception condition is set to exist, the method is not activated, and execution continues as specified in general rule 7f.
 - c) If identifier-1 is a universal object reference and the method being invoked is a COBOL method, neither a formal parameter nor the returning item in the invoked method shall be described with the ANY LENGTH clause, and the rules for conformance specified in 14.7, Conformance for parameters and returning items, apply. If a violation of these rules is detected, the EC-OO-UNIVERSAL exception condition is set to exist if checking for it is enabled in both the invoked method and the activating runtime element, and execution continues as specified in general rule 7f.
 - d) The method specified by the INVOKE statement is made available for execution and control is transferred to the invoked method. Control is transferred to the invoked method in a manner consistent with the entry convention specified for the method. If the invoked method is a COBOL method, its execution is described in 14.1.3, General rules of the procedure division; otherwise, the execution is defined by the implementor.
 - e) After control is returned from the invoked method, if an exception condition is propagated from the invoked method, execution continues as specified in general rule 7f; otherwise, control is transferred to the end of the INVOKE statement.
 - f) If an exception condition has been raised, any declarative that is associated with that exception condition is executed. Execution then proceeds as defined for the exception condition and execution of the declarative.
- 8) If a RETURNING phrase is specified, the result of the activated method is placed into identifier-4.
- 9) If an OMITTED phrase is specified or a trailing argument is omitted, the omitted-argument condition for that parameter shall be true in the invoked method.
- 10) If a parameter for which the omitted-argument condition is true is referenced in an invoked method, except as an argument or in the omitted-argument condition, the EC-PROGRAM-ARG-OMITTED exception condition is set to exist.

14.8.23 MERGE statement

The MERGE statement combines two or more identically sequenced files on a set of specified keys, and during the process makes records available, in merged order, to an output procedure or to an output file.

14.8.23.1 General format

$$\begin{aligned} &\text{MERGE file-name-1} \left\{ \text{ON} \left\{ \begin{array}{l} \text{ASCENDING} \\ \text{DESCENDING} \end{array} \right\} \text{KEY} \{ \text{data-name-1} \} \dots \right\} \dots \\ &\left[\text{COLLATING SEQUENCE} \left\{ \begin{array}{l} \text{IS alphabet-name-1 [alphabet-name-2]} \\ \left\{ \begin{array}{l} \text{FOR ALPHANUMERIC IS alphabet-name-1} \\ \text{FOR NATIONAL IS alphabet-name-2} \end{array} \right\} \end{array} \right\} \right] \\ &\text{USING file-name-2} \{ \text{file-name-3} \} \dots \\ &\left\{ \begin{array}{l} \text{OUTPUT PROCEDURE IS procedure-name-1} \left[\left\{ \begin{array}{l} \text{THROUGH} \\ \text{THRU} \end{array} \right\} \text{procedure-name-2} \right] \\ \text{GIVING} \{ \text{file-name-4} \} \dots \end{array} \right\} \end{aligned}$$

14.8.23.2 Syntax rules

- 1) A MERGE statement may appear anywhere in the procedure division except in the declaratives portion.
- 2) File-name-1 shall be described in a sort-merge file description entry in the data division.
- 3) If the file description entry for file-name-1 describes variable-length records, the file description entry for file-name-2 or file-name-3 shall describe neither records smaller than the smallest record nor larger than the largest record described for file-name-1. If the file description entry for file-name-1 describes fixed-length records, the file description entry for file-name-2 or file-name-3 shall not describe a record that is larger than the record described for file-name-1.
- 4) Data-name-1 is a key data-name. Key data-names are subject to the following rules:
 - a) The data items identified by key data-names shall be described in records associated with file-name-1.
 - b) Key data-names may be qualified.
 - c) Key data items shall not be of the class boolean, object, or pointer.
 - d) The data items identified by key data-name shall not be variable-length data items.
 - e) If file-name-1 has more than one record description, the data items identified by key data-names need be described in only one of the record descriptions. The same byte positions referenced by a key data-name in one record description entry are taken as the key in all records of the file.
 - f) None of the data items identified by key data-names may be described by an entry that either contains an OCCURS clause or is subordinate to an entry that contains an OCCURS clause.

- g) If the file referenced by file-name-1 contains variable-length records, all the data items identified by key data-names shall be contained within the first x bytes of the record, where x equals the minimum record size specified for the file referenced by file-name-1.
- 5) Alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.
- 6) Alphabet-name-2 shall reference an alphabet that defines a national collating sequence.
- 7) File-names shall not be repeated within the MERGE statement.
- 8) The words THROUGH and THRU are equivalent.
- 9) File-name-2, file-name-3, and file-name-4 shall be described in a file description entry that is not for a report file and is not a sort-merge file description entry.
- 10) If file-name-4 references an indexed file, the first specification of data-name-1 shall be associated with an ASCENDING phrase and the data item referenced by that data-name-1 shall occupy the same byte positions in its record as the data item associated with the prime record key for that file.
- 11) No pair of file-names in a MERGE statement may be specified in the same SAME AREA, SAME SORT AREA, or SAME SORT-MERGE AREA clause. The only file-names in a MERGE statement that may be specified in the same SAME RECORD AREA clause are those associated with the GIVING phrase.
- 12) If the GIVING phrase is specified and the file description entry for file-name-4 describes variable-length records, the file description entry for file-name-1 shall describe neither records smaller than the smallest record nor larger than the largest record described for file-name-4. If the file description entry for file-name-4 describes fixed-length records, the file description entry for file-name-1 shall not describe a record that is larger than the record described for file-name-4.
- 13) If file-name-2, or file-name-3 references a relative or an indexed file, its access mode shall be sequential or dynamic.

14.8.23.3 General rules

- 1) The MERGE statement merges all records contained on the files referenced by file-name-2 and file-name-3.
- 2) If the file referenced by file-name-1 contains only fixed-length records, any record in the file referenced by file-name-2 or file-name-3 containing fewer character positions than that fixed length is space filled on the right to that fixed length, beginning with the first character position after the last character in the record, when that record is released to the file referenced by file-name-1, as follows:
 - a) If there is only one record description entry associated with the file referenced by file-name-2 or file-name-3 and that record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - b) If there are multiple record description entries associated with the file referenced by file-name-2 or file-name-3 and the descriptions include a SELECT WHEN clause, the rules of the SELECT WHEN clause are applied to the record to select its description. When the record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - c) Otherwise, the record is filled with alphanumeric space characters.
- 3) The data-names following the word KEY are listed from left to right in the MERGE statement in order of decreasing significance without regard to how they are divided into KEY phrases. The leftmost data-name is the major key, the next data-name is the next most significant key, etc.

- a) When the ASCENDING phrase is specified, the merged sequence is from the lowest value of the contents of the data items identified by the key data-names to the highest value, according to the rules for comparison of operands in a relation condition.
- b) When the DESCENDING phrase is specified, the merged sequence is from the highest value of the contents of the data items identified by the key data-names to the lowest value, according to the rules for comparison of operands in a relation condition.

The words ASCENDING and DESCENDING are transitive across all occurrences of data-name-1 until another occurrence of the word ASCENDING or DESCENDING is encountered.

- 4) When, according to the rules for the comparison of operands in a relation condition, the contents of all the key data items of one record are equal to the contents of the corresponding key data items of one or more other records, the order of return of these records:
 - a) Follows the order of the associated input files as specified in the MERGE statement.
 - b) Is such that all records associated with one input file are returned prior to the return of records from another input file.
- 5) The alphanumeric collating sequence that applies to the comparison of key data items of class alphabetic and class alphanumeric, and the national collating sequence that applies to the comparison of key data items of class national, are separately determined at the beginning of the execution of the MERGE statement in the following order of precedence:
 - a) First, the collating sequence established by the COLLATING SEQUENCE phrase, if specified, in this MERGE statement. The collating sequence associated with alphabet-name-1 applies to key data items of class alphabetic and alphanumeric; the collating sequence associated with alphabet-name-2 applies to key data items of class national.
 - b) Second, the collating sequences established as the program collating sequences.
- 6) If the records in the file referenced by file-name-2 and file-name-3 are not ordered as described in the ASCENDING or DESCENDING KEY clauses and the collating sequence associated with the MERGE statement, the EC-SORT-MERGE-SEQUENCE exception condition is set to exist, all files associated with the MERGE statement are closed, and the results of the merge operation are undefined.
- 7) All the records in the files referenced by file-name-2 and file-name-3 are transferred to the file referenced by file-name-1. At the start of execution of the MERGE statement, the file connectors referenced by file-name-2 and file-name-3 shall not be in the open mode, otherwise the EC-SORT-MERGE-FILE-OPEN exception condition is set to exist and the execution of the MERGE statement terminates. For each of the files referenced by file-name-2 and file-name-3 the execution of the MERGE statement causes the following actions to be taken:
 - a) The processing of the file is initiated. If the file-control entry for the file has a SHARING clause with the ALL phrase, the initiation is performed as if an OPEN statement with the INPUT phrase and the SHARING WITH READ ONLY phrase had been executed; otherwise, the initiation is performed as if an OPEN statement with the INPUT phrase and without a SHARING phrase is executed. If an output procedure is specified, this initiation is performed before control passes to the output procedure. If a non-fatal exception condition exists as a result of the execution of the implicit OPEN statement, the MERGE statement is terminated unless there is an applicable USE procedure that completes normally, after which the MERGE statement continues processing as if the exception condition did not exist.
 - b) The logical records are obtained and released to the merge operation. Each record is obtained as if a READ statement with the NEXT phrase, the IGNORING LOCK phrase, and the AT END phrase had been executed. When the at end condition exists for file-name-2 or file-name-3, the processing for that file connector is terminated. If the file referenced by file-name-1 is described with variable-length records, the size of any record written to file-name-1 is the size of that record when it was read from file-name-2 or file-name-3, regardless of the content of the data item referenced by the DEPENDING ON phrase of either a RECORD

IS VARYING clause or an OCCURS clause specified in the sort-merge file description entry for file-name-1. If the size of the record read from the file referenced by file-name-2 or file-name-3 is larger than the largest record allowed in the file description entry for file-name-1, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the MERGE statement is terminated. If file-name-1 is specified with variable-length records and the size of the record read from the file referenced by file-name-2 or file-name-3 is smaller than the smallest record allowed in the file description entry for file-name-1, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the MERGE statement is terminated.

- c) The processing of the file is terminated. The termination is performed as if a CLOSE statement without optional phrases had been executed. If an output procedure is specified, this termination is not performed until after control passes the last statement in the output procedure. For a relative file, the content of the relative key data item is undefined after the execution of the MERGE statement.

These implicit functions are performed such that any applicable USE procedures are executed. If a non-fatal exception condition exists from an attempt to CLOSE file-name-2 or file-name-3:

1. If there is an applicable USE procedure that completes normally, the MERGE statement continues.
2. If there is no applicable USE procedure, the exception condition is ignored and the MERGE statement continues execution.

The value of the data item referenced by the DEPENDING ON phrase of a RECORD IS VARYING clause specified in the file description entry for file-name-2 or file-name-3 is undefined upon completion of the MERGE statement.

- 8) The output procedure may consist of any procedure needed to select, modify, or copy the records that are made available one at a time by the RETURN statement in merged order from the file referenced by file-name-1. The range includes all statements that are executed as the result of a transfer of control in the range of the output procedure, as well as all statements in declarative procedures that are executed as a result of the execution of statements in the range of the output procedure. The range of the output procedure shall not cause the execution of any MERGE, RELEASE, or the file format of the SORT statement. (See 14.5.3, Explicit and implicit transfers of control.) If this rule is violated, the EC-SORT-MERGE-ACTIVE exception condition is set to exist and the results of the merge operation are undefined.
- 9) If an output procedure is specified, control passes to it during execution of the MERGE statement. The compiler inserts a return mechanism after the last statement in the output procedure. When control passes to that return mechanism, the mechanism provides for termination of the merge, and then passes control to the next executable statement after the MERGE statement. Before entering the output procedure, the merge procedure reaches a point at which it selects the next record in merged order when requested. The RETURN statements in the output procedure are the requests for the next record.

NOTE This return mechanism transfers control from the end of the output procedure and is not associated with the RETURN statement.

- 10) During the execution of the output procedure, no statement may be executed manipulating the file referenced by or accessing the record area associated with file-name-2 or file-name-3.
- 11) During the execution of any USE procedure implicitly invoked while executing the MERGE statement, no statement may be executed manipulating the file referenced by or accessing the record area associated with file-name-2, file-name-3, or file-name-4.
- 12) If the GIVING phrase is specified, all the merged records are written on each file referenced by file-name-4 as the implied output procedure for the MERGE statement. At the start of execution of the MERGE statement, the file referenced by file-name-4 shall not be in the open mode. If the file is in an open mode, the EC-SORT-MERGE-FILE-OPEN exception condition is set to exist and the execution of the MERGE statement terminates. For each of the files referenced by file-name-4, the execution of the MERGE statement causes the following actions to be taken:

- a) The processing of the file is initiated. The initiation is performed as if an OPEN statement with the OUTPUT and SHARING WITH NO OTHER phrases had been executed. If a fatal exception condition exists as a result of this implicit OPEN statement and there is an applicable USE procedure that completes normally, processing for the file connector that caused the exception condition is bypassed. If a non-fatal exception condition exists as a result of this implicit OPEN statement and there is an applicable USE procedure that completes normally, the file connector that caused the exception condition is processed as if the exception did not exist.
- b) The merged logical records are returned and written onto the file. Each record is written as if a WRITE statement without any optional phrases had been executed. If the file referenced by file-name-4 is described with variable-length records, the size of any record written to file-name-4 is the size of that record when it was read from file-name-1, regardless of the content of the data item referenced by the DEPENDING ON phrase of either a RECORD IS VARYING clause or an OCCURS clause specified in the file description entry for file-name-4. If an exception condition exists as a result of this implicit WRITE statement and there is an applicable USE procedure that completes normally, the MERGE continues execution, otherwise the MERGE statement is terminated.

For a relative file, the relative key data item for the first record returned has the value 1; for the second record returned, the value 2; etc. After execution of the MERGE statement, the content of the relative key data item indicates the last record returned to the file.

- c) The processing of the file is terminated. The termination is performed as if a CLOSE statement without optional phrases had been executed.

These implicit functions are performed such that any associated USE procedures are executed; however, the execution of such a USE procedure shall not cause the execution of any statement manipulating the file referenced by, or accessing the record area associated with, file-name-4. On the first attempt to write beyond the externally defined boundaries of the file, any USE procedure associated with the file connector referenced by file-name-4 is executed; if control is returned from that USE procedure or if no such USE procedure is specified, the processing of the file is terminated as in general rule 12c above.

The value of the data item referenced by the DEPENDING ON phrase of a RECORD IS VARYING clause specified in the sort-merge file description entry for file-name-1 is undefined upon completion of the MERGE statement for which the GIVING phrase is specified.

- 13) If the file referenced by file-name-4 contains only fixed-length records, any record in the file referenced by file-name-1 containing fewer character positions than that fixed-length is space filled on the right to that fixed length, beginning with the first character position after the last character in the record, when that record is returned to the file referenced by file-name-4, as follows:
 - a) If there is only one record description entry associated with the file referenced by file-name-4 and that record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - b) If there are multiple record description entries associated with the file referenced by file-name-4 and the descriptions include a SELECT WHEN clause, the rules of the SELECT WHEN clause are applied to the record to select its description. When the record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - c) Otherwise, the record is filled with alphanumeric space characters.

14.8.24 MOVE statement

The MOVE statement transfers data, in accordance with the rules of editing, to one or more data areas.

14.8.24.1 General format

Format 1 (simple):

$$\underline{\text{MOVE}} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \underline{\text{TO}} \{ \text{identifier-2} \} \dots$$

Format 2 (corresponding):

$$\underline{\text{MOVE}} \left\{ \begin{array}{l} \underline{\text{CORRESPONDING}} \\ \underline{\text{CORR}} \end{array} \right\} \text{identifier-3} \underline{\text{TO}} \text{identifier-4}$$
14.8.24.2 Syntax rules

FORMAT 1

- 1) The class of identifier-1 or identifier-2 shall not be index, object, or pointer.
- 2) If identifier-2 references a strongly-typed group item, identifier-1 shall be specified and be described as a group item of the same type.
- 3) Literal-1 and the data item referenced by identifier-1 are sending operands.
- 4) Identifier-2 is a receiving operand.
- 5) The figurative constant SPACE shall not be moved to a numeric or numeric-edited item.
- 6) The figurative constant ZERO shall not be moved to an alphabetic data item.
- 7) Any figurative constant for which the associated character or characters are not boolean characters shall not be moved to a boolean data item.
- 8) If identifier-1 is a data item described with usage binary-char, binary-short, binary-long, or binary-double, identifier-2 shall be a numeric or numeric-edited item; otherwise, table 17, Validity of types of MOVE statements, specifies the validity of the move.

Table 17 — Validity of types of MOVE statements

Category of sending operand		Category of receiving operand					
		Alphabetic	Alphanumeric -edited, Alphanumeric	Boolean	National, National- edited	Numeric, Numeric- edited	Type-name
Alphabetic		Yes	Yes	No	Yes	No	No
Alphanumeric		Yes	Yes	Yes	Yes	Yes	No
Alphanumeric-edited		Yes	Yes	No	Yes	No	No
Boolean		No	Yes	Yes	Yes	No	No
National		No	No	Yes	Yes	Yes	No
National-edited		No	No	No	Yes	No	No
Numeric	Integer	No	Yes	No	Yes	Yes	No
	Noninteger	No	No	No	No	Yes	No
Numeric-edited		No	Yes	No	Yes	Yes	No
Type-name		Yes	Yes	Yes	Yes	Yes	Yes

FORMAT 2

- 9) The words CORR and CORRESPONDING are equivalent.
- 10) Identifier-3 and identifier-4 shall specify group data items and shall not be reference modified.
- 11) The corresponding data items within identifier-3 are sending operands. The corresponding data items within identifier-4 are receiving operands. The corresponding data items are determined according to the rules specified in 14.6.5, CORRESPONDING phrase.

14.8.24.3 General rules

FORMAT 1

- 1) Literal-1 or the content of the data item referenced by identifier-1 is moved to the data item referenced by each identifier-2 in the order specified.

Item identification for identifier-2 is performed immediately before the data is moved to the respective data item. If identifier-2 is a zero-length item, the MOVE statement leaves identifier-2 unchanged.

If identifier-1 is reference modified, subscripted, or is a function-identifier, the reference modifier, subscript, or function-identifier is evaluated only once, immediately before data is moved to the first of the receiving operands.

The length of the data item referenced by identifier-1 is evaluated only once, immediately before the data is moved to the first of the receiving operands. If identifier-1 is a zero-length item, it is as if literal-1 were specified as the figurative constant SPACE.

The evaluation of the length of identifier-1 or identifier-2 may be affected by the DEPENDING ON phrase of the OCCURS clause.

The result of the statement

MOVE a (b) TO b, c (b)

is equivalent to:

MOVE a (b) TO temp
MOVE temp TO b
MOVE temp to c (b)

where 'temp' is an intermediate result item provided by the implementor.

- 2) Any move in which the sending operand is either a literal or an elementary item and the receiving item is an elementary item is an elementary move. Bit group items and national group items are treated as elementary items in the MOVE statement.

Any move that is not an elementary move is treated exactly as if it were an alphanumeric to alphanumeric elementary move, except that there is no conversion of data from one form of internal representation to another. In such a move, the receiving area will be filled without consideration for the individual elementary or group items contained within either the sending or receiving area, except as specified in general rule 8 of the OCCURS clause and except as may be required by an implementation for subordinate items of class object or pointer.

- 3) De-editing takes place only when the sending operand is a numeric-edited data item and the receiving item is a numeric or a numeric-edited data item.
- 4) Any necessary conversion of data from one form of internal representation to another takes place during valid elementary moves, along with any editing specified for, or deducting implied by, the receiving data item. When a national group item is referenced in a MOVE statement, no editing or de-editing takes place.

NOTE Bit group items and national group items are treated as elementary items in the MOVE statement.

Any necessary conversion from alphanumeric character to national character representation shall be performed, before any alignment, in accordance with a correspondence defined by the implementor. If no correspondence exists for any given alphanumeric character in the sending item, an implementor-defined substitution character is used as the corresponding national character in the receiving item and the EC-DATA-CONVERSION exception condition is set to exist.

The following rules apply:

- a) When an alphanumeric, alphanumeric-edited, national, or national-edited data item is a receiving operand, alignment and any necessary space filling shall take place as defined in 14.5.8, Alignment of data within data items. If the sending operand is described as being signed numeric, the operational sign is not moved; if the operational sign occupies a separate character position, that character is not moved and the size of the sending operand is considered to be one less than its actual size. (See 13.16.50, SIGN clause.) If the usage of the sending operand is different from that of the receiving operand, conversion of the sending operand to the internal representation of the receiving operand takes place. If the sending operand is numeric and contains the picture symbol 'P', all digit positions specified with this symbol are considered to have the value zero and are counted in the size of the sending operand.

If the sending item is of class boolean, its boolean value shall be moved.

NOTE When the runtime coded character set is the UTF-16 format of the UCS, the COBOL system does not detect truncation that bisects the two halves of a surrogate pair.

- b) When a numeric or numeric-edited item is the receiving item, alignment by decimal point and any necessary zero filling takes place as defined in 14.5.8, Alignment of data within data items or, if the LOCALE phrase of the PICTURE clause is specified, as defined in 13.16.38.4, Editing rules. When the sending operand is numeric-edited, de-editing is implied to establish the operand's unedited numeric value, which may be signed; then the unedited numeric value is moved to the receiving field. Restrictions on the content

of a numeric-edited sending operand are given in 14.5.12.2, Incompatible data. When the category of the sending operand is other than numeric-edited and the content of the sending operand would result in a false value in a numeric class condition, the EC-DATA-INCOMPATIBLE exception condition is set to exist and the results of the execution of the MOVE statement are undefined.

1. When a signed numeric item is the receiving item, the sign of the sending operand is placed in the receiving item. (See 13.16.50, SIGN clause.) Conversion of the representation of the sign takes place as necessary. If the sending operand is unsigned, a positive sign is generated for the receiving item.
2. When an unsigned numeric item is the receiving item, the absolute value of the sending operand is moved and no operational sign is generated for the receiving item.
3. When the sending operand is described as alphanumeric or national, the sending operand is treated as if it were an unsigned integer of category numeric with the following characteristics:
 - a. If the sending operand is a data item, the number of digits is the number of character positions in the sending data item unless the number of character positions is greater than 31, in which case the rightmost 31 character positions are used.
 - b. If the sending operand is a figurative constant, the number of digits is the same as the number of digits in the receiving operand and the figurative constant is replicated in this item, from left to right, as described in the rules for figurative constants. If the receiving item is not an integer, the number of digits includes both those to the right and the left of the decimal point.
 - c. If the sending operand is an alphanumeric or national literal, the number of digits is the same as the number of characters in the literal. If the number of characters exceeds 31, the size of the sending operand is 31 digits and only the rightmost 31 alphanumeric characters in the literal are used.
- c) When a receiving item is described as alphabetic, justification and any necessary space filling takes place as defined in 14.5.8, Alignment of data within data items.
- d) When a boolean data item is a receiving item, the boolean value of the sending item is moved, with conversion of data representation if necessary, and any necessary alignment and zero filling takes place as defined in 14.5.8, Alignment of data within data items. If the category of the sending operand is not boolean, the sending operand is treated as if it were a boolean data item with the same usage as the actual sending operand and with the same number of character positions as the actual sending operand. If the content of the sending operand would result in a false value in a boolean class condition, the EC-DATA-INCOMPATIBLE exception condition is set to exist and the results of the execution of the MOVE statement are undefined.
- 5) Alphanumeric, boolean, national, and numeric literals belong to the categories alphanumeric, boolean, national, and numeric, respectively. The category of figurative constants when used in the MOVE statement depends on the category of the receiving operand as shown in table 18, Category of figurative constants used in the MOVE statement.

NOTE MOVE of alphanumeric figurative constants to numeric items is an archaic feature and its use should be avoided.

Table 18 — Category of figurative constants used in the MOVE statement

Figurative constant	Category of receiving operand	Category of figurative constant
ALL literal, where literal is: Alphanumeric Boolean National	— — —	Alphanumeric Boolean National
ALL symbolic character, where symbolic character is: Alphanumeric National	— —	Alphanumeric National
HIGH-VALUE, HIGH-VALUES; LOW-VALUE, LOW-VALUES; and QUOTE, QUOTES	Alphabetic Alphanumeric Alphanumeric-edited National National-edited Numeric Numeric-edited — if usage is display — if usage is national	Alphanumeric Alphanumeric Alphanumeric National National National Alphanumeric Alphanumeric National
SPACE, SPACES	Alphabetic Alphanumeric Alphanumeric-edited National National-edited	Alphanumeric Alphanumeric Alphanumeric National National
ZERO, ZEROS, ZEROES	Alphanumeric Alphanumeric-edited Boolean National National-edited Numeric Numeric-edited	Alphanumeric Alphanumeric Boolean National National Numeric Numeric
— indicates the figurative constant category does not depend on the category of the receiving operand		

FORMAT 2

- 6) Data items within identifier-3 are selected to be moved to selected data items within identifier-4 according to the rules specified in 14.6.5, CORRESPONDING phrase. The results are the same as if the user had referred to each pair of corresponding identifiers in separate MOVE statements except that if subscripting is specified for identifier-3 or identifier-4, the subscript value used is that resulting from the evaluation of the subscript at the start of the execution of the statement.

NOTE For purposes of MOVE CORRESPONDING, bit group items and national group items are processed as group items, rather than as elementary items.

14.8.25 MULTIPLY statement

The MULTIPLY statement causes numeric data items to be multiplied and sets the values of data items equal to the results.

14.8.25.1 General format

Format 1 (by):

```
MULTIPLY { identifier-1  
            literal-1 } BY { identifier-2 [ ROUNDED ] } ...  
  
[ ON SIZE ERROR imperative-statement-1  
  NOT ON SIZE ERROR imperative-statement-2 ]  
[ END-MULTIPLY ]
```

Format 2 (by-giving):

```
MULTIPLY { identifier-1  
            literal-1 } BY { identifier-2  
                            literal-2 }  
  
GIVING { identifier-3 [ ROUNDED ] } ...  
  
[ ON SIZE ERROR imperative-statement-1  
  NOT ON SIZE ERROR imperative-statement-2 ]  
[ END-MULTIPLY ]
```

14.8.25.2 Syntax rules

- 1) Identifier-1 and identifier-2 shall reference a data item of category numeric.
- 2) Identifier-3 shall reference a data item of category numeric or numeric-edited.
- 3) Literal-1 and literal-2 shall be numeric literals.
- 4) When native arithmetic is in effect, the composite of operands described in 14.6.6, Arithmetic statements, is determined by using all of the operands in the statement.

14.8.25.3 General rules

- 1) When format 1 is used and native arithmetic is in effect, the initial evaluation consists of determining the multiplier, which is literal-1 or the value of the data item referenced by identifier-1. The multiplicand is the value of the data item referenced by identifier-2. The product of the multiplier and the multiplicand is stored as the new value of the data item referenced by identifier-2.
- 2) When format 2 is used and native arithmetic is in effect, the initial evaluation consists of determining the multiplier, which is literal-1 or the value of the data item referenced by identifier-1; determining the multiplicand, which is literal-2 or the value of the data item referenced by identifier-2; and forming the product of the multiplier and the multiplicand. The product is stored as the new value of each data item referenced by identifier-3.

- 3) When format 1 or 2 is used and standard arithmetic is in effect, the product equals the result of the arithmetic expression

(multiplier * multiplicand)

where the values for multiplier and multiplicand are as defined in general rules 1 and 2 for the respective formats.

- 4) Additional rules and explanations relative to this statement are given in 14.5.12.2, Incompatible data; 14.6.3, ROUNDED phrase; 14.6.4, SIZE ERROR phrase and size error condition; 14.6.6, Arithmetic statements; and 14.5.9, Overlapping operands.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.26 OPEN statement

The OPEN statement initiates the processing of files.

14.8.26.1 General format

$$\text{OPEN} \left\{ \begin{array}{l} \text{INPUT} \\ \text{OUTPUT} \\ \text{I-O} \\ \text{EXTEND} \end{array} \right\} [\text{sharing-phrase}] [\text{retry-phrase}] \{ \text{file-name-1} [\text{WITH NO REWIND}] \} \dots$$

where sharing-phrase is:

$$\text{SHARING WITH} \left\{ \begin{array}{l} \text{ALL OTHER} \\ \text{NO OTHER} \\ \text{READ ONLY} \end{array} \right\}$$

where retry-phrase is described in 14.6.8, RETRY phrase

14.8.26.2 Syntax rules

- 1) The OPEN statement for a report file shall not contain the INPUT phrase or the I-O phrase.
- 2) The EXTEND phrase shall be specified only if the access mode of the file connector referenced by file-name-1 is sequential and the LINAGE clause is not specified in the file description entry for file-name-1.
- 3) The files referenced in the OPEN statement need not all have the same organization or access.
- 4) The NO REWIND phrase may be specified only for sequential files.
- 5) The NO REWIND phrase may be specified only when the INPUT or OUTPUT phrase is specified.
- 6) If the SHARING phrase is omitted from the OPEN statement and the ALL phrase is specified in the SHARING clause of the file control entry for file-name-1 or if the ALL phrase is specified on the OPEN statement, the LOCK MODE clause shall be specified in the file control entry for file-name-1.
- 7) The I-O phrase shall not be specified if the FORMAT clause is specified in the file description entry for file-name-1.

14.8.26.3 General rules

- 1) The file connector referenced by file-name-1 shall not be open. If it is open, the execution of the OPEN statement is unsuccessful and the I-O status associated with file-name-1 is set to '41'.
- 2) The successful execution of an OPEN statement associates the file connector referenced by file-name-1 with a physical file if the physical file is available, and sets the open mode of the file connector to input, output, I-O, or extend, depending on the keywords INPUT, OUTPUT, I-O or EXTEND specified in the OPEN statement. The open mode determines the input-output statements that are allowed to reference the file connector as shown in table 21, Permissible I-O statements by access mode and open mode.

A physical file is available if it is physically present and is recognized by the operating environment. Table 19, Opening available and unavailable files (file not currently open), shows the results of opening available and unavailable physical files that are not currently open by another file connector. Table 20, Opening available

shared files that are currently open by another file connector, shows the results of opening available physical files that are currently open by another file connector, including those implicitly opened by the SORT and MERGE statements.

Table 19 — Opening available and unavailable files (file not currently open)

Open mode	File is available	File is unavailable
INPUT	Normal open	Open is unsuccessful
INPUT (optional file)	Normal open	Normal open; the first read causes the at end condition or invalid key condition
I-O	Normal open	Open is unsuccessful
I-O (optional file)	Normal open	Open causes the file to be created
OUTPUT	Normal open; the file contains no records	Open causes the file to be created
EXTEND	Normal open	Open is unsuccessful
EXTEND (optional file)	Normal open	Open causes the file to be created

Table 20 — Opening available shared files that are currently open by another file connector

Open request		Most restrictive existing sharing mode and open mode				
		sharing with no other	sharing with read only		sharing with all other	
		extend I-O input output	extend I-O output	input	extend I-O output	input
SHARING WITH NO OTHER	EXTEND I-O INPUT OUTPUT	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open
SHARING WITH READ ONLY	EXTEND I-O	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open	Normal open
	INPUT	Unsuccessful open	Unsuccessful open	Normal open	Unsuccessful open	Normal open
	OUTPUT	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open
SHARING WITH ALL OTHER	EXTEND I-O	Unsuccessful open	Unsuccessful open	Unsuccessful open	Normal open	Normal open
	INPUT	Unsuccessful open	Normal open	Normal open	Normal open	Normal open
	OUTPUT	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open	Unsuccessful open

- 3) The successful execution of an OPEN statement makes the associated record area available to the runtime element. If the file connector associated with file-name is an external file connector, there is only one record area associated with the file connector for the run unit.
- 4) When a file connector is not open, no statement shall be executed that references the associated file-name, either explicitly or implicitly, except for a MERGE or SORT statement with the USING or GIVING phrase, or an OPEN statement.
- 5) The OPEN statement for a report file connector shall be executed before the execution of an INITIATE statement that references a report-name that is associated with file-name-1.
- 6) For a given file connector, an OPEN statement shall be successfully executed prior to the execution of any other permissible input-output statement. In table 21, Permissible I-O statements by access mode and open mode, 'X' at an intersection indicates that the specified statement, used in the access mode given for that row, may be used with the open mode given at the top of the column.

Table 21 — Permissible I-O statements by access mode and open mode

Access mode	Statement	Open mode			
		Input	Output	I-O	Extend
Sequential	READ	X		X	
	WRITE		X		X
	REWRITE			X	
	START	X		X	
Sequential (relative and indexed files only)	DELETE			X	
Random	READ	X		X	
	WRITE		X	X	
	REWRITE			X	
	START				
	DELETE			X	
Dynamic	READ	X		X	
	WRITE		X	X	
	REWRITE			X	
	START	X		X	
	DELETE			X	

- 7) Execution of the OPEN statement does not obtain or release the first record.
- 8) During the execution of the OPEN statement when the file connector is matched with the physical file and the physical file exists, the attributes of the file connector as specified in the file control paragraph and the file description entry are compared with the fixed file attributes of the physical file. If the attributes don't match, a file attribute conflict condition occurs, the execution of the OPEN statement is unsuccessful, and the I-O status associated with file-name-1 is set to '39'. The implementor defines which of the fixed-file attributes are validated during the execution of the OPEN statement. The validation of fixed-file attributes may vary depending on the organization or storage medium of the file. (See 9.1.6, Fixed file attributes.)

- 9) The NO REWIND phrase will be ignored if it does not apply to the storage medium on which the physical file resides. If the NO REWIND phrase is ignored, the OPEN statement is successful and the I-O status associated with file-name-1 is set to '07'.
- 10) If the storage medium for the physical file permits rewinding, the following rules apply:
 - a) When neither the EXTEND, nor the NO REWIND phrase is specified, execution of the OPEN statement causes the physical file to be positioned at its beginning.
 - b) When the NO REWIND phrase is specified, execution of the OPEN statement does not cause the physical file to be repositioned; the physical file shall be already positioned at its beginning prior to execution of the OPEN statement.
- 11) If the physical file is not present, and the INPUT phrase is specified in the OPEN statement, and the OPTIONAL clause is specified in the file control entry for file-name-1, the file position indicator in the file connector referenced by file-name-1 is set to indicate that an optional input file is not present.
- 12) When the organization of the file referenced by file-name-1 is sequential or relative and the INPUT or I-O phrase is specified in the OPEN statement, the file position indicator for that file connector is set to 1. When the organization is indexed, the file position indicator is set to the characters that have the lowest ordinal position in the collating sequence associated with the file, and the prime record key is established as the key of reference.
- 13) When the EXTEND phrase is specified, the OPEN statement positions the file immediately after the last logical record for that file. The last logical record for a sequential file is the last record written in the file. The last logical record for a relative file is the currently existing record with the highest relative record number. The last logical record for an indexed file is the currently existing record with the highest prime key value.
- 14) If the I-O phrase is specified, the physical file shall support the input and output statements that are permitted for the organization of that file when opened in the I-O mode. If the physical file does not support those statements, the I-O status value for file-name-1 is set to '37' and the execution of the OPEN statement is unsuccessful. The successful execution of an OPEN statement with the I-O phrase sets the open mode of file connector referenced by file-name-1 to open in the I-O mode.
- 15) If the physical file is not present, and the EXTEND or I-O phrase is specified in the OPEN statement, and the OPTIONAL clause is specified in the file control entry for file-name-1, the OPEN statement creates the file. This creation takes place as if the following statements were executed in the order shown:

OPEN OUTPUT file-name.
CLOSE file-name.

These statements are followed by execution of the OPEN statement specified in the source element.
- 16) If the OUTPUT phrase is specified, the successful execution of the OPEN statement creates the physical file. After the creation of the physical file, the file contains no records. If physical pages have meaning for the physical file, the positioning of the output medium with respect to physical page boundaries is implementor-defined following the successful execution of the OPEN statement, whether or not the LINAGE clause is specified in the file description entry of file-name-1.
- 17) Upon successful execution of the OPEN statement, the current volume pointer is set:
 - a) To point to the first or only reel/unit in the physical file if INPUT or I-O is specified.
 - b) To point to the reel/unit containing the last record in the physical file if EXTEND is specified.
 - c) To point to the newly created reel/unit in the physical file for an unavailable file if EXTEND, I-O, or OUTPUT is specified.

- 18) The execution of the OPEN statement causes the value of the I-O status associated with file-name-1 to be updated to one of the values in 9.1.12, I-O status.
- 19) If more than one file-name is specified in an OPEN statement, the result of executing this OPEN statement is the same as if a separate OPEN statement had been written for each file-name in the same order as specified in the OPEN statement. These separate OPEN statements would each have the same open mode specification, the sharing-phrase, retry-phrase, and REWIND phrase as specified in the OPEN statement. If an implicit OPEN statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit OPEN statement, if any.
- 20) The SHARING phrase is effective only for files that are shareable.
- 21) The SHARING phrase specifies the level of sharing permitted for the physical file associated with file-name-1 and specifies the operations that may be performed on the physical file through other file connectors sharing the physical file, as indicated in 9.1.14, Sharing mode.
- 22) The SHARING phrase overrides any SHARING clause in the file control entry of file-name-1. If there is no SHARING phrase on the OPEN statement, then file sharing is completely specified in the file control entry. If neither a SHARING phrase on the OPEN statement nor a SHARING clause in the file control entry is specified, the implementor shall define the sharing mode that is established for each file connector.
- 23) The RETRY phrase is used to control the behavior of an OPEN statement when the open mode or sharing mode requested conflicts with those of other file connectors that are currently associated with the physical file. The I-O status is set in accordance with the rules in 14.6.8, RETRY phrase.
- 24) If the file connector referenced by file-name-1 is locked by a previously-executed CLOSE statement with the LOCK phrase, the execution of the OPEN statement is unsuccessful and the I-O status associated with that file connector is set to '38'.
- 25) If the execution of the OPEN statement is unsuccessful, the physical file is not affected and the following actions take place in the following order:
 - a) A value is placed in the I-O status associated with file-name to indicate the condition that caused the OPEN statement to be unsuccessful.
 - b) The level-3 EC-I-O exception condition associated with the I-O status value is set to exist.
 - c) Any applicable USE FOR EXCEPTION or USE AFTER EXCEPTION procedure is executed as specified for the rules for the USE statement.

14.8.27 PERFORM statement

The PERFORM statement is used to transfer control explicitly to one or more procedures and to return control implicitly whenever execution of the specified procedure is complete. The PERFORM statement is also used to control execution of one or more imperative statements that are within the scope of that PERFORM statement.

14.8.27.1 General format

Format 1 (out-of-line):

$$\underline{\text{PERFORM}} \text{ procedure-name-1 } \left[\left\{ \begin{array}{c} \underline{\text{THROUGH}} \\ \underline{\text{THRU}} \end{array} \right\} \text{ procedure-name-2 } \right] \left[\begin{array}{c} \text{times-phrase} \\ \text{until-phrase} \\ \text{varying-phrase} \end{array} \right]$$

Format 2 (inline):

$$\underline{\text{PERFORM}} \left[\begin{array}{c} \text{times-phrase} \\ \text{until-phrase} \\ \text{varying-phrase} \end{array} \right] \text{ imperative-statement-1 } \underline{\text{END-PERFORM}}$$

where times-phrase is:

$$\left\{ \begin{array}{c} \text{identifier-1} \\ \text{integer-1} \end{array} \right\} \underline{\text{TIMES}}$$

where until-phrase is:

$$\left[\text{WITH } \underline{\text{TEST}} \left\{ \begin{array}{c} \underline{\text{BEFORE}} \\ \underline{\text{AFTER}} \end{array} \right\} \right] \underline{\text{UNTIL}} \text{ condition-1}$$

where varying-phrase is:

$$\left[\text{WITH } \underline{\text{TEST}} \left\{ \begin{array}{c} \underline{\text{BEFORE}} \\ \underline{\text{AFTER}} \end{array} \right\} \right]$$

$$\underline{\text{VARYING}} \left\{ \begin{array}{c} \text{identifier-2} \\ \text{index-name-1} \end{array} \right\} \underline{\text{FROM}} \left\{ \begin{array}{c} \text{identifier-3} \\ \text{index-name-2} \\ \text{literal-1} \end{array} \right\} \left[\underline{\text{BY}} \left\{ \begin{array}{c} \text{identifier-4} \\ \text{literal-2} \end{array} \right\} \right] \underline{\text{UNTIL}} \text{condition-1}$$

$$\left[\underline{\text{AFTER}} \left\{ \begin{array}{c} \text{identifier-5} \\ \text{index-name-3} \end{array} \right\} \underline{\text{FROM}} \left\{ \begin{array}{c} \text{identifier-6} \\ \text{index-name-4} \\ \text{literal-3} \end{array} \right\} \left[\underline{\text{BY}} \left\{ \begin{array}{c} \text{identifier-7} \\ \text{literal-4} \end{array} \right\} \right] \underline{\text{UNTIL}} \text{condition-2} \right] \dots$$

14.8.27.2 Syntax rules

- 1) If neither the TEST BEFORE nor the TEST AFTER phrase is specified, the TEST BEFORE phrase is assumed.
- 2) Each identifier shall reference a numeric elementary item described in the data division. Identifier-1 shall be an integer.
- 3) Each literal shall be numeric.
- 4) The words THROUGH and THRU are equivalent.
- 5) If an index-name is specified in the VARYING or AFTER phrase, then:
 - a) The identifier in the associated FROM and BY phrases shall reference an integer data item.
 - b) The literal in the associated FROM phrase shall be a positive integer.
 - c) The literal in the associated BY phrase shall be a nonzero integer.
- 6) If an index-name is specified in the FROM phrase, then:
 - a) The identifier in the associated VARYING or AFTER phrase shall reference an integer data item.
 - b) The identifier in the associated BY phrase shall reference an integer data item.
 - c) The literal in the associated BY phrase shall be an integer.
- 7) The literal in the BY phrase shall not be zero.
- 8) Condition-1, condition-2, ... , may be any conditional expression. (See 8.8.4, Conditional expressions.)
- 9) When procedure-name-1 and procedure-name-2 are both specified and either is the name of a procedure in the declaratives portion of the procedure division, both shall be procedure-names in the same declarative section.
- 10) At least six AFTER phrases shall be permitted in varying-phrase.
- 11) Procedure-name-1 shall be the name of either a paragraph or a section in the same source element as that in which the PERFORM statement is specified.

- 12) Procedure-name-2 shall be the name of either a paragraph or a section in the same source element as that in which the PERFORM statement is specified.

14.8.27.3 General rules

- 1) If an index-name is specified in the VARYING or AFTER phrase, and an identifier is specified in the associated FROM phrase, at the time the data item referenced by the identifier is used to initialize the index associated with the index-name, the data item shall have a positive value. If the data item does not have a positive value, the EC-RANGE-PERFORM-VARYING exception condition is set to exist.
- 2) An inline PERFORM statement and an out-of-line PERFORM statement function identically according to the following rules. For an out-of-line PERFORM statement, the specified set of statements consists of all statements beginning with the first statement of procedure-name-1 and ending with the last statement of procedure-name-2, or, if procedure-name-2 is not specified, the last statement of procedure-name-1. For an inline PERFORM statement, the specified set of statements consists of all statements contained within the PERFORM statement.
- 3) When the PERFORM statement is executed, control is transferred to the first statement of the specified set of statements except as indicated in general rules 7, 8, and 9. For those cases where a transfer of control to the specified set of statements does take place, an implicit transfer of control to the end of the PERFORM statement is established as follows:
 - a) If procedure-name-2 is not specified, the return mechanism is after the last statement of procedure-name-1.
 - b) If procedure-name-2 is specified, the return mechanism is after the last statement of procedure-name-2.
- 4) There is no necessary relationship between procedure-name-1 and procedure-name-2 except that a consecutive sequence of operations is to be executed beginning at the procedure named procedure-name-1 and ending with the execution of the procedure named procedure-name-2.

NOTE Statements such as the GO TO statement, the PERFORM statement, and the procedure format of the EXIT statement may occur in the flow of execution of the specified set of statements, however the flow of execution should eventually pass to the end of procedure-name-2.

- 5) If control passes to the specified set of statements by means other than a PERFORM statement, control will pass through the last statement of the set to the next executable statement as if no PERFORM statement referenced the set.
- 6) A PERFORM statement without times-phrase, until-phrase, or varying-phrase is the basic PERFORM statement. The specified set of statements referenced by this type of PERFORM statement is executed once and then control passes to the end of the PERFORM statement.
- 7) If times-phrase is specified, the specified set of statements is performed the number of times specified by integer-1 or by the value of the data item referenced by identifier-1 at the start of the execution of the PERFORM statement. If at the start of the execution of a PERFORM statement, the value of the data item referenced by identifier-1 is equal to zero or is negative, control passes to the end of the PERFORM statement. Following the execution of the specified set of statements the specified number of times, control is transferred to the end of the PERFORM statement.

NOTE During execution of the PERFORM statement, a change to the contents of identifier-1 does not alter the number of times the specified set of statements is performed.

- 8) If until-phrase is specified, the specified set of statements is performed until the condition specified by the UNTIL phrase is true. When the condition is true, control is transferred to the end of the PERFORM statement. If the condition is true when the PERFORM statement is entered, and the TEST BEFORE phrase is specified or implied, no transfer to the specified set of statements takes place, and control is passed to the end of the PERFORM statement. If the TEST AFTER phrase is specified, the PERFORM statement functions as if the TEST BEFORE phrase were specified except that the condition is tested after the specified set of statements has been

executed. Item identification associated with the operands specified in condition-1 is done each time the condition is tested.

- 9) If varying-phrase is specified, the execution of the PERFORM statement augments the data items referenced by one or more identifiers or the indexes referenced by one or more index-names in an orderly fashion. In the following rules, the data items referenced by identifier-2 and identifier-5 and the indexes referenced by index-name-1 and index-name-3 are referred to as the induction variables. The content of the data item referenced by the identifier, the occurrence number corresponding to the value of the index referenced by the index-name, or the value of the literal referenced in the FROM phrase is referred to as the initialization value. The content of the data item referenced by the identifier or the value of the literal in a BY phrase is referred to as the augment value. For any BY phrase that is omitted, the augment value is 1. Item identification for identifier-2, identifier-5, index-name-1, or index-name-3 is done each time the content of the data item referenced by the identifier or the value of the index referenced by the index-name is set or augmented. Item identification for identifier-3, identifier-4, identifier-6, identifier-7, index-name-2, and index-name-4 is done each time the content of the data item referenced by the identifier or the index referenced by the index-name is used in a setting or augmenting operation. Item identification associated with the operands specified in condition-1 or condition-2 is done each time the condition is tested.

NOTE If an augment value is less than 0, the induction variable is actually decremented by the absolute value of the augment value.

The sequence of operation of the PERFORM statement is as follows:

- a) All induction variables are set to their associated initialization values in the left-to-right order in which the induction variables are specified.
- b) If the TEST AFTER phrase is specified, and there is no AFTER phrase, the specified set of statements is executed once and condition-1 is tested. If the condition is false, the induction variable is incremented by the augment value, and the specified set of statements is executed again. The cycle continues until condition-1 is tested and found to be true, at which point control is transferred to the end of the PERFORM statement. At that point, the induction variable contains the value it contained at the completion of the execution of the specified set of statements.
- c) If the TEST AFTER phrase is specified, and there is one or more AFTER phrase, the following occurs:
 1. The specified set of statements is executed.
 2. The rightmost condition-2 is then evaluated.
 3. If the rightmost condition-2 is false, the associated induction variable is incremented by the associated augment value, and execution proceeds with step a.
 4. If the last condition evaluated is true, the condition to its left is evaluated. This is repeated until either a false condition is found or the last condition evaluated is condition-1 and condition-1 is true. If a false condition is found, the induction variable associated with that condition is incremented by the associated augment value, all induction variables to the right of the false condition are set to their initialization values, and execution proceeds with step a. If no condition is found to be false, control is transferred to the end of the PERFORM statement.

NOTE After successful execution of the PERFORM statement, all induction variables contain the values they had at the completion of the last execution of the specified set of statements.

- d) If the TEST AFTER phrase is not specified and there is no AFTER phrase, condition-1 is evaluated, and if it is true, control is transferred to the end of the PERFORM statement. If it is false, the specified set of statements is executed. Then, the induction variable is incremented by the augment value, and condition-1 is evaluated again. When control is passed to the end of the PERFORM statement, the induction variable contains the value it contained when condition-1 was evaluated.
- e) If the TEST AFTER phrase is not specified, and there is one or more AFTER phrase, the following occurs:

1. Condition-1 is evaluated.

If condition-1 is true, control is transferred to the end of the PERFORM statement; otherwise, the condition-2 immediately to the right becomes the current condition.

2. The current condition is evaluated.

If the current condition is true:

- a. the induction variable associated with the current condition is set to its initialization value
- b. the condition to the left of the current condition becomes the current condition
- c. the induction variable associated with the new current condition is incremented by its associated augment value
- d. if the current condition is condition-1 execution proceeds to step a, else execution proceeds to the beginning of step b.

otherwise:

- a. if there is another AFTER phrase to the right of the current condition,
 - the condition associated with that AFTER phrase becomes the current condition
 - execution proceeds to the beginning of step b;
- b. otherwise
 - the specified set of statements is executed
 - the induction variable associated with the current condition is incremented by the augment value
 - execution proceeds to the beginning of step b.

NOTE After successful execution of the PERFORM statement, all induction variables contain the values they had at the completion of the last evaluation of condition-1. With the exception of the induction variable associated with condition-1, these values are the same as they were at the last execution of the specified set of statements, or are their associated initialization values if no statements were executed. If no statements were executed, the induction variable associated with condition-1 contains its associated initialization value; otherwise, the induction variable associated with condition-1 contains the value it contained after the last execution of the specified set of statements, incremented by the augment value.

During the execution of the specified set of statements associated with the PERFORM statement, all changes to the induction variable, the variables associated with the augment value, and the variables associated with the initialization value have immediate effect and all subsequent references to the associated data items use the updated contents.

- 10) The range of a PERFORM statement consists logically of all those statements that are executed as a result of executing the PERFORM statement through execution of the implicit transfer of control to the end of the PERFORM statement. The range includes all statements that are executed as the result of a transfer of control in the range of the PERFORM statement, except for statements executed as the result of a transfer of control by an EXIT FUNCTION, EXIT METHOD, EXIT PROGRAM, or GOBACK statement specified in the same instance of the same source element as the PERFORM statement. Declarative procedures that are executed as a result of the execution of statements in the range of a PERFORM statement are included in the range of the PERFORM statement. The statements in the range of a PERFORM statement need not appear consecutively in the source element.

11) The results of executing the following sequence of PERFORM statements are undefined and no exception condition is set to exist when the sequence is executed:

- a) a PERFORM statement is executed and has not yet terminated, then
- b) within the range of that PERFORM statement another PERFORM statement is executed, then
- c) the execution of the second PERFORM statement passes through the exit of the first PERFORM statement.

NOTE Because this is undefined, the user should avoid such an execution sequence. On some implementations it causes stack overflows, on some it causes returns to unlikely places, and on others other actions can occur. Therefore, the results are unpredictable and are unlikely to be portable.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.28 RAISE statement

The RAISE statement causes a specified exception condition to be raised.

14.8.28.1 General Format

$$\underline{\text{RAISE}} \left\{ \begin{array}{l} \underline{\text{EXCEPTION}} \text{ exception-name-1} \\ \text{identifier-1} \end{array} \right\}$$

14.8.28.2 Syntax Rules

- 1) Exception-name-1 shall be a level-3 exception-name as specified in 14.5.12.1, Exception conditions.
- 2) Identifier-1 shall be an object reference; the predefined object references NULL and SUPER shall not be specified.
- 3) Identifier-1 is a sending operand.

14.8.28.3 General Rules

- 1) If exception-name-1 is specified, the associated exception condition is raised, and EXCEPTION-OBJECT is set to null.
- 2) If identifier-1 is specified, EXCEPTION-OBJECT is set to reference the object referenced by identifier-1.
- 3) The effect of the RAISE statement is the same as that of a CONTINUE statement if one of the following is true:
 - a) Exception-name-1 is specified, the exception condition is non-fatal, and there is no applicable declarative.
 - b) Identifier-1 is specified and there is no applicable declarative.

14.8.29 READ statement

For sequential access, the READ statement makes available the next logical record from a file. For random access, the READ statement makes available a specified record from a mass storage file.

14.8.29.1 General format

Format 1 (sequential):

```

READ file-name-1 { NEXT
                  PREVIOUS } RECORD [ INTO identifier-1 ]

[ ADVANCING ON LOCK
  IGNORING LOCK
  retry-phrase ]

[ WITH LOCK
  WITH NO LOCK ]

[ AT END imperative-statement-1
  NOT AT END imperative-statement-2 ]
[ END-READ ]

```

Format 2 (random):

```

READ file-name-1 RECORD [ INTO identifier-1 ]

[ IGNORING LOCK
  retry-phrase ]

[ WITH LOCK
  WITH NO LOCK ]

[ KEY IS { data-name-1
           record-key-name-1 } ]

[ INVALID KEY imperative-statement-3
  NOT INVALID KEY imperative-statement-4 ]
[ END-READ ]

```

where retry-phrase is described in 14.6.8, RETRY phrase

14.8.29.2 Syntax rules

ALL FORMATS

- 1) The INTO phrase may be specified in a READ statement:
 - a) If no record description entry or only one record description is subordinate to the file description entry, or
 - b) If the data item referenced by identifier-1 and all record-names associated with file-name-1 describe an alphanumeric group item or an elementary item of category alphanumeric or category national.

- 2) The storage area associated with identifier-1 and the record area associated with file-name-1 shall not be the same storage area.
- 3) If identifier-1 is a strongly-typed group item, there shall be at most one record area subordinate to the FD for file-name-1. This record area, if specified, shall be a strongly-typed group item of the same type as identifier-1.
- 4) The LOCK phrase shall not be specified in the same READ statement as the IGNORING LOCK phrase.
- 5) If automatic locking has been specified for file-name-1, none of the phrases IGNORING LOCK, WITH LOCK, or WITH NO LOCK shall be specified.

FORMAT 1

- 6) None of the phrases ADVANCING, AT END, NEXT, NOT AT END, or PREVIOUS shall be specified if ACCESS MODE RANDOM is specified in the file control entry for file-name-1.
- 7) If neither the NEXT phrase nor the PREVIOUS phrase is specified and ACCESS MODE SEQUENTIAL is specified in the file control entry for file-name-1, the NEXT phrase is implied.
- 8) If neither the NEXT phrase nor the PREVIOUS phrase is specified and ACCESS MODE DYNAMIC is specified in the file control entry for file-name-1, the NEXT phrase is implied if any of the following phrases is specified: ADVANCING, AT END, or NOT AT END.

FORMAT 2

- 9) The KEY phrase may be specified only if ORGANIZATION IS INDEXED is specified in the file control entry for file-name-1.
- 10) Data-name-1 or record-key-name-1 shall be specified in the RECORD KEY clause or an ALTERNATE RECORD KEY clause associated with file-name-1.
- 11) Data-name-1 or record-key-name-1 may be qualified.

14.8.29.3 General rules

ALL FORMATS

- 1) The open mode of the file connector referenced by file-name-1 shall be input or I-O. If it is any other value, the execution of the READ statement is unsuccessful and the I-O status value for file-name-1 is set to '47'.
- 2) The execution of the READ statement causes the value of the I-O status in the file connector referenced by file-name-1 to be updated as indicated in 9.1.12, I-O status.
- 3) When the logical records of a file are described with more than one record description, these records automatically share the same record area in storage; this is equivalent to an implicit redefinition of the area. The contents of any data items that lie beyond the range of the current record are undefined at the completion of the execution of the READ statement.
- 4) The result of the successful execution of a READ statement with the INTO phrase is equivalent to the application of the following rules in the order specified:
 - a) The same READ statement without the INTO phrase is executed.
 - b) The current record is moved from the record area to the area specified by identifier-1 according to the rules for the MOVE statement without the CORRESPONDING phrase. The size of the current record is determined by rules specified in the RECORD clause. If the file description entry contains a RECORD IS VARYING clause, the implied move is an alphanumeric group move. Item identification of the data item

referenced by identifier-1 is done after the record has been read and immediately before it is moved to the data item. The record is available in both the record area and the data item referenced by identifier-1.

If the execution of a READ statement with the INTO phrase is unsuccessful, the content of the data item referenced by identifier-1 is unchanged and item identification of the data item referenced by identifier-1 is not done.

- 5) The execution of a READ statement with the INTO phrase when there are no record description entries subordinate to the file description entry proceeds as though there were one record description entry describing an alphanumeric group item of the maximum size established by the RECORD clause.
- 6) Whether record locking is in effect is determined by the rules specified in 12.3.4.8, LOCK MODE clause.
- 7) If record locking is enabled for the file connector referenced by file-name-1 and the record identified for access by the general rules for the READ statement is locked by that file connector, the record lock is ignored and the READ operation proceeds as if the record were not locked.
- 8) If record locking is enabled for the file connector referenced by file-name-1 and the record identified for access is locked by another file connector, the result of the operation depends on the presence or absence of the RETRY phrase. If the RETRY phrase is specified, additional attempts may be made to read the record as specified in the rules in 14.6.8, RETRY phrase. If the RETRY phrase is not specified or the record is not successfully accessed as specified by the RETRY phrase, the record operation conflict condition exists. The I-O status is set in accordance with the rules for the RETRY phrase.
- 9) If the record operation conflict condition exists as a result of the READ statement:
 - a) The file position indicator is unchanged.
 - b) A value is placed into the I-O status associated with file-name-1 to indicate the record operation conflict condition.
 - c) The content of the associated record area is undefined.
 - d) The key of reference for indexed files is unchanged.
 - e) The READ statement is unsuccessful.
- 10) If record locks are in effect, the following actions take place:
 - a) If single record locking is specified for the file connector associated with file-name-1, any prior record lock associated with that file connector is released by the execution of the READ statement.
 - b) If multiple record locking is specified for the file connector associated with file-name-1, no record locks are released, except when the NO LOCK phrase is specified and the record accessed was already locked by that file connector. In this case, that record lock is released at the completion of the successful execution of the READ statement.
 - c) If the lock mode is automatic, the record lock associated with a successfully accessed record is set.
 - d) If lock mode is manual, the record lock associated with a successfully accessed record is set only if the LOCK phrase is specified on the READ statement.
- 11) If the IGNORING LOCK phrase is specified on the READ statement, the requested record is made available, even if it is locked.
- 12) If neither an at end nor an invalid key condition occurs during the execution of a READ statement, the AT END phrase or the INVALID KEY phrase is ignored, if specified, and the following actions occur:

- a) The I-O status associated with file-name-1 is updated and, if the record operation conflict condition did not occur, the file position indicator is set.
 - b) If an exception condition that is not an at end or an invalid key condition exists, control is transferred according to the following rules:
 - 1. If a USE AFTER EXCEPTION procedure is associated with the file connector referenced by file-name-1, control is transferred according to the rules for the specific exception condition and the rules for the USE statement following the execution of the associated declarative procedure.
 - 2. If there is no USE AFTER EXCEPTION procedure associated with the file connector referenced by file-name-1, control is transferred according to the rules for the specific exception condition. If the exception condition is not a fatal exception condition, control is transferred to the end of the READ statement.
 - c) If no exception condition exists, the record is made available in the record area and any implicit move resulting from the presence of an INTO phrase is executed. Control is transferred to the end of the READ statement, or, if the NOT AT END phrase or NOT INVALID KEY phrase is specified, to imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the READ statement.
- 13) If the number of bytes in the record that is read is less than the minimum size specified by the record description entries for file-name-1, the portion of the record area that is to the right of the last valid character read is undefined. If the number of bytes in the record that is read is greater than the maximum size specified by the record description entries for file-name-1, the record is truncated on the right to the maximum size. In either of these cases, the READ statement is successful and an I-O status is set indicating a record length conflict has occurred. (See 9.1.12, I-O status.)
- 14) Regardless of the method used to overlap access time with processing time, the concept of the READ statement is unchanged; a record is available to the runtime element prior to the execution of imperative-statement-2 or imperative-statement-4, if specified, or prior to the execution of any statement following the READ statement, if imperative-statement-2 or imperative-statement-4 is not specified.
- 15) Unless otherwise specified, at the completion of any unsuccessful execution of a READ statement, the content of the associated record area is undefined, the key of reference is undefined for indexed files, and the file position indicator is set to indicate that no valid record position has been established.

FORMAT 1

- 16) An implicit or explicit NEXT phrase or a PREVIOUS phrase results in a sequential read: otherwise, the read is a random read and the rules for format 2 apply.
- 17) If the PREVIOUS phrase is specified, the physical file associated with the file connector referenced by file-name-1 shall be a single reel/unit mass storage file.
- 18) The setting of the file position indicator at the start of the execution of the READ statement is used in determining the record to be made available according to the following rules. Comparisons for records in sequential files relate to the record number. Comparisons for records in relative files relate to the relative key number. Comparisons for records in indexed files relate to the value of the current key of reference. For indexed files, the comparisons are made according to the collating sequence of the file.
 - a) If the file position indicator indicates that no valid record position has been established, execution of the READ statement is unsuccessful.

- b) If the file position indicator indicates that an optional input file is not present, the I-O status value associated with file-name-1 is set to '10', the at end condition exists, and execution proceeds as specified in general rule 21.
- c) If the file position indicator was established by a prior OPEN or START statement, the first existing record that is selected is either:
 - 1. If NEXT is specified or implied, the first existing record in the physical file whose record number or key value is greater than or equal to the file position indicator, or
 - 2. If PREVIOUS is specified, the first existing record in the physical file whose record number or key value is less than or equal to the file position indicator.

NOTE For OPEN, this means that you normally get the first record in the file for sequential or relative and normally get an at end condition for indexed.

- d) If the file position indicator was established by a prior READ statement and the file is an indexed file whose current key of reference does not allow duplicates or a sequential or relative file, the first existing record in the physical file whose record number or key value is greater than the file position indicator if NEXT is specified or implied or is less than the file position indicator if PREVIOUS is specified is selected.
- e) For indexed files, if the file position indicator was established by a prior READ statement, and the current key of reference does allow duplicates, the record that is selected is one of the following:
 - 1. If NEXT is specified or implied,
 - a. If there exists in the physical file a record whose key value is equal to the file position indicator and whose logical position within the set of duplicates is after the record that was made available by that prior READ statement, the record within the set of duplicates that is immediately after the record that was made available by that prior READ statement;
 - b. otherwise; the first record in the physical file whose key value is greater than the file position indicator.
 - 2. If PREVIOUS is specified,
 - a. If there exists in the physical file a record whose key value is equal to the file position indicator and whose logical position within the set of duplicates is before the record that was made available by that prior READ statement, the record within the set of duplicates that is immediately before the record that was made available by that prior READ statement;
 - b. otherwise, the last record within the set of duplicates, if any, whose key value is the first key value less than the file position indicator.

If a record is found that satisfies this general rule and other general rules for the READ statement, the record is made available in the record area associated with file-name-1 unless the RELATIVE KEY clause is specified for file-name-1 and the number of significant digits in the relative record number of the selected record is larger than the size of the relative key data item. In that case, the I-O status value associated with file-name-1 is set to '14', the at end condition exists, the file position indicator is set to indicate that no next or previous logical record exists, and execution proceeds as specified in general rule 21.

NOTE Except in the case of an indexed file, the record made available may have a length of zero.

If no record is found that satisfies the above rules, the file position indicator is set to indicate that no next or previous logical record exists, the I-O status value associated with file-name-1 is set to '10', the at end condition exists, and execution proceeds as specified in general rule 21.

If a record is made available, the file position indicator is updated as follows:

- a) For sequential files, the file position indicator is set to the record number of the record made available.
 - b) For relative files, the file position indicator is set to the relative record number of the record made available.
 - c) For indexed files, the file position indicator is set to the value of the current key of reference of the record made available.
- 19) If the ADVANCING ON LOCK phrase is specified on the READ statement of a file open for file sharing and the record to be made available is locked by another file connector, the result of this READ statement is as if the locked record were read and then the same READ statement were executed. If the record to be made available is locked by another file connector, this action is repeated until either an unlocked record is read or the end of the file is encountered if NEXT is specified or implied, or the beginning of file is encountered if PREVIOUS is specified. A record operation conflict condition does not exist. If the end of the file or beginning of the file is encountered, the file position indicator is set to indicate that no next or previous logical record exists and execution proceeds as indicated in general rule 21.

If the file is not open for file sharing, the ADVANCING ON LOCK phrase is ignored.

- 20) If, during the execution of the READ statement, the end of reel/unit is recognized or a reel/unit contains no logical records, and the logical end of the file has not been reached for a given file connector, a reel/unit swap occurs and the current volume pointer is updated to point to the next reel/unit existing for the physical file.
- 21) If the at end condition exists, the following occurs in the order specified:
- a) The I-O status value associated with file-name-1 is set to '10' to indicate the at end condition.
 - b) If the AT END phrase is specified in the statement causing the condition, control is transferred to the AT END imperative-statement-1. Any USE AFTER EXCEPTION procedure associated with the file connector referenced by file-name-1 is not executed. Execution then continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules of that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the READ statement and the NOT AT END phrase, if specified, is ignored.
 - c) If the AT END phrase is not specified and a USE AFTER EXCEPTION procedure is associated with the file connector referenced by file-name-1, that procedure is executed. Control is then transferred to the end of the READ statement. The NOT AT END phrase is ignored if it is specified.
 - d) If the AT END phrase is not specified and there is no USE AFTER EXCEPTION procedure associated with the file connector referenced by file-name-1, control is transferred to the end of the READ statement. The NOT AT END phrase is ignored if it is specified.

When the at end condition exists, execution of the READ statement is unsuccessful.

- 22) For a relative file, if the RELATIVE KEY clause is specified for file-name-1, the execution of a READ statement moves the relative record number of the record made available to the relative key data item according to the rules for the MOVE statement.
- 23) For an indexed file being sequentially accessed, records having the same duplicate value in an alternate record key that is the key of reference are made available in the same order, or, in the case of PREVIOUS, in the reverse order, in which they are released by execution of WRITE statements, or by execution of REWRITE statements that create such duplicate values.
- 24) The I-O status for the file connector referenced by file-name-1 is set to '02' if the execution of the READ statement is successful, an indexed file is being sequentially accessed, the key of reference is an alternate record key, and one of the following is true:

- a) the NEXT phrase is specified or implied and the alternate record key in the record that follows the record that was successfully read duplicates the same key in the record that was successfully read, or
- b) the PREVIOUS phrase is specified and the alternate record key in the record that immediately precedes the record that was successfully read duplicates the same key in the record that was successfully read.

NOTE 1 If the sharing mode of the file is sharing with all other, I-O status value '02' on a sequential read should not be relied on for a subsequent sequential read. The record with a duplicate key might have been deleted through another file connector between the return of I-O status value '02' and the execution of the subsequent READ statement.

NOTE 2 If the sharing mode of the file is sharing with all other, the lack of an I-O status value '02' on a sequential read should not be relied on as an indication that no duplicate key will exist at the time of a subsequent sequential read. A record with a duplicate key might have been added through another file connector before the execution of that subsequent READ statement.

FORMAT 2

- 25) If, at the time of the execution of a READ statement, the file position indicator indicates that an optional input file is not present, the invalid key condition exists and execution of the READ statement is unsuccessful. (See 9.1.13, Invalid key condition.)
- 26) For a relative file, execution of a READ statement sets the file position indicator to the value contained in the data item referenced by the RELATIVE KEY clause for the file, and the record whose relative record number equals the file position indicator is made available in the record area associated with file-name-1. If the physical file does not contain such a record, the invalid key condition exists and execution of the READ statement is unsuccessful. (See 9.1.13, Invalid key condition.)
- 27) For an indexed file accessed through a given file connector, if the KEY phrase is specified, data-name-1 or record-key-name-1 is established as the key of reference for this retrieval. If the dynamic access mode is specified, this key of reference is also used for retrievals by any subsequent executions of sequential format READ statements for the file through the file connector until a different key of reference is established for the file through that file connector.
- 28) For an indexed file accessed through a given file connector, if the KEY phrase is not specified, the prime record key is established as the key of reference for this retrieval. If the dynamic access mode is specified, this key of reference is also used for retrievals by any subsequent executions of sequential format READ statements for the file through the file connector until a different key of reference is established for the file through that file connector.
- 29) For an indexed file accessed through a given file connector, execution of a READ statement sets the file position indicator to the value in the key of reference. This value is compared with the value contained in the corresponding data item of the stored records in the file until the first record having an equal value is found. In the case of an alternate key with duplicate values, the first record found is the first record in a sequence of duplicates that was released to the operating environment. The record so found is made available in the record area associated with file-name-1. If no record is so identified, the invalid key condition exists and execution of the READ statement is unsuccessful. (See 9.1.13, Invalid key condition.)

14.8.30 RELEASE statement

The RELEASE statement transfers records to the initial phase of a sort operation.

14.8.30.1 General format

$$\text{RELEASE record-name-1} \left[\text{FROM} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \right]$$
14.8.30.2 Syntax rules

- 1) Record-name-1 shall be the name of a logical record in a sort-merge file description entry and it may be qualified.
- 2) If identifier-1 is a function-identifier, it shall reference an alphanumeric or national function. Record-name-1 and identifier-1 shall not reference the same storage area.
- 3) Identifier-1 or literal-1 shall be valid as a sending operand in a MOVE statement specifying record-name-1 as the receiving operand.

14.8.30.3 General rules

- 1) A RELEASE statement may be executed only when it is within the range of an input procedure being executed by a SORT statement that references the file-name associated with record-name-1. If it is executed at any other time, the EC-FLOW-RELEASE exception condition is set to exist.
- 2) The execution of a RELEASE statement causes the record named by record-name-1 to be released to the initial phase of a sort operation.
- 3) The logical record released by the execution of the RELEASE statement is no longer available in the record area unless the sort-merge file-name associated with record-name-1 is specified in a SAME RECORD AREA clause. The logical record is also available as a record of other files referenced in the same SAME RECORD AREA clause as the associated output file, as well as the file associated with record-name-1.
- 4) The result of the execution of a RELEASE statement with the FROM phrase is equivalent to the execution of the following statements in the order specified:

a) The statement:

MOVE identifier-1 TO record-name-1

or

MOVE literal-1 TO record-name-1

according to the rules specified for the MOVE statement.

- b) The same RELEASE statement without the FROM phrase.
- 5) After the execution of the RELEASE statement is complete, the information in the area referenced by identifier-1 is available, even though the information in the area referenced by record-name-1 is not available except as specified by the SAME RECORD AREA clause.
 - 6) If the number of bytes to be released to the sort operation is greater than the number of bytes in record-name-1, the content of the bytes that extend beyond the end of record-name-1 are undefined.

14.8.31 RESUME statement

The RESUME statement transfers control to a procedure-name or to the statement following the statement that caused a declarative to be executed.

14.8.31.1 General format

RESUME AT { NEXT STATEMENT }
 { procedure-name-1 }

14.8.31.2 Syntax rules

- 1) The RESUME statement may be specified only in a declarative.
- 2) The RESUME statement shall not be specified in a declarative procedure for which the GLOBAL phrase is specified in the associated USE statement.
- 3) Procedure-name-1 shall be a procedure-name in the nondeclarative portion of the function, method, or program.

14.8.31.3 General rules

- 1) If the RESUME statement is executed within the scope of execution of a global declarative, it is the equivalent of the execution of a CONTINUE statement.
- 2) If the NEXT STATEMENT phrase is specified, control is transferred to an implicit CONTINUE statement that immediately follows the end of the statement that was executing when control was transferred to the declarative, unless general rules associated with the applicable statement specify otherwise. When an exception condition caused the declarative to be executed, the applicable statement is one of the following:
 - a) If the exception condition was raised within a statement within the runtime entity and was not a propagated exception condition, the applicable statement is the one in which the exception condition was raised.
 - b) If the exception condition was propagated from an activated runtime entity, the applicable statement is the CALL or INVOKE statement that activated the entity, or, for an inline invocation or a function invocation, it is the statement in which the inline invocation or function invocation was specified.
 - c) If the statement is contained in other statements, the applicable statement is the lowest level statement, not the containing statement.

If the declarative was not executed because of an exception condition but was executed instead by a PERFORM statement in the nondeclarative portion of the source element that referenced the declarative procedure, control is transferred to an implicit CONTINUE statement immediately following the last statement of the terminating procedure referenced in that PERFORM statement.

NOTE Use of NEXT STATEMENT may cause a transfer of control to a statement that in the normal course of events would not be executed. For example IF a GO TO x ELSE GO TO y END-IF. If an exception condition was raised during the evaluation of 'a', transfer would be after the END-IF even though control normally would never be passed there.

- 3) If procedure-name-1 is specified, control is transferred to procedure-name-1 as if a GO TO procedure-name-1 were executed.

NOTE Use of this method of recovery may cause the flow of control for PERFORM statements to be undefined as described in 14.8.27, PERFORM statement general rule 11.

14.8.32 RETURN statement

The RETURN statement obtains either sorted records from the final phase of a sort operation or merged records during a merge operation.

14.8.32.1 General format

```
RETURN file-name-1 RECORD [ INTO identifier-1 ]
    AT END imperative-statement-1
    [ NOT AT END imperative-statement-2 ]
    [ END-RETURN ]
```

14.8.32.2 Syntax rules

- 1) The storage area associated with identifier-1 and the record area associated with file-name-1 shall not be the same storage area.
- 2) File-name-1 shall be described by a sort-merge file description entry in the data division.
- 3) The INTO phrase may be specified in a RETURN statement:
 - a) If only one record description is subordinate to the sort-merge file description entry, or
 - b) If all record-names associated with file-name-1 and the data item referenced by identifier-1 describe an alphanumeric group item or an elementary item of category alphanumeric or category national.
- 4) If identifier-1 is a strongly-typed group item, there shall be exactly one record area subordinate to the SD for file-name-1. This record area shall be a strongly-typed group item of the same type as identifier-1.
- 5) The AT END phrase and the NOT AT END phrase, when specified, may be written in reversed order.

14.8.32.3 General rules

- 1) A RETURN statement may be executed only when it is within the range of an output procedure being executed by a MERGE or SORT statement that references file-name. If it is executed at any other time, the EC-FLOW-RETURN exception condition is set to exist.
- 2) When the logical records in a file are described with more than one record description, these records automatically share the same storage area; this is equivalent to an implicit redefinition of the area. The contents of any data items that lie beyond the range of the current record are undefined at the completion of the execution of the RETURN statement.
- 3) The execution of the RETURN statement causes the next existing record in the file referenced by file-name-1, as determined by the keys listed in the SORT or MERGE statement, to be made available in the record area associated with file-name-1. If no next logical record exists in the file referenced by file-name-1, the at end condition is set to exist and control is transferred to imperative-statement-1 of the AT END phrase. Execution continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred according to the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the RETURN statement and the NOT AT END phrase is ignored, if specified. When the at end condition exists, execution of the RETURN statement is unsuccessful and the contents of the record area associated with file-name-1 are undefined. After the execution of imperative-statement-1 in the AT END phrase, no RETURN statement may be executed as part of the current output procedure. If such a RETURN statement is executed, the EC-SORT-MERGE-RETURN exception condition is set to exist and the results of the execution of the RETURN statement are undefined.

- 4) If an at end condition does not exist during the execution of a RETURN statement, then after the record is made available and after executing any implicit move resulting from the presence of an INTO phrase, control is transferred to imperative-statement-2, if specified; otherwise, control is transferred to the end of the RETURN statement.
- 5) The result of the execution of a RETURN statement with the INTO phrase is equivalent to the application of the following rules in the order specified:
 - a) The same RETURN statement without the INTO phrase is executed.
 - b) The current record is moved from the record area to the area specified by identifier-1 according to the rules for the MOVE statement without the CORRESPONDING phrase. The size of the current record is determined by rules specified for the RECORD clause. If the file description entry contains a RECORD IS VARYING clause, the implied move is an alphanumeric group move. The implied MOVE statement does not occur if the execution of the RETURN statement was unsuccessful. Item identification of the data item referenced by identifier-1 is done after the record has been read and immediately before it is moved to the data item. The record is available in both the record area and the data item referenced by identifier-1.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.33 REWRITE statement

The REWRITE statement logically replaces a record existing in a mass storage file.

14.8.33.1 General format

$$\text{REWRITE} \left\{ \begin{array}{l} \text{record-name-1} \\ \text{FILE file-name-1} \end{array} \right\} \text{RECORD} \left[\text{FROM} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \right]$$

[retry-phrase]

[WITH LOCK]

[WITH NO LOCK]

[INVALID KEY imperative-statement-1]

[NOT INVALID KEY imperative-statement-2]

[END-REWRITE]

where retry-phrase is described in 14.6.8, RETRY phrase

14.8.33.2 Syntax rules

- 1) Record-name-1 and identifier-1 shall not reference the same storage area.
- 2) Record-name-1 is the name of a logical record in the file section of the data division and may be qualified.
- 3) Neither the INVALID KEY phrase nor the NOT INVALID KEY phrase shall be specified for a REWRITE statement that references a file with sequential organization or a file with relative organization and sequential access mode.
- 4) If record-name-1 is defined in a containing program and is referenced in a contained program, the file description entry for the file associated with record-name-1 shall contain a GLOBAL clause.
- 5) If automatic locking has been specified for the rewrite file, neither the WITH LOCK phrase nor the WITH NO LOCK phrase shall be specified.
- 6) If record-name-1 is specified, identifier-1 or literal-1 shall be valid as a sending operand in a MOVE statement specifying record-name-1 as the receiving operand.
- 7) If identifier-1 references a bit data item other than an intrinsic function and the FILE phrase is specified, identifier-1 shall be described such that:
 - a) subscripting and reference modification in identifier-1 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 8) If identifier-1 references an intrinsic function and the FILE phrase is specified, identifier-1 shall reference an alphanumeric or national function.
- 9) If identifier-1 references an intrinsic function and the FILE phrase is not specified, identifier-1 shall reference an alphanumeric, boolean, or national function.
- 10) If the FILE phrase is specified, the FROM phrase shall also be specified and:

- a) identifier-1 shall be valid as a sending operand in a MOVE statement;
- b) literal-1 shall be an alphanumeric, boolean, or national literal and shall not be a figurative constant.

11) File-name-1 shall not reference a report file or a sort-merge file description entry.

12) If the FILE phrase is specified, the description of identifier-1, including its subordinate data items, shall not contain a data item described with a USAGE OBJECT REFERENCE clause.

14.8.33.3 General rules

- 1) The rewrite file connector is the file connector referenced by file-name-1 or the file-name associated with record-name-1.
- 2) The rewrite file connector shall have an open mode of I-O. If the open mode is some other value or the file is not open, the I-O status in the rewrite file connector is set to '49' and the execution of the REWRITE statement is unsuccessful.
- 3) The successful execution of the REWRITE statement releases a logical record to the operating environment.
- 4) If the rewrite file connector has an access mode of sequential, the immediately previous input-output statement executed that referenced this file connector shall have been a successfully executed READ statement. If this is not true, the I-O status in the rewrite file connector is set to '43' and the execution of the REWRITE statement is unsuccessful. For a successful REWRITE statement, the operating environment logically replaces the record that was accessed by the READ statement.

NOTE Logical records in relative and sequential files may have a length of zero. Logical records in an indexed file shall always be long enough to contain the record keys.

- 5) The logical record released by a successful execution of the REWRITE statement is no longer available in the record area unless file-name-1 or the file-name associated with record-name-1 is specified in a SAME RECORD AREA clause. The logical record is also available as a record of other file-names referenced in the same SAME RECORD AREA clause as file-name-1 or the file-name associated with record-name-1, as well as the file associated with record-name-1.
- 6) The result of the execution of a REWRITE statement specifying record-name-1 and the FROM phrase is equivalent to the execution of the following statements in the order specified:

- a) The statement:

MOVE identifier-1 TO record-name-1

or

MOVE literal-1 TO record-name-1

according to the rules specified for the MOVE statement.

- b) The same REWRITE statement without the FROM phrase.

- 7) The figurative constant SPACE when specified in the REWRITE statement references one alphanumeric space character.
- 8) The result of execution of a REWRITE statement with the FILE phrase is equivalent to the execution of the following in the order specified:

- The statement

MOVE identifier-1 TO implicit-record-1

or

MOVE literal-1 TO implicit-record-1

— The statement

REWRITE implicit-record-1

where implicit-record-1 refers to the record area for file-name-1 and is treated:

- a) when identifier-1 references an intrinsic function, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same class, category, usage, and length as the returned value of the intrinsic function, or
 - b) when identifier-1 does not reference an intrinsic function, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same description as identifier-1, or
 - c) when literal-1 is specified, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same class, category, usage, and length as literal-1.
- 9) After the execution of the REWRITE statement is complete, the information in the area referenced by identifier-1 is available, even though the information in the area referenced by record-name-1 is not available except as specified for the SAME RECORD AREA clause as indicated in general rule 5.
 - 10) If record locking is enabled for the rewrite file connector and the record identified for rewriting is locked by another file connector, the result of the operation depends on the presence or absence of the RETRY phrase. If the RETRY phrase is specified, additional attempts may be made to rewrite the record as specified in the rules in 14.6.8, RETRY phrase. If the RETRY phrase is not specified or the record is not successfully rewritten as specified by the RETRY phrase, the record operation conflict condition exists. The I-O status is set in accordance with the rules for the RETRY phrase. When the record operation conflict condition exists as a result of the REWRITE statement:
 - a) The file position indicator is unchanged.
 - b) A value is placed into the I-O status associated with the rewrite file connector to indicate the record operation conflict condition.
 - c) The REWRITE statement is unsuccessful.
 - 11) If record locks are in effect, the following actions take place at the beginning or at the successful completion of the execution of the REWRITE statement:
 - a) If single record locking is specified for the rewrite file connector:
 1. If that file connector holds a record lock on the record to be logically replaced, that lock is released at completion unless the WITH LOCK phrase is specified.
 2. If that file connector holds a record lock on a record other than the one to be logically replaced, that lock is released at the beginning.
 - b) If multiple record locking is specified for the rewrite file connector, and a record lock is associated with the record to be logically replaced, that record lock is released at completion only when the WITH NO LOCK phrase is specified and the record to be logically replaced was already locked by that file connector.
 - c) If the WITH LOCK phrase is specified, the record lock associated with the record to be replaced is set at completion.

- 12) The file position indicator in the rewrite file connector is not affected by the execution of a REWRITE statement.
- 13) The execution of the REWRITE statement causes the I-O status value in the rewrite file connector to be updated as indicated in 9.1.12, I-O status.
- 14) If the execution of the REWRITE statement is unsuccessful, no logical record updating takes place, the content of the record area is unaffected, and the I-O status in the rewrite file connector is updated as indicated in other general rules.
- 15) When record-name-1 is specified, if the number of bytes to be written to the file is greater than the number of bytes in record-name-1, the content of the bytes that extend beyond the end of record-name-1 are undefined.

SEQUENTIAL FILES

- 16) If the number of bytes in the data item referenced by identifier-1, the runtime representation of literal-1, or the record referenced by record-name-1 is not equal to the number of bytes in the record being replaced, the execution of the REWRITE statement is unsuccessful and the I-O status in the rewrite file connector is set to '44'.

RELATIVE AND INDEXED FILES

- 17) The number of bytes in the record referenced by identifier-1, the runtime representation of literal-1, or the record referenced by record-name-1 may differ from the number of bytes in the record being replaced.
- 18) Transfer of control following the successful or unsuccessful execution of the REWRITE operation depends on the presence or absence of the optional INVALID KEY and NOT INVALID KEY phrases in the REWRITE statement. (See 9.1.13, Invalid key condition.)
- 19) The number of bytes in the runtime representation of literal-1, the data item referenced by identifier-1, or the record referenced by record-name-1 after any changes made to the record length by the FORMAT clause shall not be larger than the largest or smaller than the smallest number of bytes allowed by the RECORD IS VARYING clause associated with file-name-1 or the file-name associated with record-name-1. If this rule is violated, the execution of the REWRITE statement is unsuccessful and the I-O status in the rewrite file connector is set to '44'.

RELATIVE FILES

- 20) For a file accessed in either random or dynamic access mode, the operating environment logically replaces the record identified by the relative key data item specified for file-name-1 or the file-name associated with record-name-1. If the file does not contain the record specified by the key, the invalid key condition exists. When the invalid key condition is recognized, the execution of the REWRITE statement is unsuccessful and the I-O status in the rewrite file connector is set to the invalid key condition '23'.

INDEXED FILES

- 21) If the access mode of the REWRITE file connector is sequential, the record to be replaced is specified by the value of the prime record key. When the REWRITE statement is executed the value of the prime record key of the record to be replaced shall be equal to the value of the prime record key of the last record read using this file connector. If it is not, the execution of the REWRITE statement is unsuccessful and the I-O status in the rewrite file connector is set to the invalid key condition, '21'.
- 22) If the access mode of the rewrite file connector is random or dynamic, the record to be replaced is specified by the prime record key. If there is no existing record in the physical file with that prime record key, the execution of the REWRITE statement is unsuccessful and the I-O status in the rewrite file connector is set to the invalid key condition, '23'.
- 23) Execution of the REWRITE statement for a record that has an alternate record key occurs as follows:

- a) When the value of a specific alternate record key is not changed, the order of retrieval when that key is the key of reference remains unchanged.
- b) When the value of a specific alternate record key is changed, the subsequent order of retrieval of that record may be changed when that specific alternate record key is the key of reference. When duplicate key values are permitted, the record is logically positioned last within the set of duplicate records where the alternate record key value is equal to the same alternate key value in one or more records in the file based on the collating sequence for the file.

NOTE If two or more file connectors share the physical file, a duplicate alternate key might not actually be positioned last at the completion of the REWRITE statement, because another duplicate key might have been created by another operation.

- 24) The comparison for equality for record keys is based on the collating sequence for the file according to the rules for a relation condition. The invalid key condition exists under the following circumstances:
- a) When the rewrite file connector is open in the sequential access mode and the value of the prime record key of the record to be replaced is not equal to the value of the prime record key of the last record read through the file connector, the I-O status associated with the file connector is set to '21'.
 - b) When the rewrite file connector is open in the dynamic or random access mode and the value of the prime record key of the record to be replaced is not equal to the value of the prime record key of any record existing in that physical file, the I-O status associated with the rewrite file connector is set to '23'.
 - c) When an alternate record key of the record to be replaced does not allow duplicates and the value of that alternate record key is equal to the value of the corresponding alternate record key of a record in that physical file, the I-O status associated with the rewrite file connector is set to '22'.

When the invalid key condition is recognized, the execution of the REWRITE statement is unsuccessful, the updating operation does not take place, and the content of the record area is unaffected.

14.8.34 SEARCH statement

The SEARCH statement is used to search a table for a table element that satisfies the specified condition and to adjust the value of the associated index to indicate that table element.

14.8.34.1 General format

Format 1 (serial):

```

SEARCH identifier-1 [ VARYING { identifier-2
                        index-name-1 } ]
[ AT END imperative-statement-1 ]
{ WHEN condition-1 { imperative-statement-2
                     NEXT SENTENCE } } ...
[ END-SEARCH ]
    
```

NOTE NEXT SENTENCE is an archaic feature and its use should be avoided.

Format 2 (all):

```

SEARCH ALL identifier-1 [ AT END imperative-statement-1 ]
WHEN { data-name-1 { IS EQUAL TO { identifier-3
                        IS =      literal-1
                                arithmetic-expression-1 } }
      condition-name-1 }
[ AND { data-name-2 { IS EQUAL TO { identifier-4
                        IS =      literal-2
                                arithmetic-expression-2 } }
      condition-name-2 } } ...
{ imperative-statement-2
  NEXT SENTENCE }
[ END-SEARCH ]
    
```

NOTE NEXT SENTENCE is an archaic feature and its use should be avoided.

14.8.34.2 Syntax rules

ALL FORMATS

- 1) Identifier-1 shall not be subscripted or reference modified and its data description entry shall contain an OCCURS clause including an INDEXED phrase.
- 2) If the END-SEARCH phrase is specified, the NEXT SENTENCE phrase shall not be specified.

FORMAT 1

- 3) Identifier-2 shall reference a data item whose usage is index or a data item that is an integer. Identifier-2 shall not be subscripted by the first or only index-name specified in the INDEXED phrase in the OCCURS clause specified in the data description entry for identifier-1.
- 4) Condition-1 may be any conditional expression evaluated as specified in 8.8.4, Conditional expressions.

FORMAT 2

- 5) The OCCURS clause associated with identifier-1 shall contain the KEY phrase.
- 6) Data-name-1 and all repetitions of data-name-2 may be qualified, shall be subscripted by the first index-name associated with identifier-1 along with any subscripts required to uniquely identify the data item, and shall be referenced in the KEY phrase in the OCCURS clause associated with identifier-1. The index-name subscript shall not be followed by a '+' or a '-'.
- 7) All referenced condition-names shall be defined as having only a single value and shall be subscripted by the first index-name associated with identifier-1, along with any subscripts required to uniquely identify the condition-name. The data-name associated with each condition-name shall be specified in the KEY phrase in the OCCURS clause associated with identifier-1. The index-name subscript shall not be followed by a '+' or a '-'.
- 8) Identifier-3, identifier-4, identifiers specified in arithmetic-expression-1, and identifiers specified in arithmetic-expression-2 shall be neither referenced in the KEY phrase of the OCCURS clause associated with identifier-1 nor subscripted by the first index-name associated with identifier-1.
- 9) When a data-name in the KEY phrase in the OCCURS clause associated with identifier-1 is referenced or when a condition-name associated with a data-name in the KEY phrase in the OCCURS clause associated with identifier-1 is referenced, all preceding data-names in that KEY phrase or their associated condition-names shall also be referenced.

14.8.34.3 General rules

ALL FORMATS

- 1) The SEARCH statement automatically varies the first or only index associated with identifier-1 and tests conditions specified in WHEN phrases in the SEARCH statement to determine whether a table element satisfies these conditions. Any subscripting specified in a WHEN phrase is evaluated each time the conditions in that WHEN phrase are evaluated. For Format 1, an additional index or data item may be varied. If identifier-1 references a data item that is subordinate to a data item whose data description entry contains an OCCURS clause, only the setting of an index associated with identifier-1 (and any data item referenced by identifier-2 or any index referenced by index-name-1, if specified) is modified by the execution of the SEARCH statement. The subscript that is used to determine the occurrence of each superordinate table to search is specified by the user in the WHEN phrases. Therefore, each appropriate subscript shall be set to the desired value before the SEARCH statement is executed.

Upon completion of the search operation, one of the following occurs:

- a) If the search operation is successful according to the general rules that follow, then: the search operation is terminated immediately; the index being varied by the search operation remains set at the occurrence number that caused a WHEN condition to be satisfied; if the WHEN phrase contains the NEXT SENTENCE phrase, control is transferred to an implicit CONTINUE statement immediately preceding the next separator period; if the WHEN phrase contains imperative-statement-2, control is transferred to that imperative-statement-2 and execution continues according to the rules for each statement specified in that imperative-statement-2. If the execution of a procedure branching or conditional statement results in an explicit transfer of control, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of that imperative-statement-2, control is transferred to the end of the SEARCH statement.

b) If the search operation is unsuccessful according to the general rules that follow, then:

1. If the AT END phrase is specified, control is transferred to imperative-statement-1 and execution continues according to the rules for each statement specified in imperative-statement-1. If the execution of a procedure branching or conditional statement results in an explicit transfer of control, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the SEARCH statement.
2. If the AT END phrase is not specified and either the EC-RANGE-SEARCH-INDEX or EC-RANGE-SEARCH-NO-MATCH exception condition was raised during the execution of the SEARCH statement and an applicable declarative exists, control is transferred to that declarative and, if control is returned from that declarative control is transferred to the end of the SEARCH statement.
3. If the AT END phrase is not specified and neither exception condition was raised because the checking for those exception conditions was not enabled, control is transferred to the end of the SEARCH statement.

2) The comparison associated with each WHEN phrase is executed in accordance with the rules specified for conditional expressions. (See 8.8.4, Conditional expressions.)

FORMAT 1

3) The index to be varied by the search operation is referred to as the search index and it is determined as follows:

- a) If the VARYING phrase is not specified, the search index is the index referenced by the first (or only) index-name specified in the INDEXED phrase in the OCCURS clause associated with identifier-1.
- b) If the VARYING identifier-2 phrase is specified, the search index is the same as in general rule 3a and the following also applies:
 1. If identifier-2 references an index data item, that data item is incremented by the same amount as, and at the same time as, the search index.
 2. If identifier-2 references an integer data item, that data item is incremented by the value one at the same time as the search index is incremented.
- c) If the VARYING index-name-1 phrase is specified, the search index depends on the following:
 1. If index-name-1 is specified in the INDEXED BY phrase in the OCCURS clause associated with identifier-1, the index referenced by index-name-1 is the search index.
 2. If index-name-1 is not one of the indexes specified in the INDEXED phrase in the OCCURS clause associated with identifier-1, the search index is the same as in general rule 3a. The index referenced by index-name-1 is incremented by one occurrence number at the same time as the search index is incremented.

Only the data item and indexes indicated are varied by the search operation. All other indexes associated with identifier-1 are unchanged by the search operation.

4) The search operation is serial, starting from the occurrence number that corresponds to the value of the search index at the beginning of the execution of the SEARCH statement. If, at the start of the execution, the search index contains a value that corresponds to an occurrence number that is negative, zero, or greater than the highest permissible occurrence number for identifier-1, the search operation is unsuccessful, the EC-RANGE-SEARCH-INDEX exception condition is set to exist, and execution proceeds as indicated in general rule 1b. The number of occurrences of identifier-1, the last of which is permissible, is specified in the OCCURS clause. If, at the start of the execution of the SEARCH statement, the search index contains a value that corresponds to an occurrence number that is not greater than the highest permissible occurrence number for identifier-1, the search operation proceeds by evaluating the conditions in the order they are written. If none

of the conditions is satisfied, the search index is incremented by one occurrence number. The process is then repeated using the new index setting unless the new value for the search index corresponds to a table element outside the permissible range of occurrence values, in which case the search operation is unsuccessful, the EC-RANGE-SEARCH-NO-MATCH exception condition is set to exist, and execution proceeds as indicated in general rule 1b. If one of the conditions is satisfied upon its evaluation, the search operation is successful and the execution proceeds as indicated in general rule 1a.

FORMAT 2

- 5) At the start of the execution of a SEARCH statement with the ALL phrase specified, the following conditions shall be true:
 - a) The contents of each key data item referenced in the WHEN phrase shall be sequenced in the table according to the ASCENDING or DESCENDING phrase associated with that key data item. (See 13.16.36, OCCURS clause.)
 - b) If identifier-1 is subordinate to one or more data description entries that contain an OCCURS clause, the evaluation of the conditions within a WHEN phrase that reference a key data item subordinate to identifier-1 shall result in the same occurrence number for any subscripts associated with a given level of the superordinate tables. That is, the outermost level occurrence numbers shall all be equal, the next level occurrence numbers shall all be equal down to, but not including, the innermost table.
- 6) If any condition specified in general rule 5 is not satisfied:
 - a) If one or more settings of the search index satisfy all conditions in the WHEN phrase, one of the following occurs:
 1. the final setting of the search index is set equal to one of those settings, but it is undefined which one; execution proceeds as in general rule 1a;
 2. the final setting of the search index is undefined, the EC-RANGE-SEARCH-NO-MATCH exception condition is set to exist, and execution proceeds as in general rule 1b.

It is undefined which of these alternatives occurs.
 - b) If no such setting of the search index exists, the final setting of the search index is undefined, the EC-RANGE-SEARCH-NO-MATCH exception condition is set to exist, and execution proceeds as in general rule 1b.
- 7) If both conditions specified in general rule 5 are satisfied and there is more than one setting of the search index for which all conditions in the WHEN phrase can be satisfied, the search operation is successful. The final setting of the search index is equal to one of them, but it is undefined which one.
- 8) The search index is the index referenced by the first (or only) index-name specified in the INDEXED phrase in the OCCURS clause associated with identifier-1. Any other indexes associated with identifier-1 remain unchanged by the search operation.
- 9) A nonserial type of search operation may take place. The initial setting of the search index is ignored. Its setting is varied during the search operation in a manner specified by the implementor. At no time is it set to a value that exceeds the value that corresponds to the last element of the table or is less than the value that corresponds to the first element of the table. The length of the table is discussed in the OCCURS clause. If any of the conditions specified in the WHEN phrase is not satisfied for any setting of the search index within the permitted range, the final setting of the search index is undefined, the search operation is unsuccessful, the EC-RANGE-SEARCH-NO-MATCH exception condition is set to exist, and execution proceeds as indicated in general rule 1b. If all the conditions are satisfied, the search operation is successful and execution proceeds as indicated in general rule 1a.

14.8.35 SET statement

The SET statement provides a means for:

- establishing reference points for table handling operations by setting indexes associated with table elements,
- altering the status of external switches,
- altering the value of conditional variables,
- assigning object references,
- altering the attributes associated with a screen item,
- assigning the address of a data item to a data-pointer data item,
- assigning the address of a based item,
- assigning the address of a program to a program-pointer data item,
- setting and saving locale categories, and
- clearing the last exception status.

14.8.35.1 General format

Format 1 (index-assignment):

$$\underline{\text{SET}} \left\{ \begin{array}{l} \text{index-name-1} \\ \text{identifier-1} \end{array} \right\} \dots \underline{\text{TO}} \left\{ \begin{array}{l} \text{arithmetic-expression-1} \\ \text{index-name-2} \\ \text{identifier-2} \end{array} \right\}$$

Format 2 (index-arithmetic):

$$\underline{\text{SET}} \{ \text{index-name-3} \} \dots \left\{ \begin{array}{l} \underline{\text{UP}} \text{ BY} \\ \underline{\text{DOWN}} \text{ BY} \end{array} \right\} \text{arithmetic-expression-2}$$

Format 3 (switch-setting):

$$\underline{\text{SET}} \left\{ \{ \text{mnemonic-name-1} \} \dots \underline{\text{TO}} \left\{ \begin{array}{l} \underline{\text{ON}} \\ \underline{\text{OFF}} \end{array} \right\} \right\} \dots$$

Format 4 (condition-setting):

$$\underline{\text{SET}} \left\{ \{ \text{condition-name-1} \} \dots \underline{\text{TO}} \left\{ \begin{array}{l} \underline{\text{TRUE}} \\ \underline{\text{FALSE}} \end{array} \right\} \right\} \dots$$

Format 5 (object-reference-assignment):

$$\underline{\text{SET}} \{ \text{identifier-3} \} \dots \underline{\text{TO}} \left\{ \begin{array}{l} \text{class-name-1} \\ \text{identifier-4} \end{array} \right\}$$

Format 6 (attribute):

$$\text{SET screen-name-1 ATTRIBUTE} \left\{ \left\{ \begin{array}{l} \text{BELL} \\ \text{BLINK} \\ \text{HIGHLIGHT} \\ \text{LOWLIGHT} \\ \text{REVERSE-VIDEO} \\ \text{UNDERLINE} \end{array} \right\} \left\{ \begin{array}{l} \text{OFF} \\ \text{ON} \end{array} \right\} \dots \right.$$
Format 7 (data-pointer-assignment):

$$\text{SET} \left\{ \begin{array}{l} \text{ADDRESS OF data-name-1} \\ \text{identifier-5} \end{array} \right\} \dots \text{TO identifier-6}$$
Format 8 (program-pointer-assignment):

$$\text{SET} \{ \text{identifier-7} \} \dots \text{TO identifier-8}$$
Format 9 (data-pointer-arithmetic):

$$\text{SET} \{ \text{identifier-9} \} \dots \left\{ \begin{array}{l} \text{UP} \\ \text{DOWN} \end{array} \right\} \text{BY arithmetic-expression-3}$$
Format 10 (set-locale):

$$\text{SET LOCALE} \left\{ \left\{ \begin{array}{l} \text{LC\_ALL} \\ \text{LC\_COLLATE} \\ \text{LC\_CTYPE} \\ \text{LC\_MESSAGES} \\ \text{LC\_MONETARY} \\ \text{LC\_NUMERIC} \\ \text{LC\_TIME} \\ \text{USER-DEFAULT} \end{array} \right\} \text{TO} \left\{ \begin{array}{l} \text{identifier-10} \\ \text{locale-name-1} \\ \text{USER-DEFAULT} \\ \text{SYSTEM-DEFAULT} \end{array} \right\} \right.$$
Format 11 (save-locale):

$$\text{SET identifier-11 TO LOCALE} \left\{ \begin{array}{l} \text{LC\_ALL} \\ \text{USER-DEFAULT} \end{array} \right\}$$

Format 12 (saved-exception):

SET LAST EXCEPTION TO OFF

14.8.35.2 Syntax rules

FORMAT 1

- 1) Identifier-1 shall reference a data item of class index or an integer data item.
- 2) Identifier-2 shall reference a data item of class index.
- 3) If identifier-1 references a data item of class index, arithmetic-expression-1 shall not be specified.
- 4) If identifier-1 references a numeric data item, index-name-2 shall be specified.

FORMAT 3

- 5) Mnemonic-name-1 shall be associated with an external switch, the status of which may be altered. The implementor defines which external switches may be referenced by the SET statement.

FORMAT 4

- 6) Condition-name-1 shall be associated with a conditional variable.
- 7) If the FALSE phrase is specified, the FALSE phrase shall be specified in the VALUE clause of the data description entry for condition-name-1.

FORMAT 5

- 8) Identifier-3 shall be any item of class object that is permitted as a receiving item.
- 9) Identifier-4 shall be an object reference; the predefined object reference SUPER shall not be specified.
- 10) If identifier-4 is specified and the data item referenced by identifier-3 is described with an interface-name that identifies the interface int-1, the data item referenced by identifier-4 shall be one of the following:
 - a) an object reference described with an interface-name that identifies int-1 or an interface inheriting from int-1;
 - b) an object reference described with a class-name, subject to the following rules:
 1. if described with a FACTORY phrase, the factory object of the specified class shall implement int-1,
 2. if described without a FACTORY phrase, the objects of the specified class shall implement int-1;
 - c) an object reference described with an ACTIVE-CLASS phrase, subject to the following rules:
 1. if described with a FACTORY phrase, the factory object of the class containing the data item referenced by identifier-4 shall implement int-1,
 2. if described without a FACTORY phrase, the objects of the class containing the data item referenced by identifier-4 shall implement int-1;
 - d) the predefined object reference SELF, subject to the following rules:
 1. if the SET statement is contained in a method within the factory definition of the class, that factory definition shall be described with an IMPLEMENTS clause that references int-1,

2. if the SET statement is contained in a method within the instance definition of the class, that instance definition shall be described with an IMPLEMENTS clause that references int-1;
- e) the predefined object reference NULL.
- 11) If class-name-1 is specified and the data item referenced by identifier-3 is described with an interface-name that identifies the interface int-1, the factory object of class-name-1 shall be described with an IMPLEMENTS clause that references int-1.
 - 12) If identifier-4 is specified and the data item referenced by identifier-3 is described with a class-name, the data item referenced by identifier-4 shall be one of the following:
 - a) an object reference described with a class-name, subject to the following rules:
 1. if the data item referenced by identifier-3 is described with an ONLY phrase, the data item referenced by identifier-4 shall be described with the ONLY phrase, and the class-name specified in the description of the data item referenced by identifier-4 shall be the same as the class-name specified in the description of the data item referenced by identifier-3,
 2. if the data item referenced by identifier-3 is described without an ONLY phrase, the class-name specified in the description of the data item referenced by identifier-4 shall reference the same class or a subclass of the class specified in the description of the data item referenced by identifier-3,
 3. the presence or absence of the FACTORY phrase shall be the same as in the description of the data item referenced by identifier-3;
 - b) an object reference described with an ACTIVE-CLASS phrase, subject to the following rules:
 1. the data item referenced by identifier-3 shall not be described with the ONLY phrase,
 2. the class containing the data item referenced by identifier-4 shall be the same class or a subclass of the class specified in the description of the data item referenced by identifier-3,
 3. the presence or absence of the FACTORY phrase shall be the same as in the description of the data item referenced by identifier-3;
 - c) the predefined object reference SELF, subject to the following rules:
 1. the data item referenced by identifier-3 shall not be described with the ONLY phrase,
 2. the class containing the SET statement shall be the same class or a subclass of the class specified in the description of the data item referenced by identifier-3,
 3. if the data item referenced by identifier-3 is described without a FACTORY phrase, the method containing the SET statement shall be defined in the instance definition of its containing class;
 4. if the data item referenced by identifier-3 is described with a FACTORY phrase, the method containing the SET statement shall be defined in the factory definition of its containing class;
 - d) the predefined object reference NULL.
 - 13) If class-name-1 is specified and the data item referenced by identifier-3 is described with a class-name, the data item shall be described with the FACTORY phrase and class-name-1 shall reference the same class or a subclass of the class specified in the description of the data item referenced by identifier-3.
 - 14) If the data item referenced by identifier-3 is described with an ACTIVE-CLASS phrase, the data item referenced by identifier-4 shall be one of the following:

- a) an object reference described with the ACTIVE-CLASS phrase, where the presence or absence of the FACTORY phrase is the same as in the data item referenced by identifier-3;
- b) the predefined object SELF, subject to the following rules:
 - 1. if the data item referenced by identifier-3 is described without a FACTORY phrase, the method containing the SET statement shall be defined in the instance definition of its containing class,
 - 2. if the data item referenced by identifier-4 is described with a FACTORY phrase, the method containing the SET statement shall be defined in the factory definition of its containing class;
- c) the predefined object reference NULL.

FORMAT 6

15) Any particular screen-attribute shall not be specified more than once in a SET statement.

16) HIGHLIGHT and LOWLIGHT shall not both be specified in the same SET statement.

FORMAT 7

17) Identifier-5 shall reference a data item of category data-pointer. Identifier-6 shall be of category data-pointer.

18) Data-name-1 shall be a based data item.

19) If identifier-5 references a restricted data-pointer, identifier-6 shall be the predefined address NULL or shall reference a data-pointer restricted to the same type. If data-name-1 is a strongly-typed group item or a restricted pointer, identifier-6 shall reference a data-pointer restricted to the type of data-name-1.

If identifier-6 references a restricted data-pointer, either identifier-5 shall reference a data-pointer restricted to the same type or data-name-1 shall be a typed item of the type to which identifier-6 is restricted.

FORMAT 8

20) Identifier-7 shall reference a data item of category program-pointer. Identifier-8 shall be of category program-pointer.

21) If identifier-7 references a restricted program-pointer, identifier-8 shall be the predefined address NULL or shall reference a program-pointer and the program-prototypes associated with identifier-7 and identifier-8 shall have the same signature.

FORMAT 9

22) Identifier-9 shall be of category data-pointer.

23) Identifier-9 shall not be a data-pointer restricted to a type described with the STRONG phrase.

FORMAT 10

24) If USER-DEFAULT is specified as the first operand, identifier-10 or locale-name-1 shall be specified in the TO phrase.

25) Locale-name-1 shall be specified in the LOCALE clause of the SPECIAL-NAMES paragraph.

26) Identifier-10 shall reference an elementary data item of category data-pointer.

FORMAT 11

27) Identifier-11 shall reference an elementary data item of category data-pointer.

14.8.35.3 General rules

FORMATS 1 AND 2

- 1) Index-names are associated with a given table by being specified in the INDEXED BY phrase of the OCCURS clause for that table.

FORMAT 1

- 2) The following occurs for each recurrence of index-name-1 or identifier-1. Each time, the value of the sending operand is used as it was at the beginning of the execution of the statement. Item identification of the data item referenced by identifier-1 is done immediately before the value of that data item is changed:

- a) If index-name-1 is specified:

1. If arithmetic-expression-1 is specified, a subscript is determined by evaluating arithmetic-expression-1 as described in 8.4.1.2, Subscripts. If the evaluation of that subscript is successful, index-name-1 is set to a value causing it to refer to the table element that corresponds in occurrence number to that subscript; otherwise the execution of the SET statement is unsuccessful and the content of the receiving operand is unchanged.

2. If identifier-2 is specified, the content of the data item referenced by identifier-2 is placed in the index referenced by index-name-1 unchanged.

3. If index-name-2 is specified:

- a. If index-name-2 is associated with the same table as index-name-1, the content of the index referenced by index-name-2 is placed in the index referenced by index-name-1 unchanged.

- b. Otherwise, index-name-1 is set to a value causing it to refer to the table element that corresponds in occurrence number to the table element associated with index-name-2.

- b) If identifier-1 references an index data item, the content of index-name-2 or of the data item referenced by identifier-2 is placed in the index referenced by index-name-1 unchanged.

- c) If identifier-1 references a numeric data item, that item is set to the occurrence number of the table element referenced by index-name-2.

FORMAT 2

- 3) The following occurs for each recurrence of index-name-3. Each time, the value of arithmetic-expression-2 is used as it was at the beginning of the execution of the statement:

- a) If arithmetic-expression-2 does not evaluate to an integer, the EC-BOUND-SUBSCRIPT exception condition is set to exist, the execution of the SET statement is unsuccessful, and the content of the receiving operand is unchanged.

- b) If the occurrence number represented by the content of index-name-3 incremented (UP BY) or decremented (DOWN BY) the result of the evaluation of arithmetic-expression-2 is a valid subscript for the table associated with index-name-3 according to the constraints described in 8.4.1.2, Subscripts, index-name-3 is set to a value causing it to refer to the table element that corresponds in occurrence number to that subscript; otherwise the EC-BOUND-SUBSCRIPT exception condition is set to exist, the execution of the SET statement is unsuccessful, and the content of the receiving operand is unchanged.

FORMAT 3

- 4) The status of each external switch associated with the specified mnemonic-name-1 is modified such that the truth value resultant from evaluation of a condition-name associated with that switch will reflect an on status if the ON phrase is specified, or an off status if the OFF phrase is specified. (See 8.8.4.1.5, Switch-status condition.)

FORMAT 4

- 5) If the TRUE phrase is specified, the literal in the VALUE clause associated with condition-name-1 is placed in the conditional variable according to the rules for the VALUE clause, except that when the conditional variable is an alphanumeric group item, bit group item, or national group item to which a table is subordinate, its length is determined as specified in 13.16.36, OCCURS clause. If the length of the conditional variable is zero, the SET statement leaves it unchanged. If more than one literal is specified in the VALUE clause, the conditional variable is set to the value of the first literal that appears in the VALUE clause.
- 6) If the FALSE phrase is specified, the literal in the FALSE phrase of the VALUE clause associated with condition-name-1 is placed in the conditional variable according to the rules for the VALUE clause, except that when the conditional variable is an alphanumeric group item, bit group item, or national group item to which a table is subordinate, its length is determined as specified in 13.16.36, OCCURS clause. If the length of the conditional variable is zero, the SET statement leaves it unchanged.
- 7) If multiple condition-names are specified, the results are the same as if a separate SET statement had been written for each condition-name-1 in the same order as specified in the SET statement.

FORMAT 5

- 8) If identifier-4 is specified, a reference to the object identified by identifier-4 is placed into each data item referenced by identifier-3 in the order specified.
- 9) If class-name-1 is specified, a reference to the factory object of the class identified by class-name-1 is placed into each data item referenced by identifier-3 in the order specified.

FORMAT 6

- 10) When the SET statement is executed, the settings of the specified attributes of the screen item referenced by screen-name-1 are turned on or off as specified. The latest settings of the attributes are used when screen-name-1 is referenced in an ACCEPT screen or DISPLAY screen statement.

FORMAT 7

- 11) If identifier-5 is specified, the address identified by identifier-6 is stored in each data item referenced by identifier-5 in the order specified. Item identification of the data item referenced by identifier-5 is done immediately before the value of that data item is changed.
- 12) If data-name-1 is specified, the address identified by identifier-6 is assigned to each based item referenced by data-name-1 in the order specified.

FORMAT 8

- 13) The address identified by identifier-8 is stored in each data item referenced by identifier-7 in the order specified. Item identification of the data item referenced by identifier-7 is done immediately before the value of that data item is changed.
- 14) The effect of the SET statement on the program whose address is being stored in the program-pointer is implementor-defined.

FORMAT 9

- 15) If identifier-9 contains the predefined address NULL, the EC-DATA-PTR-NULL exception condition is set to exist.
- 16) If arithmetic-expression-3 does not evaluate to an integer, the EC-SIZE-ADDRESS exception condition is set to exist, the execution of the SET statement is unsuccessful, and the content of identifier-9 is unchanged.
- 17) The address contained in each identifier-9, in the order specified, is incremented, if UP is specified, or decremented, if DOWN is specified, by the number of bytes specified by arithmetic-expression-3. Item identification of the data item referenced by identifier-9 is done immediately before the value of that data item is changed. If this new address is outside the range of values allowed by the implementor for a data-pointer data item, the EC-RANGE-PTR exception condition is set to exist and the value of the data item referenced by identifier-9 is unchanged.

FORMAT 10

- 18) The content of the pointer data item referenced by identifier-10 shall reference saved locale information; otherwise, the EC-LOCALE-INVALID-PTR exception condition is set to exist and the SET statement is unsuccessful.

A reference to 'saved locale' or 'saved locale information' in the rules of COBOL is a reference to a locale and its locale category information as established with a set-locale format of the SET statement.

- 19) If USER-DEFAULT immediately follows the keyword LOCALE, the user default locale is set to the locale identified by the second operand.
- 20) If a locale category immediately follows the keyword LOCALE:
 - a) If locale-name-1 or identifier-10 is specified in the TO phrase, the current runtime locale for the specified category is set to that category in the saved locale identified by locale-name-1 or by the content of the data item referenced by identifier-10, respectively.
 - b) If USER-DEFAULT is specified in the TO phrase, the current runtime locale for the specified category is set to that category in the user default locale.
 - c) If SYSTEM-DEFAULT is specified, the current runtime locale for the specified category is set to that category in the system default locale.

- 21) If the locale specified by locale-name-1 is not available, the EC-LOCALE-MISSING exception condition is set to exist.
- 22) Each locale category specified remains in effect for the duration of the run unit or until another SET statement specifying that category is processed.

FORMAT 11

- 23) If LC_ALL is specified, the current locale is saved and a reference to the saved locale is placed into the pointer data item referenced by identifier-11.
- 24) If USER-DEFAULT is specified, the user default locale is saved and a reference to the saved locale is placed into the pointer data item referenced by identifier-11.

FORMAT 12

- 25) The predefined object reference EXCEPTION-OBJECT is set to null, and the last exception status is set to indicate no exception.

14.8.36 SORT statement

The SORT statement causes a set of records or table elements to be arranged in a user-specified sequence.

14.8.36.1 General format

Format 1 (file):

$$\begin{aligned} & \text{SORT file-name-1} \left\{ \text{ON} \left\{ \begin{array}{l} \text{ASCENDING} \\ \text{DESCENDING} \end{array} \right\} \text{KEY} \{ \text{data-name-1} \} \dots \right\} \dots \\ & \quad [\text{WITH} \text{ DUPLICATES IN ORDER}] \\ & \quad \left[\text{COLLATING} \text{ SEQUENCE} \left\{ \begin{array}{l} \text{IS alphabet-name-1 [alphabet-name-2]} \\ \left\{ \begin{array}{l} \text{FOR ALPHANUMERIC IS alphabet-name-1} \\ \text{FOR NATIONAL IS alphabet-name-2} \end{array} \right\} \end{array} \right\} \right] \\ & \quad \left\{ \begin{array}{l} \text{INPUT} \text{ PROCEDURE IS procedure-name-1} \left[\left\{ \begin{array}{l} \text{THROUGH} \\ \text{THRU} \end{array} \right\} \text{procedure-name-2} \right] \\ \text{USING} \{ \text{file-name-2} \} \dots \end{array} \right\} \\ & \quad \left\{ \begin{array}{l} \text{OUTPUT} \text{ PROCEDURE IS procedure-name-3} \left[\left\{ \begin{array}{l} \text{THROUGH} \\ \text{THRU} \end{array} \right\} \text{procedure-name-4} \right] \\ \text{GIVING} \{ \text{file-name-3} \} \dots \end{array} \right\} \end{aligned}$$

Format 2 (table):

$$\begin{aligned} & \text{SORT data-name-2} \left[\text{ON} \left\{ \begin{array}{l} \text{ASCENDING} \\ \text{DESCENDING} \end{array} \right\} \text{KEY} [\text{data-name-1}] \dots \right] \dots \\ & \quad [\text{WITH} \text{ DUPLICATES IN ORDER}] \\ & \quad \left[\text{COLLATING} \text{ SEQUENCE} \left\{ \begin{array}{l} \text{IS alphabet-name-1 [alphabet-name-2]} \\ \left\{ \begin{array}{l} \text{FOR ALPHANUMERIC IS alphabet-name-1} \\ \text{FOR NATIONAL IS alphabet-name-2} \end{array} \right\} \end{array} \right\} \right] \end{aligned}$$

14.8.36.2 Syntax rules

ALL FORMATS

- 1) A SORT statement may appear anywhere in the procedure division except that a format 1 SORT statement shall not appear in the declarative portion.
- 2) Alphabet-name-1 shall reference an alphabet that defines an alphanumeric collating sequence.

- 3) Alphabet-name-2 shall reference an alphabet that defines a national collating sequence.

FORMAT 1

- 4) File-name-1 shall be described in a sort-merge file description entry in the data division.
- 5) If the USING phrase is specified and the file description entry for file-name-1 describes variable-length records, the file description entry for file-name-2 shall describe neither records smaller than the smallest record nor larger than the largest record described for file-name-1. If the file description entry for file-name-1 describes fixed-length records, the file description entry for file-name-2 shall not describe a record that is larger than the record described for file-name-1.
- 6) Data-name-1 is a key data-name. Key data-names are subject to the following rules:
- a) The data items identified by key data-names shall be described in records associated with file-name-1.
 - b) Key data items may be qualified.
 - c) Key data items shall not be of the class boolean, object, or pointer.
 - d) The data items identified by key data-names shall not be variable-length data items.
 - e) If file-name-1 has more than one record description, then the data items identified by key data-names need be described in only one of the record descriptions. The same byte positions that are referenced by a key data-name in one record description entry are taken as the key in all records of the file.
 - f) None of the data items identified by key data-names may be described by an entry that either contains an OCCURS clause or is subordinate to an entry that contains an OCCURS clause.
 - g) If the file referenced by file-name-1 contains variable-length records, all the data items identified by key data-names shall be contained within the first x bytes of the record, where x is the number of bytes of the minimum record size for the file referenced by file-name-1.
- 7) The words THROUGH and THRU are equivalent.
- 8) File-name-2 and file-name-3 shall be described in a file description entry that is not for a report file and is not a sort-merge file description entry.
- 9) If file-name-3 references an indexed file, the first specification of data-name-1 shall be associated with an ASCENDING phrase and the data item referenced by that data-name-1 shall begin at the same byte location within its record and occupy the same number of bytes as the prime record key for that file.
- 10) No pair of file-names in the same SORT statement may be specified in the same SAME SORT AREA or SAME SORT-MERGE AREA clause. File-names associated with the GIVING phrase shall not be specified in the same SAME AREA clause.
- 11) If the GIVING phrase is specified and the file description entry for file-name-3 describes variable-length records, the file description entry for file-name-1 shall describe neither records smaller than the smallest record nor larger than the largest record described for file-name-3. If the file description entry for file-name-3 describes fixed-length records, the file description entry for file-name-1 shall not describe a record that is larger than the record described for file-name-3.
- 12) If file-name-2 references a relative or an indexed file, its access mode shall be sequential or dynamic.

FORMAT 2

- 13) Data-name-2 may be qualified and shall have an OCCURS clause in its data description entry. If data-name-2 is subject to more than one level of OCCURS clauses, subscripts shall be specified for all levels with the exception that the rightmost subscript shall be the word ALL.
- 14) Data-name-1 is a key data-name, subject to the following rules:
 - a) The data item identified by a key data-name shall be the same as, or subordinate to, the data item referenced by data-name-2.
 - b) Key data items may be qualified.
 - c) Key data items shall not be of class boolean, object, or pointer.
 - d) The data items identified by key data-names shall not be variable-length data items.
 - e) If the data item identified by a key data-name is subordinate to data-name-2, it shall not be described with an OCCURS clause, and it shall not be subordinate to an entry that is also subordinate to data-name-2 and contains an OCCURS clause.
- 15) The KEY phrase may be omitted only if the description of the table referenced by data-name-2 contains a KEY phrase.

14.8.36.3 General rules

ALL FORMATS

- 1) The words ASCENDING and DESCENDING are transitive across all occurrences of data-name-1 until another word ASCENDING or DESCENDING is encountered.
- 2) The data items referenced by the specifications of data-name-1 are the key data items that determine the order in which records are returned from the file referenced by file-name-1 or the order in which the table elements are stored after sorting takes place. The order of significance of the keys is the order in which they are specified in the SORT statement, without regard to their association with ASCENDING or DESCENDING phrases.
- 3) If the DUPLICATES phrase is specified and the contents of all the key data items associated with one record or table element are equal to the contents of the corresponding key data items associated with one or more other records or table elements, the order of return of these records or the relative order of the contents of these table elements is:
 - a) The order of the associated input files as specified in the SORT statement. Within a given input file the order is that in which the records are accessed from that file.
 - b) The order in which these records are released by an input procedure, when an input procedure is specified.
 - c) The relative order of the contents of these table elements before sorting takes place.
- 4) If the DUPLICATES phrase is not specified and the contents of all the key data items associated with one record or table element are equal to the contents of the corresponding key data items associated with one or more other records or table elements, the order of return of these records or the relative order of the contents of these table elements is undefined.
- 5) The alphanumeric collating sequence that applies to the comparison of key data items of class alphabetic and class alphanumeric, and the national collating sequence that applies to the comparison of key data items of class national, are each separately determined at the beginning of the execution of the SORT statement in the following order of precedence:
 - a) First, the collating sequence established by the COLLATING SEQUENCE phrase, if specified, in this SORT statement. The collating sequence associated with alphabet-name-1 applies to key data items of class

alphabetic and alphanumeric; the collating sequence associated with alphabet-name-2 applies to key data items of class national.

- b) Second, the collating sequences established as the program collating sequences.

FORMAT 1

- 6) If the file referenced by file-name-1 contains only fixed-length records, any record in the file referenced by file-name-2 containing fewer character positions than that fixed-length is space filled on the right to that fixed length, beginning with the first character position after the last character in the record, when that record is released to the file referenced by file-name-1, as follows:
 - a) If there is only one record description entry associated with the file referenced by file-name-2 and that record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - b) If there are multiple record description entries associated with the file referenced by file-name-2 and the descriptions include a SELECT WHEN clause, the rules of the SELECT WHEN clause are applied to the record to select its description. When the record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - c) Otherwise, the record is space filled with alphanumeric space characters.
- 7) To determine the relative order in which two records are returned from the file referenced by file-name-1, the contents of corresponding key data items are compared according to the rules for comparison of operands in a relation condition, starting with the most significant key data item.
 - a) If the contents of the corresponding key data items are not equal and the key is associated with the ASCENDING phrase, the record containing the key data item with the lower value is returned first;
 - b) If the contents of the corresponding key data items are not equal and the key is associated with the DESCENDING phrase, the record containing the key data item with the higher value is returned first; and,
 - c) If the contents of the corresponding key data items are equal, the determination is made on the contents of the next most significant key data item.
- 8) The execution of the SORT statement consists of three distinct phases as follows:
 - a) Records are made available to the file referenced by file-name-1. If INPUT PROCEDURE is specified, the execution of RELEASE statements in the input procedure makes the records available. If USING is specified, implicit READ and RELEASE statements make the records available. If the file referenced by file-name-2 is in an open mode when this phase commences, the EC-SORT-MERGE-FILE-OPEN exception condition is set to exist and the results of the execution of the SORT statement are undefined. When this phase terminates, the file referenced by file-name-2 is not in an open mode.
 - b) The file referenced by file-name-1 is sequenced. No processing of the files referenced by file-name-2 and file-name-3 takes place during this phase.
 - c) The records of the file referenced by file-name-1 are made available in sorted order. The sorted records are either written to the file referenced by file-name-3 or, by the execution of a RETURN statement, are made available for processing by the output procedure. If the file referenced by file-name-3 is in an open mode when this phase commences, the EC-SORT-MERGE-FILE-OPEN exception condition is set to exist and the results of the execution of the SORT statement are undefined. When this phase terminates, the file referenced by file-name-3 is not in the open mode.
- 9) The input procedure may consist of any procedure needed to create the records that are to be made available to the sort mechanism by executing RELEASE statements. The range includes all statements that are executed

as the result of a transfer of control in the range of the input procedure, as well as all statements in declarative procedures that are executed as a result of the execution of statements in the range of the input procedure. If the range of the input procedure causes the execution of any MERGE, RETURN, or format 1 SORT statements, the EC-SORT-MERGE-ACTIVE exception condition is set to exist and the results of the execution of the SORT statement are undefined. (See 14.5.3, Explicit and implicit transfers of control.)

- 10) If an input procedure is specified, control is passed to the input procedure before the file referenced by file-name-1 is sequenced by the SORT statement. The compiler inserts a return mechanism after the last statement in the input procedure. When control passes to that return mechanism, the records that have been released to the file referenced by file-name-1 are sorted.
- 11) If the USING phrase is specified, all the records in the file(s) referenced by file-name-2 are transferred to the file referenced by file-name-1. For each of the files referenced by file-name-2 the execution of the SORT statement causes the following actions to be taken:
 - a) The processing of the file is initiated. If the file-control entry for the file has a SHARING clause with the ALL phrase, the initiation is performed as if an OPEN statement with the INPUT phrase and the SHARING WITH READ ONLY phrase had been executed; otherwise, the initiation is performed as if an OPEN statement with the INPUT phrase and without a SHARING phrase is executed. The absence of the SHARING phrase means that the sharing mode is completely determined by the SHARING clause, if any, in the file control entry for the file connector referenced by file-name-2. If a non-fatal exception condition exists as a result of the execution of the implicit OPEN statement and there is an applicable USE procedure that completes normally or if there is no applicable USE procedure, the SORT statement continues as if the exception condition did not exist.
 - b) The logical records are obtained and released to the sort operation. Each record is obtained as if a READ statement with the NEXT phrase, the IGNORING LOCK phrase, and the AT END phrase had been executed. When the at end condition exists for file-name-1, the processing for that file connector is terminated. If the file referenced by file-name-1 is described with variable-length records, the size of any record released to file-name-1 is the size of that record when it was read from file-name-2, regardless of the content of the data item referenced by the DEPENDING ON phrase of either a RECORD IS VARYING clause or an OCCURS clause specified in the sort-merge file description entry for file-name-1. If the size of the record read from the file referenced by file-name-2 is larger than the largest record allowed in the file description entry for file-name-1, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the SORT statement is terminated. If file-name-1 is specified with variable-length records and the size of the record read from the file referenced by file-name-2 is smaller than the smallest record allowed in the file description entry for file-name-1, the EC-SORT-MERGE-RELEASE exception condition is set to exist and the execution of the SORT statement is terminated. If a fatal exception condition exists for file-name-1, the SORT is terminated.
 - c) The processing of file-name-1 is terminated. The termination is performed as if a CLOSE statement without optional phrases had been executed. This termination is performed before the file referenced by file-name-1 is sequenced by the SORT statement. For a relative file, the content of the relative key data item associated with file-name-2 is undefined after the execution of the SORT statement if file-name-2 is not referenced in the GIVING phrase.

These implicit functions are performed such that any applicable USE procedures are executed; however, the execution of such a USE procedure shall not cause the execution of any statement manipulating the file referenced by, or accessing the record area associated with, file-name-2.

The value of the data item referenced by the DEPENDING ON phrase of a RECORD IS VARYING clause specified in the file description entry for file-name-2 is undefined upon completion of the SORT statement.

- 12) The output procedure may consist of any procedure needed to process the records that are made available one at a time by the RETURN statement in sorted order from the file referenced by file-name-1. The range includes all statements that are executed as the result of a transfer of control in the range of the output procedure, as well as all statements in declarative procedures that are executed as a result of the execution of statements in the range of the output procedure. If the range of the output procedure causes the execution of any MERGE,

RELEASE, or format 1 SORT statement, the EC-SORT-MERGE-ACTIVE exception condition is set to exist and the results of the execution of the SORT statement are undefined. (See 14.5.3, Explicit and implicit transfers of control.)

- 13) If an output procedure is specified, control passes to it after the file referenced by file-name-1 has been sequenced by the SORT statement. The compiler inserts a return mechanism after the last statement in the output procedure. When control passes to that return mechanism, the mechanism provides for the termination of the sort and then passes control to the next executable statement after the SORT statement. Before entering the output procedure, the sort procedure reaches a point at which it selects the next record in sorted order when requested. The RETURN statements in the output procedure are the requests for the next record.

NOTE This return mechanism transfers control from the end of the output procedure and is not associated with the RETURN statement.

- 14) If the GIVING phrase is specified, all the sorted records are written on the file referenced by file-name-3 as the implied output procedure for the SORT statement. For each of the files referenced by file-name-3, the execution of the SORT statement causes the following actions to be taken:

- a) The processing of the file is initiated. The initiation is performed as if an OPEN statement with the OUTPUT and SHARING WITH NO OTHER phrases had been executed. This initiation is performed after the execution of any input procedure.
- b) The sorted logical records are returned and written onto the file. Each record is written as if a WRITE statement without any optional phrases had been executed. If the file referenced by file-name-3 is described with variable-length records, the size of any record written to file-name-3 is the size of that record when it was read from file-name-1, regardless of the content of the data item referenced by the DEPENDING ON phrase of either a RECORD IS VARYING clause or an OCCURS clause specified in the file description entry for file-name-3.

For a relative file, the relative key data item for the first record returned has the value 1; for the second record returned, the value 2; etc. After execution of the SORT statement, the content of the relative key data item indicates the last record returned to the file.

- c) The processing of the file is terminated. The termination is performed as if a CLOSE statement without optional phrases had been executed.

These implicit functions are performed such that any associated USE AFTER EXCEPTION/ERROR procedures are executed; however, the execution of such a USE procedure shall not cause the execution of any statement manipulating the file referenced by, or accessing the record area associated with, file-name-3. On the first attempt to write beyond the externally defined boundaries of the file, any USE AFTER EXCEPTION procedure associated with the file connector referenced by file-name-3 is executed; if that USE procedure completes normally or if no such USE procedure is specified, the processing of the file is terminated as in general rule 14c above. If a fatal exception condition exists for file-name-3 as a result of the implicit OPEN during file initiation, the SORT is terminated. If a non-fatal exception condition exists for file-name-3 as a result of the implicit OPEN during file initiation, and there is an applicable USE procedure that completes normally, or no applicable USE procedure is available, the SORT statement continues.

The value of the data item referenced by the DEPENDING ON phrase of a RECORD IS VARYING clause specified in the sort-merge file description entry for file-name-1 is undefined upon completion of the SORT statement for which the GIVING phrase is specified.

- 15) If the file referenced by file-name-3 contains only fixed-length records, any record in the file referenced by file-name-1 containing fewer character positions than that fixed-length is space filled on the right to that fixed length, beginning with the first character position after the last character in the record, when that record is returned to the file referenced by file-name-3, as follows:

- a) If there is only one record description entry associated with the file referenced by file-name-2 and that record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - b) If there are multiple record description entries associated with the file referenced by file-name-2 and the descriptions include a SELECT WHEN clause, the rules of the SELECT WHEN clause are applied to the record to select its description. When the record is described as a national data item or as an elementary data item of usage national and of category numeric, numeric-edited, or boolean, the record is filled with national space characters.
 - c) Otherwise, the record is space filled with alphanumeric space characters.
- 16) If a USE procedure invoked while a format 1 SORT statement is active does not complete normally, the SORT statement is terminated.

FORMAT 2

- 17) The SORT statement sorts the table referenced by data-name-2 and presents the sorted table in data-name-2 either in the order determined by the ASCENDING or DESCENDING phrases, if specified, or in the order determined by the KEY phrase associated with data-name-2.
- 18) To determine the relative order in which the table elements are stored after sorting, the contents of corresponding key data items are compared according to the rules for comparison of operands in a relation condition, starting with the most significant key data item.
- a) If the contents of the corresponding key data items are not equal and the key is associated with the ASCENDING phrase, the table element containing the key data item with the lower value has the lower occurrence number.
 - b) If the contents of the corresponding key data items are not equal and the key is associated with the DESCENDING phrase, the table element containing the key data item with the higher value has the lower occurrence number.
 - c) If the contents of the corresponding key data items are equal, the determination is based on the contents of the next most significant key data item.
- 19) The number of occurrences of table elements referenced by data-name-2 is determined by the rules in the OCCURS clause.
- 20) If the KEY phrase is not specified, the sequence is determined by the KEY phrase in the data description entry of the table referenced by data-name-2.
- 21) If the KEY phrase is specified, it overrides any KEY phrase specified in the data description entry of the table referenced by data-name-2.
- 22) If data-name-1 is omitted, the data item referenced by data-name-2 is the key data item.
- 23) The sorted table elements of the table referenced by data-name-2 are placed in the table referenced by data-name-2.

14.8.37 START statement

The START statement provides a basis for logical positioning within a file, for subsequent sequential retrieval of records.

14.8.37.1 General format

START file-name-1

[	<u>FIRST</u> <u>KEY</u> relational-operator { data-name-1 record-key-name-1 } [WITH <u>LENGTH</u> arithmetic-expression-1] <u>LAST</u>	]
[	<u>INVALID</u> KEY imperative-statement-1 <u>NOT</u> <u>INVALID</u> KEY imperative-statement-2	]
[<u>END-START</u>]		

14.8.37.2 Syntax rules

- 1) The access mode of the file referenced by file-name-1 shall be either sequential or dynamic.
- 2) If the organization of the file referenced by file-name-1 is sequential, either the FIRST or the LAST phrase shall be specified.
- 3) In the KEY phrase, relational-operator is a relational operator specified in the general-relation format of 8.8.4.1.1, Relation conditions, with the exception of the relational operators 'IS NOT EQUAL TO' or 'IS NOT='.
- 4) Data-name-1 or record-key-name-1 may be qualified.
- 5) For relative files, data-name-1, if specified, shall be the data item specified in the RELATIVE KEY clause in the associated file control entry.
- 6) For indexed files, data-name-1, if specified, shall reference either:
 - a) A data item specified as a prime or alternate record key associated with file-name-1, or
 - b) A data item with the following characteristics:
 1. Its leftmost character position within a record of the file corresponds to the leftmost character position of a prime or alternate record key that is associated with file-name-1 and that is defined without the SOURCE phrase in the RECORD KEY clause or ALTERNATE RECORD KEY clause.
 2. It has the same class, category, and usage as that record key.
 3. Its length is not greater than the length of that record key.
- 7) Record-key-name-1 shall be specified with the SOURCE phrase in the RECORD KEY clause or in the ALTERNATE RECORD KEY clause in the file control entry for file-name-1.
- 8) If the LENGTH phrase is specified, file-name-1 shall reference a file with indexed organization.

14.8.37.3 General rules

- 1) The open mode of the file connector referenced by file-name-1 shall be input or I-O.

- 2) The execution of the START statement does not alter either the content of the record area or the content of the data item referenced by the data-name specified in the DEPENDING ON phrase of the RECORD clause associated with file-name-1.
- 3) The execution of the START statement does not detect, acquire, or release record locks.
- 4) The execution of the START statement causes the value of the I-O status associated with file-name-1 to be updated. (See 9.1.12, I-O status.)
- 5) If, at the time of the execution of the START statement, the file position indicator indicates that an optional input file is not present, the invalid key condition exists and the execution of the START statement is unsuccessful.
- 6) Transfer of control following the successful or unsuccessful execution of the START operation depends on the presence or absence of the optional INVALID KEY and NOT INVALID KEY phrases in the START statement as specified in 9.1.13, Invalid key condition.
- 7) Following the unsuccessful execution of a START statement, the file position indicator is set to indicate that no valid record position has been established. For indexed files, the key of reference is undefined.

RELATIVE FILES

- 8) If the KEY phrase is omitted, the START statement behaves as though KEY IS EQUAL TO data-name-1 had been specified, where data-name-1 is the name of the key specified in the RELATIVE KEY clause associated with file-name-1.
- 9) The type of comparison specified by the relational operator in the KEY phrase occurs between a key associated with a record in the file referenced by file-name-1 and a data item as specified in general rule 10. Numeric comparison rules apply. (See 8.8.4.1.1.3, Comparison of numeric operands.)
 - a) If the relational operator is EQUAL, GREATER, NOT LESS, or GREATER OR EQUAL, the file position indicator is set to the relative record number of the first logical record in the file whose key satisfies the comparison searching the file sequentially.
 - b) If the relational operator is LESS, NOT GREATER, or LESS OR EQUAL, the file position indicator is set to the relative record number of the first logical record in the file whose key satisfies the comparison searching the file in reverse order.
 - c) If the comparison is not satisfied by any record in the file, the invalid key condition exists and the execution of the START statement is unsuccessful.
- 10) The comparison described in general rule 9 uses the data item referenced by the RELATIVE KEY phrase of the ACCESS MODE clause associated with file-name-1.
- 11) If FIRST is specified, the file position indicator is set to the relative record number of the first existing logical record in the file. If no records exist in the file, the invalid key condition exists and the execution of the START statement is unsuccessful.
- 12) If LAST is specified, the file position indicator is set to the relative record number of the last existing logical record in the file. If no records exist in the file, the invalid key condition exists and the execution of the START statement is unsuccessful.

INDEXED FILES

- 13) The value of arithmetic-expression-1 reflects the number of characters that will be used as a partial key for positioning to a record in file-name-1. If data-name-1 or record-key-name-1 is of class alphanumeric, arithmetic-expression-1 is the number of alphanumeric character positions; if data-name-1 or record-key-name-1 is of class national, arithmetic-expression-1 is the number of national character positions.

- 14) If arithmetic-expression-1 does not evaluate to a positive non-zero integer that is less than or equal to the length of the associated key, the I-O status value in the file connector referenced by file-name-1 is set to '23', the invalid key condition exists, and the execution of the START statement is unsuccessful.
- 15) If the KEY phrase is not specified, the behavior is the same as if KEY IS EQUAL TO data-name-1 or record-key-name-1 had been specified, with data-name-1 or record-key-name-1 being the prime record key for the file.
- 16) The key specified in the KEY phrase, or that shares a leftmost character with the data item specified in the KEY phrase, becomes the key of reference. This key of reference is used to establish the ordering of records for the purpose of this START statement as indicated in general rule 17. If the execution of the START statement is successful, this key of reference is used for subsequent sequential READ statements referencing file-name-1.
- 17) Execution of the START statement behaves as if:
 - a) The specified key is set up by moving the relevant parts of the record area into a temporary data area.
 - b) The length of this temporary area is considered to be the length specified in the LENGTH clause, if specified, or else the length of record-key-name-1, if specified, or else the length of data-name-1.
 - c) If the relational operator is EQUAL, GREATER, NOT LESS, or GREATER OR EQUAL, the file is searched sequentially with the key of reference being extracted from each record in turn into another temporary area. This second temporary area is truncated to the same length as the first.
 - d) If the relational operator is LESS, NOT GREATER, or LESS OR EQUAL, the file is searched in reverse order with the key of reference being extracted from each record in turn into another temporary area. This second temporary area is truncated to the same length as the first.
 - e) The comparison specified by the relational operator in the KEY phrase is made between these two temporary areas, with the second temporary area on the left hand side, and according to the collating sequence of the file. Comparison proceeds as specified for items of the class of data-name-1 and operands of equal length in 8.8.4.1.1.6, Comparison of alphanumeric operands, or 8.8.4.1.1.8, Comparison of national operands. Then, either:
 1. The file position indicator is set to the value of the key of reference in the first logical record whose key satisfies the comparison, or
 2. If the comparison is not satisfied by any record in the file, the invalid key condition exists and the execution of the START statement is unsuccessful.
- 18) If FIRST is specified, the file position indicator is set to the value of the primary key of the first existing logical record in the physical file and the key of reference is set to the primary key. If no records exist in the file, the I-O status value in the file connector referenced by file-name-1 is set to '23', the invalid key condition exists, and the execution of the START statement is unsuccessful.
- 19) If LAST is specified, the file position indicator is set to the value of the primary key of the last existing logical record in the physical file and the key of reference is set to the primary key. If no records exist in the file, the I-O status value in the file connector referenced by file-name-1 is set to '23', the invalid key condition exists, and the execution of the START statement is unsuccessful.

SEQUENTIAL FILES

- 20) If FIRST is specified, the file position indicator is set to 1 if records exist in the physical file. If no records exist in the file, or the physical file does not support the ability to position at the first record, the I-O status value in the file connector referenced by file-name-1 is set to '23', the invalid key condition exists, and the execution of the START statement is unsuccessful.

- 21) If LAST is specified, the file position indicator is set to the record number of the last existing logical record in the physical file. If no records exist in the file, or the physical file does not support the ability to position at the last record, the I-O status value in the file connector referenced by file-name-1 is set to '23', the invalid key condition exists, and the execution of the START statement is unsuccessful.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.38 STOP statement

The STOP statement causes termination of the execution of the run unit.

14.8.38.1 General format

$$\underline{\text{STOP}} \quad \underline{\text{RUN}} \quad \left[\text{WITH} \left\{ \begin{array}{c} \underline{\text{ERROR}} \\ \underline{\text{NORMAL}} \end{array} \right\} \text{STATUS} \left[\begin{array}{c} \text{identifier-1} \\ \text{literal-1} \end{array} \right] \right]$$
14.8.38.2 Syntax rules

- 1) If a STOP statement appears in a consecutive sequence of imperative statements within a sentence, it shall appear as the last statement in that sequence.
- 2) Identifier-1 shall reference an integer data item or a data item with usage display or usage national.
- 3) If literal-1 is numeric, it shall be an integer.

14.8.38.3 General rules

- 1) The operations described in 14.5.10, Normal run unit termination, are performed.
- 2) If the ERROR phrase is specified, the operating system will indicate an error termination of the run unit if such a capability exists within the operating system.
- 3) If the NORMAL phrase is specified, the operating system will indicate a normal termination of the run unit if such a capability exists within the operating system.
- 4) If neither the ERROR phrase nor the NORMAL phrase is specified, the operating system will indicate a normal termination of the run unit if such a capability exists within the operating system unless error termination has been indicated by an implementor-defined mechanism.
- 5) During execution of the STOP statement with literal-1 or identifier-1 specified, literal-1 or the contents of the data item referenced by identifier-1 are passed to the operating system. Any constraints on the value of literal-1 or the contents of the data item referenced by identifier-1 are defined by the implementor.
- 6) Execution of the run unit terminates and control is transferred to the operating system.

14.8.39 STRING statement

The STRING statement provides concatenation of the partial or complete contents of one or more data items into a single data item.

14.8.39.1 General format

$$\text{STRING} \left\{ \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \dots \left[\text{DELIMITED BY} \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-2} \\ \text{SIZE} \end{array} \right\} \right] \right\} \dots$$

INTO identifier-3
 [WITH POINTER identifier-4]
 [ON OVERFLOW imperative-statement-1
 NOT ON OVERFLOW imperative-statement-2]
 [END-STRING]

14.8.39.2 Syntax rules

- 1) All literals shall be described as alphanumeric, boolean, or national literals, and all identifiers, except identifier-4, shall be described implicitly or explicitly as usage display or national. If any one of literal-1, literal-2, identifier-1, identifier-2, or identifier-3 is of class national, then all shall be of class national.
- 2) Literal-1 or literal-2 shall not be a figurative constant that begins with the word ALL.
- 3) Identifier-3 shall not be reference modified.
- 4) Identifier-3 shall not reference an edited data item and shall not be described with the JUSTIFIED clause.
- 5) Identifier-3 shall not reference a strongly-typed group item.
- 6) Identifier-4 shall be described as an elementary numeric integer data item of sufficient size to contain a value equal to 1 plus the size of the data item referenced by identifier-3. The symbol 'P' shall not be used in the picture character-string of identifier-4.
- 7) Where identifier-1 or identifier-2 is an elementary numeric data item, it shall be described as an integer without the symbol 'P' in its picture character-string.
- 8) The DELIMITED phrase may be omitted only immediately preceding the INTO phrase. If it is omitted, DELIMITED BY SIZE is implied.
- 9) Literal-1 or the data item referenced by identifier-1 is the sending operand. The data item referenced by identifier-3 is the receiving operand.

14.8.39.3 General rules

- 1) Literal-2 or the content of the data item referenced by identifier-2 indicates the character(s) delimiting the move. If the SIZE phrase is used, the content of the complete data item defined by identifier-1 or literal-1 is moved.
- 2) When a figurative constant is specified as literal-1 or literal-2, it refers to an implicit one character data item whose usage shall be the same as the usage of identifier-3, either display or national.

- 3) When the STRING statement is executed, the transfer of data is governed by the following rules:
- a) Characters from literal-1 or from the content of the data item referenced by identifier-1 are transferred to the data item referenced by identifier-3 in accordance with the MOVE statement rules for alphanumeric-to-alphanumeric moves or, when identifier-3 is of class national, national-to-national moves, except that no space filling is provided. If an identifier-1 references a zero-length item, that sending operand is ignored.
 - b) If the DELIMITED phrase is specified and literal-2 is specified or identifier-2 is specified and is not a zero-length item, the content of the data item referenced by identifier-1, or the value of literal-1, is transferred to the receiving data item in the sequence specified in the STRING statement beginning with the leftmost character positions and continuing from left to right until the end of the sending data item is reached or the end of the receiving data item is reached or until the character(s) specified by literal-2, or by the content of the data item referenced by identifier-2, are encountered. The character(s) specified by literal-2 or by the data item referenced by identifier-2 are not transferred.
 - c) If the DELIMITED phrase is specified and the SIZE phrase is specified or identifier-2 is specified and is a zero-length item, the entire content of literal-1, or the content of the data item referenced by identifier-1, is transferred, in the sequence specified in the STRING statement, to the data item referenced by identifier-3 until all data has been transferred or the end of the data item referenced by identifier-3 has been reached.

This behavior is repeated until all occurrences of literal-1 or data items referenced by identifier-1 have been processed.

- 4) If the POINTER phrase is specified, the data item referenced by identifier-4 shall have a value greater than zero at the start of execution of the STRING statement.
- 5) If the POINTER phrase is not specified, the following general rules apply as if the user had specified identifier-4 referencing a data item with an initial value of 1.
- 6) When characters are transferred to the data item referenced by identifier-3, the moves behave as though the characters were moved one at a time from the source into the character positions of the data item referenced by identifier-3 designated by the value of the data item referenced by identifier-4 (provided the value of the data item referenced by identifier-4 does not exceed the length of the data item referenced by identifier-3), and then the data item referenced by identifier-4 was increased by one prior to the move of the next character or prior to the end of execution of the STRING statement. The value of the data item referenced by identifier-4 is changed during execution of the STRING statement only by the behavior specified above.
- 7) At the end of execution of the STRING statement, only the portion of the data item referenced by identifier-3 that was referenced during the execution of the STRING statement is changed. All other portions of the data item referenced by identifier-3 will contain data that was present before this execution of the STRING statement.
- 8) Before each move of a character to the data item referenced by identifier-3, if the value associated with the data item referenced by identifier-4 is either less than one or exceeds the number of character positions in the data item referenced by identifier-3, the following occurs:
 - a) No further data is transferred to the data item referenced by identifier-3.
 - b) The EC-OVERFLOW-STRING exception condition is set to exist.
 - c) If the ON OVERFLOW phrase is specified, control is transferred to imperative-statement-1 and execution continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the STRING statement.

- d) If the ON OVERFLOW phrase is not specified, execution continues as specified in 14.5.12.1.3, Non-fatal exception conditions.
 - e) The NOT ON OVERFLOW phrase, if specified, is ignored.
- 9) If, at the time of execution of a STRING statement with the NOT ON OVERFLOW phrase, the conditions described in general rule 8 are not encountered, after completion of the transfer of data according to the other general rules, the ON OVERFLOW phrase, if specified, is ignored and control is transferred to the end of the STRING statement or, if the NOT ON OVERFLOW phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the STRING statement.
- 10) If identifier-1, or identifier-2, occupies the same storage area as identifier-3, or identifier-4, or if identifier-3 and identifier-4 occupy the same storage area, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002(E)

14.8.40 SUBTRACT statement

The SUBTRACT statement is used to subtract one, or the sum of two or more, numeric data items from one or more items, and set the values of one or more items equal to the results.

14.8.40.1 General format

Format 1 (simple):

```
SUBTRACT { identifier-1
           literal-1 } ... FROM { identifier-2 [ ROUNDED ] } ...
[ ON SIZE ERROR imperative-statement-1
  NOT ON SIZE ERROR imperative-statement-2 ]
[ END-SUBTRACT ]
```

Format 2 (giving):

```
SUBTRACT { identifier-1
           literal-1 } ... FROM { identifier-2
           literal-2 }
GIVING { identifier-3 [ ROUNDED ] } ...
[ ON SIZE ERROR imperative-statement-1
  NOT ON SIZE ERROR imperative-statement-2 ]
[ END-SUBTRACT ]
```

Format 3 (corresponding):

```
SUBTRACT { CORRESPONDING
           CORR } identifier-4 FROM identifier-5 [ ROUNDED ]
[ ON SIZE ERROR imperative-statement-1
  NOT ON SIZE ERROR imperative-statement-2 ]
[ END-SUBTRACT ]
```

14.8.40.2 Syntax rules

ALL FORMATS

- 1) When native arithmetic is in effect, the composite of operands described in 14.6.6, Arithmetic statements, is determined as follows:
 - a) In format 1, by using all of the operands in the statement.
 - b) In format 2, by using all of the operands in the statement excluding the data item that follow the word GIVING.
 - c) In format 3, by using the two corresponding operands for each separate pair of corresponding items.

FORMATS 1 AND 2

- 2) Identifier-1 and identifier-2 shall reference numeric data items.
- 3) Literal-1 and literal-2 shall be numeric literals.

FORMAT 2

- 4) Identifier-3 shall reference a numeric data item or a numeric-edited data item.

FORMAT 3

- 5) The words CORR and CORRESPONDING are equivalent.
- 6) Identifier-4 and identifier-5 shall be alphanumeric group items, national group items, or strongly-typed group items and shall not be described with level-number 66.

14.8.40.3 General rules

- 1) When format 1 is used, the initial evaluation consists of determining the value to be subtracted, which is literal-1 or the value of the data item referenced by identifier-1, or if more than one is specified, the sum of such operands. The initial evaluation is subtracted from the value of the data item referenced by identifier-2 and the result is stored as the new value of the data item referenced by identifier-2.

When standard arithmetic is in effect, the result of the initial evaluation is equivalent to the result of the arithmetic expression

$$(\text{operand-1}_1 + \text{operand-1}_2 + \dots + \text{operand-1}_n)$$

where the values of operand-1 are the values of literal-1 and the data items referenced by identifier-1 in the order in which they are specified in the SUBTRACT statement. The result of the subtraction from the value of each data item referenced by identifier-2 is equivalent to the result of the arithmetic expression

$$(\text{identifier-2} - \text{initial-evaluation})$$

where initial-evaluation represents the result of the initial evaluation.

- 2) When format 2 is used, the initial evaluation consists of determining the value to be subtracted, which is literal-1 or the value of the data item referenced by identifier-1, or if more than one is specified, the sum of such operands; and subtracting this value from literal-2 or the value of the data item referenced by identifier-2. The result is stored as the new value of the data item referenced by identifier-3.

When standard arithmetic is in effect, the result of the initial evaluation is equivalent to the result of the arithmetic expression

$$(\text{operand-2} - (\text{operand-1}_1 + \text{operand-1}_2 + \dots + \text{operand-1}_n))$$

where the values of operand-1 are the values of literal-1 and the data items referenced by identifier-1 in the order in which they are specified in the SUBTRACT statement and the value of operand-2 is the value of either literal-2 or the data item referenced by identifier-2 in the SUBTRACT statement.

- 3) When format 3 is used, data items in identifier-4 are subtracted from and stored in corresponding items in identifier-5.

When standard arithmetic is in effect, the result of the subtraction is equivalent to

$$(\text{operand-1} - \text{operand-2})$$

where the value of operand-1 is the value of the data item in identifier-4 and the value of operand-2 is the value of the corresponding data item in identifier-5.

- 4) When native arithmetic is in effect and none of the operands is described with usage binary-char, binary-short, binary-long, binary-double, float-short, float-long, or float-extended, enough places shall be carried so as not to lose significant digits during execution.
- 5) Data items within identifier-4 are selected to be subtracted from selected data items within identifier-5 according to the rules specified in 14.6.5, CORRESPONDING phrase. The results are the same as if the user had referred to each pair of corresponding identifiers in separate SUBTRACT statements.
- 6) Additional rules and explanations relative to this statement are given in 14.5.9, Overlapping operands; 14.5.12.2, Incompatible data; 14.6.3, ROUNDED phrase; 14.6.4, SIZE ERROR phrase and size error condition; 14.6.5, CORRESPONDING phrase; and 14.6.6, Arithmetic statements.

14.8.41 SUPPRESS statement

The SUPPRESS statement inhibits the printing of a report group.

14.8.41.1 General format

SUPPRESS PRINTING

14.8.41.2 Syntax rules

- 1) The SUPPRESS statement may appear only in a USE BEFORE REPORTING procedure.

14.8.41.3 General rules

- 1) The SUPPRESS statement inhibits printing only for the report group named in the USE procedure within which the SUPPRESS statement appears.
- 2) The effect of the SUPPRESS statement is limited to the current instance of the report group.

NOTE A SUPPRESS statement should be executed again on each further occasion that the associated report group is to be inhibited.

- 3) When the SUPPRESS statement is executed, the following report group functions are inhibited:
 - a) The printing of the print lines of the report group.
 - b) Any page advance associated with the report group.
 - c) The processing of any NEXT GROUP clause in the report group.
 - d) Any changes to LINE-COUNTER associated with the report group.
 - e) If the associated report group is a detail, the SUPPRESS statement does not affect the sensing for control breaks or the subsequent control break processing.

14.8.42 TERMINATE statement

The TERMINATE statement completes the processing of the specified reports.

14.8.42.1 General format

TERMINATE { report-name-1 } ...

14.8.42.2 Syntax rules

- 1) Report-name-1 shall be defined by a report description entry in the report section.
- 2) If report-name-1 is defined in a containing program, the file description entry associated with report-name-1 shall contain a GLOBAL clause.

14.8.42.3 General rules

- 1) The TERMINATE statement may be executed only for a report that is in the active state. If the report is not in the active state, the EC-REPORT-INACTIVE exception condition is set to exist and the execution of the statement has no other effect.
- 2) If no GENERATE statement has been executed for a report during the interval between the execution of an INITIATE statement and a TERMINATE statement for that report, the TERMINATE statement causes no processing of any kind to take place for any report groups and has the sole effect of changing the state of the report to inactive.
- 3) If at least one GENERATE statement has been executed for a report during the interval between the execution of an INITIATE statement and a TERMINATE statement for that report, the TERMINATE statement causes the following actions to take place:
 - a) The contents of any control data items are changed to their prior values.
 - b) Each control footing is printed, if defined, beginning with the minor control footing, as defined for the GENERATE statement, as though a control break has been sensed in the most major control data item.
 - c) The report footing is printed, if defined.
 - d) The contents of any control data items are restored to the values they had at the start of execution of the TERMINATE statement.
- 4) The result of executing a TERMINATE statement in which more than one report-name-1 is specified is as though a separate TERMINATE statement had been executed for each report-name-1 in the same order as specified in the statement. If an implicit TERMINATE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit TERMINATE statement, if any.
- 5) If a non-fatal exception condition is raised during the execution of a TERMINATE statement, execution resumes at the next report item, line, or report group, whichever follows in logical order.
- 6) The TERMINATE statement does not close the file associated with report-name-1.

14.8.43 UNLOCK statement

The UNLOCK statement explicitly releases any record locks associated with a file connector.

14.8.43.1 General format

UNLOCK file-name-1

RECORD
RECORDS

14.8.43.2 Syntax rules

- 1) File-name-1 shall not refer to a sort file or a merge file.

14.8.43.3 General rules

- 1) Any record locks associated with the file connector referenced by file-name-1 are released by the execution of the UNLOCK statement. The presence or absence of any record locks does not affect the success of the execution of the UNLOCK statement.

NOTE To unlock one particular record, use the READ statement with the NO LOCK phrase.

- 2) File-name-1 shall reference a file connector in the open mode.
- 3) The execution of the UNLOCK statement causes the value of the I/O status of the file connector referenced by file-name-1 to be updated.

14.8.44 UNSTRING statement

The UNSTRING statement causes contiguous data in a sending field to be separated and placed into multiple receiving fields.

14.8.44.1 General format

UNSTRING identifier-1

$$\left[\begin{array}{l} \text{DELIMITED BY [ALL] } \left\{ \begin{array}{l} \text{identifier-2} \\ \text{literal-1} \end{array} \right\} \left[\text{OR [ALL] } \left\{ \begin{array}{l} \text{identifier-3} \\ \text{literal-2} \end{array} \right\} \right] \dots \\ \text{INTO } \{ \text{identifier-4 [DELIMITER IN identifier-5] [COUNT IN identifier-6] } \} \dots \\ \text{[WITH POINTER identifier-7]} \\ \text{[TALLYING IN identifier-8]} \\ \left[\begin{array}{l} \text{ON OVERFLOW imperative-statement-1} \\ \text{NOT ON OVERFLOW imperative-statement-2} \end{array} \right] \\ \text{[END-UNSTRING]} \end{array} \right]$$

14.8.44.2 Syntax rules

- 1) Literal-1 and literal-2 shall be literals of the category alphanumeric or national and shall not be a figurative constant that begins with the word ALL.
- 2) Identifier-1, identifier-2, identifier-3, and identifier-5 shall reference data items of category alphanumeric or national.
- 3) If any of identifier-1, identifier-2, identifier-3, identifier-4, identifier-5, literal-1, or literal-2 are of category national, then all shall be of category national.
- 4) Identifier-4 shall be described implicitly or explicitly as usage display and category alphabetic, alphanumeric, or numeric; or as usage national and category national or numeric. Numeric items shall not be specified with the symbol 'P' in their picture character-string.
- 5) Identifier-6 and identifier-8 shall reference integer data items. The symbol 'P' shall not be used in the picture character-string.
- 6) Identifier-7 shall be described as an elementary numeric integer data item of sufficient size to contain a value equal to 1 plus the size of the data item referenced by identifier-1. The symbol 'P' shall not be used in the picture character-string of identifier-7.
- 7) The DELIMITER IN phrase and the COUNT IN phrase may be specified only if the DELIMITED BY phrase is specified.
- 8) The data item referenced by identifier-1 is the sending operand.
- 9) The data item referenced by identifier-4 is the receiving operand for data. The data item referenced by identifier-5 is the receiving operand for delimiters.

14.8.44.3 General rules

- 1) All references to identifier-2 and literal-1 apply equally to identifier-3 and literal-2, respectively, and all recursions thereof.

- 2) If the data item referenced by identifier-1 is a zero-length item, execution of the UNSTRING statement terminates immediately.
- 3) Literal-1 or the data item referenced by identifier-2 specifies a delimiter.
- 4) The data item referenced by identifier-6 represents the count of the number of characters within the data item referenced by identifier-1 isolated by the delimiters for the move to the data item referenced by identifier-4. This value does not include a count of the delimiter character(s).
- 5) The data item referenced by identifier-7 contains a value that indicates a relative character position within the area referenced by identifier-1.
- 6) The data item referenced by identifier-8 is a counter that is incremented by 1 for each occurrence of the data item referenced by identifier-4 accessed during the UNSTRING operation.
- 7) When a figurative constant is used as the delimiter, it stands for a single-character national literal if identifier-1 is a national data item; otherwise, it stands for a single-character alphanumeric literal.

When the ALL phrase is specified, one occurrence or two or more contiguous occurrences of literal-1 (figurative constant or not) or the content of the data item referenced by identifier-2 are treated as if they were only one occurrence, and one occurrence of literal-1 or the data item referenced by identifier-2 is moved to the receiving data item according to the rules in general rule 11d.

- 8) When any examination encounters two contiguous delimiters, the current receiving area shall be space-filled if it is described as alphabetic, alphanumeric, or national; or zero-filled if it is described as numeric.
- 9) Each literal-1 or the data item referenced by identifier-2 represents one delimiter. When a delimiter contains two or more characters, all of the characters shall be present in contiguous positions of the sending item, and in the order given, to be recognized as a delimiter. If the data item referenced by identifier-2 or identifier-3 is a zero-length item, that delimiter is ignored. When neither literal-1 nor literal-2 is specified and all data items referenced by identifier-2 and identifier-3 are zero-length items, it is as if the DELIMITED phrase were not specified.
- 10) When two or more delimiters are specified in the DELIMITED BY phrase, an OR condition exists between them. Each delimiter is compared to the sending field. If a match occurs, the character(s) in the sending field is considered to be a single delimiter. No character(s) in the sending field shall be considered a part of more than one delimiter.

Each delimiter is applied to the sending field in the sequence specified in the UNSTRING statement.

- 11) When the UNSTRING statement is initiated, the current receiving area is the data item referenced by identifier-4. Data is transferred from the data item referenced by identifier-1 to the data item referenced by identifier-4 according to the following rules:
 - a) If the POINTER phrase is specified, the string of characters referenced by identifier-1 is examined beginning with the relative character position indicated by the content of the data item referenced by identifier-7. If the POINTER phrase is not specified, the string of characters is examined beginning with the leftmost character position.
 - b) If the DELIMITED BY phrase is specified, the examination proceeds left to right until a delimiter specified by either literal-1 or the value of the data item referenced by identifier-2 is encountered. (See general rule 9.) If the DELIMITED BY phrase is not specified, the number of characters examined is equal to the size of the current receiving area. However, if the sign of the receiving item is defined as occupying a separate character position, the number of characters examined is one less than the size of the current receiving area. Size is defined as number of character positions.

If the end of the data item referenced by identifier-1 is encountered before the delimiting condition is met, the examination terminates with the last character examined.

- c) The characters examined, excluding any delimiting characters, shall be treated as an elementary national data item if identifier-1 is of category national, and otherwise as an elementary alphanumeric data item, and shall be moved into the current receiving area according to the rules for the MOVE statement.
 - d) If the DELIMITER IN phrase is specified the delimiting character(s) shall be treated as an elementary national data item if identifier-1 is of category national, and otherwise as an elementary alphanumeric data item and shall be moved into the data item referenced by identifier-5 according to the rules for the MOVE statement. If the delimiting condition is the end of the data item referenced by identifier-1, then the data item referenced by identifier-5 is space filled.
 - e) If the COUNT IN phrase is specified, a value equal to the number of characters examined, excluding any delimiter characters, shall be moved into the area referenced by identifier-6 according to the rules for an elementary move.
 - f) If the DELIMITED BY phrase is specified the string of characters is further examined beginning with the first character position to the right of the delimiter. If the DELIMITED BY phrase is not specified the string of characters is further examined beginning with the character position to the right of the last character transferred.
 - g) After data is transferred to the data item referenced by identifier-4, the current receiving area is the data item referenced by the next recurrence of identifier-4. The behavior described in general rules 12b through 12f is repeated until either all the characters are exhausted in the data item referenced by identifier-1, or until there are no more receiving areas.
- 12) The initialization of the contents of the data items associated with the POINTER phrase or the TALLYING phrase is the responsibility of the user.
- 13) The content of the data item referenced by identifier-7 will be incremented by one for each character examined in the data item referenced by identifier-1. When the execution of an UNSTRING statement with a POINTER phrase is completed, the content of the data item referenced by identifier-7 will contain a value equal to the initial value plus the number of characters examined in the data item referenced by identifier-1.
- 14) When the execution of an UNSTRING statement with a TALLYING phrase is completed, the content of the data item referenced by identifier-8 contains a value equal to its value at the beginning of the execution of the statement plus a value equal to the number of identifier-4 receiving data items accessed during execution of the statement.
- 15) Either of the following situations causes an overflow condition:
- a) An UNSTRING is initiated, and the value in the data item referenced by identifier-7 is less than 1 or greater than the number of character positions described for the data item referenced by identifier-1.
 - b) If, during execution of an UNSTRING statement, all receiving areas have been acted upon, and the data item referenced by identifier-1 contains characters that have not been examined.
- 16) When an overflow condition exists, the following occurs:
- a) The UNSTRING operation is terminated.
 - b) The EC-OVERFLOW-UNSTRING exception condition is set to exist.
 - c) If the ON OVERFLOW phrase is specified, control is transferred to imperative-statement-1 and execution continues according to the rules for each statement in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1 control is transferred to the end of the UNSTRING statement.

- d) If the ON OVERFLOW phrase is not specified, execution continues as specified in 14.5.12.1.3, Non-fatal exception conditions
 - e) The NOT ON OVERFLOW phrase, if specified, is ignored.
- 17) If, at the time of execution of an UNSTRING statement, the conditions described in general rule 15 are not encountered, after completion of the transfer of data according to the other general rules, the ON OVERFLOW phrase, if specified, is ignored and control is transferred to the end of the UNSTRING statement or, if the NOT ON OVERFLOW phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the UNSTRING statement.
- 18) If identifier-1, identifier-2, or identifier-3, occupies the same storage area as identifier-4, identifier-5, identifier-6, identifier-7, or identifier-8, or if identifier-4, identifier-5, or identifier-6, occupies the same storage area as identifier-7 or identifier-8, or if identifier-7 and identifier-8 occupy the same storage area, the result of the execution of this statement is undefined, even if they are defined by the same data description entry. (See 14.5.9, Overlapping operands.)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.45 USE statement

The USE statement specifies:

- Procedures for error or exception handling that are in addition to the standard procedures provided by other facilities,

NOTE These facilities can include the input-output control system and the operating system.

- A procedure to be executed just before the printing of the designated report group, or
- Procedures that are executed after the detection of exception conditions.

14.8.45.1 General format

Format 1 (file-exception):

USE [GLOBAL] AFTER STANDARD { EXCEPTION
ERROR } PROCEDURE ON { { file-name-1 } ...
INPUT
OUTPUT
I-O
EXTEND }

Format 2 (reporting):

USE [GLOBAL] BEFORE REPORTING identifier-1

Format 3 (exception-name):

USE AFTER { EXCEPTION CONDITION } { exception-name-1
EC } { exception-name-2 { FILE file-name-2 } ... } ...

Format 4 (exception-object):

USE AFTER { EXCEPTION OBJECT } { class-name-1
EO } { interface-name-1 }

14.8.45.2 Syntax rules

ALL FORMATS

- 1) A USE statement, when present, shall immediately follow a section header in the declaratives portion of the procedure division and shall appear in a sentence by itself. The remainder of the section shall consist of zero, one, or more procedural paragraphs that define the procedures to be used.
- 2) File-name-1 or file-name-2 shall not be a sort or a merge file.
- 3) Within a declarative procedure, there shall be no reference to any nondeclarative procedures except in a RESUME statement.
- 4) Procedure-names within a declarative section may be referenced in a different declarative section or in a nondeclarative procedure only with a PERFORM statement.

FORMATS 1 AND 3

- 5) The files implicitly or explicitly referenced in the USE statement need not all have the same organization or access.

FORMAT 1

- 6) The words ERROR and EXCEPTION are synonymous and may be used interchangeably.
- 7) The INPUT, OUTPUT, I-O, and EXTEND phrases may each be specified only once in the declaratives portion of a given procedure division.
- 8) The same file-name shall not appear in more than one USE AFTER EXCEPTION statement within the same procedure division.

FORMAT 2

- 9) Identifier-1 shall reference a report group. The same identifier-1 shall not appear in more than one USE BEFORE REPORTING statement within the same procedure division.
- 10) The GENERATE, INITIATE, or TERMINATE statements shall not appear in a paragraph within a USE BEFORE REPORTING procedure.
- 11) A USE BEFORE REPORTING procedure shall not alter the value of any control data item.

FORMAT 3

- 12) EC is synonymous with EXCEPTION CONDITION.
- 13) Exception-name-2 shall be an exception-name beginning with 'EC-I-O'.
- 14) The same pair of exception-name-2 and file-name-2 shall not be specified in more than one USE statement within the same procedure division.

FORMAT 4

- 15) EO is synonymous with EXCEPTION OBJECT.
- 16) Class-name-1 shall be the name of a class specified in the REPOSITORY paragraph.
- 17) Interface-name-1 shall be the name of an interface specified in the REPOSITORY paragraph.

14.8.45.3 General rules

ALL FORMATS

- 1) The USE statement is never executed; it merely defines the conditions calling for the execution of the USE procedures.
- 2) During the execution of a USE procedure, if a statement raises an exception condition that would cause the execution of a USE procedure that had previously been activated and had not yet returned control to the activating entity, the EC-FLOW-USE exception condition is set to exist.

FORMATS 1, 3, AND 4

- 3) A declarative is selected for execution by analyzing the USE statements in the source element in the order in which they are specified. The first declarative that satisfies the selection criteria is executed and no other

declaratives are executed. If an exception object was raised, the method specified in general rule 13 is applied. Otherwise, the following rules are applied in order:

- a) All format 1 USE statements in which file-name-1 is specified are examined using the criteria specified in general rule 6. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- b) All format 1 USE statements in which file-name-1 is not specified are examined using the criteria specified in general rule 6. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- c) All format 3 USE statements in which file-name-2 is specified and exception-name-2 is a level-3 exception-name are examined. If the exception condition that was raised matches exception-name-2 and the exception condition is associated with file-name-2, that declarative is executed. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- d) All format 3 USE statements in which file-name-2 is specified and exception-name-2 is a level-2 exception-name are examined. If the exception condition that was raised matches exception-name-2 and the exception condition is associated with file-name-2, that declarative is executed. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- e) All format 3 USE statements in which file-name-2 is not specified and exception-name-1 is a level-3 exception-name are examined. If the exception condition that was raised matches exception-name-1, that declarative is executed. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- f) All format 3 USE statements in which file-name-2 is not specified and exception-name-1 is a level-2 exception-name are examined. If the exception condition that was raised matches exception-name-1, that declarative is executed. If no qualifying USE statement is found, the USE statements in the source element are examined again.
- g) Any format 3 USE statements in which file-name-2 is not specified and exception-name-1 is a level-1 exception-name are examined. If the exception condition that was raised matches exception-name-1, that declarative is executed. If no qualifying USE statement is found, and a containing source element contains a USE statement with the GLOBAL clause, the search is repeated as specified in general rule 4. If no declarative is identified, no declarative is executed.

FORMATS 1 AND 2

- 4) For source elements contained within other source elements, multiple declaratives may be eligible for selection for a given exception condition. The declarative selected for execution is determined in the following order of precedence:
 - a) the qualifying declarative in the source element that contains the statement that caused the condition to exist.
 - b) a qualifying declarative with the GLOBAL attribute in the next inclusive directly containing source element. This step is repeated with the next higher directly containing source element until a declarative is selected or the outermost source element is reached.

FORMAT 1

- 5) Within a given procedure division, a USE statement specifying file-name-1 takes precedence over any USE statements specifying an INPUT, OUTPUT, I-O, or EXTEND phrase.
- 6) The procedures associated with a USE statement are executed by the input-output control system after completion of the standard input-output exception routine upon the unsuccessful execution of an input-output

operation unless an AT END or INVALID KEY phrase takes precedence. The rules concerning when the procedures are executed are as follows:

- a) If file-name-1 is specified, the associated procedure is executed when the condition described in the USE statement occurs.
 - b) If INPUT is specified, the associated procedure is executed when the condition described in the USE statement occurs for any file open in the input mode or in the process of being opened in the input mode, except those files referenced by file-name-1 in another USE statement specifying the same condition.
 - c) If OUTPUT is specified, the associated procedure is executed when the condition described in the USE statement occurs for any file open in the output mode or in the process of being opened in the output mode, except those files referenced by file-name-1 in another USE statement specifying the same condition.
 - d) If I-O is specified, the associated procedure is executed when the condition described in the USE statement occurs for any file open in the I-O mode or in the process of being opened in the I-O mode, except those files referenced by file-name-1 in another USE statement specifying the same condition.
 - e) If EXTEND is specified, the associated procedure is executed when the condition described in the USE statement occurs for any file open in the extend mode or in the process of being opened in the extend mode, except those files referenced by file-name-1 in another USE statement specifying the same condition.
- 7) After execution of the USE procedure, control is transferred to the invoking routine in the input-output control system. If the I-O status value does not indicate a fatal EC-I-O exception condition, the input-output control system returns control to the next executable statement following the input-output statement whose execution caused the exception. If the I-O status value does indicate a fatal EC-I-O exception condition, the implementor determines what action is taken as described in 9.1.12, I-O status.

FORMAT 2

- 8) The declarative is invoked just before the named report group is produced during the execution of the runtime element. The report group is named by identifier-1 in the USE BEFORE REPORTING statement that prefaces the declarative procedure.
- 9) The declarative procedure associated with the USE BEFORE REPORTING statement is implicitly performed on each occasion that the named report group is processed at the following logical point:
 - a) After any control break processing, if the associated report group is a detail and the associated report description has a CONTROL clause. (See 13.16.15, CONTROL clause.)
 - b) After any adding that is required to increment sum counters defined in the report group;
 - c) Before any page fit processing, if the associated report group is a body group and the report is divided into pages.
 - d) Before the processing of any LINE clauses defined for the report group and any printable items described in entries subordinate to them.
- 10) If a GENERATE, INITIATE, or TERMINATE statement is executed within the range of a declarative procedure whose USE statement contains the BEFORE REPORTING phrase, the EC-FLOW-REPORT exception condition is set to exist, the result of the execution of the GENERATE, INITIATE, or TERMINATE statement is unsuccessful, and the state of the report is unchanged.

FORMAT 3

- 11) The exception condition that is used to determine which USE statement to select is the first one that occurs in the order of evaluation of the statement that causes the exception to exist.
- 12) When exception-name-1 or exception-name-2 begins with EC-I-O, after execution of the USE procedure, control is transferred to the invoking routine in the input-output control system. If the I-O status value does not indicate a fatal input-output error, the input-output control system returns control to the next executable statement following the input-output statement whose execution caused the exception. If the I-O status value does indicate a fatal error, the implementor determines what action is taken. (See 9.1.12, I-O status.)

FORMAT 4

- 13) A declarative is selected for execution by analyzing the USE statements in a source element in the order in which they are specified. Zero or one declarative is selected for execution by applying the following rules in order:
 - a) If class-name-1 is specified and the exception object that was raised is a factory object or instance object of class-name-1 or of a subclass of class-name-1, the associated declarative is executed and no other declaratives are executed; otherwise, all of the USE statements in the source element are analyzed again and:
 - b) If interface-name-1 is specified and the exception object that was raised is described with an IMPLEMENTS clause that references interface-name-1, the associated declarative is executed and no other declaratives are executed; otherwise execution proceeds as specified in 14.5.12.1.4, Exception objects.
- 14) During execution of the associated declarative, the predefined object reference EXCEPTION-OBJECT references the exception object.

14.8.46 VALIDATE statement

The VALIDATE statement invokes data validation, input distribution, and error indication for a data item.

14.8.46.1 General format

VALIDATE { identifier-1 } ...

14.8.46.2 Syntax rules

- 1) Identifier-1 shall reference a data item described in the file, linkage, local-storage, or working-storage section. Identifier-1 shall not be reference modified.
- 2) Identifier-1 shall not reference a data item of class index, object, or pointer.
- 3) The data description entry for the data item referenced by identifier-1 or any data item subordinate to identifier-1 shall not contain a VALIDATE-STATUS clause referencing identifier-1 or an item subordinate to identifier-1.
- 4) Identifier-1 shall not reference a 66-level entry.
- 5) Identifier-1 shall not be described with the ANY LENGTH clause.

14.8.46.3 General rules

- 1) If identifier-1 or a group subordinate to identifier-1 is described with a GROUP-USAGE clause, format validation is performed on each elementary item within the bit group or national group. Any DEFAULT, DESTINATION, or VALUE clause specified, applies to the elementary item or group item on which it is specified, even when that item is explicitly or implicitly described with a GROUP-USAGE clause.
- 2) The data item specified by identifier-1 and any data items subordinate to it, except for items of class index, object, or pointer, are referred to in the following general rules as 'the elements of the operand'.
- 3) If more than one identifier-1 is specified in a VALIDATE statement, the result of executing this statement is the same as if a separate VALIDATE statement had been written for each identifier-1 in the same order as specified in the statement. If an implicit VALIDATE statement results in the execution of a declarative procedure that executes a RESUME statement with the NEXT STATEMENT phrase, processing resumes at the next implicit VALIDATE statement, if any.
- 4) The VALIDATE statement is executed in five stages. Each stage is executed for all the elements of the operand before each next stage. Any given stage may be omitted because of the absence of any clause applying to that stage, or because all the elements of the operand failed an earlier stage. The five stages are listed below, together with the clauses that apply to each stage:
 - a) Format validation: the DEFAULT clause, the PICTURE clause, the SIGN clause, and the USAGE clause.
 - b) Input distribution: the DESTINATION clause.
 - c) Content validation: the CLASS clause and the VALUE clause.
 - d) Relation validation: the INVALID clause.
 - e) Error indication: the VALIDATE-STATUS clause.

At each stage, the execution of the VALIDATE statement will be affected also by any OCCURS clause, REDEFINES clause, or PRESENT WHEN clause that is specified in the data description entry for any of the elements of the operand.

- 5) An internal indicator is assigned to each of the elements of the operand whose data description contains (or is associated with, in the case of 88-level entries) a clause that causes the data item to take part in either format validation, content validation, or relation validation. If any invalid status is detected in a data item as a result of any of these data description clauses, the execution of the VALIDATE statement does not terminate and the content of the invalid data item does not change. Instead, the invalid condition is recorded by setting the data item's internal indicator to one of three distinct values indicating invalid data — designated invalid on format, invalid on content, and invalid on relation.

An elementary item that is invalid on format does not undergo a content check and a data item that is invalid on content does not undergo a relation check.

NOTE Therefore, internal indicators do not change from invalid on format to invalid on content or relation, or from invalid on content to invalid on relation. An indicator is set to indicate an error only if it is in its initial valid state.

If any data description contains an OCCURS clause, internal indicators are assigned independently to each occurrence of the data item, or up to the maximum number of occurrences if the TO phrase is present.

The internal indicators for all of the elements of the operand are assigned the initial valid value at the start of the execution of the VALIDATE statement. For any data items that are subsequently not processed by the VALIDATE statement, the internal indicators are set to a unique value signifying not processed.

- 6) The validation process consists of five stages that are listed in the following paragraphs. If, during the execution of these stages a fatal exception condition other than EC-DATA-INCOMPATIBLE is set to exist, the execution of the VALIDATE statement ceases and control proceeds as defined for fatal exception conditions. The conditions under which the EC-DATA-INCOMPATIBLE exception condition is set to exist during execution of a VALIDATE statement are specified in 14.5.12.2, Incompatible data. If a non-fatal exception condition is raised, it is processed as defined for non-fatal exception conditions, and, upon completion of exception processing, if any, execution continues as if the exception condition had not been set to exist. The stages of validation are as follows:

a) Stage one (format validation)

Each elementary data item is checked for compatibility with the PICTURE, USAGE, and SIGN clauses, as applicable, in the item's data description.

If any data item fails this check, its internal indicator is set to invalid on format.

A default value is established for each data item to which the circumstances defined under 13.16.16, DEFAULT clause apply, even if there is no DEFAULT clause associated with the data item.

b) Stage two (input distribution)

DESTINATION clauses specified in the data description entries of any of the elements of the operand cause the values of the data items to be moved to the receiving data items according to the rules for the MOVE statement.

c) Stage three (content validation)

Each of the operand's data items whose description contains a CLASS clause or is followed by one or more 88-level entries with the VALID or INVALID phrase is now checked for compatibility with the corresponding CLASS definition in SPECIAL-NAMES or the 88-level entries, as described under the VALUE clause.

If any data item fails any of these checks, its internal indicator is set to invalid on content.

If both a group item and a subordinate data item are subject to content validation, content validation on the subordinate data item is applied before content validation on the group item.

d) Stage Four (relation validation)

Each of the operand's data items whose description contains an INVALID clause is now checked according to the rules for relation validation specified under this clause. If any data item fails a relation validation check, its internal indicator is set to invalid on relation.

Any number of INVALID clauses may be present in the same data description entry. If several conditions have been specified, the effect is as though a single INVALID clause had been specified using a condition made by writing each of the original conditions in parentheses joined by the logical connector OR.

If both a group item and a subordinate data item within that group are subject to relation validation, relation validation on the subordinate data item is applied before relation validation on the group item.

e) Stage five (error indication)

If the internal indicator of any of the operand's data items is set to other than its initial valid value, an EC-VALIDATE exception condition is set to exist. If any of these internal indicators is set to invalid on format, an EC-VALIDATE-FORMAT exception condition is set to exist, if any of these internal indicators is set to invalid on content, an EC-VALIDATE-CONTENT exception condition is set to exist, and if any of these internal indicators is set to invalid on relation, an EC-VALIDATE-RELATION exception condition is set to exist.

Any elementary data item whose corresponding internal indicator is set to indicate invalid data is considered to be invalid on format, content, or relation, depending on the value of the internal indicator. A group data item is considered invalid on format if it has a subordinate item that is invalid on format. A group data item is considered invalid on content or relation if it has a subordinate item that is invalid for that reason, or if the group item's own internal indicator shows that it was rejected at that stage.

The data items whose data description entries contain a VALIDATE-STATUS clause with a FOR phrase that references an element of the operand are updated, in accordance with the rules specified in 13.16.60, VALIDATE-STATUS clause, in the order in which their data description entries are specified in the data division.

7) The effect of the OCCURS clause on the execution of the VALIDATE statement is as follows:

- a) If the data description entry of identifier-1 contains or is subordinate to an entry that contains an OCCURS clause, identifier-1 itself shall be subscripted and the value of the subscript or subscripts shall specify the particular occurrence of the data item to be processed by the VALIDATE statement.
- b) If the data item referenced by identifier-1 is a group data item and there are one or more OCCURS clauses subordinate to it, execution of the VALIDATE statement causes each occurrence of the data item to be processed independently of the other occurrences at all five stages of processing. If there is a VARYING clause associated with an OCCURS clause, any number of counters, defined as data-names in the VARYING clause, are initially set and implicitly incremented for each occurrence, whenever the repeating data item is processed.
- c) If any OCCURS clause subordinate to identifier-1 has a DEPENDING phrase, the value of the data item referenced by the DEPENDING phrase is evaluated as soon as the clause is encountered during the format validation stage of the VALIDATE statement. The value obtained establishes, for this and all subsequent stages of processing of the current VALIDATE statement, the number of occurrences of the data item to be processed.

8) If identifier-1 references, in whole or in part, a record in the file section whose FD entry contains a RECORD clause with the VARYING phrase, identifier-1 shall be processed by the VALIDATE statement as though filled or extended on the right, as applicable, by spaces.

9) The data item referenced by identifier-1 shall not contain or overlap any data item specified in a DESTINATION clause contained in or subordinate to the description of identifier-1.

- 10) The data item referenced by identifier-1 shall not contain or overlap any data item specified in a DEFAULT clause contained in or subordinate to the description of identifier-1 unless that DEFAULT clause follows, within the subordinate items of identifier-1, the description of the data item that the DEFAULT clause references.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

14.8.47 WRITE statement

The WRITE statement releases a logical record for an output or input-output file. It also is used for vertical positioning of lines within a logical page.

14.8.47.1 General format

Format 1 (sequential):

$$\begin{aligned} & \underline{\text{WRITE}} \left\{ \begin{array}{l} \text{record-name-1} \\ \underline{\text{FILE}} \text{ file-name-1} \end{array} \right\} \left[\underline{\text{FROM}} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \right] \\ & \left[\begin{array}{l} \left\{ \begin{array}{l} \underline{\text{BEFORE}} \\ \underline{\text{AFTER}} \end{array} \right\} \text{ADVANCING} \left\{ \begin{array}{l} \left\{ \begin{array}{l} \text{identifier-2} \\ \text{integer-1} \end{array} \right\} \left[\begin{array}{l} \text{LINE} \\ \text{LINES} \end{array} \right] \\ \left\{ \begin{array}{l} \text{mnemonic-name-1} \\ \underline{\text{PAGE}} \end{array} \right\} \end{array} \right\} \\ \underline{\text{AT}} \left\{ \begin{array}{l} \underline{\text{END-OF-PAGE}} \\ \underline{\text{EOP}} \end{array} \right\} \text{imperative-statement-1} \\ \underline{\text{NOT AT}} \left\{ \begin{array}{l} \underline{\text{END-OF-PAGE}} \\ \underline{\text{EOP}} \end{array} \right\} \text{imperative-statement-2} \end{array} \right] \\ & \left[\text{retry-phrase} \right] \\ & \left[\begin{array}{l} \underline{\text{WITH LOCK}} \\ \underline{\text{WITH NO LOCK}} \end{array} \right] \\ & \left[\underline{\text{END-WRITE}} \right] \end{aligned}$$

Format 2 (random):

$$\begin{aligned} & \underline{\text{WRITE}} \left\{ \begin{array}{l} \text{record-name-1} \\ \underline{\text{FILE}} \text{ file-name-1} \end{array} \right\} \left[\underline{\text{FROM}} \left\{ \begin{array}{l} \text{identifier-1} \\ \text{literal-1} \end{array} \right\} \right] \\ & \left[\text{retry-phrase} \right] \\ & \left[\begin{array}{l} \underline{\text{WITH LOCK}} \\ \underline{\text{WITH NO LOCK}} \end{array} \right] \\ & \left[\begin{array}{l} \underline{\text{INVALID KEY}} \text{ imperative-statement-1} \\ \underline{\text{NOT INVALID KEY}} \text{ imperative-statement-2} \end{array} \right] \\ & \left[\underline{\text{END-WRITE}} \right] \end{aligned}$$

where retry-phrase is described in 14.6.8, RETRY phrase

14.8.47.2 Syntax rules

- 1) The write file is the file referenced by file-name-1 or by the file-name associated with record-name-1.
- 2) If the organization of the write file is sequential, format 1 shall be specified.
- 3) If the organization of the write file is indexed or relative, format 2 shall be specified.
- 4) If identifier-1 is a function-identifier, it shall reference an alphanumeric, or national function. Record-name-1 and identifier-1 shall not reference the same storage area.
- 5) Record-name-1 is the name of a logical record in the file section of the data division and may be qualified.
- 6) If record-name-1 is specified, identifier-1 or literal-1 shall be valid as a sending operand in a MOVE statement specifying record-name-1 as the receiving operand.
- 7) If the FILE phrase is specified, the FROM phrase shall also be specified and:
 - a) identifier-1 shall be valid as a sending operand in a MOVE statement;
 - b) literal-1 shall be an alphanumeric, boolean, or national literal and shall not be a figurative constant.
- 8) If the FILE phrase is specified, the description of identifier-1, including its subordinate data items, shall not contain a data item described with a USAGE OBJECT REFERENCE clause.
- 9) If identifier-1 references a bit data item other than an intrinsic function and the FILE phrase is specified, identifier-1 shall be described such that:
 - a) subscripting and reference modification in identifier-1 consist of only fixed-point numeric literals or arithmetic expressions in which all operands are fixed-point numeric literals and the exponentiation operator is not specified; and
 - b) it is aligned on a byte boundary.
- 10) If identifier-1 references an intrinsic function and the FILE phrase is specified, identifier-1 shall reference an alphanumeric or national function.
- 11) If identifier-1 references an intrinsic function and the FILE phrase is not specified, identifier-1 shall reference an alphanumeric, boolean, or national function.
- 12) The file description entry associated with the write file shall not contain the REPORT clause and shall not be a sort-merge file description entry.
- 13) If the file description entry associated with the write file contains the LINAGE clause, mnemonic-name-1 shall not be specified.
- 14) Identifier-2 shall reference an integer data item.
- 15) Integer-1 shall be positive or zero.
- 16) When mnemonic-name-1 is specified, the name is associated with a feature-name specified by the implementor. Mnemonic-name-1 is defined in the SPECIAL-NAMES paragraph of the environment division.
- 17) The phrases ADVANCING PAGE and END-OF-PAGE shall not both be specified in a single WRITE statement.
- 18) If the END-OF-PAGE or the NOT END-OF-PAGE phrase is specified, the LINAGE clause shall be specified in the file description entry associated with the write file.

- 19) The words END-OF-PAGE and EOP are equivalent.
- 20) If record-name-1 is defined in a containing program and is referenced in a contained program, the file description entry for the file-name associated with record-name-1 shall contain a GLOBAL clause.
- 21) If automatic locking has been specified for the write file, neither the WITH LOCK phrase nor the WITH NO LOCK phrase shall be specified.

14.8.47.3 General rules

ALL FILES

- 1) The write file connector is the file connector associated with the write file. If the access mode of the write file is sequential, the open mode of the write file connector shall be extend or output. Otherwise, the open mode of the write file connector shall be I-O or output. If the open mode is not as described, the execution of the WRITE statement is unsuccessful and the I-O status for the write file connector is set to '48'.
- 2) The logical record released by the successful execution of the WRITE statement is no longer available in the record area unless the file-name associated with record-name-1 is specified in a SAME RECORD AREA clause. The logical record is also available as a record of other files referenced in the same SAME RECORD AREA clause as the associated output file, as well as the file associated with record-name-1.
- 3) The result of the execution of a WRITE statement specifying record-name-1 and the FROM phrase is equivalent to the execution of the following statements in the order specified:

a) The statement:

`MOVE identifier-1 TO record-name-1`

or

`MOVE literal-1 TO record-name-1`

according to the rules specified for the MOVE statement.

b) The same WRITE statement without the FROM phrase.

- 4) The figurative constant SPACE when specified in the WRITE statement references one alphanumeric space character.
- 5) The result of execution of a WRITE statement with the FILE phrase is equivalent to the execution of the following in the order specified:

— The statement:

`MOVE identifier-1 TO implicit-record-1`

or

`MOVE literal-1 TO implicit-record-1`

— The statement:

`WRITE implicit-record-1`

where implicit-record-1 refers to the record area for file-name-1 and is treated:

- a) when identifier-1 references an intrinsic function, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same class, category, usage, and length as the returned value of the intrinsic function, or
 - b) when identifier-1 does not reference an intrinsic function, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same description as identifier-1, or
 - c) when literal-1 is specified, as though implicit-record-1 were a record description entry subordinate to the file description entry having the same class, category, usage, and length as literal-1.
- 6) After the successful execution of a WRITE statement, the information in the area referenced by identifier-1 is available, even though the information in the area referenced by record-name-1 is not available except as specified by the SAME RECORD AREA clause.
 - 7) If the locking mode of the write file connector is single record locking, any record lock associated with that file connector is released by the execution of the WRITE statement.
 - 8) If record locks have an effect for the write file connector and the WITH LOCK phrase is specified, the record lock associated with the record written is set when the execution of the WRITE statement is successful.
 - 9) The file position indicator is not affected by the execution of a WRITE statement.
 - 10) The execution of a WRITE statement causes the value of the I-O status of the write file connector to be updated to a value given in 9.1.12, I-O status.
 - 11) The successful execution of a WRITE statement releases a logical record to the operating environment.

NOTE Logical records in relative and sequential files may have a length of zero. Logical records in an indexed file shall always be long enough to contain the record keys.
 - 12) When record-name-1 is specified, if the number of bytes to be written to the file is greater than the number of bytes in record-name-1, the content of the bytes that extend beyond the end of record-name-1 are undefined.
 - 13) If the execution of a WRITE statement is unsuccessful, the write operation does not take place, the content of the record area is unaffected, and the I-O status of the write file connector is set to a value indicating the cause of the condition as specified in the following general rules. The transfer of control depends on other clauses and the value of the I-O status as described in 9.1.12, I-O status and 9.1.13, Invalid key condition.
 - 14) The number of bytes in the runtime representation of literal-1, the data item referenced by identifier-1, or the record referenced by record-name-1 after any changes made to the record length by the FORMAT clause shall not be larger than the largest or smaller than the smallest number of bytes allowed by the RECORD IS VARYING clause associated with file-name-1 or the file-name associated with record-name-1. If this rule is violated, the execution of the WRITE statement is unsuccessful and the I-O status of the write file connector is set to '44'.
 - 15) The RETRY phrase is used to control the behavior of the WRITE statement for files opened for file sharing for the case where resources needed to write a record are locked by another run unit. The I-O status is set in accordance with the rules in 14.6.8, RETRY phrase.

SEQUENTIAL FILES

- 16) The successor relationship of a sequential file is established by the order of execution of WRITE statements when the physical file is created. The relationship does not change except when records are added to the end of a physical file.
- 17) When the organization of the write file connector is sequential and the open mode is extend, the execution of the WRITE statement will add records to the end of the physical file as though the open mode of the file

connector were output. If there are records in the physical file, the first record written after the execution of the OPEN statement with the EXTEND phrase is the successor of the last record in the physical file.

- 18) If two or more file connectors for a sequential file add records by sharing the physical file after opening it in extend mode, the added records follow the records present in the physical file when it was opened, but are otherwise in an undefined order.
- 19) When an attempt is made to write beyond the externally-defined boundaries of the physical file, the execution of the WRITE statement is unsuccessful and the I-O status value of the write file connector is set to '34'.
- 20) If the end of reel/unit is recognized and the externally defined boundaries of the physical file have not been exceeded, a reel/unit swap occurs and the current volume pointer is updated to point to the next reel/unit existing for the physical file.
- 21) Both the ADVANCING phrase and the END-OF-PAGE phrase allow control of the vertical positioning of each line on a representation of a printed page. If the ADVANCING phrase is not used, automatic advancing shall be provided by the implementor to act as if the user has specified AFTER ADVANCING 1 LINE. If the physical file does not support vertical positioning, the ADVANCING and END-OF-PAGE phrases are ignored. If the physical file does support vertical positioning and the ADVANCING phrase is specified, advancing is provided as follows:
 - a) If integer-1 or the value of the data item referenced by identifier-2 is positive, the representation of the printed page is advanced the number of lines equal to that value.
 - b) If the value of the data item referenced by identifier-2 is negative, the results are undefined.
 - c) If integer-1 or the value of the data item referenced by identifier-2 is zero, no repositioning of the representation of the printed page is performed.
 - d) If mnemonic-name-1 is specified, the representation of the printed page is advanced according to the rules specified by the implementor for that hardware device.
 - e) If the BEFORE phrase is used, the line is presented before the representation of the printed page is advanced according to general rule 21a, 21b, 21c, and 21d above.
 - f) If the AFTER phrase is used, the line is presented after the representation of the printed page is advanced according to general rule 21a, 21b, 21c, and 21d above.
 - g) If PAGE is specified and the LINAGE clause is specified in the associated file description entry, the record is presented on the logical page before or after (depending on the phrase used) the device is repositioned to the next logical page. The repositioning is to the first line that may be written on the next logical page as specified in the LINAGE clause.
 - h) If PAGE is specified and the LINAGE clause is not specified in the associated file description entry, the record is presented on the physical page before or after (depending on the phrase used) the device is repositioned to the next physical page. If physical page has no meaning in conjunction with a specific device, advancing will be provided as if the user had specified BEFORE or AFTER (depending on the phrase used) ADVANCING 1 LINE.
- 22) If the LINAGE clause is specified in the file description entry of the associated file, an end-of-page condition occurs when the lines written by a WRITE statement do not fit within the current page body. This occurs when:
 - a) The logical end of the representation of the printed page is reached. This occurs when the associated LINAGE-COUNTER is equal to or exceeds the page size. If the AFTER phrase is specified or implied, the device is repositioned to the first line that may be written on the next logical page and the logical record is presented on that line. If the BEFORE phrase is specified, the logical record is presented and the device is repositioned to the first line that may be written on the next logical page.

- b) The FOOTING phrase is specified in the LINAGE clause and the execution of the WRITE statement causes printing or spacing within the footing area of a page body. This occurs when the associated LINAGE-COUNTER is equal to or exceeds the current value of the footing start and is less than the page size.
- 23) When an end-of-page condition occurs, the following actions take place:
- a) If the end-of-page condition was caused by the action in general rule 22a, the EC-I-O-EOP-OVERFLOW exception condition is set to exist. If the end-of-page condition was caused by the action in general rule 22b, the EC-I-O-EOP exception condition is set to exist.
 - b) If the END-OF-PAGE phrase is specified, control is transferred to imperative-statement-1 and execution continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the WRITE statement. The NOT END-OF-PAGE phrase, if specified, is ignored.
- 24) If, during the successful execution of a WRITE statement with the NOT END-OF-PAGE phrase, the end-of-page condition does not occur, control is transferred to imperative-statement-2 after execution of the input-output operation and execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of execution of imperative-statement-1, control is transferred to the end of the WRITE statement. The END-OF-PAGE phrase, if specified, is ignored.

RELATIVE FILES

- 25) The WRITE statement proceeds as follows:
- a) If the access mode of the write file connector is sequential, the successful execution of the WRITE statement causes a record to be released to the operating environment. If the open mode of the write file connector is output, the first record released after the OPEN is 1. If the open mode is extend, the first record released after the OPEN is assigned a record number that is one greater than the highest relative record number existing in the physical file. Subsequent records released have relative record numbers that are ascending ordinal numbers. If the physical file is shared and the open mode is extend, the record numbers are not necessarily consecutive. Otherwise, they are consecutive. If the RELATIVE KEY clause is specified for file-name-1 or the file-name associated with record-name-1, the relative record number of the record being released is moved into the relative key data item by the operating environment during execution of the WRITE statement according to the rules for the MOVE statement. If the maximum numeric value allowed for the relative key data item is exceeded by the relative record number that would be generated by a successful WRITE operation, the WRITE statement is unsuccessful, the invalid key condition exists, and the I-O status for the write file connector is set to '24'.
 - b) If the access mode of the write file connector is random or dynamic, prior to the execution of the WRITE statement the value of the relative key data item shall be initialized by the runtime element with the relative record number to be associated with the record that is to be written. If there is no record in the physical file with a relative record number that matches the relative key value, the record is released to the operating environment. If a record in the file matches, the execution of the WRITE statement is unsuccessful, the invalid key condition exists, and the I-O status for the write file connector is set to '22'.
- 26) When a relative file is opened with the file connector in the extend mode, records are inserted into the file through that file connector. The first record released to the operating environment has a relative record number one greater than the highest relative record number existing in the file. Subsequent records released to the operating environment have consecutively higher relative record numbers. If the RELATIVE KEY clause is specified for file-name-1 or the file-name associated with record-name-1, the relative record number of the record being released is moved into the relative key data item by the operating environment during execution of the WRITE statement according to the rules for the MOVE statement.

- 27) If two or more file connectors for a relative file add records by sharing the file after opening it in extend mode, the relative key values returned are ascending, but not necessarily consecutive.
- 28) When a relative file is opened in the I-O mode and the access mode is random or dynamic, records are to be inserted in the associated file. Prior to the execution of the WRITE statement, the value of the relative key data item shall be initialized by the runtime element with the relative record number to be associated with the record that is to be written. That record is then released to the operating environment by the execution of the WRITE statement.
- 29) The invalid key condition exists under the following circumstances, regardless of any locks that are associated with the record being accessed:
- a) When the value of the relative key data item specifies a record that already exists in the file, the I-O status associated with the write file connector is set to '22'.
 - b) When an attempt is made to write beyond the externally defined boundaries of the file, the I-O status associated with the write file connector is set to '24'.
 - c) When the number of significant digits in the relative record number is larger than the size of the relative key data item specified for the file, the I-O status associated with the write file connector is set to '24'.

INDEXED FILES

- 30) Successful execution of a WRITE statement causes the content of the record area to be released. The operating environment utilizes the contents of the record keys in such a way that subsequent access of the record may be made based upon any of these specified record keys.
- 31) The comparison used for ensuring uniqueness or for ordering records in the physical file is based on the collating sequence for the file according to the rules for a relation condition.
- 32) The value of the prime record key shall not be equal to the value of the prime record key of any record existing in the file.
- 33) The data item specified as the prime record key shall be set by the runtime element to the desired value prior to the execution of the WRITE statement.
- 34) If the access mode of the write file connector is sequential, records shall be released to the operating environment through that file connector in ascending order of prime record key values according to the collating sequence of the file. When the open mode is extend, the first record released to the operating environment shall have a prime record key whose value is greater than the highest prime record key value existing in the physical file when it was opened through that file connector and each subsequent record released to the operating environment through that file connector shall have a prime record key whose value is greater than the highest prime record key value written referencing this file connector. If the record is not in the sequence above, the execution of the WRITE statement is unsuccessful, the invalid key condition exists, and the I-O status for the write file connector is set to '21'.
- 35) If the access mode of the write file connector is random or dynamic, WRITE statements may release records to the operating environment through that connector in any order.
- 36) When the ALTERNATE RECORD KEY clause is specified in the file control entry associated with the write file connector, the value of the alternate record key may be nonunique only if the DUPLICATES phrase is specified for that data item. In this case the operating environment provides storage of records such that when records are accessed sequentially, the order of retrieval of those records is the order in which the operating environment actually writes the record into the physical file. If the DUPLICATES phrase is not specified and the alternate key value is nonunique, the execution of the WRITE statement is unsuccessful, the invalid key condition exists, and the I-O status of the write file connector is set to '22'.

- 37) The invalid key condition exists under the following circumstances. The comparison for equality for record keys is based on the collating sequence for the file according to the rules for a relation condition. Any record locks associated with the record being accessed are ignored in detection of these exceptions.
- a) When the write file connector is open for output or extend in the sequential access mode and the value of the prime record key is not greater than the value of the prime record key of the last record written through that file connector, the I-O status associated with the write file connector is set to '21'.
 - b) When the value of the prime record key of the record to be written is equal to the value of the prime record key of any record existing in the file, the I-O status associated with the write file connector is set to '22'.
 - c) When an alternate record key of the record to be written does not allow duplicates and the value of that alternate record key is equal to the value of the corresponding alternate record key of a record in the file, the I-O status associated with the write file connector is set to '22'.
 - d) When the record that is to be released to the operating environment would reside beyond the externally defined boundaries of the physical file, the I-O status associated with the write file connector is set to '24'.

15 Intrinsic functions

Each intrinsic function definition specifies:

- 1) the name and description of the function
- 2) the type of the function
- 3) the general format of the function
- 4) the arguments, if any
- 5) the returned value.

See 8.4.2.2, Function-identifier, for rules and explanations on the referencing of functions.

15.1 Types of functions

Types of intrinsic functions are:

- 1) **Alphanumeric functions.** These are of the class and category alphanumeric. The number of character positions in this data item is specified in the function definition. Alphanumeric functions have an implicit usage display. Unless stated otherwise in the definition of a function, the data item is represented in the alphanumeric coded character set in effect when the function is referenced at runtime.
- 2) **Boolean functions.** These are of the class and category boolean. The number of boolean positions in this data item is specified in the function definition. Boolean functions have an implicit usage bit.
- 3) **National functions.** These are of the class and category national. The number of character positions in this data item is specified in the function definition. National functions have an implicit usage national. Unless stated otherwise in the definition of a function, the data item is represented in the national coded character set in effect when the function is referenced at runtime.
- 4) **Numeric functions.** These are of the class and category numeric. A numeric function has an operational sign.
- 5) **Integer functions.** These are of the class and category numeric. An integer function has an operational sign and no digits to the right of the decimal point.
- 6) **Index functions.** These are of the class and category index.

15.2 Arguments

Arguments specify values used in the evaluation of a function. Arguments are specified in the function-identifier. The definition of a function specifies the number of arguments required, which may be zero, one, or more. For some functions, the number of arguments may be variable. The order in which arguments are specified in a function-identifier determines the interpretation given to each value in arriving at the function value.

Arguments may be required to have a certain class or a subset of a certain class, to be a keyword, a type declaration, or a mnemonic-name. The types of argument are:

- 1) **Alphabetic.** An elementary data item of the class alphabetic or an alphanumeric literal containing only alphabetic characters shall be specified. The size associated with the argument may be used in determining the value of the function.
- 2) **Alphanumeric.** A data item of the class alphabetic or alphanumeric or an alphanumeric literal shall be specified. The size associated with the argument may be used in determining the value of the function. Strongly-typed group items are treated as though they were of class and category alphanumeric, unless they are prohibited as arguments of a function.
- 3) **Boolean.** A bit group item, a boolean expression or literal, or an elementary boolean data item shall be specified. The size associated with the argument may be used in determining the value of the function.

- 4) Index. An index data item shall be specified. The size associated with the argument may be used in determining the value of the function.
- 5) Integer. An arithmetic expression that will always result in an integer value or an integer data item shall be specified. The value of the arithmetic expression, including operational sign, is used in determining the value of the function.
- 6) Keyword. A keyword shall be specified in accordance with the function definition.
- 7) Locale-name. A locale-name defined in the SPECIAL-NAMES paragraph shall be specified. The locale associated with the locale-name may be used in determining the value of the function.
- 8) National. A national group item, a national literal, or an elementary data item of usage national shall be specified. The size associated with the argument may be used in determining the value of the function.
- 9) Numeric. An arithmetic expression or a numeric data item shall be specified. The value of the arithmetic expression is used in determining the value of the function.
- 10) Object. An object reference shall be specified; the predefined object reference SUPER shall not be specified. The size associated with the argument may be used in determining the value of the function.
- 11) Ordering-name. An ordering-name defined in the SPECIAL-NAMES paragraph shall be specified. The ordering table associated with the ordering-name may be used in determining the value of the function.
- 12) Pointer. A data item of class pointer shall be specified. The size associated with the argument may be used in determining the value of the function.
- 13) Type declaration. A type-name shall be specified. The size associated with the type declaration may be used in determining the value of the function.

The rules for a function may place constraints on the permissible values for arguments in order to permit meaningful determination of the function's value. If the evaluation of an argument results in an incorrect value for that argument according to the rules specified in the function definition and no exception condition was raised during item identification or expression evaluation, the EC-ARGUMENT-FUNCTION exception condition is set to exist. If an exception condition is raised during item identification or expression evaluation, that exception condition is raised, not EC-ARGUMENT-FUNCTION. If the EC-ARGUMENT-FUNCTION exception condition is set to exist and checking for EC-ARGUMENT-FUNCTION is not enabled, the implementor defines the result of the function reference.

NOTE An example of another exception condition that might be raised is EC-SIZE-OVERFLOW during evaluation of a subscript or arithmetic expression.

When the definition of a function permits an argument to be repeated a variable number of times, a table may be referenced by specifying the data-name and any qualifiers that identify the table, followed immediately by subscripting where one or more of the subscripts is the word ALL.

When ALL is specified as a subscript, the effect is as if each table element associated with that subscript position were specified. The order of the implicit specification of each occurrence is from left to right, with the first (or leftmost) specification being the identifier with each subscript specified by the word ALL replaced by one, the next specification being the same identifier with the rightmost subscript specified by the word ALL incremented by one. This process continues with the rightmost ALL subscript being incremented by one for each implicit specification until the rightmost ALL subscript has been incremented through its range of values. If there are any additional ALL subscripts, the ALL subscript immediately to the left of the rightmost ALL subscript is incremented by one, the rightmost ALL subscript is reset to one and the process of varying the rightmost ALL subscript is repeated. The ALL subscript to the left of the rightmost ALL subscript is incremented by one through its range of values. For each additional ALL subscript, this process is repeated in turn until the leftmost ALL subscript has been incremented by one through its range of values. If the ALL subscript is associated with a data item described with an OCCURS DEPENDING ON clause, the range of values is determined by the object of the OCCURS DEPENDING ON clause.

The evaluation of an ALL subscript shall result in at least one argument, otherwise the result of the reference to the function-identifier is undefined.

15.3 Returned values

The evaluation of a function produces a returned value in a temporary elementary data item. The type of a function identifies the type of the returned value as specified in 15.1, Types of functions.

15.3.1 Numeric and integer functions

The returned value rules for certain integer and numeric intrinsic functions contain one or more equivalent arithmetic expressions. An equivalent arithmetic expression is a formal definition that defines the relationship among a function, its arguments, and its returned value. In the presentation of the equivalent arithmetic expressions where there is a variable number of occurrences of an argument, the rules may contain an equivalent arithmetic expression for one, two, and *n* occurrences.

The returned value of numeric and integer functions depends on the mode of arithmetic in effect, native or standard, and on whether an equivalent arithmetic expression is specified for the function.

When standard arithmetic is in effect, the returned value for numeric and integer functions is contained in a temporary standard intermediate data item. With the exception of the DATE-TO-YYYYMMDD function when argument-3 is not specified, the DAY-TO-YYYYDDD function when argument-3 is not specified, the RANDOM function when no argument is specified, and the YEAR-TO-YYYY function when argument-3 is not specified, the returned value is the same for all instances of a given function within a single execution of the runtime element so long as the value and order of the arguments, the collating sequence, and the locale are unchanged.

When native arithmetic is in effect, the characteristics and representation of the returned value are defined by the implementor.

When native arithmetic is in effect and an equivalent arithmetic expression is specified, the value returned is an implementor-defined approximation of the value of that expression.

NOTE The result of an equivalent arithmetic expression is implementor-defined if any one or more of the following applies:

- 1) Native arithmetic is in effect.
- 2) One or more of the arguments are implementor-defined.
- 3) One or more of the arithmetic expressions that compose the equivalent arithmetic expression produces implementor-defined results.
- 4) The result is explicitly implementor-defined.

When standard arithmetic is in effect and an equivalent arithmetic expression is specified:

- 1) the returned value shall equal the value of the equivalent arithmetic expression.

NOTE As a result, the relation condition

function-identifier = equivalent-arithmetic-expression

will evaluate to true.

- 2) the result of an equivalent arithmetic expression is implementor-defined if one or more of the following apply:
 - a) One or more of the arguments are implementor-defined.
 - b) One or more of the arithmetic expressions that compose the equivalent arithmetic expression produce implementor-defined results.

- c) The returned value is explicitly implementor-defined.

When either standard or native arithmetic is in effect and a numeric or integer function does not have an equivalent arithmetic expression, its returned value is implementor-defined unless otherwise specified in the function definition.

15.4 Date conversion functions

The date conversion functions use the Gregorian calendar. The method for determining leap years is specified in ISO 8601:2000, 4.3.2.1, The Gregorian calendar.

The integer date form used by the date conversion functions is based on a starting date of Monday, January 1, 1601, which was chosen to establish a simple relationship between the integer date and DAY-OF-WEEK: integer date 1 was a Monday, DAY-OF-WEEK 1.

The standard date form is YYYYMMDD, where YYYY represents the year, MM represents the month of that year, and DD represents the day of that month.

The Julian date form is YYYYDDD, where YYYY represents the year and DDD represents the ordinal date within that year.

15.5 Summary of functions

Table 22, Table of functions, summarizes the functions that are available.

The 'arguments' column defines argument type and the 'type' column defines the type of the function, as follows:

Alph means alphabetic
Anum means alphanumeric
Bool means boolean
Ind means index
Int means integer
Key means a keyword
Loc means a locale
Nat means national
Num means numeric
Obj means object
Ord means an ordering table
Ptr means pointer
Type means a type declaration

Num in the arguments column includes Int. Both Int and Num are listed in the arguments column when the type of the argument determines the type of the function.

Anum in the arguments column includes strongly-typed group items. When the type of the argument determines the type of the function, the function is an alphanumeric function when any of the arguments is strongly-typed, even when all the arguments of the function are of the same type.

The 'Value returned' column gives a synopsis of the value returned; additional details are specified in the definition of the function.

Table 22 — Table of functions

Intrinsic-function-name	Arguments	Type	Value returned
ABS	Int1 or Num1	Depends upon argument	The absolute value of argument
ACOS	Num1	Num	Arccosine of Num1
ANNUITY	Num1, Int2	Num	Ratio of annuity paid for Int2 periods at interest of Num1 to initial investment of one
ASIN	Num1	Num	Arcsine of Num1
ATAN	Num1	Num	Arctangent of Num1
BOOLEAN-OF-INTEGER	Int1, Int2	Bool	A boolean item representing the binary value equivalent of the numeric value in argument-1
BYTE-LENGTH	Alph1 or Anum1 or Bool1 or Ind1 or Nat1 or Num1 or Obj 1 or Ptr1 or Type1	Int	Length of argument in number of bytes
CHAR	Int1	Anum	Character in position Int1 of the alphanumeric program collating sequence
CHAR-NATIONAL	Int1	Nat	Character in position Int1 of the national program collating sequence
COS	Num1	Num	Cosine of Num1
CURRENT-DATE		Anum	Current date and time and local time differential
DATE-OF-INTEGER	Int1	Int	Standard date equivalent (YYYYMMDD) of integer date
DATE-TO-YYYYMMDD	Int1, Int2, Int3	Int	Argument-1 converted from YYMMDD to YYYYMMDD based on the values of argument-2 and argument-3
DAY-OF-INTEGER	Int1	Int	Julian date equivalent (YYYYDDD) of integer date
DAY-TO-YYYYDDD	Int1, Int2, Int3	Int	Argument-1 converted from YYDDD to YYYYDDD based on the values of argument-2 and argument-3
DISPLAY-OF	Nat1, Anum2	Anum	Usage display representation of argument Nat1
E		Num	The value of e , the natural base
EXCEPTION-FILE		Anum	Information about the file exception that raised an exception
EXCEPTION-FILE-N		Nat	Information about the file exception that raised an exception

Table 22 — Table of functions (Continued)

Intrinsic-function-name	Arguments	Type	Value returned
EXCEPTION-LOCATION		Anum	Implementor-defined location of statement causing an exception
EXCEPTION-LOCATION-N		Nat	Implementor-defined location of statement causing an exception
EXCEPTION-STATEMENT		Anum	Name of statement causing an exception
EXCEPTION-STATUS		Anum	Exception-name identifying last exception
EXP	Num1	Num	e raised to the power Num1
EXP10	Num1	Num	10 raised to the power Num1
FACTORIAL	Int1	Int	Factorial of Int1
FRACTION-PART	Num1	Num	Fraction part of Num1
HIGHEST-ALGEBRAIC	Anum1 or Int1 or Nat1 or Num1	Int Num	Greatest algebraic value that may be represented in the argument
INTEGER	Num1	Int	The greatest integer not greater than Num1
INTEGER-OF-BOOLEAN	Bool1	Int	The numeric value of a BINARY-DOUBLE item whose bit configuration is the same as Bool1, right-justified.
INTEGER-OF-DATE	Int1	Int	Integer date equivalent of standard date (YYYYMMDD)
INTEGER-OF-DAY	Int1	Int	Integer date equivalent of Julian date (YYYYDDD)
INTEGER-PART	Num1	Int	Integer part of Num1
LENGTH	Alph1 or Anum1 or Bool1 or Ind1 or Nat1 or Num1 or Obj1 or Ptr1 or Type1	Int	Length of argument in number of character positions or number of boolean positions
LOCALE-COMPARE	Alph1, Anum1, or Nat1 Alph2, Anum2, or Nat2 Loc3	Anum	A character indicating the result of comparing argument-1 to argument-2 using an ordering defined by a locale
LOCALE-DATE	Anum1 or Nat1, Loc2	Anum	A character string containing a date specified by argument-1 in a format specified by argument-2 and a locale

Table 22 — Table of functions (Continued)

Intrinsic-function-name	Arguments	Type	Value returned
LOCALE-TIME	Anum1 or Nat1, Loc2	Anum	A character string containing a time specified by argument-1 in a format specified by a locale
LOG	Num1	Num	Natural logarithm of Num1
LOG10	Num1	Num	Logarithm to base 10 of Num1
LOWER-CASE	Alph1 or Anum1 or Nat1	Depends upon argument*	A character string with any uppercase letters in the argument set to lowercase
LOWEST-ALGEBRAIC	Anum1 or Int1 or Nat1 or Num1	Int Num	Lowest algebraic value that may be represented in the argument.
MAX	Alph1 ... or Anum1 ... or Ind1 ... or Int1 ... or Nat1 ... or Num1 ...	Depends upon arguments*	Value of maximum argument
MEAN	Num1 ...	Num	Arithmetic mean of arguments
MEDIAN	Num1 ...	Num	Median of arguments
MIDRANGE	Num1 ...	Num	Mean of minimum and maximum arguments
MIN	Alph1 ... or Anum1 ... or Ind1 ... or Int1 ... or Nat1 ... or Num1 ...	Depends upon arguments*	Value of minimum argument
MOD	Int1, Int2	Int	Int1 modulo Int2
NATIONAL-OF	Anum1, Nat2	Nat	Usage national representation of argument Anum1
NUMVAL	Anum1 or Nat1	Num	Numeric value of simple numeric string
NUMVAL-C	Anum1 or Nat1, Anum2 or Nat2 or Key2 Loc2, Key3	Num	Numeric value of numeric string with optional commas and currency sign
NUMVAL-F	Anum1 or Nat1	Num	Numeric value of numeric string representing a floating-point number
ORD	Alph1 or Anum1 or Nat1	Int	Ordinal position of the argument in collating sequence
ORD-MAX	Alph1 ... or Anum1 ... or Ind1 ... or Nat1 ... or Num1 ...	Int	Ordinal position of maximum argument

Table 22 — Table of functions (Continued)

Intrinsic-function-name	Arguments	Type	Value returned
ORD-MIN	Alph1 ... or Anum1 ... or Ind1 ... or Nat1 ... or Num1 ...	Int	Ordinal position of minimum argument
PI		Num	The value of π
PRESENT-VALUE	Num1, Num2 ...	Num	Present value of a series of future period-end amounts, Num2, at a discount rate of Num1
RANDOM	Int1	Num	Random number
RANGE	Int1 ... or Num1 ...	Depends upon argument	Value of maximum argument minus value of minimum argument
REM	Num1, Num2	Num	Remainder of Num1/Num2
REVERSE	Alph1 or Anum1 or Nat1	Depends upon argument*	Reverse order of the characters of the argument
SIGN	Num1	Int	The sign of Num1
SIN	Num1	Num	Sine of Num1
SQRT	Num1	Num	Square root of Num1
STANDARD-COMPARE	Alph1, Anum1, or Nat1 Alph2, Anum2, or Nat2 Ord3 Int4	Anum	A character indicating the result of comparing argument-1 to argument-2 using the ordering specified by argument-3 at the comparison level specified by argument-4
STANDARD-DEVIATION	Num1 ...	Num	Standard deviation of arguments
SUM	Int1 ... or Num1 ...	Depends upon arguments	Sum of arguments
TAN	Num1	Num	Tangent of Num1
TEST-DATE-YYYYMMDD	Int1	Int	0 if Int1 is a valid standard date; otherwise identifies the sub-field in error
TEST-DAY-YYYYDDD	Int1	Int	0 if Int1 is a valid Julian date; otherwise identifies the sub-field in error
TEST-NUMVAL	Anum1 or Nat1	Int	0 if argument-1 conforms to the requirements of the NUMVAL function; otherwise identifies the character in error
TEST-NUMVAL-C	Anum1 or Nat1, Anum2 or Nat2 or Key2 Loc2, Key3	Int	0 if argument-1 conforms to the requirements of the NUMVAL-C function; otherwise identifies the character in error
TEST-NUMVAL-F	Anum1 or Nat1	Int	0 if argument-1 conforms to the requirements of the NUMVAL-F function; otherwise identifies the character in error

Table 22 — Table of functions (Continued)

Intrinsic-function-name	Arguments	Type	Value returned
UPPER-CASE	Alph1 or Anum1 or Nat1	Depends upon argument*	A character string with any lowercase letters in the argument set to uppercase
VARIANCE	Num1 ...	Num	Variance of argument
WHEN-COMPILED		Anum	Date and time compilation unit was compiled
YEAR-TO-YYYY	Int1, Int2, Int3	Int	Argument-1 converted from YY to YYYY based on the values of argument-2 and argument-3
* A function that has only alphabetic arguments is type alphanumeric.			

15.6 ABS function

The ABS function returns the absolute value of the argument.

The type of this function depends on the argument type as follows:

Argument type	Function type
Integer	Integer
Numeric	Numeric

15.6.1 General format

FUNCTION ABS (argument-1)

15.6.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.6.3 Returned values

- 1) The equivalent arithmetic expression is as follows:
 - a) When the value of argument-1 is zero or positive,
 (argument-1)
 - b) When the value of argument-1 is negative,
 $(- (\text{argument-1}))$

15.7 ACOS function

The ACOS function returns a numeric value in radians that approximates the arccosine of argument-1.

The type of this function is numeric.

15.7.1 General format

FUNCTION ACOS (argument-1)

15.7.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be greater than or equal to -1 and less than or equal to $+1$.

15.7.3 Returned values

- 1) The returned value is the approximation of the arccosine of argument-1 and is greater than or equal to zero and less than or equal to π .

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.8 ANNUITY function

The ANNUITY function (annuity immediate) returns a numeric value that approximates the ratio of an annuity paid at the end of each period for the number of periods specified by argument-2 to an initial investment of one. Interest is earned at the rate specified by argument-1 and is applied at the end of the period, before the payment.

The type of this function is numeric.

15.8.1 General format

FUNCTION ANNUITY (argument-1 argument-2)

15.8.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be greater than or equal to zero.
- 3) Argument-2 shall be a positive integer.

15.8.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) When the value of argument-1 is zero,

$$(1 / (\text{argument-2}))$$

- b) When the value of argument-1 is not zero,

$$(\text{argument-1} / (1 - (1 + \text{argument-1})^{**} (- (\text{argument-2}))))$$

15.9 ASIN function

The ASIN function returns a numeric value in radians that approximates the arcsine of argument-1.

The type of this function is numeric.

15.9.1 General format

FUNCTION ASIN (argument-1)

15.9.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be greater than or equal to -1 and less than or equal to $+1$.

15.9.3 Returned values

- 1) The returned value is the approximation of the arcsine of argument-1 and is greater than or equal to $-\pi/2$ and less than or equal to $+\pi/2$.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.10 ATAN function

The ATAN function returns a numeric value in radians that approximates the arctangent of argument-1.

The type of this function is numeric.

15.10.1 General format

FUNCTION ATAN (argument-1)

15.10.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.10.3 Returned values

- 1) The returned value is the approximation of the arctangent of argument-1 and is greater than $-\pi/2$ and less than $+\pi/2$.

15.11 BOOLEAN-OF-INTEGER function

The BOOLEAN-OF-INTEGER function returns a boolean item of usage bit representing the binary value of argument-1. Argument-2 specifies the length of the boolean data item that is returned.

The function type is boolean.

15.11.1 General format

FUNCTION BOOLEAN-OF-INTEGER (argument-1 argument-2)

15.11.2 Arguments

- 1) Argument-1 shall be a positive integer.
- 2) Argument-2 shall be a positive nonzero integer.

15.11.3 Returned values

- 1) The returned value is a boolean item of usage bit that has the same bit configuration as the binary representation of the value of argument-1, where the rightmost boolean position is the low-order binary digit. The boolean value is zero-filled or truncated on the left, if necessary, in order to return a boolean item whose length is specified by argument-2 in terms of boolean positions.

NOTE Binary representation is a mathematical concept. It is not required that this representation be the same as a COBOL representation.

15.12 BYTE-LENGTH function

The BYTE-LENGTH function returns an integer equal to the length of the argument in bytes.

The type of the function is integer.

15.12.1 General format

FUNCTION BYTE-LENGTH (argument-1)

15.12.2 Arguments

- 1) Argument-1 shall be an alphanumeric or national literal, a based entry, a type-name, or a data item of any class or category.

15.12.3 Returned values

- 1) The returned value is an integer that is the length of argument-1 in number of bytes.
- 2) If any data description entry subordinate to the data description entry of argument-1 is described with the DEPENDING phrase of the OCCURS clause, then
 - a) if argument-1 is a based entry unassociated with actual data or is a type declaration, the length of argument-1 is determined in accordance with the rules of the OCCURS clause for a receiving data item; otherwise
 - b) the length of argument-1 is determined in accordance with the rules of the OCCURS clause for a sending data item.
- 3) The returned value shall include the number of implicit filler positions, if any, in argument-1.
- 4) When argument-1 does not occupy an integral number of bytes, the returned value is rounded to the next larger integer value.

15.13 CHAR function

The CHAR function returns a one-character alphanumeric value that is a character in the alphanumeric program collating sequence having the ordinal position equal to the value of argument-1.

The type of this function is alphanumeric.

15.13.1 General format

FUNCTION CHAR (argument-1)

15.13.2 Arguments

- 1) Argument-1 shall be an integer.
- 2) The value of argument-1 shall be greater than zero and less than or equal to the number of positions in the alphanumeric program collating sequence.

15.13.3 Returned values

- 1) The returned value shall be the character in the alphanumeric program collating sequence having the ordinal position specified by argument-1.
- 2) If more than one character has the same position in the alphanumeric program collating sequence, the character returned is the first character defined for that character position. If the order of multiple characters having the same position is undefined, the implementor shall define which of those multiple characters is returned; for a given implementation, collating sequence, and ordinal position, every invocation of the CHAR function shall return the same character.

15.14 CHAR-NATIONAL function

The CHAR-NATIONAL (national character) function returns a one-character value that is a character in the national program collating sequence having the ordinal position equal to the value of the argument.

The type of the function is national.

15.14.1 General format

FUNCTION CHAR-NATIONAL (argument-1)

15.14.2 Arguments

- 1) Argument-1 shall be an integer.
- 2) The value of argument-1 shall be greater than zero and less than or equal to the number of positions in the national program collating sequence.

15.14.3 Returned values

- 1) The returned value is the character in the national program collating sequence having the ordinal position specified by argument-1.
- 2) If more than one character has the same position in the national program collating sequence, the character returned is the first character defined for that character position. If the order of multiple characters having the same position is undefined, the implementor shall define which of those multiple characters is returned; for a given implementation, collating sequence, and ordinal position, every invocation of the CHAR-NATIONAL function shall return the same character.

15.15 COS function

The COS function returns a numeric value that approximates the cosine of an angle or arc, expressed in radians, that is specified by argument-1.

The type of this function is numeric.

15.15.1 General format

FUNCTION COS (argument-1)

15.15.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.15.3 Returned values

- 1) The returned value is the approximation of the cosine of argument-1 and is greater than or equal to -1 and less than or equal to $+1$.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.16 CURRENT-DATE function

The CURRENT-DATE function returns a 21-character alphanumeric value that represents the calendar date, time of day, and local time differential factor provided by the system on which the function is evaluated.

The type of this function is alphanumeric.

15.16.1 General format

FUNCTION CURRENT-DATE

15.16.2 Returned values

- 1) The character positions returned, numbered from left to right, are:

Character Positions	Contents
1-4	Four numeric digits of the year in the Gregorian calendar.
5-6	Two numeric digits of the month of the year, in the range 01 through 12.
7-8	Two numeric digits of the day of the month, in the range 01 through 31.
9-10	Two numeric digits of the hours past midnight, in the range 00 through 23.
11-12	Two numeric digits of the minutes past the hour, in the range 00 through 59.
13-14	Two numeric characters of the seconds past the minute in the range: — 00 through 59 when a LEAP-SECOND directive with the OFF phrase is in effect — 00 through nn, where nn is defined by the implementor, when a LEAP-SECOND directive with the ON phrase is in effect.
15-16	Two numeric digits of the hundredths of a second past the second, in the range 00 through 99. The value 00 is returned if the system on which the function is evaluated does not have the facility to provide the fractional part of a second.
17	Either the character '-', the character '+', or the character '0'. The character '-' is returned if the local time indicated in the previous character positions is behind Coordinated Universal Time. The character '+' is returned if the local time indicated is the same as or ahead of Coordinated Universal time. The character '0' is returned if the system on which this function is evaluated does not have the facility to provide the local time differential factor.
18-19	If character position 17 is '-', two numeric digits are returned in the range 00 through 12 indicating the number of hours that the local time is behind Coordinated Universal Time. If character position 17 is '+', two numeric digits are returned in the range 00 through 13 indicating the number of hours that the local time is ahead of Coordinated Universal Time. If character position 17 is '0', the value 00 is returned.
20-21	Two numeric digits are returned in the range 00 through 59 indicating the number of additional minutes that the local time is ahead of or behind Coordinated Universal Time, depending on whether character position 17 is '+' or '-', respectively. If character position 17 is '0', the value 00 is returned.

15.17 DATE-OF-INTEGER function

The DATE-OF-INTEGER function converts a date in the Gregorian calendar from integer date form to standard date form (YYYYMMDD).

The type of this function is integer.

15.17.1 General format

FUNCTION DATE-OF-INTEGER (argument-1)

15.17.2 Arguments

- 1) Argument-1 is a positive integer that represents a number of days succeeding December 31, 1600, in the Gregorian calendar. It shall not exceed the value of FUNCTION INTEGER-OF-DATE(99991231), which is 3,067,671.

15.17.3 Returned values

- 1) The returned value represents the standard date equivalent of the integer specified in argument-1.
- 2) The returned value is in the form (YYYYMMDD) where YYYY represents a year in the Gregorian calendar; MM represents the month of that year; and DD represents the day of that month.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.18 DATE-TO-YYYYMMDD function

The DATE-TO-YYYYMMDD function converts argument-1 from the form YYmmdd to the form YYYYmmdd. Argument-2, when added to the year at the time of execution, defines the ending year of a 100-year interval, or sliding window, into which the year of argument-1 falls. Argument-3 specifies the year at the time of execution.

The type of the function is integer.

15.18.1 General format

FUNCTION DATE-TO-YYYYMMDD (argument-1 [argument-2 [argument-3]])

15.18.2 Arguments

- 1) Argument-1 shall be a positive integer less than 1000000.

NOTE This function does not check argument -1 to ensure that it is a valid date. The returned value can be an argument to the TEST-DATE-YYYYMMDD function to check its validity.

- 2) Argument-2 shall be an integer.
- 3) If argument-2 is omitted, the function shall be evaluated as though 50 were specified for argument-2.
- 4) Argument-3 shall be an integer greater than 1600 and less than 10000.
- 5) If argument-3 is omitted, the function shall be evaluated as though the following were specified for argument-3:

(FUNCTION NUMVAL (FUNCTION CURRENT-DATE (1:4)))

- 6) The sum of the year at the time of execution and the value of argument-2 shall be less than 10000 and greater than 1699.

15.18.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

(FUNCTION YEAR-TO-YYYY (YY, argument-2, argument-3) * 10000 + mmdd)

where

YY = FUNCTION INTEGER (argument-1/10000)
mmdd = FUNCTION MOD (argument-1, 10000)

and where argument-1, argument-2 and argument-3 are the same as argument-1, argument-2, and argument-3 of the DATE-TO-YYYYMMDD function reference itself.

NOTE 1 In the year 2002 the returned value for FUNCTION DATE-TO-YYYYMMDD (851003, 10) is 19851003. In the year 1994 the returned value for FUNCTION DATE-TO-YYYYMMDD (981002, (-10)) is 18981002.

NOTE 2 See the notes for the YEAR-TO-YYYY function for a discussion of how to specify a fixed window or a sliding window algorithm.

15.19 DAY-OF-INTEGER function

The DAY-OF-INTEGER function converts a date in the Gregorian calendar from integer date form to Julian date form (YYYYDDD).

The type of this function is integer.

15.19.1 General format

FUNCTION DAY-OF-INTEGER (argument-1)

15.19.2 Arguments

- 1) Argument-1 is a positive integer that represents a number of days succeeding December 31, 1600, in the Gregorian calendar. It shall not exceed the value of FUNCTION INTEGER-OF-DATE (99991231), which is 3,067,671.

15.19.3 Returned values

- 1) The returned value represents the Julian equivalent of the integer specified in argument-1.
- 2) The returned value is an integer of the form (YYYYDDD) where YYYY represents a year in the Gregorian calendar and DDD represents the day of that year.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.20 DAY-TO-YYYYDDD function

The DAY-TO-YYYYDDD function converts argument-1 from the form YYnnn to the form YYYYnnn. Argument-2, when added to the year at the time of execution, defines the ending year of a 100-year interval, or sliding window, into which the year of argument-1 falls. Argument-3 specifies the year at the time of execution.

The type of the function is integer.

15.20.1 General format

FUNCTION DAY-TO-YYYYDDD (argument-1 [argument-2 [argument-3]])

15.20.2 Arguments

- 1) Argument-1 shall be a positive integer less than 100000.

NOTE This function does not check argument -1 to ensure that it is a valid date. The returned value can be an argument to the TEST-DAY-YYYYDDD function to check its validity.

- 2) Argument-2 shall be an integer.
- 3) If argument-2 is omitted, the function shall be evaluated as though 50 were specified for argument-2.
- 4) Argument-3 shall be an integer greater than 1600 and less than 10000.
- 5) If argument-3 is omitted, the function shall be evaluated as though the following were specified for argument-3:

(FUNCTION NUMVAL (FUNCTION CURRENT-DATE (1:4)))

- 6) The sum of the values of argument-2 and argument-3 shall be less than 10000 and greater than 1699.

15.20.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

(FUNCTION YEAR-TO-YYYY (YY, argument-2, argument-3) * 1000 + nnn)

where

YY = FUNCTION INTEGER (argument-1/1000)

nnn = FUNCTION MOD (argument-1, 1000)

and where argument-1, argument-2 and argument-3 are the same as argument-1, argument-2, and argument-3 of the DAY-TO-YYYYDDD function reference itself.

NOTE 1 In the year 2002 the returned value for FUNCTION DAY-TO-YYYYDDD (10004, 20) is 2010004. In the year 2013 the returned value for FUNCTION DAY-TO-YYYYDDD (95005, (-10)) is 1995005.

NOTE 2 See the notes for the YEAR-TO-YYYY function for a discussion of how to specify a fixed window or a sliding window algorithm.

15.21 DISPLAY-OF function

The DISPLAY-OF function returns a character string containing the alphanumeric coded character set representation of the national characters in the argument.

The type of the function is alphanumeric.

15.21.1 General format

FUNCTION DISPLAY-OF (argument-1 [argument-2])

15.21.2 Arguments

- 1) Argument-1 shall be of class national.
- 2) Argument-2 shall be of class alphabetic or alphanumeric and shall be one character position in length. Argument-2 specifies an alphanumeric substitution character for use in conversion of national characters for which there is no corresponding alphanumeric character.

15.21.3 Returned values

- 1) A character string is returned with each national character of argument-1 converted to its corresponding alphanumeric character representation, if any. The implementor shall define the correspondence of characters between the alphanumeric character set and the national character set for purposes of conversion with the DISPLAY-OF function.
- 2) If argument-2 is specified, the alphanumeric substitution character is returned for each national character in argument-1 that has no corresponding alphanumeric character representation.
- 3) If argument-2 is unspecified and argument-1 contains a national character for which there is no corresponding alphanumeric character representation, an implementor-defined substitution character is used as the corresponding alphanumeric character and the EC-DATA-CONVERSION exception condition is set to exist.
- 4) The length of the returned value is the number of character positions of usage display required to hold the converted argument and depends on the number of characters contained in argument-1.

15.22 E function

The E function returns an approximation of e, the base of natural logarithms.

The type of the function is numeric.

15.22.1 General format

FUNCTION E

15.22.2 Returned values

- 1) The equivalent arithmetic expression is

$(2 + .7182818284590452353602874713526)$

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.23 EXCEPTION-FILE function

The EXCEPTION-FILE function returns an alphanumeric character string that is the I-O status value and file-name of the file connector, if any, associated with the last exception status.

The type of the function is alphanumeric.

15.23.1 General Format

FUNCTION EXCEPTION-FILE

15.23.2 Returned values

- 1) The returned value is an alphanumeric character string that has a length that is based on its contents and the contents are as follows:
 - a) If the last exception status is not an EC-I-O exception condition, the returned value is two alphanumeric zeros.
 - b) Otherwise, the returned value is a character string that is as long as is needed to contain the I-O status value and the file-name. The first two characters are the I-O status value in alphanumeric characters. The succeeding characters contain the file-name exactly as specified in the SELECT clause converted at runtime to the runtime alphanumeric character set.

15.24 EXCEPTION-FILE-N function

The EXCEPTION-FILE-N function returns a national character string that is the I-O status value and file-name of the file connector, if any, associated with the last exception status.

The type of the function is national.

15.24.1 General Format

FUNCTION EXCEPTION-FILE-N

15.24.2 Returned values

- 1) The returned value is a national character string that has a length that is based on its contents and the contents are as follows:
 - a) If the last exception status is not an EC-I-O exception condition, the returned value is two national zeros.
 - b) Otherwise, the returned value is a character string that is as long as is needed to contain the I-O status value and the file-name. The first two characters are the I-O status value in national characters. The succeeding characters contain the file-name exactly as specified in the SELECT clause converted at runtime to the runtime national character set.

15.25 EXCEPTION-LOCATION function

The EXCEPTION-LOCATION function returns an alphanumeric character string that is the implementor-defined location of the statement associated with the last exception status.

The type of the function is alphanumeric.

15.25.1 General format

FUNCTION EXCEPTION-LOCATION

15.25.2 Returned values

- 1) If the LOCATION option of the TURN directive that enabled checking for the exception condition associated with the last exception status is not specified and the implementor does not save the location information, the returned value is one alphanumeric space character.
- 2) If the LOCATION option of the associated TURN directive was specified, the returned value is an alphanumeric character string that has a length that is based on its contents and the contents are as follows:
 - a) If the last exception status indicates that no exception condition was raised, the returned value is one alphanumeric space character.
 - b) Otherwise, the returned value is a character string that is as long as is needed to contain the location information. All of the names are exactly as specified in the source element containing the statement and they are converted at runtime to the runtime alphanumeric character set. The character string is composed of three parts as follows:
 1. The name of the runtime element as specified in the FUNCTION-ID, METHOD-ID, or PROGRAM-ID paragraph of the function, method, or program containing the statement. In the case of a propagated exception condition, the name is that of the function, method, or program in which the exception condition that was propagated actually occurred. The name is immediately followed by a semicolon and a space character.
 2. The procedure-name of the procedure that contains the statement as follows:
 - a. If there is no paragraph-name or section-name in the source element, a semicolon and a space character are appended.
 - b. If there is a paragraph-name, the paragraph-name is appended and, if the paragraph is within a section, the section-name of the section containing the paragraph is appended prefixed by the alphanumeric characters ' OF '. This is followed by a semicolon and a space character.
 - c. If there is a section-name and no paragraph-name, the section-name is appended followed by a semicolon and a space character.
 3. An implementor-defined identifier of the source line that contains the beginning of the statement is then appended.

NOTE The user cannot rely on the value returned being consistent from one compilation of the same compilation unit to the next. Therefore, it should not be used in a comparison with a known value.

15.26 EXCEPTION-LOCATION-N function

The EXCEPTION-LOCATION-N function returns a national character string that is the implementor-defined location of the statement associated with the last exception status.

The type of the function is national.

15.26.1 General format

FUNCTION EXCEPTION-LOCATION-N

15.26.2 Returned values

- 1) If the LOCATION option of the TURN directive that enabled checking for the exception condition associated with the last exception status is not specified and the implementor does not save the location information, the returned value is one national space character.
- 2) If the LOCATION option of the associated TURN directive was specified, the returned value is a national character string that has a length that is based on its contents and the contents are as follows:
 - a) If the last exception status indicates that no exception condition was raised, the returned value is one national space character.
 - b) Otherwise, the returned value is a character string that is as long as is needed to contain the location information. All of the names are exactly as specified in the source element containing the statement and they are converted at runtime to the runtime national character set. The character string is composed of three parts as follows:
 1. The name of the runtime element as specified in the FUNCTION-ID, METHOD-ID, or PROGRAM-ID paragraph of the function, method, or program containing the statement. In the case of a propagated exception condition, the name is that of the function, method, or program in which the exception condition that was propagated actually occurred. The name is immediately followed by a semicolon and a national space character.
 2. The procedure-name of the procedure that contains the statement as follows:
 - a. If there is no paragraph-name or section-name in the source element, a semicolon and a space character are appended.
 - b. If there is a paragraph-name, the paragraph-name is appended and, if the paragraph is within a section, the section-name of the section containing the paragraph is appended prefixed by the national characters ' OF '. This is followed by a semicolon and a space character.
 - c. If there is a section-name and no paragraph-name, the section-name is appended followed by a semicolon and a space character.
 3. An implementor-defined identifier of the source line that contains the beginning of the statement is then appended.

NOTE The user cannot rely on the value returned being consistent from one compilation of the same compilation unit to the next. Therefore, it should not be used in a comparison with a known value.

15.27 EXCEPTION-STATEMENT function

The EXCEPTION-STATEMENT function returns an alphanumeric value that is the name of the statement that caused the associated exception condition.

The type of the function is alphanumeric.

15.27.1 General format

FUNCTION EXCEPTION-STATEMENT

15.27.2 Returned values

- 1) If the LOCATION option of the TURN directive that enabled checking for the exception condition associated with the last exception status is not specified and the implementor does not save the location information, the returned value is 31 spaces.
- 2) If the LOCATION option of the associated TURN directive was specified, the returned value is a 31-character alphanumeric character-string that is the name of the statement that caused the exception condition to be raised in uppercase letters, left-justified and space-filled on the right.
- 3) The names of the statements are given in table 13, Procedural statements, in the column labeled 'Statement name'.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.28 EXCEPTION-STATUS function

The EXCEPTION-STATUS function returns an alphanumeric value that is the exception-name associated with the last exception status.

The type of the function is alphanumeric.

15.28.1 General format

FUNCTION EXCEPTION-STATUS

15.28.2 Returned values

- 1) A 31-character, left-justified, alphanumeric character string that is the exception-name or the value 'EXCEPTION-OBJECT', as applicable, associated with the last exception status. All letters in the exception-name are returned as uppercase letters and all unused characters are alphanumeric spaces. If the last exception status indicates no exception, alphanumeric spaces are returned.

15.29 EXP function

The EXP function returns an approximation of the value of e raised to the power of the argument.

The type of the function is numeric.

15.29.1 General format

FUNCTION EXP (argument-1)

15.29.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.29.3 Returned values

- 1) The equivalent arithmetic expression is:

(FUNCTION E ** (argument-1))

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.30 EXP10 function

The EXP10 function returns an approximation of the value of 10 raised to the power of the argument.

The type of the function is numeric.

15.30.1 General format

FUNCTION EXP10 (argument-1)

15.30.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.30.3 Returned values

- 1) The equivalent arithmetic expression is:

$(10 ** (\text{argument-1}))$

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.31 FACTORIAL function

The FACTORIAL function returns an integer that is the factorial of argument-1.

The type of this function is integer.

15.31.1 General format

FUNCTION FACTORIAL (argument-1)

15.31.2 Arguments

- 1) Argument-1 shall be an integer greater than or equal to zero.

15.31.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) When the value of argument-1 is 0 or 1,

(1)

- b) When the value of argument-1 is 2,

(2)

- c) When the value of argument-1 is n,

$(n * (n - 1) * (n - 2) * ... * 1)$

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.32 FRACTION-PART function

The FRACTION-PART function returns a numeric value that is the fraction portion of the argument.

The type of the function is numeric.

15.32.1 General format

FUNCTION FRACTION-PART (argument-1)

15.32.2 Arguments

- 1) Argument-1 shall be of the class numeric.

15.32.3 Returned values

- 1) The equivalent arithmetic expression is:

$(\text{argument-1} - \text{FUNCTION INTEGER-PART}(\text{argument-1}))$

where the argument for the INTEGER-PART function is the same as for the FRACTION-PART function itself.

NOTE If the value of argument-1 is +1.5, +0.5 is returned. If the value of argument-1 is -1.5, -0.5 is returned.

15.33 HIGHEST-ALGEBRAIC function

The HIGHEST-ALGEBRAIC function returns a value that is equal to the greatest algebraic value that may be represented in argument-1.

The type of this function depends upon the argument types as follows:

Argument type	Function type
Alphanumeric	Numeric
Integer	Integer
National	Numeric
Numeric	Numeric

15.33.1 General format

FUNCTION HIGHEST-ALGEBRAIC (argument-1)

15.33.2 Arguments

- 1) Argument-1 shall be a data item of category numeric or numeric-edited and shall not be an integer or numeric function.

15.33.3 Returned values

- 1) The value returned is equal to the positive algebraic value of greatest magnitude that may be represented in argument-1.

NOTE The following illustrates the expected results for some values of argument-1.

Argument-1 characteristics	Value returned
S999	+999
S9(4) BINARY	+9999
99V9(3)	+99.999
\$**, **9.99BCR	+99999.99
\$**, **9.99	+99999.99
BINARY-CHAR SIGNED	+127 (assuming an 8-bit representation)
BINARY-CHAR UNSIGNED	+255 (assuming an 8-bit representation)

15.34 INTEGER function

The INTEGER function returns the greatest integer value that is less than or equal to the argument.

The type of this function is integer.

15.34.1 General format

FUNCTION INTEGER (argument-1)

15.34.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.34.3 Returned values

- 1) When standard arithmetic is specified, argument-1 is not rounded.
- 2) The returned value is the greatest integer less than or equal to the value of argument-1.

NOTE For example:

- If the value of argument-1 is -1.5, the value -2 is returned.
- If the value of argument-1 is +1.5, the value +1 is returned.
- If the value of argument-1 is zero, the value zero is returned.

The INTEGER-PART function is similar but returns different values for negative numbers.

15.35 INTEGER-OF-BOOLEAN function

The INTEGER-OF-BOOLEAN function returns the numeric value of the boolean string in argument-1.

The function type is integer.

15.35.1 General format

FUNCTION INTEGER-OF-BOOLEAN (argument-1)

15.35.2 Arguments

- 1) Argument-1 shall be of class boolean.

15.35.3 Returned values

- 1) The returned value is determined as follows:

- a) Argument-1 is assigned to a temporary boolean data item of usage bit described with the same number of boolean positions as argument-1.
- b) The unsigned binary value represented by the same bit configuration as the bit configuration of that temporary boolean data item is determined.

NOTE Binary representation is a mathematical concept. It is not required that this representation be the same as a COBOL representation.

- c) The numeric value determined in subrule 1b is the returned value.

15.36 INTEGER-OF-DATE function

The INTEGER-OF-DATE function converts a date in the Gregorian calendar from standard date form (YYYYMMDD) to integer date form.

The type of this function is integer.

15.36.1 General format

FUNCTION INTEGER-OF-DATE (argument-1)

15.36.2 Arguments

- 1) Argument-1 shall be an integer of the form YYYYMMDD, whose value is obtained from the calculation $(YYYY * 10,000) + (MM * 100) + DD$.
 - a) YYYY represents the year in the Gregorian calendar. It shall be an integer greater than 1600 and less than 10000.
 - b) MM represents a month and shall be a positive integer less than 13.
 - c) DD represents a day and shall be a positive integer less than 32 provided that it is valid for the specified month and year combination.

15.36.3 Returned values

- 1) The returned value is an integer that is the number of days the date represented by argument-1 succeeds December 31, 1600, in the Gregorian calendar.

15.37 INTEGER-OF-DAY function

The INTEGER-OF-DAY function converts a date in the Gregorian calendar from Julian date form (YYYYDDD) to integer date form.

The type of this function is integer.

15.37.1 General format

FUNCTION INTEGER-OF-DAY (argument-1)

15.37.2 Arguments

- 1) Argument-1 shall be an integer of the form YYYYDDD, whose value is obtained from the calculation $(YYYY * 1000) + DDD$.
 - a) YYYY represents the year in the Gregorian calendar. It shall be an integer greater than 1600 and less than 10000.
 - b) DDD represents the day of the year. It shall be a positive integer less than 367 provided that it is valid for the year specified.

15.37.3 Returned values

- 1) The returned value is an integer that is the number of days the date represented by argument-1 succeeds December 31, 1600, in the Gregorian calendar.

15.38 INTEGER-PART function

The INTEGER-PART function returns an integer that is the integer portion of argument-1.

The type of this function is integer.

15.38.1 General format

FUNCTION INTEGER-PART (argument-1)

15.38.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.38.3 Returned values

- 1) The equivalent arithmetic expression is:

(FUNCTION SIGN (argument-1) * FUNCTION INTEGER (FUNCTION ABS (argument-1)))

where the arguments for the SIGN and ABS functions are the same as for the INTEGER-PART function itself.

NOTE For example:

- If the value of argument-1 is -1.5, the value -1 is returned.
- If the value of argument-1 is +1.5, the value +1 is returned.
- If the value of argument-1 is zero, the value zero is returned.
- If the value of argument-1 is -1.0, the value -1 is returned.
- If the value of argument-1 is +1.0, the value +1 is returned.

The INTEGER function is similar but returns different values for negative numbers.

15.39 LENGTH function

The LENGTH function returns an integer equal to the length of the argument in alphanumeric character positions, national character positions, or boolean positions, depending on the class of the argument.

The type of this function is integer.

15.39.1 General format

FUNCTION LENGTH (argument-1)

15.39.2 Arguments

- 1) Argument-1 shall be an alphanumeric, national, or boolean literal; a data item of any class or category; a based entry; or a type-name.

15.39.3 Returned values

- 1) If argument-1 is a bit group item, an elementary boolean data item, a boolean literal, or a type declaration for a boolean item, the returned value is an integer equal to the length of argument-1 in boolean positions.
- 2) If argument-1 is a national group item, an elementary data item of usage national other than a boolean data item, a national literal, or a type declaration for a data item of usage national, the returned value is an integer equal to the length of argument-1 in national character positions.
- 3) If argument-1 is other than category boolean or usage national, the returned value is an integer equal to the length of argument-1 in alphanumeric character positions.
- 4) If any data description entry subordinate to the data description entry of argument-1 is described with the DEPENDING phrase of the OCCURS clause, then
 - a) If argument-1 is a based item unassociated with actual data or is a type declaration, the length of argument-1 is determined in accordance with the rules of the OCCURS clause for a receiving data item, otherwise
 - b) the length of argument-1 is determined in accordance with the rules of the OCCURS clause for a sending data item.
- 5) The returned length shall include the number of implicit FILLER positions, if any, in argument-1.
- 6) When the returned value is expressed as a number of alphanumeric character positions and argument-1 does not occupy an integral number of positions, the returned value is rounded to the next larger integer value.

15.40 LOCALE-COMPARE function

The LOCALE-COMPARE function returns a character indicating the result of comparing argument-1 and argument-2 using a culturally-preferred ordering defined by a locale.

The function type is alphanumeric.

15.40.1 General format

FUNCTION LOCALE-COMPARE (argument-1 argument-2 [locale-name-1])

15.40.2 Arguments

- 1) Argument-1 shall be of class alphabetic, alphanumeric, or national.
- 2) Argument-2 shall be of class alphabetic, alphanumeric, or national.
- 3) Arguments may be of different classes.
- 4) Locale-name-1 shall be associated with a locale in the SPECIAL-NAMES paragraph.

15.40.3 Returned values

- 1) If the arguments are of different classes, and one is national, the other argument is converted to class national for purposes of comparison.
- 2) For purposes of comparison, trailing spaces are truncated from the operands except that an operand consisting of all spaces is truncated to a single space.
- 3) If locale-name-1 is specified, the locale used for comparison is the one associated with locale-name-1; otherwise, the current locale is used. If the locale associated with locale-name-1 is not available, the EC-LOCALE-MISSING exception condition is set to exist.
- 4) Argument-1 and argument-2 are compared using the cultural ordering defined by the locale being used.

NOTE Locale-based ordering is not necessarily a character-by-character comparison.

- 5) The returned value is:

'=' if the arguments compare equal,
'<' if argument-1 is less than argument-2,
'>' if argument-1 is greater than argument-2.

- 6) The length of the returned value is 1.

15.41 LOCALE-DATE function

The LOCALE-DATE function returns a character string containing a date in a culturally-appropriate format specified by a locale.

The function type is alphanumeric.

15.41.1 General format

FUNCTION LOCALE-DATE (argument-1 [locale-name-1])

15.41.2 Arguments

- 1) Argument-1 shall be of class alphanumeric or national and shall be 8 character positions in length.
- 2) The content of argument-1 shall be a date in the same format as the year, month, and day returned in character positions 1 through 8 by the CURRENT-DATE function and shall be valid according to the definition of a returned value from that function.
- 3) Locale-name-1 shall be associated with a locale in the SPECIAL-NAMES paragraph.

15.41.3 Returned values

- 1) If locale-name-1 is specified, the locale used for formatting the date is the one associated with locale-name-1; otherwise, the current locale is used. If the locale associated with locale-name-1 is not available, the EC-LOCALE-MISSING exception condition is set to exist.
- 2) The returned value is a character-string containing the date specified by argument-1 in the appropriate date format as indicated in the locale by locale field d_fmt.
- 3) The length of the returned value depends on the format indicated in the locale.

15.42 LOCALE-TIME function

The LOCALE-TIME function returns a character string containing a time in a culturally-appropriate format specified by a locale.

The function type is alphanumeric.

15.42.1 General format

FUNCTION LOCALE-TIME (argument-1 [locale-name-1])

15.42.2 Arguments

- 1) Argument-1 shall be of class alphanumeric or national and shall be 6 character positions in length.
- 2) The content of argument-1 shall be in the same format as the hours, minutes, and seconds returned in character positions 9 through 14 of the CURRENT-DATE function and shall be valid according to the definition of a returned value from that function.
- 3) The content of argument-1 shall be valid according to the definition of a returned value from the CURRENT-DATE function, with the following exceptions:
 - a) The hours past midnight shall be 00 through 24.
 - b) The seconds past the minutes shall be 00 through 99.

NOTE The value of seconds is not precisely specified because the maximum number of leap seconds that can appear in user data is not constrained. A LEAP-SECOND directive with the ON phrase need not be in effect in order for user data to contain leap seconds.

- 4) Locale-name-1 shall be associated with a locale in the SPECIAL-NAMES paragraph.

15.42.3 Returned values

- 1) If locale-name-1 is specified, the locale used for formatting the time is the one associated with locale-name-1; otherwise, the current locale is used. If the locale associated with locale-name-1 is not available, the EC-LOCALE-MISSING exception condition is set to exist.
- 2) The returned value is a character-string containing hours, minutes, and seconds of the time specified by argument-1 in the culturally-appropriate format indicated in the locale by locale field t_fmt.
- 3) The length of the returned value depends on the format indicated in the locale.

15.43 LOG function

The LOG function returns a numeric value that approximates the logarithm to the base e (natural log) of argument-1.

The type of this function is numeric.

15.43.1 General format

FUNCTION LOG (argument-1)

15.43.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be greater than zero.

15.43.3 Returned values

- 1) The returned value is the approximation of the logarithm to the base e of argument-1.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.44 LOG10 function

The LOG10 function returns a numeric value that approximates the logarithm to the base 10 of argument-1.

The type of this function is numeric.

15.44.1 General format

FUNCTION LOG10 (argument-1)

15.44.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be greater than zero.

15.44.3 Returned values

- 1) The returned value is the approximation of the logarithm to the base 10 of argument-1.

15.45 LOWER-CASE function

The LOWER-CASE function returns a character string containing the value of argument-1 with any uppercase letters replaced by their corresponding lowercase letters.

The type of the function depends on the argument type as follows:

Argument Type	Function Type
Alphabetic	Alphanumeric
Alphanumeric	Alphanumeric
National	National

15.45.1 General format

FUNCTION LOWER-CASE (argument-1)

15.45.2 Arguments

- 1) Argument-1 shall be of class alphabetic, alphanumeric, or national and shall be at least one character position in length.

15.45.3 Returned values

- 1) A character string with the content of argument-1 is returned, with any uppercase letters replaced by their corresponding lowercase letters.
- 2) When a locale is in effect for character classification, as described in 12.2.5, OBJECT-COMPUTER paragraph, the correspondence of uppercase to lowercase letters is determined from locale category LC_CTYPE.
- 3) The character string returned has the same length as argument-1 when there is a one-to-one correspondence between uppercase and lowercase letters. When the correspondence of uppercase and lowercase letters is not one-to-one, the character string returned may be longer or shorter than argument-1 and depends on the content of argument-1 and the locale specification.
- 4) If there is no corresponding lowercase letter for a given uppercase letter, that letter is unchanged in the returned value; when a locale is in effect for character classification and there is no lowercase correspondence specified in the locale, the letter or letters are unchanged in the returned value.

15.46 LOWEST-ALGEBRAIC function

The LOWEST-ALGEBRAIC function returns a value that is equal to the lowest algebraic value that may be represented in argument-1.

The type of this function depends upon the argument types as follows:

Argument type	Function type
Alphanumeric	Numeric
Integer	Integer
National	Numeric
Numeric	Numeric

15.46.1 General format

FUNCTION LOWEST-ALGEBRAIC (argument-1)

15.46.2 Arguments

- Argument-1 shall be a data item of category numeric or numeric-edited and shall not be an integer or numeric function.

15.46.3 Returned values

- The value returned is equal to the lowest algebraic value that may be represented in argument-1.

NOTE The following illustrates the expected results for some values of argument-1.

Argument-1 characteristics	Value returned
S999	-999
S9(4) BINARY	-9999
99V9(3)	0
\$**,**9.99BCR	-99999.99
\$**,**9.99	0
BINARY-CHAR SIGNED	-128 (assuming an 8-bit twos-complement representation)
BINARY-CHAR UNSIGNED	0 (assuming an 8-bit twos-compliment representation)

15.47 MAX function

The MAX function returns the content of the argument-1 that contains the maximum value.

The type of this function depends upon the argument types as follows:

Argument type	Function type
Alphabetic	Alphanumeric
Alphanumeric	Alphanumeric
Index	Index
All arguments integer	Integer
National	National
Numeric (some arguments may be integer)	Numeric

15.47.1 General format

FUNCTION MAX ({ argument-1 } ...)

15.47.2 Arguments

- 1) Argument-1 shall not be of class boolean, object, or pointer, nor shall it be a strongly-typed group item.
- 2) All arguments shall be of the same class with the exception that mixing of arguments of alphabetic and alphanumeric classes is allowed.

15.47.3 Returned values

- 1) The returned value is the content of the argument-1 having the greatest value. The comparisons used to determine the greatest value are made according to the rules for simple conditions. (See 8.8.4.1, Simple conditions.)
- 2) If the value of more than one argument-1 is equal to the greatest value, the content of the argument-1 returned is the leftmost argument-1 having that value.
- 3) If the type of the function is alphanumeric or national, the size of the returned value is the same as the size of the selected argument-1.

15.48 MEAN function

The MEAN function returns a numeric value that is the arithmetic mean (average) of its arguments.

The type of this function is numeric.

15.48.1 General format

FUNCTION MEAN ({ argument-1 } ...)

15.48.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.48.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) For one occurrence of argument-1,

$$(\text{argument-1})$$

- b) For two occurrences of argument-1,

$$((\text{argument-1}_1 + \text{argument-1}_2) / 2)$$

- c) For n occurrences of argument-1,

$$((\text{argument-1}_1 + \text{argument-1}_2 + \dots + \text{argument-1}_n) / n)$$

15.49 MEDIAN function

The MEDIAN function returns the content of the argument whose value is the middle value in the list formed by arranging the arguments in sorted order.

The type of this function is numeric.

15.49.1 General format

FUNCTION MEDIAN ({ argument-1 } ...)

15.49.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.49.3 Returned values

- 1) When the number of occurrences of argument-1 is odd, the returned value is such that at least half of the occurrences referenced by argument-1 are greater than or equal to the returned value and at least half are less than or equal. For the purposes of the equivalent arithmetic expression, the middle value is referred to as argument-a. The equivalent arithmetic expression is

(argument-a)

- 2) When the number of occurrences of argument-1 is even, the returned value is the arithmetic mean of the two middle values. For the purposes of the equivalent arithmetic expression, the two middle values are referred to as argument-b and argument-c. The equivalent arithmetic expression is

((argument-b + argument-c) / 2)

- 3) The comparisons used to arrange the argument-1 values in sorted order are made according to the rules for simple conditions. (See 8.8.4.1, Simple conditions.)

15.50 MIDRANGE function

The MIDRANGE (middle range) function returns a numeric value that is the arithmetic mean (average) of the values of the minimum argument and the maximum argument.

The type of this function is numeric.

15.50.1 General format

FUNCTION MIDRANGE ({ argument-1 } ...)

15.50.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.50.3 Returned values

- 1) The equivalent arithmetic expression is

$$((\text{FUNCTION MAX (argument-list)} + \text{FUNCTION MIN (argument-list)}) / 2)$$

where argument-list is the argument-1 list for the MIDRANGE function itself.

15.51 MIN function

The MIN function returns the content of the argument-1 that contains the minimum value.

The type of this function depends upon the argument types as follows:

Argument Type	Function type
Alphabetic	Alphanumeric
Alphanumeric	Alphanumeric
Index	Index
All arguments integer	Integer
National	National
Numeric (some arguments may be integer)	Numeric

15.51.1 General format

FUNCTION MIN ({ argument-1 } ...)

15.51.2 Arguments

- 1) Argument-1 shall not be of class boolean, object, or pointer, nor shall it be a strongly-typed group item.
- 2) All arguments shall be of the same class with the exception that mixing of arguments of alphabetic and alphanumeric classes is allowed.

15.51.3 Returned values

- 1) The returned value is the content of the argument-1 having the least value. The comparisons used to determine the least value are made according to the rules for simple conditions. (See 8.8.4.1, Simple conditions.)
- 2) If the value of more than one argument-1 is equal to the least value, the content of the argument-1 returned is the leftmost argument-1 having that value.
- 3) If the type of the function is alphanumeric or national, the size of the returned value is the same as the size of the selected argument-1.

15.52 MOD function

The MOD function returns an integer value that is argument-1 modulo argument-2.

The type of this function is integer.

15.52.1 General format

FUNCTION MOD (argument-1 argument-2)

15.52.2 Arguments

- 1) Argument-1 and argument-2 shall be integers.
- 2) The value of argument-2 shall not be zero.

15.52.3 Returned values

- 1) The equivalent arithmetic expression is

$$((\text{argument-1}) - ((\text{argument-2}) * \text{FUNCTION INTEGER } ((\text{argument-1}) / (\text{argument-2}))))$$

where argument-1 and argument-2 for the INTEGER function are the same as the arguments for the MOD function itself.

NOTE The following illustrates the expected results for some values of argument-1 and argument-2.

Argument-1	Argument-2	Return
11	5	1
-11	5	4
11	-5	-4
-11	-5	-1

15.53 NATIONAL-OF function

The NATIONAL-OF function returns a character string containing the national character representation of the characters in the argument.

The type of the function is national.

15.53.1 General format

FUNCTION NATIONAL-OF (argument-1 [argument-2])

15.53.2 Arguments

- 1) Argument-1 shall be of class alphabetic or class alphanumeric.
- 2) Argument-2 shall be of category national and shall be one character in length. Argument-2 specifies a national substitution character for use in conversion of alphanumeric characters for which there is no corresponding national character.

15.53.3 Returned values

- 1) A character string is returned with each alphanumeric character in argument-1 converted to its corresponding national coded character set representation. The implementor defines the correspondence of characters.
- 2) If argument-2 is specified, each character in argument-1 that has no corresponding national representation is converted to the substitution character specified by argument-2.
- 3) If argument-2 is unspecified and argument-1 contains an alphanumeric character for which there is no corresponding national character representation, an implementor-defined substitution character is used as the corresponding national character and the EC-DATA-CONVERSION exception condition is set to exist.
- 4) The length of the returned value is the number of character positions of usage national required to hold the converted argument and depends on the number of characters contained in argument-1.

15.54 NUMVAL function

The NUMVAL function returns the numeric value represented by the character string specified by argument-1. Leading and trailing spaces are ignored.

The type of this function is numeric.

NOTE Locale-based functionality equivalent to NUMVAL can be obtained by using the NUMVAL-C function with the LOCALE keyword. A currency sign is optional in NUMVAL-C. The locale category LC_MONETARY will be used because there is no sign convention specified in locale category LC_NUMERIC.

15.54.1 General format

FUNCTION NUMVAL (argument-1)

15.54.2 Arguments

- Argument-1 shall be an alphanumeric or national literal or an alphanumeric or national data item whose content has one of the following two formats:

$$[\text{space-string}] \left[\begin{array}{c} + \\ - \end{array} \right] [\text{space-string}] \left\{ \begin{array}{l} \text{digit} [. [\text{digit}]] \\ . \text{digit} \end{array} \right\} [\text{space-string}]$$

or

$$[\text{space-string}] \left\{ \begin{array}{l} \text{digit} [. [\text{digit}]] \\ . \text{digit} \end{array} \right\} [\text{space-string}] \left[\begin{array}{c} + \\ - \\ \text{CR} \\ \text{DB} \end{array} \right] [\text{space-string}]$$

where space-string is a string of one or more space characters and digit is a string of one to 31 digits. If argument-1 is alphanumeric, CR or DB, if specified, shall be the letters 'CR' or 'DB' in uppercase or lowercase, or a combination of uppercase and lowercase, in the computer's alphanumeric character set. If argument-1 is national, CR or DB, if specified, shall be the letters 'CR' or 'DB' in uppercase or lowercase, or a combination of uppercase and lowercase, in the computer's national character set.

- The total number of digits in argument-1 shall not exceed 31.
- The character period in argument-1 represents the decimal separator. When the DECIMAL-POINT IS COMMA clause is specified, the character comma shall be used in argument-1 instead of the character period to represent the decimal separator

15.54.3 Returned values

- The returned value is the numeric value represented by argument-1.
- The maximum number of decimal digits represented in the returned value is 31.
- If argument-1 contains CR, DB, or the minus sign, the returned value is negative.

15.55 NUMVAL-C function

The NUMVAL-C function returns the numeric value represented by the character string specified by argument-1. The currency string, if any, and any grouping separators preceding the decimal separator are ignored. Optionally, the currency string, the sign convention, the grouping separator, and the decimal separator permitted in the character string may be specified by locale category LC_MONETARY, or the currency string may be specified by argument-2.

The type of this function is numeric.

15.55.1 General format

FUNCTION NUMVAL-C (argument-1 $\left[\begin{array}{l} \text{LOCALE [locale-name-1]} \\ \text{argument-2} \end{array} \right]$ [ANYCASE])

15.55.2 Arguments

- 1) Argument-1 shall be of category alphanumeric or national.
- 2) Argument-2, if specified, shall be of the same class as argument-1. Argument-2 shall contain at least one non-space character. Any leading or trailing spaces in argument-2 are ignored. Argument-2 shall not contain any of the digits 0 through 9; the characters '*', '+', '-', ',', or '.'; or the two consecutive letters 'CR' or 'DB', whether in uppercase or lowercase or a combination of uppercase and lowercase. Argument-2 specifies a currency string that may appear in argument-1.

NOTE The currency string specified by argument-2 may contain spaces, in addition to the leading and trailing spaces.

- 3) If the ANYCASE keyword is specified, the matching rules for detecting a currency string in argument-1 are case-insensitive. If the ANYCASE keyword is not specified, the matching rules for detecting a currency string are case sensitive.
- 4) If neither argument-2 nor the LOCALE keyword is specified, there shall be only one currency string for the compilation unit, either the default currency sign or a currency string specified in the SPECIAL-NAMES paragraph.
- 5) If the LOCALE keyword is not specified, the following rules apply:

— Argument-1 shall have one of the following two formats:

$$[\text{space}] \left[\begin{array}{c} + \\ - \end{array} \right] [\text{space}] [\text{currency}] [\text{space}] \left\{ \begin{array}{l} \text{digit} [, \text{digit}] \dots [. [\text{digit}]] \\ . \text{digit} \end{array} \right\} [\text{space}]$$

or

$$[\text{space}] [\text{currency}] [\text{space}] \left\{ \begin{array}{l} \text{digit} [, \text{digit}] \dots [. [\text{digit}]] \\ . \text{digit} \end{array} \right\} [\text{space}] \left[\begin{array}{c} + \\ - \\ \text{CR} \\ \text{DB} \end{array} \right] [\text{space}]$$

where

- digit is a string of one or more of the digits 0 through 9;
- space is one or more space characters;

- currency is a string of one or more characters matching character for character the currency string in argument-2, if specified, or matching character for character the default currency sign if argument-2 is not specified.
 - a) If argument-1 is alphanumeric, CR or DB, if specified, shall be the letters 'CR' or 'DB' in uppercase or lowercase, or a combination of uppercase and lowercase, in the computer's alphanumeric character set.
 - b) If argument-1 is national, CR or DB, if specified, shall be the letters 'CR' or 'DB' in uppercase or lowercase, or a combination of uppercase and lowercase, in the computer's national character set.
 - c) The character period in argument-1 represents the decimal separator. The character comma in argument-1 represents the grouping separator. When the DECIMAL-POINT IS COMMA clause is specified, the character comma shall be used in argument-1 to represent the decimal separator and the character period shall be used to represent the grouping separator.
- 6) If the LOCALE keyword is specified, the following rules apply:
- a) Locale-name-1, if specified, shall be associated with a locale in the SPECIAL-NAMES paragraph; locale category LC_MONETARY in the referenced locale is used in evaluating the monetary format in argument-1. If locale-name-1 is not specified, category LC_MONETARY in the current locale is used. If the required locale is not available, the EC-LOCALE-MISSING exception condition is set to exist.
 - b) The content of argument-1 shall be a string of digits and characters in a format consistent with the specifications of locale category LC_MONETARY in the locale in use. The following rules apply:
 1. If the ANYCASE keyword is specified, the matching rules for detecting a currency string in argument-1 are case-insensitive. If the ANYCASE keyword is not specified, the matching rules for detecting a currency string are case sensitive.
 2. Usage national representation of locale fields is used for purposes of matching argument-1. If argument-1 is of category alphanumeric, usage national representation of argument-1 is used for purposes of matching locale fields.
 3. Argument-1 may contain a currency string that matches either locale field currency_symbol or the first three characters of locale field int_curr_symbol, in accordance with locale fields p_cs_precedes and n_cs_precedes.
 4. Argument-1 may contain a positive sign in accordance with locale fields positive_sign and p_sign_posn or a negative sign in accordance with locale fields negative_sign and n_sign_posn.
 5. Argument-1 may contain a decimal separator in accordance with locale fields mon_decimal_point, int_frac_digits, and frac_digits.
 6. Argument-1 may contain one or more grouping separators in accordance with locale fields mon_thousands_sep and mon_grouping.
 7. Argument-1 shall contain at least one digit and may contain leading or trailing spaces.
- 7) The total number of digits in argument-1 shall not exceed 31.

15.55.3 Returned values

- 1) The returned value is 31 digits and is the numeric value represented by argument-1.
- 2) When the LOCALE keyword is specified, the returned value is negative if argument-1 contains a negative sign convention as specified by locale fields negative_sign and n_sign_posn. When the LOCALE keyword is not specified, the returned value is negative if argument-1 contains CR, DB, or a minus sign.

15.56 NUMVAL-F function

The NUMVAL-F function returns the value or an approximation of the value represented by the character string specified by argument-1. Leading, trailing, and embedded spaces are ignored.

The type of this function is numeric.

15.56.1 General format

FUNCTION NUMVAL-F (argument-1)

15.56.2 Arguments

- 1) Argument-1 shall be an alphanumeric or national literal or an alphanumeric or national data item whose content has the following format:

$$[\text{space}] \left[\begin{array}{c} + \\ - \end{array} \right] [\text{space}] \left\{ \begin{array}{l} \text{digit} [\cdot [\text{digit}]] \\ \cdot \text{digit} \end{array} \right\} [\text{space}] \left[\begin{array}{c} E [\text{space}] \left\{ \begin{array}{c} + \\ - \end{array} \right\} [\text{space}] n [\text{space}] \end{array} \right]$$

where space is one or more space characters; n is one, two, or three digits representing the exponent; and digit is a string of one to 31 digits. If argument-1 is alphanumeric, E shall be either an uppercase or lowercase E in the computer's alphanumeric character set. If argument-1 is national, E shall be either an uppercase or lowercase E in the computer's national character set.

- 2) The total number of digits in the significand shall not exceed 31.
- 3) The character period in argument-1 represents the decimal separator. When the DECIMAL-POINT IS COMMA clause is specified, the character comma shall be used in argument-1 instead of the character period to represent the decimal separator.

15.56.3 Returned values

- 1) Leading, trailing, and embedded spaces are ignored.
- 2) If native arithmetic is in effect, the returned value is an approximation of the numeric value represented by argument-1. If standard arithmetic is in effect, the returned value is the numeric value represented by argument-1.

15.57 ORD function

The ORD function returns an integer value that is the ordinal position of argument-1 in the program collating sequence. The lowest ordinal position is 1.

The type of this function is integer.

15.57.1 General format

FUNCTION ORD (argument-1)

15.57.2 Arguments

- 1) Argument-1 shall be one character position in length and shall be of category alphabetic, alphanumeric, or national.

15.57.3 Returned values

- 1) If the class of argument-1 is alphabetic or alphanumeric, the returned value is the ordinal position of argument-1 in the current alphanumeric program collating sequence.
- 2) If the class of argument-1 is national, the returned value is the ordinal position of argument-1 in the current national program collating sequence.

15.58 ORD-MAX function

The ORD-MAX function returns a value that is the ordinal number of the argument-1 that contains the maximum value.

The type of this function is integer.

15.58.1 General format

FUNCTION ORD-MAX ({ argument-1 } ...)

15.58.2 Arguments

- 1) Argument-1 shall not be of class boolean, object, or pointer, nor shall it be a strongly-typed group item.
- 2) All arguments shall be of the same class with the exception that mixing of arguments of alphabetic and alphanumeric classes is allowed.

15.58.3 Returned values

- 1) The returned value is the ordinal number that corresponds to the position of the argument-1 having the greatest value in the argument-1 series.
- 2) The comparisons used to determine the greatest valued argument are made according to the rules for simple conditions. (See 8.8.4.1, Simple conditions.)
- 3) If the value of more than one argument-1 is equal to the greatest value, the number returned corresponds to the position of the leftmost argument-1 having that value.

15.59 ORD-MIN function

The ORD-MIN function returns a value that is the ordinal number of the argument that contains the minimum value.

The type of this function is integer.

15.59.1 General format

FUNCTION ORD-MIN ({ argument-1 } ...)

15.59.2 Arguments

- 1) Argument-1 shall not be of class boolean, object, or pointer, nor shall it be a strongly-typed group item.
- 2) All arguments shall be of the same class with the exception that mixing of arguments of alphabetic and alphanumeric classes is allowed.

15.59.3 Returned values

- 1) The returned value is the ordinal number that corresponds to the position of the argument-1 having the least value in the argument-1 series.
- 2) The comparisons used to determine the least valued argument-1 are made according to the rules for simple conditions. (See 8.8.4.1, Simple conditions.)
- 3) If the value of more than one argument-1 is equal to the least value, the number returned corresponds to the position of the leftmost argument-1 having that value.

15.60 PI function

The PI function returns a value that is an approximation of π , the ratio of the circumference of a circle to its diameter.

The type of this function is numeric.

15.60.1 General format

FUNCTION PI

15.60.2 Returned values

- 1) The equivalent arithmetic expression is

$(3 + .1415926535897932384626433832795)$

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.61 PRESENT-VALUE function

The PRESENT-VALUE function returns a value that approximates the present value of a series of future period-end amounts specified by argument-2 at a discount rate specified by argument-1.

The type of this function is numeric.

15.61.1 General format

FUNCTION PRESENT-VALUE (argument-1 { argument-2 } ...)

15.61.2 Arguments

- 1) Argument-1 and argument-2 shall be of the class numeric.
- 2) The value of argument-1 shall be greater than -1.

15.61.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) For one occurrence of argument-2,

$$(\text{argument-2} / (1 + \text{argument-1}))$$

- b) For two occurrences of argument-2,

$$(\text{argument-2}_1 / (1 + \text{argument-1}) + \text{argument-2}_2 / (1 + \text{argument-1}) ** 2)$$

- c) For n occurrences of argument-2, the equivalent arithmetic expression is

$$\begin{aligned} &(\text{FUNCTION SUM (} \\ &\quad (\text{argument-2}_1 / (1 + \text{argument-1}) ** 1) \\ &\quad \dots \\ &\quad (\text{argument-2}_n / (1 + \text{argument-1}) ** n))) \end{aligned}$$

where argument-1 and argument-2_i in the terms of the SUM function are the same as the arguments for the PRESENT-VALUE function itself.

15.62 RANDOM function

The RANDOM function returns a numeric value that is a pseudo-random number from a rectangular distribution.

The type of this function is numeric.

15.62.1 General format

FUNCTION RANDOM [([argument-1])]

15.62.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) If argument-1 is specified, it shall be zero or a positive integer. It is used as the seed value to generate a sequence of pseudo-random numbers.
- 3) If a subsequent reference specifies argument-1, a new sequence of pseudo-random numbers is started.
- 4) If the first reference to this function in the run unit does not specify argument-1, the seed value is defined by the implementor.
- 5) In each case, subsequent references without specifying argument-1 return the next number in the current sequence.

15.62.3 Returned values

- 1) The returned value is greater than or equal to zero and less than one.
- 2) For a given seed value on a given implementation, the sequence of pseudo-random numbers will always be the same.
- 3) The implementor shall specify the subset of the domain of argument-1 values that will yield distinct sequences of pseudo-random numbers. This subset shall include the values from 0 through at least 32767.

15.63 RANGE function

The RANGE function returns a value that is equal to the value of the maximum argument minus the value of the minimum argument.

The type of this function depends upon the argument types as follows:

Argument type	Function type
All arguments integer	Integer
Numeric (some arguments may be integer)	Numeric

15.63.1 General format

FUNCTION RANGE ({ argument-1 } ...)

15.63.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.63.3 Returned values

- 1) The equivalent arithmetic expression is

$(\text{FUNCTION MAX}(\text{argument-list}) - \text{FUNCTION MIN}(\text{argument-list}))$

where argument-list is the argument-1 list for the RANGE function itself.

15.64 REM function

The REM function returns a numeric value that is the remainder of argument-1 divided by argument-2.

The type of this function is numeric.

15.64.1 General format

FUNCTION REM (argument-1 argument-2)

15.64.2 Arguments

- 1) Argument-1 and argument-2 shall be of class numeric.
- 2) The value of argument-2 shall not be zero.

15.64.3 Returned values

- 1) The equivalent arithmetic expression is

$$((\text{argument-1}) - ((\text{argument-2}) * \text{FUNCTION INTEGER-PART} ((\text{argument-1}) / (\text{argument-2}))))$$

where argument-1 and argument-2 of the INTEGER-PART function are the same as the arguments for the REM function itself.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.65 REVERSE function

The REVERSE function returns a character string of exactly the same length as argument-1 and whose characters are exactly the same as those of argument-1, except that they are in reverse order.

The type of the function depends on the argument type as follows:

Argument type	Function type
Alphabetic	Alphanumeric
Alphanumeric	Alphanumeric
National	National

15.65.1 General format

FUNCTION REVERSE (argument-1)

15.65.2 Arguments

- 1) Argument-1 shall be of class alphabetic, alphanumeric, or national and shall be at least one character position in length.

15.65.3 Returned values

- 1) If argument-1 is a character string of length n , the returned value is a character string of length n such that for $1 \leq j \leq n$, the character in position j of the returned value is the character from position $n - j + 1$ of argument-1.

15.66 SIGN function

The SIGN function returns +1, 0, or -1 depending on the sign of the argument.

The type of the function is integer.

15.66.1 General Format

FUNCTION SIGN (argument-1)

15.66.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.66.3 Returned Values

- 1) The equivalent arithmetic expression is as follows:

- a) When the value of argument-1 is positive,

(1)

- b) When the value of argument-1 is zero,

(0)

- c) When the value of argument-1 is negative,

(-1)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.67 SIN function

The SIN function returns a numeric value that approximates the sine of an angle or arc, expressed in radians, that is specified by argument-1.

The type of this function is numeric.

15.67.1 General format

FUNCTION SIN (argument-1)

15.67.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.67.3 Returned values

- 1) The returned value is the approximation of the sine of argument-1 and is greater than or equal to -1 and less than or equal to +1.

15.68 SQRT function

The SQRT function returns a numeric value that approximates the square root of argument-1.

The type of this function is numeric.

15.68.1 General format

FUNCTION SQRT (argument-1)

15.68.2 Arguments

- 1) Argument-1 shall be of class numeric.
- 2) The value of argument-1 shall be zero or positive.

15.68.3 Returned values

- 1) When standard arithmetic is specified, argument-1 is not rounded.
- 2) When standard arithmetic is in effect, the returned value is the absolute value of the exact square root of argument-1 truncated to 32 digits, normalized, and stored in a standard intermediate data item.

NOTE When standard arithmetic is in effect, there is no equivalent arithmetic expression. The arithmetic expression operand-1 ** 0.5 is evaluated according to the rules for the evaluation of arithmetic expressions.

- 3) When native arithmetic is in effect, the returned value is the absolute value of the approximation of the square root of argument-1.

15.69 STANDARD-COMPARE function

The STANDARD-COMPARE function returns a character indicating the result of comparing argument-1 and argument-2 using a culturally-sensitive ordering table constructed in compliance with ISO/IEC 14651:2001.

The function type is alphanumeric.

15.69.1 General format

FUNCTION STANDARD-COMPARE (argument-1 argument-2 [ordering-name-1] [argument-4])

15.69.2 Arguments

- 1) Argument-1 shall be of class alphabetic, alphanumeric, or national.
- 2) Argument-2 shall be of class alphabetic, alphanumeric, or national.
- 3) Argument-1 and argument-2 may be of different classes.
- 4) Ordering-name-1, if specified, shall be associated with an ordering table in the ORDER TABLE clause of the SPECIAL-NAMES paragraph. Ordering-name-1 identifies the ordering table to be used for the comparison. If ordering-name-1 is not specified, the default ordering table 'ISO14651_2002_TABLE1' specified in ISO/IEC 14651:2001 shall be used.
- 5) Argument-4, if specified, shall be a positive nonzero integer.

15.69.3 Returned values

- 1) If argument-4 is unspecified, the highest level defined in the ordering table is used for the comparison.
- 2) If ISO/IEC 14651:2001 is not supported on the processor, or the specified ordering level is not supported, or the level number specified by argument-4 is not defined in the ordering table, the EC-ORDER-NOT-SUPPORTED exception condition is set to exist.
- 3) If the arguments are of different classes, and one is national, the other argument is converted to class national for purposes of comparison.
- 4) For purposes of comparison, trailing spaces are truncated from the operands except that an operand consisting of all spaces is truncated to a single space.
- 5) Argument-1 and argument-2 are compared in accordance with the ordering table and ordering level being used, as specified in ISO/IEC 14651:2001.

NOTE This comparison is culturally-sensitive and acceptable for most cultures. It is not necessarily a character-by-character comparison and not necessarily a case-sensitive comparison. In order to use this function, users should understand the types of comparisons specified by ISO/IEC 14651:2001 and the ordering tables in use for their installation.

- 6) The returned value is:
 - "=" if the arguments compare equal,
 - "<" if argument-1 is less than argument-2,
 - ">" if argument-1 is greater than argument-2.
- 7) The length of the returned value is 1.

15.70 STANDARD-DEVIATION function

The STANDARD-DEVIATION function returns a numeric value that approximates the standard deviation of its arguments.

The type of this function is numeric.

15.70.1 General format

FUNCTION STANDARD-DEVIATION ({ argument-1 } ...)

15.70.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.70.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

(FUNCTION SQRT (FUNCTION VARIANCE (argument-list)))

where argument-list is the argument-1 list for the STANDARD-DEVIATION function itself.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.71 SUM function

The SUM function returns a value that is the sum of the arguments.

The type of this function depends upon the argument types as follows:

Argument type	Function type
All arguments integer	Integer
Numeric (some arguments may be integer)	Numeric

15.71.1 General format

FUNCTION SUM ({ argument-1 } ...)

15.71.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.71.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) For one occurrence of argument-1,

(argument-1)

- b) For two occurrences of argument-1,

(argument-1₁ + argument-1₂)

- c) For n occurrences of argument-1,

(argument-1₁ + argument-1₂ + ... + argument-1_n)

15.72 TAN function

The TAN function returns a numeric value that approximates the tangent of an angle or arc, expressed in radians, that is specified by argument-1.

The type of this function is numeric.

15.72.1 General format

FUNCTION TAN (argument-1)

15.72.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.72.3 Returned values

- 1) The returned value is the approximation of the tangent of argument-1.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

15.73 TEST-DATE-YYYYMMDD function

The TEST-DATE-YYYYMMDD function tests whether a date in standard date form (YYYYMMDD) is a valid date in the Gregorian calendar. Argument-1 of the INTEGER-OF-DATE function is required to be in standard date form.

The type of this function is integer.

15.73.1 General Format

FUNCTION TEST-DATE-YYYYMMDD (argument-1)

15.73.2 Arguments

- 1) Argument-1 shall be an integer.

15.73.3 Returned values

- 1) The returned value is:

- a) If the value of argument-1 is less than 16010000 or greater than 99999999,

(1)

NOTE 1 The year is not within the range 1601 to 9999.

- b) Otherwise, if the value of FUNCTION MOD (argument-1 10000) is less than 100 or greater than 1299,

(2)

NOTE 2 The month is not within the range 1 through 12.

- c) Otherwise, if the value of FUNCTION MOD (argument-1 100) is less than 1 or greater than the number of days in the month determined by FUNCTION INTEGER (FUNCTION MOD (argument-1 10000) / 100) of the year determined by FUNCTION INTEGER (argument-1 / 10000),

(3)

NOTE 3 The day is not valid for the given year and month.

- d) Otherwise,

(0)

NOTE 4 The date is valid.

15.74 TEST-DAY-YYYYDDD function

The TEST-DAY-YYYYDDD function tests whether a date in Julian date form (YYYYDDD) is a valid date in the Gregorian calendar. Argument-1 of the INTEGER-OF-DAY function is required to be in Julian date form.

The type of this function is integer.

15.74.1 General Format

FUNCTION TEST-DAY-YYYYDDD (argument-1)

15.74.2 Arguments

- 1) Argument-1 shall be an integer.

15.74.3 Returned values

- 1) The returned value is:

- a) If the value of argument-1 is less than 1601000 or greater than 9999999;

(1)

NOTE 1 The year is not within the range 1601 to 9999.

- b) Otherwise, if the value of FUNCTION MOD (argument-1 1000) is less than 1 or greater than the number of days in the year determined by FUNCTION INTEGER (argument-1 / 1000),

(2)

NOTE 2 The day is not valid in the given year.

- c) Otherwise,

(0)

NOTE 3 The date is valid.

15.75 TEST-NUMVAL function

The TEST-NUMVAL function verifies that the contents of argument-1 conform to the specification for argument-1 of the NUMVAL function.

The type of this function is integer.

15.75.1 General Format

FUNCTION TEST-NUMVAL (argument-1)

15.75.2 Arguments

- 1) Argument-1 shall be an alphanumeric or national literal or a data item of class alphanumeric or national.

15.75.3 Returned values

- 1) The returned value is:

- a) If the content of argument-1 conforms to the argument rules for the NUMVAL function,

(0)

- b) Otherwise, if one or more characters are in error, the position of the first character in error,

NOTE 1 Because one or more spaces following one or more digits is valid, if one or more spaces are embedded within a string of numeric characters, the returned value is the position of the first non-space character following the spaces. If argument-1 is '0 1', the returned value will be 3.

NOTE 2 Because the character in error for an argument that is greater than 31 digits is the 32nd digit, the returned value is the position of the 32nd digit if no prior error is found.

- c) Otherwise,

(FUNCTION LENGTH (argument-1) + 1).

NOTE 3 These errors include, but are not limited to:

- argument-1 is zero-length,
- argument-1 contains only spaces,
- argument-1 contains valid characters but is incomplete, such as the string ' + '.

15.76 TEST-NUMVAL-C function

The TEST-NUMVAL-C function verifies that the contents of argument-1 conform to the specification for argument-1 of the NUMVAL-C function.

The type of this function is integer.

15.76.1 General Format

FUNCTION TEST-NUMVAL-C (argument-1 $\left[\begin{array}{l} \text{LOCALE [locale-name-1]} \\ \text{argument-2} \end{array} \right]$ [ANYCASE])

15.76.2 Arguments

- 1) Argument-1 shall be of class alphanumeric or national.
- 2) Argument-2, if specified, shall be of the same class as argument-1.
- 3) If the LOCALE keyword is specified and locale-name-1 is specified, locale-name-1 shall be associated with a locale in the SPECIAL-NAMES paragraph. If the required locale is not available, the EC-LOCALE-MISSING exception condition is set to exist.
- 4) If the ANYCASE keyword is specified, the matching rules for detecting a currency string in argument-1 are case-insensitive. If the ANYCASE keyword is not specified, the matching rules for detecting a currency string are case sensitive.

15.76.3 Returned values

- 1) The returned value is:
 - a) If the content of argument-1 conforms to the argument rules for the NUMVAL-C function,
(0)
 - b) Otherwise, if one or more characters are in error, the position of the first character in error,

NOTE 1 Because one or more spaces following one or more digits is valid, if one or more spaces are embedded within a string of numeric characters, the returned value is the position of the first non-space character following the spaces. If argument-1 is '0 1', the returned value will be 3.

NOTE 2 Because the character in error for an argument that is greater than 31 digits is the 32nd digit, the returned value is the position of the 32nd digit if no prior error is found.

- c) Otherwise,
(FUNCTION LENGTH (argument-1) + 1).

NOTE 3 These errors include, but are not limited to:

- argument-1 is zero-length,
- argument-1 contains only spaces,
- argument-1 contains valid characters but is incomplete, such as the string ' +. '.

15.77 TEST-NUMVAL-F function

The TEST-NUMVAL-F function verifies that the contents of argument-1 conform to the specification for argument-1 of the NUMVAL-F function.

The type of this function is integer.

15.77.1 General Format

FUNCTION TEST-NUMVAL-F (argument-1)

15.77.2 Arguments

- 1) Argument-1 shall be an alphanumeric or national literal or a data item of class alphanumeric or national.

15.77.3 Returned values

- 1) The returned value is:
 - a) If the content of argument-1 conforms to the argument rules for the NUMVAL-F function,
(0)
 - b) Otherwise, if one or more characters are in error, the position of the first character in error,

NOTE 1 Because one or more spaces following one or more digits is valid, if one or more spaces are embedded within a string of numeric characters, the returned value is the position of the first non-space character following the spaces. If argument-1 is '0 1E+2', the returned value will be 3.

NOTE 2 Because the character in error for the significand of an argument that is greater than 31 digits is the 32nd digit, the returned value is the position of the 32nd digit of the significand if no prior error is found. For the same reason, the character in error for the exponent of an argument that is greater than 3 digits is the position of the 4th digit of the exponent.

NOTE 3 If there is no sign in the exponent of an argument, the position of the first digit of the exponent would be the character in error.

- c) Otherwise,
(FUNCTION LENGTH (argument-1) + 1).

NOTE 4 These errors include, but are not limited to:

- argument-1 is zero-length,
- argument-1 contains only spaces,
- argument-1 contains valid characters but is incomplete, such as the string ' +. '.

15.78 UPPER-CASE function

The UPPER-CASE function returns a character string containing the value of argument-1 with any lowercase letters in the argument replaced by their corresponding uppercase letters.

The type of the function depends on the argument type as follows:

Argument type	Function type
Alphabetic	Alphanumeric
Alphanumeric	Alphanumeric
National	National

15.78.1 General format

FUNCTION UPPER-CASE (argument-1)

15.78.2 Arguments

- 1) Argument-1 shall be of class alphabetic, alphanumeric, or national and shall be at least one character position in length.

15.78.3 Returned values

- 1) A character string with the content of argument-1 is returned, with any lowercase letters replaced by their corresponding uppercase letters.
- 2) When a locale is in effect for character classification, as described in 12.2.5, OBJECT-COMPUTER paragraph, the correspondence of lowercase to uppercase letters is determined from locale category LC_CTYPE.
- 3) The character string returned has the same length as argument-1 when there is a one-to-one correspondence between lowercase and uppercase letters. When the correspondence of lowercase and uppercase letters is not one-to-one, the character string returned may be longer or shorter than argument-1 and depends on the content of argument-1 and the locale specification.
- 4) If there is no corresponding uppercase letter for a given lowercase letter, that letter is unchanged in the returned value; when a locale is in effect for character classification and there is no uppercase correspondence specified in the locale for a given letter or letters, the letter or letters are unchanged in the returned value.

15.79 VARIANCE function

The VARIANCE function returns a numeric value that approximates the variance of its arguments.

The type of this function is numeric.

15.79.1 General format

FUNCTION VARIANCE ({ argument-1 } ...)

15.79.2 Arguments

- 1) Argument-1 shall be of class numeric.

15.79.3 Returned values

- 1) The equivalent arithmetic expression is as follows:

- a) For one occurrence of argument-1,

(0)

- b) For two occurrences of argument-1,

$$((\text{argument-1}_1 - \text{FUNCTION MEAN}(\text{argument-list}))^2 + (\text{argument-1}_2 - \text{FUNCTION MEAN}(\text{argument-list}))^2) / 2$$

- c) For n occurrences of argument-1,

$$(\text{FUNCTION SUM} (\\ ((\text{argument-1}_1 - \text{FUNCTION MEAN}(\text{argument-list}))^2) \\ \dots \\ ((\text{argument-1}_n - \text{FUNCTION MEAN}(\text{argument-list}))^2)) / n)$$

where argument-list is the argument-1 list for the VARIANCE function itself and argument-1_i is the ith argument of the argument-1 list for the VARIANCE function itself.

15.80 WHEN-COMPILED function

The WHEN-COMPILED function returns the date and time the compilation unit was compiled as provided by the system on which the compilation unit was compiled.

The type of this function is alphanumeric.

15.80.1 General format

FUNCTION WHEN-COMPILED

15.80.2 Returned values

- 1) The character positions returned, numbered from left to right, are:

Character Positions	Contents
1-4	Four numeric digits of the year in the Gregorian calendar.
5-6	Two numeric digits of the month of the year, in the range 01 through 12.
7-8	Two numeric digits of the day of the month, in the range 01 through 31.
9-10	Two numeric digits of the hours past midnight, in the range 00 through 23.
11-12	Two numeric digits of the minutes past the hour, in the range 00 through 59.
13-14	Two numeric characters of the seconds past the minute in the range: - 00 through 59 when a LEAP-SECOND directive with the OFF phrase is in effect - 00 through nn, where nn is defined by the implementor, when a LEAP-SECOND directive with the ON phrase is in effect.
15-16	Two numeric digits of the hundredths of a second past the second, in the range 00 through 99. The value 00 is returned if the system on which the compilation was done does not have the facility to provide the fractional part of a second.
17	Either the character '-', the character '+', or the character '0'. The character '-' is returned if the local time indicated in the previous character positions is behind Coordinated Universal Time. The character '+' is returned if the local time indicated is the same as or ahead of Coordinated Universal Time. The character '0' is returned if the system on which the compilation was done does not have the facility to provide the local time differential factor.
18-19	If character position 17 is '-', two numeric digits are returned in the range 00 through 12 indicating the number of hours that the local time is behind Coordinated Universal Time. If character position 17 is '+', two numeric digits are returned in the range 00 through 13 indicating the number of hours that the local time is ahead of Coordinated Universal Time. If character position 17 is '0', the value 00 is returned.
20-21	Two numeric digits are returned in the range 00 through 59 indicating the number of additional minutes that the local time is ahead of or behind Coordinated Universal Time, depending on whether character position 17 is '+' or '-', respectively. If character position 17 is '0', the value 00 is returned.

- 2) The returned value is the date and time of compilation of the compilation unit that contains this function. The returned value in a contained source unit is the compilation date and time associated with the compilation unit in which it is contained.
- 3) The returned value shall denote the same time as the compilation date and time if provided in the listing and in the generated object code, although their representations and precision may differ.

15.81 YEAR-TO-YYYY function

The YEAR-TO-YYYY function converts argument-1, the two low-order digits of a year, to a four-digit year. Argument-2, when added to the year at the time of execution, defines the ending year of a 100-year interval, or sliding window, into which the year of argument-1 falls. Argument-3 specifies the year at the time of execution.

The type of the function is integer.

15.81.1 General format

FUNCTION YEAR-TO-YYYY (argument-1 [argument-2 [argument-3]])

15.81.2 Arguments

- 1) Argument-1 shall be a nonnegative integer that is less than 100.
- 2) Argument-2 shall be an integer.
- 3) If argument-2 is omitted, the function shall be evaluated as though 50 were specified for argument-2.
- 4) Argument-3 shall be an integer greater than 1600 and less than 10000.
- 5) If argument-3 is omitted, the function shall be evaluated as though the following were specified for argument-3:

FUNCTION NUMVAL (FUNCTION CURRENT-DATE (1:4)))

- 6) The sum of the values of argument-2 and argument-3 shall be less than 10000 and greater than 1699.

15.81.3 Returned values

- 1) Maximum-year is calculated as follows:
(argument-2 + argument-3)
- 2) The equivalent arithmetic expression is as follows:

- a) When the following condition is true

FUNCTION MOD (maximum-year, 100) >= argument-1

The equivalent arithmetic expression is

(argument-1 + 100 * (FUNCTION INTEGER (maximum-year/100)))

- b) Otherwise, the equivalent arithmetic expression is

(argument-1 + 100 * (FUNCTION INTEGER (maximum-year/100) – 1))

NOTE 1 In the year 1995, the returned value for FUNCTION YEAR-TO-YYYY (4, 23) is 2004. In the year 2008 the returned value for FUNCTION YEAR-TO-YYYY (98, (–15)) is 1898.

NOTE 2 If argument-3 is omitted, the YEAR-TO-YYYY function implements a sliding window algorithm, based on the year at the time of execution, as returned by the CURRENT-DATE function. A fixed window algorithm can be achieved by specifying suitable values for argument-2 and argument-3, such that the sum of argument-2 and argument-3 defines the ending year of the desired 100-year interval.

16 Standard classes

A standard class BASE shall be provided by the implementation. It can be used as the root of a class hierarchy to provide standard object life-cycle function. This use is not required — an implementation may provide alternative root classes that use other mechanisms for supporting the object life-cycle, particularly for creating COBOL objects that interoperate with other non-COBOL object systems.

16.1 BASE class

The following is the specification of the formal interfaces that are supported by the standard BASE class. The interface BaseFactoryInterface specifies the factory interface of the BASE class, and the interface BaseInterface specifies the object interface of the BASE class. The implementation of the BASE class shall be described with an IMPLEMENTS clause that references the interface defined here, and shall provide the semantics specified below.

NOTE The standard class BASE need not be implemented in COBOL.

Interface-id. BaseFactoryInterface.

Procedure division.

Method-id. New.

Data division.

Linkage section.

01 outObject usage object reference active-class.

Procedure division returning outObject.

End-method New.

End Interface BaseFactoryInterface.

Interface-id. BaseInterface.

Procedure division.

Method-id. FactoryObject.

Data division.

Linkage section.

01 outFactory usage object reference factory of active-class.

Procedure division returning outFactory.

End method FactoryObject.

End Interface BaseInterface.

16.1.1 New method

The New method is a factory method that provides a standard mechanism for creating instance objects of a class.

16.1.1.1 General rules

- 1) The New method allocates storage for an object, initializes its instance data in accordance with 14.5.2.2, Initial state of object data, and returns a reference to the created object.
- 2) If resources needed to create a new object are not available, the returned object reference is set to NULL, and the EC-OO-RESOURCE exception condition is set to exist and is propagated back to the runtime element that invoked the New method.

16.1.2 FactoryObject method

The FactoryObject method is an instance method that provides a standard mechanism for acquiring access to the factory object associated with the class of a given instance.

16.1.2.1 General rules

- 1) When invoked on an instance object, the FactoryObject method determines the class of the object and returns a reference to the factory object associated with that class.

NOTE This method is useful when one does not know the class of an object. If the class is known, one can access the methods of a factory object trivially, using statements such as:

Invoke classname "someFactoryMethodName".

If the class of the object referenced by identifier anObject is unknown, then the coding below may be used to invoke one of its factory methods:

Invoke anObject "FactoryObject" returning aFactoryObject

Invoke aFactoryObject "someFactoryMethodName".

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

Annex A (normative)

Communications facility

The communications facility provides the ability to access, process, and create messages or portions thereof. It provides the ability to communicate through a message control system (MCS) with communication devices.

The communications facility is an optional element in this International Standard; it is an obsolete element and is to be deleted from the next revision of standard COBOL.

NOTE Support for data of classes boolean and national and exception handling are intentionally omitted from the obsolete communications facility.

The communications facility may be used only in a program definition.

Communications facility entities that are contained elsewhere in the standard are as follows:

3.1, A conforming implementation, states that Annex A, Communications facility, is optional.

4, Terms and Definitions: MCS and message control system.

8.3.1.1.1, User-defined words: cd-name.

8.4.1, Uniqueness of reference, refers to cd-name in general format 1.

8.4.2.1, Identifier, refers to cd-name in format 2 and general rule 1d.

8.4.5, Scope of names, refers to cd-name and communication section.

8.6.2, External and internal items, the fifth paragraph refers to the communication section.

8.6.3, Automatic, initial, and static internal items, refers to the communication section.

8.9, Reserved words. Those that are unique to the communication facility are: CD, DISABLE, EGI, EMI, ENABLE, END-RECEIVE, ESI, MESSAGE, PURGE, QUEUE, RECEIVE, SEGMENT, SEND, SUB-QUEUE-1, SUB-QUEUE-2, SUB-QUEUE-3, TERMINAL, and TEXT.

10.5, COBOL compilation group, syntax rule 4 refers to communication section

12.2.6, SPECIAL-NAMES paragraph, syntax rule 6 refers to SEND statement.

13.1, Data division general format, refers to the communications section.

13.16.31, Level-number, syntax rule 2 refers to CD.

13.16.42, REDEFINES clause, syntax rule 4 refers to communication section.

13.16.43, RENAMES clause, syntax rule 3 refers to CD.

13.16.61, VALUE clause, the description and general rule 4 refer to communication section.

Table 13, Procedural statements, refers to RECEIVE, the optional NO DATA and WITH DATA phrases of that statement, and the END-RECEIVE scope terminator.

14.5.2.1.2.1, Initial state, refers to the communications facility.

14.5.10, Normal run unit termination, rule 2 applies only to the communications facility.

14.5.12.1, Exception conditions, refers to the communications facility.

14.8.4, CALL statement, syntax rule 3 and syntax rule 7 refer to the communication section.

14.8.22, INVOKE statement, syntax rules 9 and 11 refer to the communication section.

B.1, Implementor-defined language element list, items 26, 27, and 113.

B.2, Undefined language element list, items 7 and 20 refer to the communication section; items 52, 53, and 54 refer to the SEND statement.

B.3, Processor-dependent language element list, item 22.

E.4.3.2.1.5, Other items, refers to the communication section.

E.4.3.2.2.3, Other items, refers to the communication section.

E.5, Communications facility, is the concepts section for the communication facility.

Index refers to numerous communications facility entities.

A.1 Data division

A.1.1 Communication section

The communication section is located in the data division of a source program. The communication section describes the data item in the source program that will serve as the interface between the message control system (MCS) and the program. This MCS interface area is defined by a communication description entry. The communication description entry is followed by none, one, or more record description entries.

The general format of the communication section is shown below:

COMMUNICATION SECTION

$$\left[\text{communication-description-entry} \left[\begin{array}{l} \text{constant-entry} \\ \text{record-description-entry} \end{array} \right] \dots \right] \dots$$

A.1.1.1 Communication description entry

In a COBOL program the communication description entry (CD entry) represents the highest level of organization in the communication section.

For an input communication description entry the clauses specify the queue, sub-queues, message date, message time, symbolic source, text length, end key, status key, and message count. For an output communication description entry the clauses specify the destination count, text length, status key, error keys, and symbolic destinations. For an input-output communication description entry the clauses specify the message date, message time, symbolic terminal, text length, end key, and status key.

A.1.1.2 Record description structure

The record area associated with a communication description entry may be implicitly redefined by user-specified record description entries written immediately following the communication description entry.

A record description consists of a set of data description entries that describe the characteristics of a particular record. Each data description entry consists of a level-number followed by the data-name or FILLER clause, if specified, followed by a series of independent clauses as required. A record description may have a hierarchical structure and therefore the clauses used with an entry may vary considerably, depending upon whether or not it is followed by subordinate entries. The structure of a record description and the elements allowed in a record description entry are explained in 8.5.1.2, Levels, and in 13.14, Data description entry.

A.1.2 Communication description entry

The communication description entry specifies the interface area between the message control system (MCS) and a COBOL program.

A.1.2.1 General format

Format 1 (input):

```

CD cd-name-1 FOR [ INITIAL ] INPUT
[
  [ SYMBOLIC QUEUE IS data-name-1 ]
  [ SYMBOLIC SUB-QUEUE-1 IS data-name-2 ]
  [ SYMBOLIC SUB-QUEUE-2 IS data-name-3 ]
  [ SYMBOLIC SUB-QUEUE-3 IS data-name-4 ]
  [ MESSAGE DATE IS data-name-5 ]
  [ MESSAGE TIME IS data-name-6 ]
  [ SYMBOLIC SOURCE IS data-name-7 ]
  [ TEXT LENGTH IS data-name-8 ]
  [ END KEY IS data-name-9 ]
  [ STATUS KEY IS data-name-10 ]
  [ MESSAGE COUNT IS data-name-11 ]
  [
    data-name-1 data-name-2 data-name-3
    data-name-4 data-name-5 data-name-6
    data-name-7 data-name-8 data-name-9
    data-name-10 data-name-11
  ]
]

```

Format 2 (output):

```

CD cd-name-1 FOR OUTPUT
[ DESTINATION COUNT IS data-name-1 ]
[ TEXT LENGTH IS data-name-2 ]
[ STATUS KEY IS data-name-3 ]
[ DESTINATION TABLE OCCURS integer-1 TIMES [ INDEXED BY { index-name-1 } ... ] ]
[ ERROR KEY IS data-name-4 ]
[ SYMBOLIC DESTINATION IS data-name-5 ] .

```

Format 3 (I-O):

CD cd-name-1 FOR [INITIAL] I-O

[MESSAGE DATE IS data-name-1]
[MESSAGE TIME IS data-name-2]
[SYMBOLIC TERMINAL IS data-name-3]
[TEXT LENGTH IS data-name-4]
[END KEY IS data-name-5]
[STATUS KEY IS data-name-6]
data-name-1 data-name-2 data-name-3 data-name-4 data-name-5 data-name-6

A.1.2.2 Syntax rules**ALL FORMATS**

- 1) A CD entry shall appear only in the communication section.

FORMATS 1 AND 3

- 2) Within a single program, the INITIAL clause may be specified in only one CD entry. The INITIAL clause shall not be used in a program that specifies the USING phrase of the procedure division header.
- 3) Except for the INITIAL clause, the optional clauses may be written in any order.
- 4) If neither option for specifying the interface area is used, a level 01 data description entry shall follow the CD entry. Either option may be followed by a level 01 data description entry.

FORMAT 1

- 5) Record description entries following an input CD entry implicitly redefine the record area established by the input CD entry and shall describe a record of exactly 87 alphanumeric character positions. Multiple redefinitions of this record are permitted; however, only the first redefinition may contain VALUE clauses. The message control system (MCS) always references the record according to the data description defined in general rule 2.
- 6) Data-name-1, data-name-2, data-name-3, data-name-4, data-name-5, data-name-6, data-name-7, data-name-8, data-name-9, data-name-10, and data-name-11 shall be unique within the CD entry. Within this series any data-name may be replaced by the reserved word FILLER.

FORMAT 2

- 7) The optional clauses may be written in any order.
- 8) If none of the optional clauses of the CD entry is specified, a level 01 data description entry shall follow the CD entry.
- 9) Record description entries subordinate to an output CD entry implicitly redefine the record area established by the output CD entry. Multiple redefinitions of this record are permitted; however, only the first redefinition may contain VALUE clauses. The MCS always references the record according to the data description defined in general rule 16.
- 10) Data-name-1, data-name-2, data-name-3, data-name-4, and data-name-5 shall be unique within a CD entry.

- 11) If the DESTINATION TABLE OCCURS clause is not specified, one error key and one symbolic destination area are assumed. In this case, subscripting is not permitted when referencing these data items.
- 12) If the DESTINATION TABLE OCCURS clause is specified, data-name-4 and data-name-5 may be referenced only by subscripting.
- 13) There is no restriction on the value of the data item referenced by data-name-1.

FORMAT 3

- 14) Record description entries following an input-output CD entry implicitly redefine the record area established by the input-output CD entry and shall describe a record of exactly 33 alphanumeric character positions. Multiple redefinitions of this record are permitted; however, only the first redefinition may contain VALUE clauses. The MCS always references the record according to the data description defined in general rule 24.
- 15) Data-name-1, data-name-2, data-name-3, data-name-4, data-name-5, and data-name-6 shall be unique within the CD entry. Within this series, any data-name may be replaced by the reserved word FILLER.

A.1.2.3 General rules**FORMAT 1**

- 1) The input CD information constitutes the communication between the message control system (MCS) and the program about the message being handled. This information does not come from the terminal as part of the message.
- 2) For each input CD entry, a record area of 87 contiguous alphanumeric character positions is allocated. This record area is defined to the MCS as follows:
 - a) The SYMBOLIC QUEUE clause defines data-name-1 as the name of an elementary alphanumeric data item of 12 characters occupying positions 1 through 12 in the record.
 - b) The SYMBOLIC SUB-QUEUE-1 clause defines data-name-2 as the name of an elementary alphanumeric data item of 12 characters occupying positions 13 through 24 in the record.
 - c) The SYMBOLIC SUB-QUEUE-2 clause defines data-name-3 as the name of an elementary alphanumeric data item of 12 characters occupying positions 25 through 36 in the record.
 - d) The SYMBOLIC SUB-QUEUE-3 clause defines data-name-4 as the name of an elementary alphanumeric data item of 12 characters occupying positions 37 through 48 in the record.
 - e) The MESSAGE DATE clause defines data-name-5 as the name of a data item whose implicit description is that of an integer of 6 digits, without an operational sign, occupying character positions 49 through 54 in the record.
 - f) The MESSAGE TIME clause defines data-name-6 as the name of a data item whose implicit description is that of an integer of 8 digits, without an operational sign, occupying character positions 55 through 62 in the record.
 - g) The SYMBOLIC SOURCE clause defines data-name-7 as the name of an elementary alphanumeric data item of 12 characters occupying positions 63 through 74 in the record.
 - h) The TEXT LENGTH clause defines data-name-8 as the name of an elementary data item whose implicit description is that of an integer of 4 digits, without an operational sign, occupying character positions 75 through 78 in the record.
 - i) The END KEY clause defines data-name-9 as the name of an elementary alphanumeric data item of 1 character occupying position 79 in the record.

- j) The STATUS KEY clause defines data-name-10 as the name of an elementary alphanumeric data item of 2 characters occupying positions 80 and 81 in the record.
- k) The MESSAGE COUNT clause defines data-name-11 as the name of an elementary data item whose implicit description is that of an integer of 6 digits, without an operational sign, occupying character positions 82 through 87 in the record.

The second option may be used to replace the above clauses by a series of data-names that, taken in order, correspond to the data-names defined by these clauses.

Use of either option results in a record whose implicit description is equivalent to the following:

IMPLICIT DESCRIPTION		COMMENT
01	data-name-0	
02	data-name-1	PICTURE X(12). SYMBOLIC QUEUE
02	data-name-2	PICTURE X(12). SYMBOLIC SUB-QUEUE-1
02	data-name-3	PICTURE X(12). SYMBOLIC SUB-QUEUE-2
02	data-name-4	PICTURE X(12). SYMBOLIC SUB-QUEUE-3
02	data-name-5	PICTURE 9(6). MESSAGE DATE
02	data-name-6	PICTURE 9(8). MESSAGE TIME
02	data-name-7	PICTURE X(12). SYMBOLIC SOURCE
02	data-name-8	PICTURE 9(4). TEXT LENGTH
02	data-name-9	PICTURE X. END KEY
02	data-name-10	PICTURE XX. STATUS KEY
02	data-name-11	PICTURE 9(6). MESSAGE COUNT

NOTE In the above, the information under 'COMMENT' is for clarification and is not part of the data description.

- 3) The contents of the data items referenced by data-name-2, data-name-3, and data-name-4, when not being used shall contain spaces.
- 4) The data items referenced by data-name-1, data-name-2, data-name-3, and data-name-4 contain symbolic names designating queues, sub-queues, ..., respectively. These symbolic names shall follow the rules for the formation of system-names, and shall have been previously defined to the message control system (MCS).
- 5) A RECEIVE statement causes the serial return of the next message or portion of a message from the queue as specified by the entries in the CD.

At the time of execution of a RECEIVE statement, the input CD area shall contain, in the content of data-name-1, the name of a symbolic queue. The data items specified by data-name-2, data-name-3, and data-name-4 may contain symbolic sub-queue names or spaces. When a given level of the queue structure is specified all higher levels shall also be specified. If less than all the levels of the queue hierarchy are specified, the MCS determines the next message or portion of a message to be accessed within the queue and/or sub-queue specified in the input CD.

After the execution of a RECEIVE statement, the contents of the data items referenced by data-name-1 through data-name-4 will contain the symbolic names of all the levels of the queue structure.

- 6) Whenever a program is scheduled by the message control system (MCS) to process a message, that program establishes a run unit and the symbolic names of the queue structure that demanded this activity will be placed in the data items referenced by data-name-1 through data-name-4 of the CD associated with the INITIAL clause as applicable. In all other cases, the contents of the data items referenced by data-name-1 through data-name-4 of the CD associated with the INITIAL clause are initialized to spaces.

The symbolic names are inserted or the initialization to spaces is completed prior to the execution of the first procedure division statement.

The execution of a subsequent RECEIVE statement naming the same contents of the data items referenced by data-name-1 through data-name-4 will return the actual message that caused the program to be scheduled. Only at that time will the remainder of the CD be updated.

- 7) If the MCS attempts to schedule a program lacking an INITIAL clause, the results are undefined.
- 8) During the execution of a RECEIVE statement, the MCS provides, in the data item referenced by data-name-5, the date on which it recognized that the message was complete in the form 'YYMMDD' (year, month, day). The content of the data item referenced by data-name-5 is not updated by the MCS other than as part of the execution of a RECEIVE statement.
- 9) During the execution of a RECEIVE statement, the MCS provides, in the data item referenced by data-name-6, the time at which it recognized that the message was complete in the form 'HHMMSSSTT' (hours, minutes, seconds, hundredths of a second). The content of the data item referenced by data-name-6 is not updated by the MCS other than as part of the execution of a RECEIVE statement.
- 10) During the execution of a RECEIVE statement, the MCS provides, in the data item referenced by data-name-7, the symbolic name of the communication terminal that is the source of the message being transferred. This symbolic name shall follow the rules for the formation of system-names. However, if the symbolic name of the communication terminal is not known to the MCS, the content of the data item referenced by data-name-7 will contain spaces.
- 11) The MCS indicates via the content of the data item referenced by data-name-8 the number of character positions filled as a result of the execution of the RECEIVE statement.
- 12) The content of the data item referenced by data-name-9 is set only by the MCS as part of the execution of a RECEIVE statement according to the following rules:
 - a) When the RECEIVE MESSAGE phrase is specified, then:
 1. If an end of group has been detected, the content of the data item referenced by data-name-9 is set to 3;
 2. If an end of message has been detected, the content of the data item referenced by data-name-9 is set to 2;
 3. If less than a message is transferred, the content of the data item referenced by data-name-9 is set to 0.
 - b) When the RECEIVE SEGMENT phrase is specified, then:
 1. If an end of group has been detected, the content of the data item referenced by data-name-9 is set to 3;
 2. If an end of message has been detected, the content of the data item referenced by data-name-9 is set to 2;
 3. If an end of segment has been detected, the content of the data item referenced by data-name-9 is set to 1;
 4. If less than a message segment is transferred, the content of the data item referenced by data-name-9 is set to 0.
 - c) When more than one of the above conditions is satisfied simultaneously, the rule first satisfied in the order listed determines the content of the data item referenced by data-name-9.
- 13) The content of the data item referenced by data-name-10 indicates the status condition of the previously executed RECEIVE, ACCEPT MESSAGE COUNT, ENABLE INPUT, or DISABLE INPUT statement.

The actual association between the content of the data item referenced by data-name-10 and the status condition itself is defined in table A.1, Communication status key conditions.

- 14) The content of the data item referenced by data-name-11 indicates the number of messages that exist in a queue, sub-queue-1, ... The MCS updates the content of the data item referenced by data-name-11 only as part of the execution of an ACCEPT MESSAGE COUNT statement.

FORMAT 2

- 15) The nature of the output CD information is such that it is not sent to the terminal, but constitutes the communication between the program and the MCS about the message being handled.
- 16) A record area of contiguous alphanumeric character positions is allocated for each output CD according to the following formula: (10 plus (13 times integer-1)). The implicit description of this record area is:
- The DESTINATION COUNT clause defines data-name-1 as the name of a data item whose implicit description is that of an integer, without an operational sign, occupying character positions 1 through 4 in the record.
 - The TEXT LENGTH clause defines data-name-2 as the name of an elementary data item whose implicit description is that of an integer of 4 digits, without an operational sign, occupying character positions 5 through 8 in the record.
 - The STATUS KEY clause defines data-name-3 to be an elementary alphanumeric data item of 2 characters occupying positions 9 and 10 in the record.
 - Character positions 11 through 23 and every set of 13 characters thereafter will form table items of the following description:
 - The ERROR KEY clause defines data-name-4 as the name of an elementary alphanumeric data item of one character.
 - The SYMBOLIC DESTINATION clause defines data-name-5 as the name of an elementary alphanumeric data item of 12 characters.

Use of the above clauses results in a record whose implicit description is equivalent to the following:

IMPLICIT DESCRIPTION			COMMENT
01	data-name-0.		
02	data-name-1	PICTURE 9(4).	DESTINATION COUNT
02	data-name-2	PICTURE 9(4).	TEXT LENGTH
02	data-name-3	PICTURE XX.	STATUS KEY
02	data-name	OCCURS integer-1 TIMES.	DESTINATION TABLE
03	data-name-4	PICTURE X.	ERROR KEY
03	data-name-5	PICTURE X(12).	SYMBOLIC DESTINATION

NOTE In the above, the information under 'COMMENT' is for clarification and is not part of the data description.

- 17) During the execution of a SEND, PURGE, ENABLE OUTPUT, or DISABLE OUTPUT statement, the content of the data item referenced by data-name-1 will indicate to the MCS the number of symbolic destinations that are to be used from the area referenced by data-name-5.

The MCS finds the first symbolic destination name in the first occurrence of the area referenced by data-name-5, the second symbolic destination name in the second occurrence of the area referenced by data-name-5, ... , up to and including the occurrence of the area referenced by data-name-5 indicated by the content of data-name-1.

If during the execution of a SEND, PURGE, ENABLE OUTPUT, or DISABLE OUTPUT statement the value of the data item referenced by data-name-1 is outside the range of 1 through integer-1, an error condition is indicated, no action is taken for any destination, and the execution of the SEND, PURGE, ENABLE OUTPUT, or DISABLE OUTPUT statement is terminated.

- 18) It is the responsibility of the user to ensure that the value of the data item referenced by data-name-1 is valid at the time of execution of the SEND, PURGE, ENABLE OUTPUT, or DISABLE OUTPUT statement.
- 19) As part of the execution of a SEND statement, the MCS will interpret the content of the data item referenced by data-name-2 to be the user's indication of the number of leftmost alphanumeric character positions of the data item referenced by the identifier in the associated SEND statement from which data is to be transferred.
- 20) Each occurrence of the data item referenced by data-name-5 contains a symbolic destination name previously known to the MCS. These symbolic destination names shall follow the rules for the formation of system-names.
- 21) The content of the data item referenced by data-name-3, indicates the status condition of the previously executed SEND, PURGE, ENABLE OUTPUT, or DISABLE OUTPUT statement.

The actual association between the content of the data item referenced by data-name-3 and the status condition itself is defined in table A.1, Communication status key conditions.

- 22) If, during execution of a DISABLE OUTPUT, ENABLE OUTPUT, PURGE, or SEND statement, the MCS determines an error has occurred, the content of the data item referenced by data-name-3 and the content of each occurrence of data-name-4, up to and including the occurrence specified by the content of data-name-1, are updated.

The actual association between the content of the data item referenced by data-name-4 and the error condition itself is defined in table A.2, Error key values.

FORMAT 3

- 23) The input-output CD information constitutes the communication between the MCS and the program about the message being handled. This information does not come from the terminal as part of the message.
- 24) For each input-output CD, a record area of 33 contiguous alphanumeric character positions is allocated. This record area is defined to the MCS as follows:
 - a) The MESSAGE DATE clause defines data-name-1 as the name of a data item whose implicit description is that of an integer of 6 digits, without an operational sign, occupying character positions 1 through 6 in the record.
 - b) The MESSAGE TIME clause defines data-name-2 as the name of a data item whose implicit description is that of an integer of 8 digits, without an operational sign, occupying character positions 7 through 14 in the record.
 - c) The SYMBOLIC TERMINAL clause defines data-name-3 as the name of an elementary alphanumeric data item of 12 characters occupying positions 15 through 26 in the record.
 - d) The TEXT LENGTH clause defines data-name-4 as the name of an elementary data item whose implicit description is that of an integer of 4 digits, without an operational sign, occupying character positions 27 through 30 in the record.
 - e) The END KEY clause defines data-name-5 as the name of an elementary alphanumeric data item of 1 character occupying position 31 in the record.
 - f) The STATUS KEY clause defines data-name-6 as the name of an elementary alphanumeric data item of 2 characters occupying positions 32 and 33 in the record.

The second option may be used to replace the above clauses by a series of data-names that, taken in order, correspond to the data-names defined by these clauses.

Use of either option results in a record whose implicit description is equivalent to the following:

IMPLICIT DESCRIPTION			COMMENT
01	data-name-0.		
02	data-name-1	PICTURE 9(6).	MESSAGE DATE
02	data-name-2	PICTURE 9(8).	MESSAGE TIME
02	data-name-3	PICTURE X(12).	SYMBOLIC TERMINAL
02	data-name-4	PICTURE 9(4).	TEXT LENGTH
02	data-name-5	PICTURE X.	END KEY
02	data-name-6	PICTURE XX.	STATUS KEY

NOTE In the above, the information under 'COMMENT' is for clarification and is not part of the data description.

- 25) When a program is scheduled by the MCS to process a message, the first RECEIVE statement referencing the input-output CD with the INITIAL clause returns the actual message that caused the program to be scheduled.
- 26) Data-name-1 has the format 'YYMMDD' (year, month, day). Its content represents the date on which the MCS recognizes that the message is complete. The content of the data item referenced by data-name-1 is updated only by the MCS as part of the execution of a RECEIVE statement.
- 27) Data-name-2 has the format 'HHMMSSSTT' (hours, minutes, seconds, hundredths of a second) and its content represents the time at which the MCS recognizes that the message is complete. The content of the data item referenced by data-name-2 is updated only by the MCS as part of the execution of the RECEIVE statement.
- 28) Whenever a program is scheduled by the MCS to process a message, that program establishes a run unit and the symbolic name of the communication terminal that is the source of the message that invoked this program is placed in the data item referenced by data-name-3 of the input-output CD associated with the INITIAL clause as applicable. This symbolic name shall follow the rules for the formation of system-names.

In all other cases, the content of the data item referenced by data-name-3 of the input-output CD associated with the INITIAL clause is initialized to spaces.

The symbolic name is inserted, or the initialization to spaces is completed, prior to the execution of the first procedure division statement.

- 29) If the MCS attempts to schedule a program lacking an INITIAL clause, the results are undefined.
- 30) When the INITIAL clause is specified for an input-output CD and the program is scheduled by the MCS, the content of the data item referenced by data-name-3 shall not be changed by the program. If this content is changed, the execution of any statement referencing cd-name-1 is unsuccessful, and the data item referenced by data-name-6 is set to indicate unknown source or destination, as applicable. (See table A.1, Communication status key conditions.)
- 31) For an input-output CD without the INITIAL clause, or for an input-output CD with the INITIAL clause when the program is not scheduled by the MCS, the program shall specify the symbolic name of the source or destination in data-name-3 prior to the execution of the first statement referencing cd-name-1.

After executing the first statement referencing cd-name-1, the content of the data item referenced by data-name-3 shall not be changed by the program. If this content is changed, the execution of any statement referencing cd-name-1 is unsuccessful, and the data item referenced by data-name-6 is set to indicate unknown source or destination, as applicable. (See table A.1, Communication status key conditions.)

- 32) The MCS indicates, through the content of the data item referenced by data-name-4, the number of alphanumeric character positions filled as a result of the execution of the RECEIVE statement.

As part of the execution of a SEND statement, the MCS interprets the content of the data item referenced by data-name-4 as the user's indication of the number of leftmost alphanumeric character positions of the data item referenced by the associated SEND identifier from which data is transferred.

33) The content of the data item referenced by data-name-5 is set only by the MCS as part of the execution of a RECEIVE statement according to the following rules:

a) When the RECEIVE MESSAGE phrase is specified:

1. If an end of group has been detected, the content of the data item referenced by data-name-5 is set to 3;
2. If an end of message has been detected, the content of the data item referenced by data-name-5 is set to 2;
3. If less than a message is transferred, the content of the data item referenced by data-name-5 is set to 0.

b) When the RECEIVE SEGMENT phrase is specified:

1. If an end of group has been detected, the content of the data item referenced by data-name-5 is set to 3;
2. If an end of message has been detected, the content of the data item referenced by data-name-5 is set to 2;
3. If an end of segment has been detected, the content of the data item referenced by data-name-5 is set to 1;
4. If less than a message segment is transferred, the content of the data item referenced by data-name-5 is set to 0.

c) When more than one of the conditions is satisfied simultaneously, the rule first satisfied in the order listed determines the content of the data item referenced by data-name-5.

34) The content of the data item referenced by data-name-6 indicates the status condition of the previously executed DISABLE, ENABLE, PURGE, RECEIVE, or SEND statement.

The actual association between the content of the data item referenced by data-name-6 and the status condition itself is defined in table A.1, Communication status key conditions.

A.1.2.4 Communication status key conditions

Table A.1 —, Communication status key conditions, indicates the possible contents of the data items referenced by data-name-10 for format 1, by data-name-3 for format 2, and by data-name-6 for format 3 at the completion of each statement shown. An 'X' on a line in a statement column indicates that the associated status key value shown for that line is possible for that statement.

Table A.1 — Communication status key conditions

RECEIVE	SEND input-output-cd	SEND output-cd	PURGE	ACCEPT MESSAGE COUNT	ENABLE INPUT	ENABLE INPUT I-O TERMINAL	ENABLE OUTPUT	ENABLE INPUT	DISABLE INPUT I-O TERMINAL	DISABLE OUTPUT	Status key value	
X	X	X	X	X	X	X	X	X	X	X	00	No error detected. Action completed.
		X	X								10	One or more destinations disabled. Action completed. (See A.1.2.5, Error key values.)
	X										10	Destination disabled. No action taken.
					X	X	X	X	X	X	15	Symbolic source, or one or more queues or destinations already disabled/enabled. (See A.1.2.5, Error key values.)
	X	X	X				X			X	20	One or more destinations unknown. Action completed for known destination. (See A.1.2.5, Error key values.)
X				X	X			X			20	One or more queues or subqueues unknown. No action taken.
X						X			X		21	Symbolic source is unknown. No action taken.
		X	X				X			X	30	Destination count invalid. No action taken.
	X	X									50	Text length exceeds size of identifier-1.
	X	X									60	Portion requested to be sent has text length of zero or identifier-1 absent. No action taken.
		X									65	Output queue capacity exceeded. (See A.1.2.5, Error key values.)
			X								70	One or more destinations do not have portions associated with them. Action completed for other destinations.
		X	X		X		X	X		X	80	A combination of at least two status key conditions 10, 15, and 20 have occurred. (See A.1.2.5, Error key values.)
											9x	Implementor-defined status.

A.1.2.5 Error key values

Table A.2 —, Error key values, indicates the possible content of the data item referenced by data-name-4 for format 2 at the completion of each statement shown. An 'X' on a line in a statement column indicates that the associated error key value shown for that line is possible for that statement.

Table A.2 — Error key values

SEND	PURGE	ENABLE OUTPUT	DISABLE OUTPUT	Error key value	
X	X	X	X	0	No error.
X	X	X	X	1	Symbolic destination unknown.
X	X			2	Symbolic destination disabled.
	X			4	No partial message with referenced symbolic destination.
		X	X	5	Symbolic destination already enabled/disabled.
X				6	Output queue capacity exceeded.
				7-9	Reserved for future use.
				A-Z	Implementor-defined condition.

A.2 Procedure division

A.2.1 ACCEPT MESSAGE COUNT statement

The ACCEPT MESSAGE COUNT statement causes the number of complete messages in a queue to be made available.

A.2.1.1 General format

ACCEPT cd-name-1 MESSAGE COUNT

A.2.1.2 Syntax rules

- 1) Cd-name-1 shall reference an input CD.

A.2.1.3 General rules

- 1) The ACCEPT MESSAGE COUNT statement causes the message count data item specified for cd-name-1 to be updated to indicate the number of complete messages that exist in the queue structure designated by the contents of the data items specified by data-name-1 (SYMBOLIC QUEUE) through data-name-4 (SYMBOLIC SUB-QUEUE-3) of the area referenced by cd-name-1.
- 2) Upon execution of the ACCEPT MESSAGE COUNT statement, the content of the area specified by a communication description entry shall contain at least the name of the symbolic queue to be tested. Testing the condition causes the content of the data items referenced by data-name-10 (STATUS KEY) and data-name-11 (MESSAGE COUNT) of the area associated with the communication description entry to be appropriately updated. (See A.1.2, Communication description entry.)

A.2.2 DISABLE statement

The DISABLE statement notifies the message control system (MCS) to inhibit data transfer between specified output queues and destinations for output or between specified sources and input queues for input or between the program and one specified source or destination for input-output.

A.2.2.1 General format

$$\text{DISABLE} \left\{ \begin{array}{l} \text{INPUT [TERMINAL]} \\ \text{I-O TERMINAL} \\ \text{OUTPUT} \end{array} \right\} \text{cd-name-1}$$

A.2.2.2 Syntax rules

- 1) Cd-name-1 shall reference an input CD when the INPUT phrase is specified.
- 2) Cd-name-1 shall reference an input-output CD when the I-O TERMINAL phrase is specified.
- 3) Cd-name-1 shall reference an output CD when the OUTPUT phrase is specified.

A.2.2.3 General rules

- 1) The DISABLE statement provides a logical disconnection between the MCS and the specified sources or destinations. When this logical disconnection is already in existence, or is to be handled by some other means external to this program, the DISABLE statement is not required in this program. No action is taken when a DISABLE statement is executed that specifies a source or destination that is already disconnected, except that the value in the status key data item indicates this condition. The logical path for the transfer of data between the COBOL programs and the MCS is not affected by the DISABLE statement.
- 2) The MCS will ensure that the execution of a DISABLE statement will cause the logical disconnection at the earliest time the source or destination is inactive. The execution of the DISABLE statement will never cause the remaining portion of the message to be terminated during transmission to or from a terminal.
- 3) When the INPUT phrase without the optional word TERMINAL is specified, the logical paths between the queue and sub-queues specified by the contents of data-name-1 (SYMBOLIC QUEUE) through data-name-4 (SYMBOLIC SUB-QUEUE-3) of the area referenced by cd-name-1 and all the associated enabled sources are deactivated.
- 4) When the INPUT phrase with the optional word TERMINAL is specified, the logical paths between the source (as defined by the content of the data item referenced by data-name-7 (SYMBOLIC SOURCE)) and all of its associated queues and sub-queues are deactivated.
- 5) When the I-O TERMINAL phrase is specified, the logical path between the source (as defined by the content of the data item referenced by data-name-3 (SYMBOLIC TERMINAL)) and the program is deactivated.
- 6) When the OUTPUT phrase is specified, the logical paths are deactivated for all destinations specified by the content of each occurrence of data-name-5 up to and including the occurrence specified by the content of data-name-1 of the area referenced by cd-name-1.

A.2.3 ENABLE statement

The ENABLE statement notifies the message control system (MCS) to allow data transfer between specified output queues and destinations for output or between specified sources and input queues for input or between the program and one specified source or destination for input-output.

A.2.3.1 General format

$$\text{ENABLE} \left\{ \begin{array}{l} \text{INPUT [TERMINAL]} \\ \text{I-O TERMINAL} \\ \text{OUTPUT} \end{array} \right\} \text{cd-name-1}$$

A.2.3.2 Syntax rules

- 1) Cd-name-1 shall reference an input CD when the INPUT phrase is specified.
- 2) Cd-name-1 shall reference an input-output CD when the I-O TERMINAL phrase is specified.
- 3) Cd-name-1 shall reference an output CD when the OUTPUT phrase is specified.

A.2.3.3 General rules

- 1) The ENABLE statement provides a logical connection between the MCS and the specified sources or destinations. When this logical connection is already in existence, or is to be handled by some other means external to this program, the ENABLE statement is not required in this program. No action is taken when an ENABLE statement is executed that specifies a source or destination that is already connected, except that the value in the status key data item indicates this condition. The logical path for the transfer of data between the COBOL programs and the MCS is not affected by the ENABLE statement.
- 2) When the INPUT phrase without the optional word TERMINAL is specified, the logical paths between the queue and sub-queues specified by the contents of data-name-1 (SYMBOLIC QUEUE) through data-name-4 (SYMBOLIC SUB-QUEUE-3) of the area referenced by cd-name-1 and all the associated sources are activated.
- 3) When the INPUT phrase with the optional word TERMINAL is specified, the logical paths between the source (as defined by the content of the data item referenced by data-name-7 (SYMBOLIC SOURCE)) and all of its associated queues and sub-queues are activated.
- 4) When the I-O TERMINAL phrase is specified, the logical path between the source (as defined by the content of the data item referenced by data-name-3 (SYMBOLIC TERMINAL)) and the program is activated.
- 5) When the OUTPUT phrase is specified, the logical paths are activated for all destinations specified by the content of each occurrence of data-name-5 up to and including the occurrence specified by the content of data-name-1 of the area referenced by cd-name-1.

A.2.4 PURGE statement

The PURGE statement eliminates from the message control system (MCS) a partial message that has been released by one or more SEND statements.

A.2.4.1 General format

PURGE cd-name-1

A.2.4.2 Syntax rules

- 1) Cd-name-1 shall reference an output CD or input-output CD.

A.2.4.3 General rules

- 1) Execution of a PURGE statement causes the MCS to eliminate any partial message awaiting transmission to the destinations specified in the CD referenced by cd-name-1.
- 2) Any message that has associated with it an EMI or EGI is not affected by the execution of a PURGE statement.
- 3) The content of the status key data item and the content of the error key data item (if applicable) of the area referenced by cd-name-1 are updated by the MCS. (See A.1.2, Communication description entry.)

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 1989:2002

A.2.5 RECEIVE statement

The RECEIVE statement makes available a message or a message segment and information about that data.

A.2.5.1 General format

RECEIVE cd-name-1 { MESSAGE
SEGMENT } INTO identifier-1

[NO DATA imperative-statement-1]

[WITH DATA imperative-statement-2]

[END-RECEIVE]

A.2.5.2 Syntax rules

- 1) Cd-name-1 shall reference an input CD or input-output CD.
- 2) Identifier-1 shall reference a data item of category alphanumeric.

A.2.5.3 General rules

- 1) If cd-name-1 references an input CD, the contents of the data items specified by data-name-1 (SYMBOLIC QUEUE) through data-name-4 (SYMBOLIC SUB-QUEUE-3) of the area referenced by cd-name-1 designate the queue structure containing the message. (See A.1.2, Communication description entry.)
- 2) If cd-name-1 references an input-output CD, the content of the data item specified by data-name-3 (SYMBOLIC TERMINAL) of the area referenced by cd-name-1 designates the source of the message. (See A.1.2, Communication description entry.)
- 3) The message, message segment, or portion of a message or segment is transferred to the receiving character positions of the area referenced by identifier-1 aligned to the left without space fill.
- 4) When, during the execution of a RECEIVE statement, the MCS makes data available in the data item referenced by identifier-1, the NO DATA phrase, if specified, is ignored and control is transferred to the end of the RECEIVE statement or, if the WITH DATA phrase is specified, to imperative-statement-2. If control is transferred to imperative-statement-2, execution continues according to the rules for each statement specified in imperative-statement-2. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-2, control is transferred to the end of the RECEIVE statement.
- 5) When, during the execution of a RECEIVE statement, the MCS does not make data available in the data item referenced by identifier-1, one of the three actions listed below will occur. The conditions under which data is not made available are defined by the implementor.
 - a) If the NO DATA phrase is specified in the RECEIVE statement, the RECEIVE operation is terminated with the indication that action is complete and control is transferred to imperative-statement-1. Execution then continues according to the rules for each statement specified in imperative-statement-1. If a procedure branching or conditional statement that causes explicit transfer of control is executed, control is transferred in accordance with the rules for that statement; otherwise, upon completion of the execution of imperative-statement-1, control is transferred to the end of the RECEIVE statement and the WITH DATA phrase, if specified, is ignored.
 - b) If the NO DATA phrase is not specified in the RECEIVE statement, execution of the run unit is suspended until data is made available in the data item referenced by identifier-1.

- c) If one or more queues or subqueues are unknown to the MCS, the appropriate status key code is stored and control is then transferred as if data had been made available. (See table A.1, Communication status key conditions.)
- 6) The data items identified by *cd-name-1* are appropriately updated by the message control system (MCS) at each execution of a RECEIVE statement. (See A.1.2, Communication description entry.)
- 7) A single execution of a RECEIVE statement never returns to the data item referenced by *identifier-1* more than a single message (when the MESSAGE phrase is used) or a single segment (when the SEGMENT phrase is used). However, the MCS does not pass any portion of a message to the run unit until the entire message is available to the MCS, even if the SEGMENT phrase of the RECEIVE statement is specified.
- 8) When the MESSAGE phrase is used, end of segment indicators are ignored, and the following rules apply to the data transfer:
- a) If a message is the same size as the area referenced by *identifier-1*, the message is stored in the area referenced by *identifier-1*.
 - b) If a message size is less than the area referenced by *identifier-1*, the message is aligned to the leftmost character position of the area referenced by *identifier-1* and the contents of the character positions not occupied by characters of the message are not changed.
 - c) If a message size is greater than the area referenced by *identifier-1*, the message fills the area referenced by *identifier-1* left to right starting with the leftmost character of the message. Further RECEIVE statements that reference the same queue, sub-queue, ... , shall be executed to transfer the remainder of the message into the area referenced by *identifier-1*. The remainder of the message, for the purposes of applying general rules 8a, 8b, and 8c, is treated as a new message.
 - d) If an end of group indicator is associated with the text accessed by the RECEIVE statement, the existence of an end of message indicator is implied.
- 9) When the SEGMENT phrase is used, the following rules apply:
- a) If a segment is the same size as the area referenced by *identifier-1*, the segment is stored in the area referenced by *identifier-1*.
 - b) If the segment size is less than the area referenced by *identifier-1*, the segment is aligned to the leftmost character position of the area referenced by *identifier-1* and the contents of character positions not occupied by characters of the segment are not changed.
 - c) If a segment size is greater than the area referenced by *identifier-1*, the segment fills the area referenced by *identifier-1* left to right starting with the leftmost character of the segment. Further RECEIVE statements that reference the same queue, sub-queue, ... , shall be executed to transfer the remainder of the segment into the area referenced by *identifier-1*. The remainder of the segment, for the purposes of applying general rules 9a, 9b, and 9c, is treated as a new segment.
 - d) If an end of message indicator or end of group indicator is associated with the text accessed by the RECEIVE statement, the existence of an end of segment indicator is implied.
- 10) Once the execution of a RECEIVE statement has returned a portion of a message, only subsequent execution of RECEIVE statements in that run unit shall cause the remaining portion of the message to be returned.

A.2.6 SEND statement

The SEND statement causes a message, a message segment, or a portion of a message or segment to be released to one or more output queues maintained by the message control system (MCS).

A.2.6.1 General format

Format 1 (message):

SEND cd-name-1 FROM identifier-1

Format 2 (segment-indicator):

$$\begin{array}{c} \text{SEND } \underline{\text{cd-name-1}} \left[\underline{\text{FROM}} \underline{\text{identifier-1}} \right] \left\{ \begin{array}{l} \text{WITH } \underline{\text{identifier-2}} \\ \text{WITH } \underline{\text{ESI}} \\ \text{WITH } \underline{\text{EMI}} \\ \text{WITH } \underline{\text{EGI}} \end{array} \right\} \\ \left[\left\{ \begin{array}{l} \underline{\text{BEFORE}} \\ \underline{\text{AFTER}} \end{array} \right\} \text{ADVANCING} \left\{ \begin{array}{l} \left\{ \begin{array}{l} \underline{\text{identifier-3}} \\ \underline{\text{integer-1}} \end{array} \right\} \left[\begin{array}{l} \underline{\text{LINE}} \\ \underline{\text{LINES}} \end{array} \right] \\ \left\{ \begin{array}{l} \underline{\text{mnemonic-name-1}} \\ \underline{\text{PAGE}} \end{array} \right\} \end{array} \right\} \right] \\ \left[\underline{\text{REPLACING LINE}} \right] \end{array}$$

A.2.6.2 Syntax rules

- 1) Cd-name-1 shall reference an output CD or input-output CD.
- 2) Identifier-1 shall reference a data item of class alphanumeric.
- 3) Identifier-2 shall reference a one-character integer without an operational sign.
- 4) Identifier-3 shall reference an integer data item.
- 5) When mnemonic-name-1 is specified, the name is associated with a feature-name specified by the implementor. Mnemonic-name-1 is defined in the SPECIAL-NAMES paragraph in the environment division.
- 6) Integer-1 or the value of the data item referenced by identifier-3 may be zero.
- 7) If identifier-1 is a function-identifier, it shall reference an alphanumeric function.

A.2.6.3 General rules

ALL FORMATS

- 1) When a receiving communication device (printer, display screen, etc.) is oriented to a fixed line size:
 - a) Each message or message segment begins at the leftmost character position of the physical line.
 - b) A message or message segment that is smaller than the physical line size is released so as to appear space filled to the right.

- c) Excess characters of a message or message segment are not truncated. Characters are packed to a size equal to that of the physical line and then transmitted to the output device. The process continues on the next line with the excess characters.
- 2) When a receiving communication device (display screen, another computer, etc.) is oriented to handle variable-length messages, each message or message segment will begin on the next available character position of the communication device.
- 3) As part of the execution of a SEND statement, the MCS will interpret the content of the text length data item of the area referenced by cd-name-1 to be the user's indication of the number of leftmost character positions of the data item referenced by identifier-1 from which data is to be transferred. (See A.1.2, Communication description entry.)

If the content of the text length data item of the area referenced by cd-name-1 is zero, no characters of the data item referenced by identifier-1 are transferred.

If the content of the text length data item of the area referenced by cd-name-1 is outside the range of zero through the size of the data item referenced by identifier-1 inclusive, an error is indicated by the value of the status key data item of the area referenced by cd-name-1, and no data is transferred. (See table A.1, Communication status key conditions.)

- 4) As part of the execution of a SEND statement, the content of the status key data item of the area referenced by cd-name-1 is updated by the MCS. (See A.1.2, Communication description entry.)
- 5) The effect of having special control characters within the content of the data item referenced by identifier-1 is undefined.
- 6) A single execution of a SEND statement represented by format 1 releases only a single portion of a message segment or a single portion of a message to the MCS.

A single execution of a SEND statement represented by format 2 never releases to the MCS more than a single message or a single message segment as indicated by the content of the data item referenced by identifier-2 or by the specified indicator ESI, EMI, or EGI.

However, the MCS will not transmit any portion of a message to a communication device until the entire message has been released to the MCS.

- 7) During the execution of the run unit, the disposition of a portion of a message that is not terminated by an EMI or EGI or that has not been eliminated by the execution of a PURGE statement is undefined. However, the message does not logically exist for the MCS and hence shall not be sent to a destination.
- 8) Once the execution of a SEND statement has released a portion of a message to the MCS, only subsequent execution of SEND statements in the same run unit shall cause the remaining portion of the message to be released.

FORMAT 2

- 9) The content of the data item referenced by identifier-2 indicates that the content of the data item referenced by identifier-1, when specified, is to have an associated end of segment indicator, end of message indicator, end of group indicator, or no indicator (which implies a portion of a message or a portion of a segment). If identifier-1 is not specified, only the indicator is transmitted to the MCS. Table A.3, SEND statement indicators, shows the indicator specified by the contents of identifier-2.

Table A.3 — SEND statement indicators

If the content of the data item referenced by identifier-2 is	then the content of data item referenced by identifier-1 has an associated	which means
0	no indicator	portion of message or of a segment
1	end of segment indicator (ESI)	end of current segment
2	end of message indicator (EMI)	end of current message
3	end of group indicator (EGI)	end of current group of messages

Any character other than 1, 2, or 3 will be interpreted as 0.

If the content of the data item referenced by identifier-2 is other than 1, 2, or 3, and identifier-1 is not specified, then an error is indicated by the value in the status key data item of the area referenced by cd-name-1, and no data is transferred.

- 10) The WITH EGI phrase indicates to the MCS that the group of messages is complete.

The WITH EMI phrase indicates to the MCS that the message is complete.

The WITH ESI phrase indicates to the MCS that the message segment is complete.

The MCS will recognize these indications and establish whatever is necessary to maintain segment, message, or group control.

- 11) The hierarchy of ending indicators is EGI, EMI, and ESI. An EGI need not be preceded by an ESI or EMI. An EMI need not be preceded by an ESI.
- 12) The ADVANCING phrase allows control of the vertical positioning of each message or message segment on a communication device where vertical positioning is applicable. If vertical positioning is not applicable on the device, the MCS will ignore the vertical positioning specified or implied.
- 13) If identifier-2 is specified and the content of the data item referenced by identifier-2 is zero, the ADVANCING phrase and the REPLACING phrase, if specified, are ignored by the MCS.
- 14) On a device where vertical positioning is applicable and the ADVANCING phrase is not specified, automatic advancing will be provided by the implementor to act as if the user had specified AFTER ADVANCING 1 LINE.
- 15) If the ADVANCING phrase is implicitly or explicitly specified and vertical positioning is applicable, the following rules apply:
- If integer-1 or identifier-3 is specified, characters transmitted to the communication device are repositioned vertically downward the number of lines equal to integer-1 or the value of the data item referenced by identifier-3.
 - If the value of the data item referenced by identifier-3 is negative, the results are undefined.
 - When mnemonic-name-1 is specified, characters transmitted to the communication device are positioned according to the rules specified by the implementor for that feature and the associated communication device.
 - If the BEFORE phrase is used, the message or message segment is represented on the communication device before vertical repositioning according to general rules 15a and 15c.

- e) If the AFTER phrase is used, the message or message segment is represented on the communication device after vertical positioning according to general rules 15a and 15c.
 - f) If PAGE is specified, characters transmitted to the communication device are represented on the device before or after (depending upon the phrase used) the device is repositioned to the next (new) page. If PAGE is specified but page has no meaning in conjunction with a specific device, then advancing is provided by the implementor to act as if the user had specified BEFORE or AFTER (depending upon the phrase used) ADVANCING 1 LINE.
- 16) When a receiving communication device is a character-imaging device on which it is possible to present two or more characters at the same position and the device permits the choice of either the second or subsequent characters appearing superimposed on characters already displayed at that position or each character appearing in the place of the characters previously transmitted to that line:
- a) If the REPLACING phrase is specified, the characters transmitted by the SEND statement replace all characters that may have previously been transmitted to the same line beginning with the leftmost character position of the line.
 - b) If the REPLACING phrase is not specified, the characters transmitted by the SEND statement appear superimposed upon the characters that may have previously been transmitted to the same line beginning with the leftmost character position of the line.
- 17) When a receiving communication device does not support the replacement of characters, regardless of whether or not the REPLACING phrase is specified, the characters transmitted by the SEND statement appear superimposed upon the characters that may have previously been transmitted to the same line, beginning with the leftmost character position of the line.
- 18) When a receiving communication device does not support the superimposition of two or more characters at the same position, regardless of whether or not the REPLACING phrase is specified, the characters transmitted by the SEND statement replace all characters that may have previously been transmitted to the same line beginning with the leftmost character position of the line.

Annex B (normative)

Language element lists

B.1 Implementor-defined language element list

The following is a list of the language elements within this International Standard that depend on implementor definition to complete the specification of the elements. Each element is defined as required, optional, or conditionally required. Furthermore, each element is defined as requiring (or not requiring) user documentation. These terms have the following meaning:

- Required: The element shall be provided by the implementor. When the element is part of a feature that is optional or processor-dependent, the item is not required if the optional or processor-dependent feature is not implemented.
- Optional: The element may be provided at the implementor's option.
- Conditionally required: If the associated feature or language element is implemented then this element is also required.
- Documentation required: If the element is provided by the implementor, the implementor's user documentation shall document the element or shall reference other documentation that fulfills this requirement.

A short header and informative optional parenthetical text provide a paraphrase of the normative detailed specification located in the body of this International Standard and direct the reader to that detail. A cross-reference is provided for all items.

- 1) ACCEPT statement (conversion of data). This item is required. This item shall be documented in the implementor's user documentation. (14.8.1, ACCEPT statement, general rules 1 and 14)
- 2) ACCEPT statement (device used when FROM is unspecified). This item is required. This item shall be documented in the implementor's user documentation. (14.8.1, ACCEPT statement, general rule 5)
- 3) ACCEPT statement, screen format (result when screen items overlap). This item is required. This item shall be documented in the implementor's user documentation. (14.8.1, ACCEPT statement, general rule 22)
- 4) ACCEPT statement, screen format (when data is verified, behavior for inconsistent data). This item is required. This item shall be documented in the implementor's user documentation. (14.8.1, ACCEPT statement, general rule 20)
- 5) ACCEPT statement (size of data transfer). This item is required. This item shall be documented in the implementor's user documentation. (14.8.1, ACCEPT statement, general rule 2)
- 6) Alignment of alphanumeric group items (relative to first elementary item). This item is required. This item shall be documented in the implementor's user documentation. (8.5.1.5.1, Alignment of alphanumeric groups and of data items of usage display and 8.5.1.5.5, Alignment of strongly-typed group items)
- 7) Alignment of data for increased efficiency (special or automatic alignment: interpretation, implicit filler, semantics of statements). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.5.1.5.4, Item alignment for increased object-code efficiency; 13.16.53, SYNCHRONIZED clause, general rule 9)

- 8) ALPHABET clause (ordinal number of characters in the native coded character sets). This item is required. This item shall be documented in the implementor's user documentation. (12.2.6, SPECIAL-NAMES paragraph, general rule 6)
- 9) Alphanumeric literals (number of hexadecimal digits that map to an alphanumeric character). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.1, Alphanumeric literals, syntax rule 6)
- 10) ASSIGN clause, USING phrase (meaning and rules for operands; consistency rules). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (12.3.4, File control entry, general rule 4)
- 11) BACKGROUND-COLOR clause (the background color when the clause is not specified or the value specified is not in the range 0 to 7). This item is required. This item shall be documented in the implementor's user documentation. (13.16.4, BACKGROUND-COLOR clause, general rule 4)
- 12) Byte (number of bits in). This item is required. This item shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set)
- 13) CALL statement (rules for program-name formation for a non-COBOL program). This item is conditionally required because it is conditioned upon support for calling non-COBOL programs. This item shall be documented in the implementor's user documentation. (14.8.4, CALL statement, general rule 3b)
- 14) CALL statement (runtime resources that are checked). This item is required. This item shall be documented in the implementor's user documentation. (14.8.4, CALL statement, general rule 3c)
- 15) CALL statement (rules for locating a non-COBOL program). This item is conditionally required because it is conditioned upon support for calling non-COBOL programs. This item shall be documented in the implementor's user documentation. (14.8.4, CALL statement, general rule 3b)
- 16) CALL statement (calling a non-COBOL program). This item is required. This item shall be documented in the implementor's user documentation. (14.8.4, CALL statement, general rule 3f)
- 17) CALL statement (other effects of the CALL statement). This item is required. This item shall be documented in the implementor's user documentation. (14.8.4, CALL statement, general rule 3g2)
- 18) CANCEL statement (result of canceling an active program when EC-PROGRAM-CANCEL-ACTIVE is not enabled). This item is required. This item shall be documented in the implementor's user documentation. (14.8.5, CANCEL statement, general rule 5)
- 19) CANCEL statement (result of canceling a non-COBOL program). This item is required. This item shall be documented in the implementor's user documentation. (14.8.5, CANCEL statement, general rule 10)
- 20) CHAR function (which one of the multiple characters is returned). This item is required. This item shall be documented in the implementor's user documentation. (15.13, CHAR function, returned values, rule 2)
- 21) CHAR-NATIONAL function (which one of the multiple characters is returned). This item is required. This item shall be documented in the implementor's user documentation. (15.14, CHAR-NATIONAL function, returned values, rule 2)
- 22) CLOSE statement (closing operations). This item is required. This item shall be documented in the implementor's user documentation. (14.8.6, CLOSE statement, general rule 3c)
- 23) COBOL character repertoire (encoding of, mapping of, substitute graphics). This item is required. This item shall be documented in the implementor's user documentation. (8.1.2, COBOL character repertoire; 8.1.2, COBOL character repertoire, general rules 1 and 5)

- 24) COBOL character repertoire (if more than one encoding in a compilation group, control functions if any). Multiple encodings are optional and control functions are optional. This item is conditionally required because it is conditioned upon support of multiple encodings in a compilation group where control functions are defined for switching between encodings. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.1.2, COBOL character repertoire)
- 25) Color number (for a monochrome terminal, the mapping of the color attributes onto other attributes). This item is required. This item shall be documented in the implementor's user documentation. (9.2.7, Color number)
- 26) Communication error key. This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (A.1.2.5, Error key values, Table A.2 —, Error key values)
- 27) Communication status key 9x. This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (A.1.2.4, Communication status key conditions, Table A.1 —, Communication status key conditions)
- 28) Compiler directives, compiler directive IMP (syntax rules and general rules). This item is conditionally required because it is conditioned upon support for an IMP directive. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (7.2, Compiler directives, syntax rule 9 and general rule 3)
- 29) Computer's coded character set (characters in and encoding of computer's alphanumeric coded character set and computer's national coded character set, encoding for usage DISPLAY and usage NATIONAL). This item is required. This item shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set; 8.3.1.2.1, Alphanumeric literals, syntax rule 2; 8.3.1.2.4, National literals, syntax rule 2)
- 30) Computer's coded character set (correspondence between alphanumeric and national characters). This item is required. This item shall be documented in the implementor's user documentation. (14.8.24, MOVE statement, general rule 4; 8.8.4.1.1.6.2, Locale-based comparison; 15.21, DISPLAY-OF function, returned value rules 1 and 3; 15.53, NATIONAL-OF function, returned value rules 1 and 3)
- 31) Computer's coded character set (for literals, correspondence between compile-time and runtime character sets, when conversion takes place). This item is conditionally required because it is conditioned upon there being a difference between the compile-time and runtime computer's coded character sets. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set)
- 32) Computer's coded character set (when composite alphanumeric and national, mapping of characters to each). This item is conditionally required because it is conditioned upon support for a composite alphanumeric and national computer character set. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set)
- 33) Computer's coded character set (when more than one encoding, the mechanism for selecting encoding for runtime). This item is conditionally required because it is conditioned upon support for more than one encoding of a computer's coded character set. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set)
- 34) Computer's coded character set (whether UTF-8 or mixed alphanumeric and national characters recognized in class alphanumeric; applicable syntax and general rules). This item is conditionally required because it is conditioned upon support for UTF-8 or mixing alphanumeric and national characters in literals and data items of class alphanumeric. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.1.1, Computer's coded character set; 8.3.1.2.1, Alphanumeric literals, syntax rule 2 and general rule 3)

- 35) COPY statement (rules for identifying and locating default library text). This item is required. This item shall be documented in the implementor's user documentation. (7.1.2, COPY statement, syntax rule 5 and general rule 3)
- 36) CRT status 9xxx (the value of xxx for unsuccessful completion with implementor-defined conditions). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.2.3, CRT status)
- 37) Cursor (the cursor movement if keys are defined that change the cursor position). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.2.4, Cursor)
- 38) Data storage (possible representations when implementation provides multiple ways of storing data). This item is conditionally required because it is conditioned on whether the implementation provides multiple ways of storing data. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.5.1, Computer independent data description)
- 39) DEFINE directive (mechanism for providing value of a compilation-variable-name from the operating environment). This item is required. This item shall be documented in the implementor's user documentation. (7.2.9, DEFINE directive, general rule 4)
- 40) Devices that allow concurrent access. This item is required. This item shall be documented in the implementor's user documentation. (9.1.14, Sharing mode)
- 41) DISPLAY statement (data conversion). This item is required. This item shall be documented in the implementor's user documentation. (14.8.10, DISPLAY statement, general rule 1)
- 42) DISPLAY statement (size of data transfer). This item is required. This item shall be documented in the implementor's user documentation. (14.8.10, DISPLAY statement, general rule 2)
- 43) DISPLAY statement (standard display device). This item is required. This item shall be documented in the implementor's user documentation. (14.8.10, DISPLAY statement, general rule 7)
- 44) ENTRY-CONVENTION clause (entry-convention-names, their meanings and the default when not specified). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (11.8.5, ENTRY-CONVENTION clause, general rule 2)
- 45) EXIT and GOBACK statements (execution continuation in a non-COBOL runtime element). This item is conditionally required, because it is conditioned upon support for calling from non-COBOL programs. This item shall be documented in the implementor's user documentation. (14.8.13, EXIT statement, general rule 4; 14.8.17, GOBACK statement, general rule 1)
- 46) Exponentiation (results for certain operand values). This item is required. This item shall be documented in the implementor's user documentation. (8.8.1.3.6, Exponentiation, rule 2e)
- 47) External repository (mechanism for specifying whether checking and updating occur). This item is required. This item shall be documented in the implementor's user documentation. (8.13, External repository)
- 48) External repository information (other information beyond the required information). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.13, External repository)
- 49) Externalized names (formation and mapping rules). This item is required. This item shall be documented in the implementor's user documentation. (7.2.8, CALL-CONVENTION directive, general rules 2a and 2b; 8.3.1.1.1, User-defined words)

- 50) Fatal exception condition (whether detected at compile time, circumstances under which detected). This item is optional. This item if provided by the implementor, does not have to be included in the implementor's user documentation. (14.5.12.1.2, Fatal exception conditions)
- 51) Fatal exception condition (whether or not execution will continue, how it will continue, and how any receiving operands are affected when events that would cause a fatal exception to exist occur but checking for that condition is not enabled). This item is required. This item shall be documented in the implementor's user documentation. (14.5.12.1.2, Fatal exception conditions)
- 52) FILE-CONTROL entry, ASSIGN clause (TO phrase meaning and rules). This item is required. This item shall be documented in the implementor's user documentation. (12.3.4, File control entry, syntax rules 5 and 6)
- 53) FILE-CONTROL entry, ASSIGN clause (consistency rules for external file connectors). This item is required. This item shall be documented in the implementor's user documentation. (12.3.4, File control entry, general rule 1)
- 54) FILE-CONTROL entry, ASSIGN clause (USING phrase meaning and rules). This item is required. This item shall be documented in the implementor's user documentation. (12.3.4, File control entry, general rule 4)
- 55) Figurative constant values (representation of zero, space, and quote). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.5, Figurative constant values)
- 56) File sharing (interaction with other facilities and languages). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.1.14, Sharing mode)
- 57) File sharing (which devices allow concurrent access to the file). This item is required. This item shall be documented in the implementor's user documentation. (9.1.14, Sharing mode)
- 58) File sharing (default mode when unspecified). This item is required. This item shall be documented in the implementor's user documentation. (9.1.3, File connector; 9.1.14, Sharing mode; 14.8.26, OPEN statement, general rule 22)
- 59) Fixed file attribute (whether the ability to share a file is a fixed file attribute). This item is required. This item shall be documented in the implementor's user documentation. (9.1.6, Fixed file attributes)
- 60) FLAG-85 directive (warning mechanism). This item is required. This item shall be documented in the implementor's user documentation. (7.2.11, FLAG-85 directive, general rule 1)
- 61) Floating-point numeric item (alignment when used as a receiving operand). This item is required. This alignment does not have to be documented in the implementor's user documentation. (14.5.8, Alignment of data within data items, rule 2)
- 62) Floating-point numeric literals (maximum permitted value and minimum permitted value of the exponent). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.2.2, Floating-point numeric literals, rule 3)
- 63) FOREGROUND-COLOR clause (the foreground color when the clause is not specified or the value specified is not in the range 0 to 7). This item is required. This item shall be documented in the implementor's user documentation. (13.16.21, FOREGROUND-COLOR clause, general rule 4)
- 64) FORMAT clause (representation produced). This item is required. This item shall be documented in the implementor's user documentation. (13.16.22, FORMAT clause, general rule 10)
- 65) FORMAT clause (exclusions on restoring to same internal representation). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (13.16.22, FORMAT clause, general rule 11)

- 66) Format validation (rules for checking items of usages other than display or national). This item is required. This item shall be documented in the implementor's user documentation. (13.16.38, PICTURE clause, general rule 14; 13.16.58, USAGE clause, general rule 3)
- 67) Function-identifier (execution of a non-COBOL function when a function-prototype-name is specified). This item is conditionally required because it is conditioned upon support for calling non-COBOL functions. This item shall be documented in the implementor's user documentation. (8.4.2.2, Function-identifier, general rule 5d)
- 68) Function-identifier (object time resources that are checked). This item is required. This item shall be documented in the implementor's user documentation. (8.4.2.2, Function-identifier, general rule 5c)
- 69) Function-identifier (result when argument rules are violated and checking for the EC-ARGUMENT-FUNCTION exception condition is not enabled). This item is required. The value returned does not have to be documented in the implementor's user documentation. (15.2, Arguments)
- 70) Function keys (context-dependent keys, function number, and method for enabling and disabling). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.2.2, Function keys)
- 71) Function returned values (characteristics, representation, and returned value for native arithmetic). This item is required. The value returned does not have to be documented in the implementor's user documentation. (15.3.1, Numeric and integer functions)
- 72) Hexadecimal alphanumeric literals (mapping for non-existing corresponding character). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.1, Alphanumeric literals, general rule 4)
- 73) Hexadecimal alphanumeric literals (mapping when characters not multiples of four bits). This item is conditionally required because it is conditioned upon a computer's coded character set with characters that are not multiples of four bits. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.3.1.2.1, Alphanumeric literals, general rule 4)
- 74) Hexadecimal national literals (mapping for non-existing corresponding character). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.4, National literals, general rule 4)
- 75) Hexadecimal national literals (mapping when characters not multiples of four bits). This item is conditionally required because it is conditioned upon a computer's coded character set with characters that are not multiples of four bits. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (8.3.1.2.4, National literals, general rule 4)
- 76) Implementor-defined exception conditions, EC-xxx-IMP (specification of xxx, meaning). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (Table 14, Exception-names and exception conditions)
- 77) INVOKE statement (behavior when invoking a non-COBOL method). This item is required. This item shall be documented in the implementor's user documentation. (14.8.22, INVOKE statement, general rule 2b)
- 78) INVOKE statement (execution time resources that are checked). This item is required. This item shall be documented in the implementor's user documentation. (14.8.22, INVOKE statement, general rule 7d)
- 79) I-O status (action taken for fatal exception conditions). This item is required. This item shall be documented in the implementor's user documentation. (9.1.12, I-O status)
- 80) I-O status (if more than one value applies). This item is required. The internal procedure employed by the implementor does not have to be documented in the implementor's user documentation. (9.1.12, I-O status)

- 81) I-O status, permanent error (technique for error correction). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.1.12, I-O status)
- 82) I-O status 0x (value of x). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.1.12.2, Implementor-defined successful completion)
- 83) I-O status 24 (manner in which the boundaries of a file are defined). This item is required. This item shall be documented in the implementor's user documentation. (9.1.12.4, Invalid key condition with unsuccessful completion)
- 84) I-O status 34 (manner in which the boundaries of a file are defined). This item is required. This item shall be documented in the implementor's user documentation. (9.1.12.5, Permanent error condition with unsuccessful completion)
- 85) I-O status 52 (conditions under which deadlock is detected). This item is required. This item shall be documented in the implementor's user documentation. (9.1.12.7, Record operation conflict condition with unsuccessful completion)
- 86) I-O status 9x (value of x). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (9.1.12.9, Implementor-defined condition with unsuccessful completion)
- 87) LEAP-SECOND directive (whether a value greater than 59 seconds may be reported and, if so, the maximum number of seconds that may be reported). This item is required. This item shall be documented in the implementor's user documentation. (7.2.14, LEAP-SECOND directive, general rule 2; 14.8.1, ACCEPT statement, general rule 11; 15.16, CURRENT-DATE function, returned value rule 1; 15.80, WHEN-COMPILED function, return value rule 1)
- 88) Life cycle for objects (timing and algorithm for taking part in continued execution). This item is required. This item need not be documented in the implementor's user documentation. (9.3.14.2, Life cycle for instance objects)
- 89) Linkage section (whether access to linkage section items is meaningful when called from a non-COBOL program). This item is conditionally required because it is conditioned upon support for calling a COBOL program from a non-COBOL program. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (13.6, Linkage section)
- 90) Listings (whether and when produced by the compiler, effect of logical conversion). This item is required. This item shall be documented in the implementor's user documentation. (6.4, Logical conversion; 7, Compiler directing facility; 7.2.15, LISTING directive, general rule 1)
- 91) Locale specification (how user and system defaults defined; at least one user and one system default). This item is required. This item need not be documented in the implementor's user documentation. The implementor may specify that the user locale and the system locale are the same locale. (8.2, Locales)
- 92) Locale specification (manner of implementation). This item is required because at least one default locale is required. This item does not have to be documented in the implementor's user documentation. (8.2, Locales)
- 93) Locale switch (whether a switch by a non-COBOL runtime module is recognized by COBOL). This item is conditionally required because it is conditioned upon support for activation of non-COBOL runtime modules. This item, if provided, shall be documented in the implementor's user documentation. (8.2, Locales)
- 94) METHOD-ID paragraph (actual method-name used when PROPERTY phrase is specified). This item is required. This item shall be documented in the implementor's user documentation. (11.6, METHOD-ID paragraph, general rule 1)

ISO/IEC 1989:2002(E)

Implementor-defined language element list

- 95) National literals (number of hexadecimal digits that map to a national character). This item is required. This item shall be documented in the implementor's user documentation. (8.3.1.2.4, National literals, syntax rule 5)
- 96) Native arithmetic (techniques used, intermediate data item). This item is required. The internal procedure employed by the implementor does not have to be documented in the implementor's user documentation. (8.8.1.2, Native arithmetic; 11.8.4, ARITHMETIC clause; 14.6.6, Arithmetic statements)
- 97) Native arithmetic (when an operand or arithmetic expression is an integer). This item is required. This item shall be documented in the implementor's user documentation. (5.4, Integer operands)
- 98) NULL (value of NULL). This item is required. This item need not be documented in the implementor's user documentation. (8.4.2.7, NULL, general rule 1; 8.4.2.10, Predefined-address, General rules 1 and 2)
- 99) OBJECT-COMPUTER paragraph (default object computer). This item is required. This item shall be documented in the implementor's user documentation. (12.2.5, OBJECT-COMPUTER paragraph, general rules 3 and 4)
- 100) OBJECT-COMPUTER paragraph (computer-name and implied equipment configuration). This item is optional. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (12.2.5, OBJECT-COMPUTER paragraph, general rule 2)
- 101) OCCURS clause (range of values allowed in the index). This item is required. This item shall be documented in the implementor's user documentation. (13.16.36, OCCURS clause, general rule 2)
- 102) OPEN statement (validation of fixed file attributes). This item is required. This item shall be documented in the implementor's user documentation. (14.8.26, OPEN statement, general rule 8)
- 103) OPEN statement with OUTPUT phrase (positioning of the output file with regard to physical page boundaries). This item is required. This item shall be documented in the implementor's user documentation. (14.8.26, OPEN statement, general rule 16)
- 104) OPEN statement without the SHARING phrase and no SHARING clause in the file control entry (definition of sharing mode established for each file connector). This item is required. This item shall be documented in the implementor's user documentation. (14.8.26, OPEN statement, general rule 22)
- 105) Ordering table (allowable content of literal identifying an ordering table that complies with ISO/IEC 14651:2001). This item is conditionally required because it is conditioned upon support of ISO/IEC 14651:2001. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (12.2.6, SPECIAL-NAMES paragraph, general rule 17)
- 106) PADDING CHARACTER clause (default character). This item is conditionally required because it is conditioned upon the existence of a device that requires padding. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (12.3.4.10, PADDING CHARACTER clause, general rule 5)
- 107) Parameterized classes (when expanded). This item is required. This item need not be documented in the implementor's user documentation. (7, Compiler directing facility)
- 108) Procedure division header rules when either the activating or the activated runtime element is not a COBOL element (restrictions and mechanisms for all supported language products with details such as the matching of parameters, data type representation, returning of a value, and omission of parameters). This item is conditionally required because it is conditioned upon support for a language other than COBOL. This item, if provided by the implementor, shall be documented in the implementor's user documentation. (14, Procedure division, general rule 13)