

RATIONALE

REVISE AS15720 TO ADD ZINC NICKEL FINISH, PIPE THREAD NOTE FOR CLARITY AND QPL/QML NOTE.

REV.  
B

AS15720

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

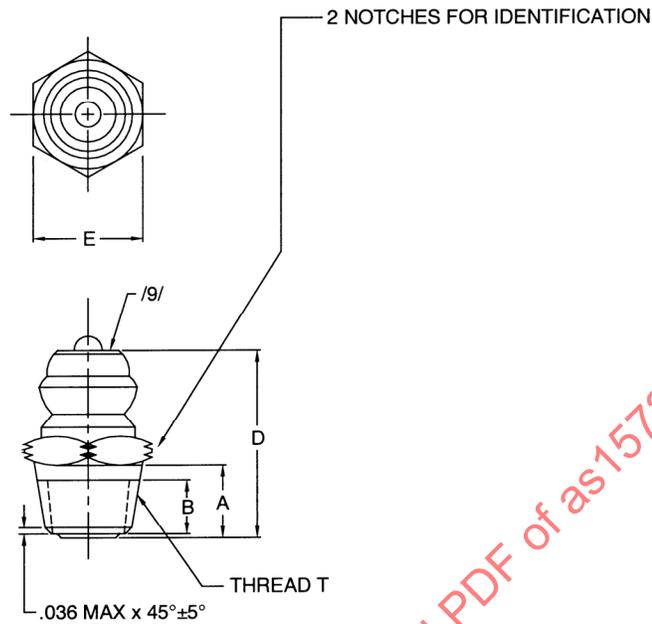


FIGURE 1 - FITTING, STRAIGHT


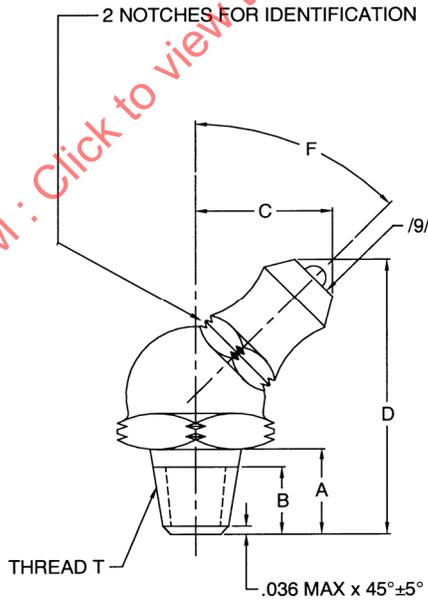


FIGURE 2 - FITTING, ELBOW

SAENORM.COM : Click to view the full PDF of as15720b

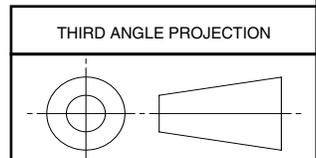

CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /5/ AS35411



**AEROSPACE STANDARD**

FITTING, LUBRICATION, HYDRAULIC, THROAT OR SURFACE CHECK, .250-28 TAPER THREADS, CORROSION RESISTANT STEEL, TYPE VII

**AS15720**  
SHEET 1 OF 3

**REV.  
B**

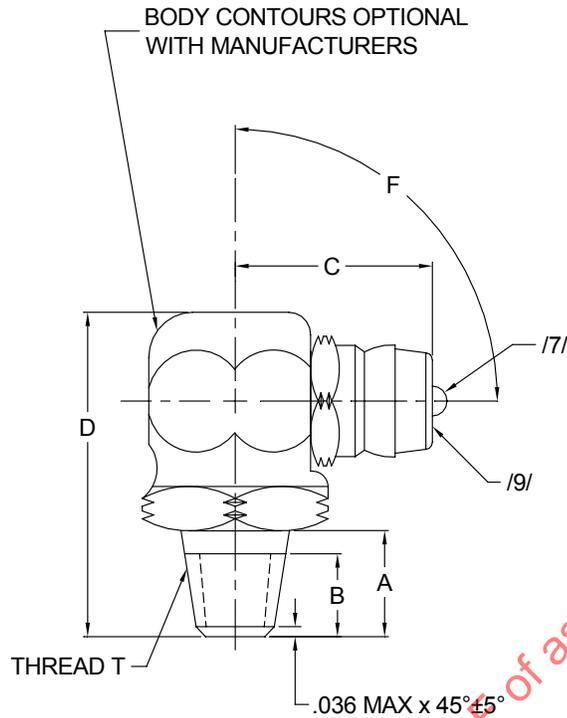


FIGURE 3 - FITTING, ELBOW, 90°

TABLE 1 - DIMENSIONS AND WEIGHTS

PART NUMBER	FIG.	THREAD T PER FED-STD-H28/2	A ±.031	B /6/ ±.004	C MAX	D ±.062	E /8/ ±.003	F ±5°	LB/100 APPROX. REF. CRES
AS15720-1	1	.250-28 UNS-2A	.188	.1094	—	.500	.312	—	
AS15720-2	2	.250-28 UNS-2A	.188	.1094	.406	.875	.375	45°	
AS15720-3	3	.250-28 UNS-2A	.188	.1094	.531	.781	.375	90°	

## NOTES:

1. MATERIAL: CORROSION RESISTANT STEEL. SEE PROCUREMENT SPECIFICATION.
2. HEAT TREATMENT: NONE.
3. FINISH: CODE LETTER U - ZINC NICKEL PLATE, SEE PROCUREMENT SPECIFICATION.
4. IDENTIFICATION: MARK PER AS478 METHOD 35D MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, AND PART NUMBER.
- /5/ PROCUREMENT SPECIFICATION: AS35411 EXCEPT AS SPECIFIED ON THIS STANDARD. THE DRAWING AND ALL THE SPECIFIED DOCUMENTS DEFINE THE REQUIREMENTS FOR THE END PRODUCT. ALL THE REQUIREMENTS MUST BE MET IN ORDER TO IDENTIFY THE ITEM WITH THAT PART NUMBER. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL BY STANDARD PAGE SUPPLEMENT OR SIMILAR MEANS.
- /6/ MINIMUM EFFECTIVE THREAD LENGTH.
- /7/ SURFACE OR THROAT CHECK OPTIONAL.
- /8/ "E" DIMENSION ALTERNATE FOR -2 AND -3: .438.