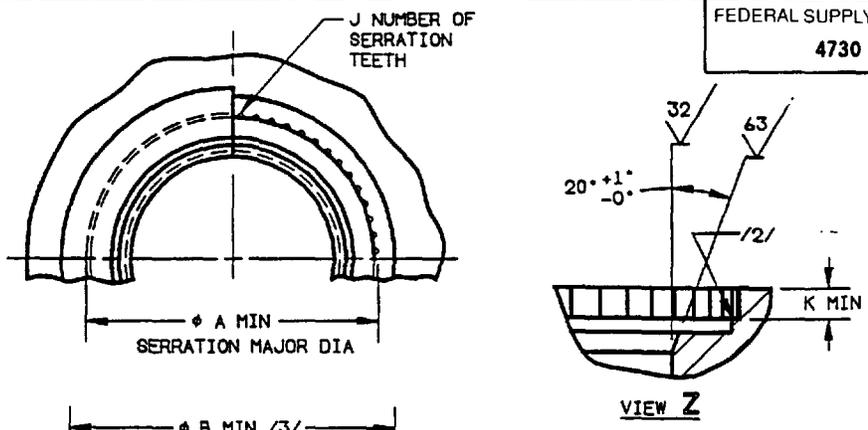


**AS4201**


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

FEDERAL SUPPLY CLASS  
**4730**



**FIGURE 1**  
**TABLE 1**

PORT NUMBER	TUBE OD REF	T THREAD MIL-S-8879 CLASS-3B	T THREAD CONTROLLED MINOR DIA	A	B /3/	C	D
AS4201-02	.125	.2160-28UNJF	.1827-.1857	.408	.65	.381-.384	.254-.256
AS4201-03	.188	.2500-28UNJF	.2167-.2197	.478	.80	.448-.451	.286-.288
AS4201-04	.250	.3125-24UNJF	.2734-.2764	.524	.88	.495-.498	.339-.341
AS4201-05	.312	.3750-24UNJF	.3359-.3389	.635	1.03	.601-.604	.401-.403
AS4201-06	.375	.4375-20UNJF	.3903-.3933	.710	1.10	.675-.678	.464-.466
AS4201-07	.438	.5000-20UNJF	.4528-.4558	.778	1.25	.747-.750	.523-.525
AS4201-08	.500	.5625-18UNJF	.5099-.5129	.826	1.35	.784-.787	.582-.584
AS4201-09	.562	.6250-24UNJEF	.5859-.5889	.902	1.40	.860-.863	.660-.662
AS4201-10	.625	.6875-24UNJEF	.6484-.6514	1.052	1.52	1.015-1.018	.725-.727
AS4201-11	.688	.7500-20UNJEF	.7028-.7058	1.116	1.68	1.073-1.076	.773-.775



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: MIL-F-85720

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space  
**INTERNATIONAL**

**AEROSPACE STANDARD**  
PORT - RING LOCKED FLUID CONNECTION TYPE  
8000 psi  
STANDARD DIMENSIONS FOR

**AS4201**  
SHEET 1 OF 2

ISSUED 1992-06-29 REVISED