

REV.
A

AS5969

RATIONALE
ADDED -20 SIZE AND NOTE 13 AND 14, REVISED NOTES
4, 8, 9 AND 10, REVISED DIMENSIONS AND WEIGHT HEADER


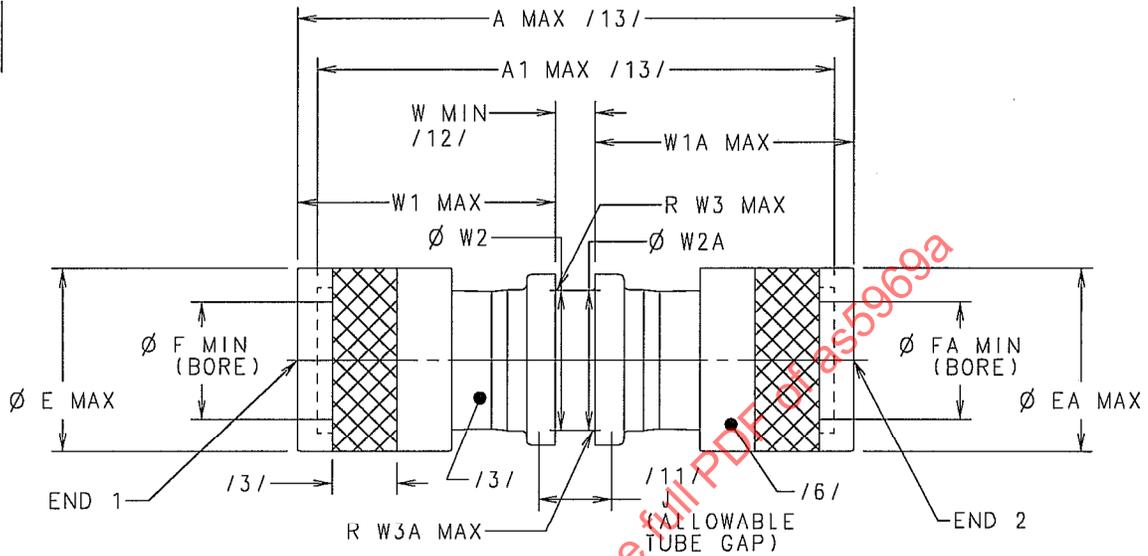


FIGURE 1 - UNION, SWAGE

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS5958

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING ASSEMBLY, UNION,
AXIALLY SWAGED, HYDRAULIC,
5080 PSI

AS5969
SHEET 1 OF 3

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1A - DIMENSIONS A THROUGH J

BASIC NO. AS5969 /15/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	A	A1	E	EA	F	FA	J / 11/ ALLOWABLE TUBE GAP	
0404	.2500	.2500	1.134	.975	.466	.466	.253	.253	.150	±.150
0604	.3750	.2500	1.621	1.448	.609	.466	.378	.253	.300	±.300
0606	.3750	.3750	1.568	1.351	.609	.609	.378	.378	.150	±.150
0806	.5000	.3750	2.032	1.785	.783	.609	.504	.378	.300	±.300
0808	.5000	.5000	1.942	1.665	.783	.783	.504	.504	.175	±.175
1008	.6250	.5000	2.582	2.262	.939	.783	.629	.504	.350	±.350
1010	.6250	.6250	2.555	2.162	.939	.939	.629	.629	.175	±.175
1210	.7500	.6250	3.003	2.609	1.122	.939	.754	.629	.325	±.325
1212	.7500	.7500	2.843	2.448	1.122	1.122	.754	.754	.175	±.175
1612	1.0000	.7500	3.521	3.117	1.495	1.122	1.004	.754	.375	±.375
1616	1.0000	1.0000	3.426	3.013	1.495	1.495	1.004	1.004	.200	±.200
2016	1.2500	1.0000	4.079	3.656	1.758	1.495	1.255	1.004	.375	±.375
2020	1.2500	1.2500	3.992	3.559	1.758	1.758	1.255	1.255	.200	±.200

TABLE 1B - DIMENSIONS W THROUGH W3 AND WEIGHTS

BASIC NO. AS5969 /15/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	W	W1	W1A	W2 ±.0015	W2A ±.0015	W3	W3A	WEIGHT LBS/EA APPROX, REF
0404	.2500	.2500	.113	.488	.488	.3005	.3005	.018	.018	.012
0604	.3750	.2500	.443	.675	.488	.4475	.3005	.033	.018	.023
0606	.3750	.3750	.173	.675	.675	.4475	.4475	.033	.033	.031
0806	.5000	.3750	.441	.871	.675	.5945	.4475	.033	.033	.050
0808	.5000	.5000	.155	.871	.871	.5945	.5945	.033	.033	.062
1008	.6250	.5000	.506	1.190	.871	.7365	.5945	.021	.033	.099
1010	.6250	.6250	.130	1.190	1.190	.7365	.7365	.021	.021	.103
1210	.7500	.6250	.441	1.327	1.190	.8805	.7365	.024	.021	.140
1212	.7500	.7500	.144	1.327	1.327	.8805	.8805	.024	.024	.165
1612	1.0000	.7500	.537	1.612	1.327	1.1725	.8805	.027	.024	.281
1616	1.0000	1.0000	.157	1.612	1.612	1.1725	1.1725	.027	.027	.359
2016	1.2500	1.0000	.536	1.886	1.612	1.4345	1.1725	.030	.027	.430
2020	1.2500	1.2500	.175	1.886	1.886	1.4345	1.4345	.030	.030	.510