

INTERNATIONAL  
STANDARDIZED  
PROFILE

**ISO/IEC**  
**ISP**  
**10612-4**

First edition  
1995-02-01

---

---

**Information technology — International  
Standardized Profile RD — Relaying the  
MAC service using transparent bridging —**

**Part 4:**

Profile RD51.51 (CSMA/CD LAN — CSMA/CD  
LAN)

*Technologies de l'information — Profil normalisé international RD —  
Transmission du service MAC utilisant un pontage transparent —  
Partie 4: Profil RD51.51 (AMDP-DC/AMDC-DP)*



Reference number  
ISO/IEC ISP 10612-4:1995(E)

# ISO/IEC ISP 10612-4:1995(E)

Contents	Page
Foreword .....	iii
Introduction .....	v
1 Scope .....	1
1.1 General .....	1
1.2 Position within the taxonomy .....	1
1.3 Scenario .....	1
2 Normative references .....	2
3 Definitions .....	3
4 Abbreviations .....	3
5 Requirements .....	3
5.1 Static conformance requirements .....	3
5.2 Dynamic conformance requirements .....	3
Annex A: ISPICS Requirements List (normative) .....	4
A.1 General options of the profile .....	4
A.2 Base standards selected and combined in the profile .....	4
A.3 Constraints on base standards .....	4

© ISO/IEC 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève • Switzerland

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. In addition to developing International Standards, ISO/IEC JTC 1 has created a Special Group on Functional Standardization for the processing of International Standardized Profiles.

An International Standardized Profile is an internationally agreed, harmonized document which identifies a standard or group of standards, together with options and parameters, necessary to accomplish a function or a set of functions.

Draft International Standardized Profiles are circulated to national bodies for voting. Publication as an International Standardized Profile requires approval by at least 75 % of the national bodies casting a vote.

International Standardized Profile ISO/IEC ISP 10612-4 was prepared with the collaboration of

- Asia-Oceania Workshop (AOW);
- European Workshop for Open Systems (EWOS);
- Open Systems Environment Implementors' Workshop (OIW).

ISO/IEC ISP 10612 consists of several parts, under the general title *Information technology - International Standardized Profile RD - Relaying the MAC service using transparent bridging*:

- *Part 1: Subnetwork-independent requirements*
- *Part 2: CSMA/CD LAN subnetwork-dependent, media-dependent requirements*
- *Part 3: Token Ring LAN subnetwork-dependent, media-dependent requirements*
- *Part 4: Profile RD51.51 (CSMA/CD LAN - CSMA/CD LAN)*
- *Part 5: Profile RD51.54 (CSMA/CD LAN - FDDI LAN)*

- Part 6: Profile RD54.54 (FDDI LAN - FDDI LAN)
- Part 7: Profile RD51.53 (CSMA/CD LAN - Token Ring LAN)
- Part 8: Profile RD53.53 (Token Ring LAN - Token Ring LAN)
- Part 9: Profile RD53.54 (Token Ring LAN - FDDI LAN)

Annex A forms an integral part of this part of ISO/IEC ISP 10612.

*IECNORM.COM : Click to view the full PDF of ISO/IEC ISP 10612-4:1995*

## Introduction

ISO/IEC ISP 10612 is defined in accordance with the principles specified by ISO/IEC TR 10000. The context of Functional Standardization is one area in the overall field of Information Technology (IT) standardization activities, covering base standards, profiles, and registration mechanisms. A profile defines a combination of base standards that collectively perform a specific well-defined IT function. Profiles standardize the use of options and other variations in the base standards, and provide a basis for the development of uniform, internationally recognized system tests.

ISPs are produced not simply to 'legitimize' a particular choice of base standards and options, but to promote real system interoperability. One of the most important roles for an ISP is to serve as the basis for the development (by organizations other than ISO and IEC) of internationally recognized test methods. The development and widespread acceptance of tests based on this and other ISPs is crucial to the successful realization of this goal.

ISO/IEC ISP 10612 consists of several parts, of which this is part 4. ISO/IEC ISP 10612-1 specifies the profile requirements which are independent of the subnetwork and media. There are further parts which specify subnetwork-dependent and media-dependent requirements. In addition, for each individual profile, there is a part of ISO/IEC ISP 10612 which identifies the specific requirements of that profile, making reference to appropriate material from part 1 and from the subnetwork-dependent parts.

IECNORM.COM : Click to view the full text of ISO/IEC ISP 10612-4:1995

This page is intentionally left blank

IECNORM.COM : Click to view the full PDF of ISO/IEC ISP 10612-4:1995

# Information technology — International Standardized Profile RD — Relaying the MAC service using transparent bridging —

## Part 4:

### Profile RD51.51 (CSMA/CD LAN - CSMA/CD LAN)

## 1 Scope

### 1.1 General

ISO/IEC ISP 10612 is applicable to interworking units concerned with operating in the Open Systems Interconnection (OSI) Local Area Network environment. It specifies a combination of OSI standards that collectively provide a MAC relay function. This part of ISO/IEC ISP 10612 is applicable to interworking units operating between CSMA/CD LAN subnetworks.

ISO/IEC ISP 10612-1 specifies the relay function and LAN subnetwork-independent requirements, ISO/IEC ISP 10612-2 specifies the CSMA/CD LAN subnetwork-dependent requirements, and this part of ISO/IEC ISP 10612 defines profile RD51.51.


### 1.2 Position within the taxonomy

The taxonomy of OSI profiles is defined in ISO/IEC TR 10000-2. This part of ISO/IEC ISP 10612 defines the profile:

RD51.51 Relaying the MAC service, using transparent bridging, between CSMA/CD LAN subnetworks.

### 1.3 Scenario

Figure 1 illustrates the configuration of systems to which this part of ISO/IEC ISP 10612 is applicable. The figure shows two reference points, but an implementation of this part of ISO/IEC ISP 10612 may include more attachments to CSMA/CD LAN subnetworks with a reference point corresponding to each.

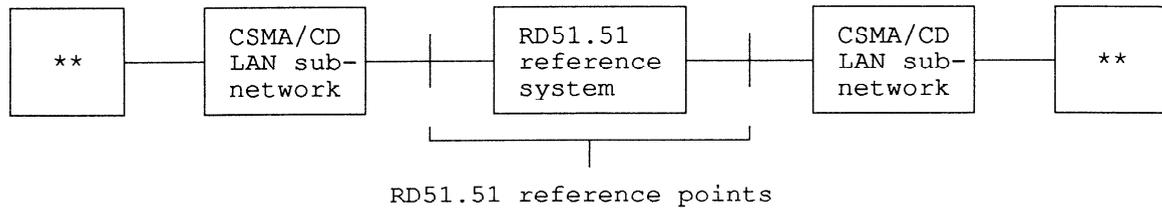

\*\* Other compatible network equipment  
 - OSI relays  
 - OSI end systems  
 - other equipment

Figure 1 - Scenario of applicability of the RD51.51 profile

This part of ISO/IEC ISP 10612 specifies the required functions from the supporting protocol stack shown in figure 2.

MAC Subl.	ISO/IEC 8802-3 (MAC)	ISO/IEC 10038	ISO/IEC 8802-3 (MAC)
PHY Layer	ISO/IEC 8802-3 (PHY)		ISO/IEC 8802-3 (PHY)

Figure 2 - Protocol stack for the RD51.51 profile

## 2 Normative references

The following documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC ISP 10612. At the time of publication, the editions indicated were valid. All documents are subject to revision and parties to agreements based on this part of ISO/IEC ISP 10612 are warned against automatically applying any more recent editions of the documents listed below, since the nature of references made by ISPs to such documents is that they may be specific to a particular edition. Members of IEC and ISO maintain registers of currently valid International Standards and ISPs, and ITU-T maintains published editions of its current Recommendations.

ISO/IEC 8802-3:1993, *Information technology - Local and metropolitan area networks - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications.*

ISO/IEC TR 10000-1:1992, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 1: Framework.*

ISO/IEC TR 10000-2:1992, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 2: Taxonomy of OSI Profiles.*

ISO/IEC ISP 10612-1:1995, *Information technology - International Standardized Profile RD - Relaying the MAC service using transparent bridging - Part 1: Subnetwork-independent requirements.*

ISO/IEC ISP 10612-2:1995, *Information technology - International Standardized Profile RD - Relaying the MAC service using transparent bridging - Part 2: CSMA/CD LAN subnetwork-dependent, media-dependent requirements.*

Additional normative references are found in each of the ISP parts listed above. These additional normative references are base standards used for development of the relevant ISP parts.

### **3 Definitions**

The terms used in this part of ISO/IEC ISP 10612 are defined in the documents that are referenced in clause 2.

### **4 Abbreviations**

The abbreviations used in this part of ISO/IEC ISP 10612 as defined in the documents that are referenced in clause 2.

### **5 Requirements**

#### **5.1 Static conformance requirements**

An implementation conforming to the profile defined in this part of ISO/IEC ISP 10612 shall support at least two points of attachment to ISO/IEC 8802-3 CSMA/CD LANs, through each of which it shall support all the features specified as static conformance requirements of parts 1 and 2 of ISO/IEC ISP 10612 and shall implement all the features identified as requirements in the ISPICS Requirements List in Annex A.

#### **5.2 Dynamic conformance requirements**

An implementation conforming to the profile defined in this part of ISO/IEC ISP 10612 shall carry out the supported functions according to the applicable dynamic conformance requirements of parts 1 and 2 of ISO/IEC ISP 10612. It shall behave in accordance with the requirements of the ISPICS Requirements List in Annex A.