
**Graphic technology — Process control
for the production of half-tone colour
separations, proof and production
prints —**

**Part 9:
Metal decoration printing processes
using offset lithography**

*Technologie graphique — Maîtrise des procédés pour la fabrication
des séparations couleur, des épreuves et des tirages en ton tramé —*

*Partie 9: Impression décorative sur métal avec un procédé offset
lithographique*



STANDARDSISO.COM : Click to view the full PDF of ISO 12647-9:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements	2
4.1 General.....	2
4.2 Data files and printing forms.....	2
4.2.1 Data delivery.....	2
4.2.2 Printing forme quality.....	3
4.2.3 Screen frequency (periodic screens).....	3
4.2.4 Dot size (non-periodic screens).....	3
4.2.5 Screen angle (periodic screens).....	3
4.2.6 Dot shape and its relationship to tone value (periodic screens).....	4
4.2.7 Tone value sum.....	4
4.2.8 Grey reproduction and grey balance.....	4
4.3 Proof or production print.....	4
4.3.1 General.....	4
4.3.2 Visual characteristics of image components — Print substrate colour.....	5
4.3.3 Ink set colours (colorant description).....	6
4.3.4 Tone value reproduction limits.....	7
4.3.5 Tone value increase and spread.....	7
4.3.6 Tolerance for image positioning.....	10
4.3.7 Conformance.....	10
5 Measurement methods	11
5.1 Computation of densities, CIELAB colour coordinates and CIELAB colour differences.....	11
5.2 Control strip.....	11
Annex A (informative) Grey reproduction and grey balance	12
Annex B (informative) Handling differences in coating colour	14
Bibliography	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 130, *Graphic technology*.

A list of all parts in the ISO 12647 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

ISO 12647-1 serves to provide definitions, general principles, the general order and materials to be covered in ISO 12647-2 to ISO 12647-9, the definition of the data, the measurement conditions, and the reporting style.

This document relates to the subject of offset printing on coated metallic substrates and establishes the printing requirements for the metal decoration market. This market includes metal boxes and cans in which the printing is performed directly onto the white coated surface of the metal prior to the formation of a container.

This document specifies aim values (or sets of aim values) and tolerances, for the primary parameters specified in ISO 12647-1 for digital proof printing. Primary parameters that define a printing condition include screening parameters (where applicable), the colours of the solids, the colour of the print substrate, colours of intermediate tint values and the tone curve. Adherence to these values essentially ensures that a grey which at the colour separation stage was composed for a specified printing condition also prints as a grey colour when both proofing and printing. Remaining deviations from grey due to differences in trapping can then be removed by adjusting the colouration within the tolerances provided. This document also specifies test methods for those properties of prints and their substrates that are considered relevant for stable and reliable metal deco reproduction.

Typically, the specified printing condition is defined through an International Color Consortium (ICC) profile or the associated characterisation data set, both of which relate the source data and the colorimetrically defined printed colour. Such data can be derived from printing conditions conforming to the pertinent process standard of ISO 12647 (all parts) by industry trade groups or individuals.

Printing on metallic substrates poses unique challenges. Sometimes, the metal surface is pre-coated with an opaque white and then the coloured inks are printed on top of the white coating. Other times, the coloured inks are printed directly onto the metallic surface and the nature of the bare metal, shininess, texture or polishing marks can be observed and measured through the ink layer. Most metallic substrates are electrolytic tinplate (ETP), tin free steel (TFS) and aluminium, all coated with a white coating or pre-printed with a printing white ink before being printed with coloured inks. This document considers only the substrates, which are pre-coated with a white coating.

Historically, there has been no consistency in the way that either the characterisation data or the criteria and limits for a satisfactory match have been provided. This has led to significant redundancy and inconsistencies in the evaluation of proofing systems for different, but similar, applications, and a cost and time burden on the industry. This document therefore attempts to provide guidance in this area by providing specifications and associated testing procedures.

This document defines requirements for printing offset on metallic substrates that have been pre-coated with a white coating. Bare metallic substrates have not been included because of the complexity of the specular and surface reflection requirements. Also, the grey nature of the substrate means that it will always be restricted in gamut and difficult to manage. The industry does not print much process imagery on bare metal.

This document does not specifically consider the production of spot colours from a process printing approach. However, such colours can be generated from such an approach and the tolerances should be agreed between the buyer and the seller. Spot colour management is defined in this document to utilize spectral data in an .xml schema defined by ISO 17972-1^[1] and ISO 17972-4^[2]. ISO 17972-4 includes exchange specifications for spot colour characterization data to facilitate the communication of spot colour data.

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 12647-9:2021

Graphic technology — Process control for the production of half-tone colour separations, proof and production prints —

Part 9: Metal decoration printing processes using offset lithography

1 Scope

This document specifies requirements for systems that are used to produce offset prints for process colour reproduction on metallic substrates, which have been printed with a white coating. It is intended for flat printed sheet metal applications. It does not cover shaped or pre-formed metal such as pre-formed cans. Recommendations are provided with regard to appropriate test methods associated with these requirements.

This document differs from the method used to produce an offset print on paper or board in ISO 12647-2 in that it considers the colour values of a typical white coated metal substrate intended for metal decoration, using offset lithography and substrates that are independent of backing colour.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 10128, *Graphic technology — Methods of adjustment of the colour reproduction of a printing system to match a set of characterization data*

ISO 12642-1, *Graphic technology — Input data for characterization of four-colour process printing — Part 1: Initial data set*

ISO 12642-2, *Graphic technology — Input data for characterization of 4-colour process printing — Part 2: Expanded data set*

ISO 12647-1:2013, *Graphic technology — Process control for the production of half-tone colour separations, proof and production prints — Part 1: Parameters and measurement methods*

ISO 12647-7, *Graphic technology — Process control for the production of halftone colour separations, proof and production prints — Part 7: Proofing processes working directly from digital data*

ISO 13655, *Graphic technology — Spectral measurement and colorimetric computation for graphic arts images*

ISO 15076-1, *Image technology colour management — Architecture, profile format and data structure — Part 1: Based on ICC.1:2010*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12647-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

total print area

ratio of the area covered with ink to the entire area in an ink zone

3.2

characterization data

set of tone values and associated colorimetric values that fully describe a given printing process

3.3

metal decoration

printing on metals to produce a graphic image on the metal surface

Note 1 to entry: The term does not exclude printing on metal for functional or promotional reasons.

3.4

spot colour

non-process colour that is used in addition to, or in place of, a process colour and is normally applied with a single impression

Note 1 to entry: When associated with a corporate product identity, a spot colour is also known as brand colour.

4 Requirements

4.1 General

Digital data files delivered for printing should be accompanied by a digital proof print, a press proof print, or an OK print from a previous print run.

Press proof prints are test prints of the data files on a printing press which may serve as a reference for subsequent printing. While most proofs are digital proofs, for colour- or content-critical work there is a need for press proof prints with the same setup as the production print.

4.2 Data files and printing forms

4.2.1 Data delivery

Data delivered for printing shall be in the colour formats CMYK or three-component and should be exchanged using PDF/X data formats.

The intended printing condition shall be indicated. In case of PDF/X, the mechanisms provided by the specified data format shall be used.

In case of other data formats, a printing condition description, a characterization data set in accordance with ISO 12642-1 and ISO 12642-2, or an International Colour Consortium (ICC) output profile in accordance with ISO 15076-1, shall be communicated.

If the data are other than CMYK, the data shall be defined by colorimetric descriptions using an ICC profile or another mechanism and an ICC CMYK output profile shall be included. The rendering intent to be used for each data element shall be communicated.

If the characterization data or ICC output profile provided conflicts with the printing conditions defined in this document, one of the methods defined in ISO/TS 10128 shall be used for data adjustment prior to print production. The aims for process control should be taken from characterization data, if agreed between all parties. Where this is done, densitometric tone values are not usually available and

colorimetric tone values should be used. Further information on the relationship between colorimetric and densitometric tone values can be found in ISO/TS 10128.

NOTE A printing condition is defined here as a print substrate description, a colorant description, a screening description, an ink set and a printing sequence.

Quality control of the content of a print job prior to final production checks are recommended since PDF/X conformance does not necessarily ensure a suitable image resolution or other production dependent criteria.

Additional spot colours are allowed, however, this document does not make provisions for tolerances.

4.2.2 Printing forme quality

The resolution of the plate setter should be selected to ensure that at least 150 tone value steps are reproduced.

For a screen employing single half-tone cell modulation, for example, if the intended nominal screen ruling is 80 cm^{-1} , the resolution of the plate setter should not be less than $1\,000 \text{ cm}^{-1}$. For a screen with super-cell technology, it is possible to set the resolution to a smaller value.

4.2.3 Screen frequency (periodic screens)

For four-colour work, the screen frequency (screen ruling) for periodic screens should be within the range from 48 cm^{-1} to 80 cm^{-1} ; 69 cm^{-1} (175 lines per inch) is the most common plate frequency.

NOTE 1 The screen frequency is often varied slightly from one process colour to another in order to minimize moiré patterns. For example, there can be a difference of up to 6 % of the nominal screen frequency between the colours C, M, Y.

NOTE 2 For the black or yellow colour halftone, a screen frequency is sometimes used which is substantially finer than the nominal screen ruling of the remaining colours, for example, 84 cm^{-1} versus 60 cm^{-1} .

Screen frequencies are often required or given in lpi (lines per inch). To convert between screens per cm and lines per inch a conversion factor of 2,54 should be used.

The requirement 4.2.3 given in lpi reads as follows (rounded to commonly used integral numbers): for four-colour work, the screen frequency (screen ruling) for periodic screens should be within the range from 120 lpi to 200 lpi.

4.2.4 Dot size (non-periodic screens)

For four-colour work, the screen dot size for non-periodic screens shall be within the range $20 \mu\text{m}$ to $40 \mu\text{m}$ and should be within the range $20 \mu\text{m}$ to $30 \mu\text{m}$.

NOTE Outside of the range $20 \mu\text{m}$ to $40 \mu\text{m}$, the general principles specified in ISO 12647-1 remain valid but specific values can differ.

4.2.5 Screen angle (periodic screens)

For half-tone dots without a principal axis, the nominal difference between the screen angles for cyan, magenta and black should be 30° , with the screen angle of yellow separated at 15° from another colour. The screen angle of the dominant colour should be 45° .

For half-tone dots with a principal axis, the nominal difference between screen angles for cyan, magenta and black should be 60° , with the screen angle of yellow separated by 15° from another colour. The screen angle of the dominant colour should be 45° or 135° .

4.2.6 Dot shape and its relationship to tone value (periodic screens)

For periodic screens, circular, square or elliptical half-tone dot shapes should be used. For half-tone dots with elliptical dot shape, the first link-up should occur no lower than at 40 % tone value and the second linkup no higher than at 60 % tone value.

4.2.7 Tone value sum

Tests should be run to determine tone value sum, depending on the printing equipment, and drying, tone value sum should not exceed 300. This should be tested on production equipment.

NOTE Press problems can be encountered at high levels of tone value sum. There can be poor ink trapping, back transfer and set-off due to insufficient ink drying.

4.2.8 Grey reproduction and grey balance

The tone values of cyan, magenta and yellow that lead to a visually neutral grey should be calculated from the standard printing condition or actual printing condition or the associated profiles by [Formulae \(1\)](#) and [\(2\)](#) describing the grey reproduction (L^* , a^* , b^*) with respect to a given substrate colour (L^* substrate, a^* substrate, b^* substrate) and solid CMY inks overprint (L^* _{cmly}) for each L^* in the range from L^* substrate to L^* _{cmly}:

$$a^* = a_s^* \times \left[\frac{1 - 0,85 \times (L_s^* - L^*)}{(L_s^* - L_{cmly}^*)} \right] \tag{1}$$

$$b^* = b_s^* \times \left[\frac{1 - 0,85 \times (L_s^* - L^*)}{(L_s^* - L_{cmly}^*)} \right] \tag{2}$$

where s is the substrate.

A single grey balance condition is usually not sufficient to ensure an achromatic colour for all print substrates and printing inks that can be used with a given printing process. Therefore, the grey balance has to be determined for each printing condition separately based on a well-defined grey reproduction. See [Annex A](#) for more details.

The grey balance of a given printing process can be used for process calibration and process control as long as the tolerances for tone value increase and mid-tone spread as defined in [Table 8](#) are not exceeded.

NOTE The multiplying factor of 0,85 represents a visual adaptation of 85 % to the substrate white.

4.3 Proof or production print

4.3.1 General

A printing condition for sheet-fed offset printing shall be communicated by a print substrate description, a colorant description, a screening description and a printing sequence.

Standard printing conditions are shown in [Table 1](#). For all printing conditions described in this document, the printing sequence should be black – cyan – magenta – yellow.

Table 1 — Standard printing conditions for typical print substrates

Metal printing condition (MPC)	Print substrate description (Table 2)	Metal colorant description (MCD)	Screening description			
			Periodic screens		Non-periodic screens	
			T_{VI} curve	Frequency (cm ⁻¹)	T_{VI} curve	Spot size (μm)
MPC1	White coated metal	MCD1	A	60 to 80 150 to 200 (lpi)	B	20 to 40
MPC2 MPC3 MPC4	White coated metal	MCD2	C	60 to 80 150 to 200 (lpi)	D	20 to 40

Standard printing conditions are usually characterized by collecting (smoothing and averaging where appropriate) colour measurement data from one or more printing presses that have been carefully set up to a given printing condition. Such a collection of measurement data along with associated metadata describing the characterized printing condition is known as a characterization data set. When such characterization data are used to describe one of the printing conditions defined by this document, the print substrate, colorant, screening and printing sequence for the printing condition from which the characterization data was collected shall be clearly indicated.

NOTE 1 Colorimetric characterization data, as specified in ISO 12642-1 and ISO 12642-2, contain all the data to be specified in accordance with 4.3.2, 4.3.3, and 4.3.5.1.

A characterization data set or an ICC profile derived from it, is required when making proofs according to ISO 12647-7. In practice this means that characterization data sets provide a convenient means for the communication of standard printing conditions. Characterization data for standard printing conditions are available from research or trade associations¹⁾.

NOTE 2 Work separated for periodic screens can be printed using non-periodic screens where there is a moiré problem on press. In some cases, moiré can introduce tone contouring artefacts and colour shift deficiencies in primary and secondary half-tones.

4.3.2 Visual characteristics of image components — Print substrate colour

The print substrate used for press proof prints should be identical to that of the production print. If this is not possible, the properties of the print substrate for press proof prints should be a close match to those of the production print in terms of colour, CIE Whiteness, gloss, type of surface (coated with white) and mass-per-area.

Evaluate the match of the press proof print substrate and the production print substrate using the attributes listed in Table 2. For digital proofing, the requirements defined in ISO 12647-7 apply.

Typical substrate characteristics are defined, for information only, in Table 2. In order to determine the closest matching printing condition for a given substrate type, compare the substrate to be used for printing with the parameters in these tables and select the closest matching reference print substrate. This procedure ensures an easy match of the associated colorant description and therefore the visual appearance.

Production metallic substrates comprising a coloration differing from the aim values pertaining to Table 2 may not be described by established data characterizations. In this case, a dedicated substrate

1) Fogra, Graphic Technology Research Association. Available at: www.forgra.org, International Color Consortium (ICC). Available at: www.color.org, International Digital Enterprise Alliance (IDEAlliance). Available at: www.idealliance.org, Japan Printing Machinery Association (JPMA). Available at: www.jpmanet.or.jp, World Association of Newspapers and News Publishers (WAN-IFRA). Available at: www.wan-ifra.org are some research or trade organization that publishes fully characterized printing conditions. This information is given for the convenience of the users of this document.

description using the attributes shown in [Table 2](#), and an associated set of characterization data is recommended.

Table 2 — CIELAB coordinates and CIE whiteness for print substrates

Characteristic	Metal coating type											
	MC1			MC2			MC3			MC4		
Type of surface	White coating without varnish			Pinkish coating without varnish			Bluish coating without varnish			Neutral coating without varnish		
CIE Whiteness (D50/2°) ^{a,b}	86 ±4			95 ±5			95 ±5			87 ±5		
Gloss (60°)	30 ± 20			80 ± 20			80 ± 20			80 ± 20		
Colour (D50/2°)	Coordinates											
	L*	a*	b*	L*	a*	b*	L*	a*	b*	L*	a*	b*
Aims	84	-2	-6	83	3	-8	81	-2	-9	89	-2	-3
Tolerance	±4	±2	±2	±5	±2	±2	±5	±2	±2	±5	±2	±2
^a ASTM E 313 provides guidance on CIE whiteness under other daylight illuminants. ^b ISO13655 and Annex B describe how to transform the primary colour targets on substrates outside these tolerances.												

4.3.3 Ink set colours (colorant description)

For the typical substrates defined in [4.3.2](#), the CIELAB colour coordinates of the process colour solids shall agree with the aim values specified in [Table 3](#), within the deviation tolerance specified in [Table 4](#). The colour coordinates of the two-colour overprints and the three-colour overprint, both without black ink, should agree with [Table 3](#). The tolerances on these colour aims can be found in [Table 4](#) for the deviation from the production aim (OK sheet) and the variation within a print run from the production prints.

Table 3 — CIELAB coordinates of colours for the printing sequence cyan-magenta-yellow

	Colorant description											
	MC1			MC2			MC3			MC4		
Colour	L*	a*	b*	L*	a*	b*	L*	a*	b*	L*	a*	b*
Black	17	-1	0	8	1	2	8	1	1	5	1	2
Cyan	50	-32	-48	48	-30	-46	49	-32	-46	51	-37	-47
Magenta	42	64	-5	45	67	6	43	65	5	48	72	9
Yellow	79	-6	88	76	-1	65	77	-7	66	84	-5	78
Red	41	57	43	44	63	44	43	61	42	48	68	50
Green	44	-60	28	43	-57	13	43	-59	14	46	-64	17
Blue	20	21	-40	16	23	-39	15	23	-38	16	24	-42
Overprint CMY ₁₀₀	19	2	6	16	7	-6	15	6	-6	15	7	-6

Table 4 — CIE ΔE_{00} tolerances for the solids of the process colours

Process colour	Deviation tolerance	Variation tolerance	
	OK print	Production print	
	ΔE_{00}	ΔE_{00}	Δh_{ab}
Black	6	4	-
Cyan	6	3	3
Magenta	6	3	3
Yellow	6	3	3

4.3.4 Tone value reproduction limits

Half-tone dot patterns within the following tone value limits in the digital data file should transfer onto the print in a consistent and uniform manner:

2 % to 98 % for white coated substrate (screen ruling 60 cm⁻¹ to 80 cm⁻¹, spot size 20 μ m to 40 μ m).

No significant image parts should rely on tone values outside of the above tone value reproduction limits.

4.3.5 Tone value increase and spread

4.3.5.1 Aim values

The tone value increase for printing and press proof prints shall conform to [Table 5](#); see also [Figure 1](#). For calibration purposes, [Table 6](#) should be used (see also NOTES 5 and 6).

Table 5 — Tone value increase for the control patches of a control strip

Values in percent (%)


Printing condition	Periodic screens				Non-periodic screens			
	30	50	75	80	30	50	75	80
MC1	18	19	14	12	28	28	18	15
MC2	17	18	13	11	33	30	18	15
MC3								
MC4								

NOTE 1 The values given in [Table 5](#) refer to densitometric measurement according to ISO 5-3 in a control strip, with an ISO Status E response, without polarization. Similar results are achievable when using a polarization filter.

NOTE 2 When using standard inks, the measurement of T_{VI} using Status T produces results that are close to those produced when using Status E measurements.

NOTE 3 Given a characterization data set or an ICC profile colorimetric tone values and colorimetric tone value increase values can be calculated. However, the concrete values depend on the colour channel and the printing condition and tend to differ from the densitometric tone values. More information on how to link colorimetric toward densitometric tone values can be found in ISO/TS 10128.

NOTE 4 If a control strip cannot be printed, then this document cannot be applied.

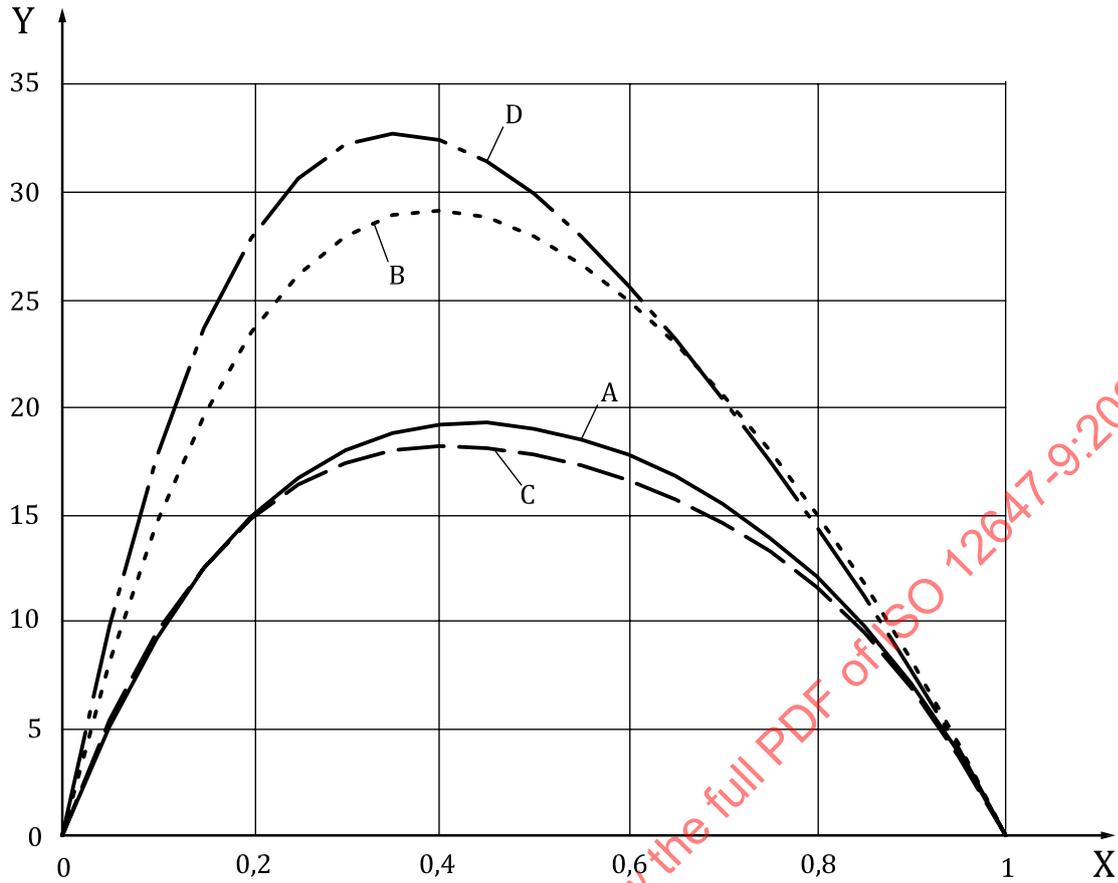

Key
 Y tone value increase
 X tone value fraction

Figure 1 — Tone value increase curves for the printing conditions defined in [Table 1](#)

Table 6 — Tone value increase values for the printing conditions defined in [Table 1](#)

Tone value	Tone value increase MC1		Tone value increase MC2, MC3, MC4	
	A	B	C	D
%	%	%	%	%
0	0	0	0	0
5	5	8	5	10
10	9	15	10	18
20	15	24	15	28
30	18	28	17	32
40	19	29	18	33
50	19	28	18	30
60	18	25	17	26
70	16	21	15	20
80	12	15	12	14
90	7	8	7	8
95	4	4	4	4

Table 6 (continued)

Tone value	Tone value increase MC1		Tone value increase MC2, MC3, MC4	
	A	B	C	D
100	0	0	0	0

NOTE 5 It is common practice to use a tone value of 40 % or 50 % for the mid-tone range and a tone value of 75 % or 80 % for the shadow region in the pertinent control strip.

NOTE 6 The tone value increase for the 50 % control patch of a control strip was chosen to be an integer value.

NOTE 7 For process calibration and control purposes, the tone value or tone value increase on a print is sometimes calculated for additional tone values. For this, exemplary fourth order polynomials function describing the curves in Figure 1 and Table 6 is given as Formula (3):

$$T_{VI}(x) = a \cdot x^4 + b \cdot x^3 + c \cdot x^2 + d \cdot x \quad (3)$$

where

T_{VI} is the tone value increase as a percentage value;

a, b, c, d are the coefficients of the polynomial;

x is the tone value normalized between 0 and 1; $x = T_V/100$;

T_V is the tone value in % ranging from 0 to 100.

The polynomial coefficients are given in Table 7.

Table 7 — Polynomial coefficients for tone value increase curves in Figure 1

Polynomial coefficient	Tone value increase curve			
	A	B	C	D
a	-91,3	-92,1	-120,1	-139,8
b	212,4	272,2	270,6	422,6
c	-234,9	-359,1	-267,0	-509,8
d	113,8	179,0	116,0	227,4

4.3.5.2 Tone value and mid-tone spread tolerances

The tolerance of the tone value increase and mid-tone spread of an OK print from the specified aim value shall not exceed the tolerances specified in Table 8.

For production printing, for at least 68 % of the prints, the T_{VI} differences between a production copy and the OK print shall not exceed the pertinent variation tolerances specified in Table 8.

The mid-tone spread (variation of tone values between chromatic colours) of at least 68 % of production printing samples shall not exceed the values listed in Table 8.

Table 8 — Tone value increase tolerances and maximum mid-tone spread for proof and production printing

Tone value of the control patch	Deviation tolerance	Variation tolerance
	OK print	Production print
<30	3	3
30 to 60	4	4
>60	3	3
Maximum mid-tone spread	5	5

NOTE 1 The values in Table 8 refer to measurements on a control strip with a screen ruling to be the same as the subject.

NOTE 2 Percentage tolerances are calculated by subtracting the aim value from the measured value.

4.3.6 Tolerance for image positioning

The maximum deviation between the image centres of any two separations shall be less than 0,3 mm and should be less than 0,15 mm.

4.3.7 Conformance

This document only defines conformance requirements with respect to those which are necessary to provide repeatable and reproducible conformity assessment results. Additional conformity assessment requirements for product, process, service, persons, systems or bodies are not covered in this document.

With respect to the evaluation of conformance, the provisions for both an individual production print and the entire print run are summarized as follows. In order to specify the aim values for conformance scrutiny, the printing condition shall first be identified by means of the pertinent substrate, the screening used and inking sequence. If a printing condition is used that is not defined in this document, the conformance label shall report the solid coloration and tone value increase aim values relating to that printing condition.

A print that conforms to this document shall be in accordance with the following requirements:

- a) a control strip in conformance with ISO 12647-1 to be positioned across the printing direction covering all ink zones to be used for the printed image;
- b) ink set colours;
- c) tone value increase and mid-tone spread.

All control patches of the control strip shall be in conformance with the above requirements.

An ISO 12647-9 conforming print should conform to the following tone value reproduction limit requirements.

For a conforming print run, a minimum of 68 % of randomly selected individual print samples spread across the production run shall conform to all normative criteria of this specification.

NOTE 1 The number of print samples required depends on the print run length and is typically defined by a print certification scheme.

NOTE 2 Ink zones with total print area less than 5 % for each colour can be excluded for the purposes of conformance evaluation.

NOTE 3 Ink zones with high total print area that do not allow for reliable tone value measurements can be excluded for the purposes of conformance evaluation of tone value increase and spread.

NOTE 4 All conformance measurements for a production print or an entire print run can be done on dry sheets, after some time that depends on the process and materials.

NOTE 5 An additional control strip, to be placed in the printing direction, can be used for additional evaluation only if enough ink consumption is present in the pertinent ink zone.

5 Measurement methods

5.1 Computation of densities, CIELAB colour coordinates and CIELAB colour differences

Both colour and density measurements shall be made in conformance with ISO 13655. When the optical brightening agent, OBA, content is high or moderate and the expected viewing condition contains UV, measurements shall be made with M1 measuring mode. When the OBA content is low or faint (i.e. $\Delta B \leq 8$) then M0, M1 or M2 may be used since comparable results are expected. Here, ΔB is the difference in ISO Brightness for M1 and M2, respectively. The measuring condition shall be reported.

The computation of CIELAB colour coordinates and CIELAB colour differences shall be made in accordance with ISO 12647-1 and ISO 13655. The computation of ΔB shall be made in accordance with ISO 12647-7.

5.2 Control strip

On each print a control strip conforming to ISO 12647-1:2013, 5.2, shall be used. Additional control strips, usually placed within printing direction, may be used.

Report all results as specified in ISO 12647-1:2013, A.6.