
**Iron ores — Determination of the
moisture content of a lot**

Minerais de fer — Détermination de l'humidité d'un lot

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020



STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	1
5 Apparatus	1
6 Samples	2
7 Procedure	2
7.1 Number of moisture measurements.....	2
7.2 Reference methods.....	2
7.2.1 General.....	2
7.2.2 Normal reference method.....	3
7.2.3 Optional reference method for ores of high combined water content.....	3
7.3 Alternative methods.....	3
7.3.1 General.....	3
7.3.2 Adjustment of drying time only.....	4
8 Verification	4
9 Calculation and expression of results	4
9.1 Test portion.....	4
9.2 Lot.....	4
10 Test report	7
Annex A (informative) Determination of moisture content of adhesive or wet iron ores	8
Annex B (normative) Corrections for sprinkled water and/or rainwater	10
Annex C (informative) Precision of moisture measurement	15
Annex D (informative) Examples of test reports	16
Bibliography	35

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 102, *Iron ore and direct reduced iron*, Subcommittee SC 1, *Sampling*.

This fifth edition cancels and replaces the fourth edition (ISO 3087:2011), which has been technically revised. The main changes compared with the previous edition are as follows:

- the existing two 105 °C moisture determination methods have been confirmed to serve as reference methods;
- alternative moisture determination methods are now allowed if they can be shown to result in equivalent moisture contents as the reference methods;
- the weighing device readability requirement has been changed from 0,05 % to 0,01 % equivalent of test portion mass;
- [Clause 9](#) has been revised;
- [Annex D](#) has been updated with new example reports.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Currently, large tonnages of iron ore are traded internationally and a small error in the measured moisture content [mass fraction (%)] of a lot has a considerable effect on the commercial transaction. The correct determination of moisture content of a lot is, therefore, a matter of importance for both the purchaser and the vendor.

This document does not address the determination of the hygroscopic moisture content of a test sample for chemical analysis. If the hygroscopic moisture content is required to be determined, reference should be made to ISO 2596:2006.

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 3087:2020

Iron ores — Determination of the moisture content of a lot

1 Scope

This document specifies a method for the determination of the moisture content of a lot of iron ore. This method is applicable to all iron ores, whether natural or processed.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3082, *Iron ores — Sampling and sample preparation procedures*

ISO 3085, *Iron ores — Experimental methods for checking the precision of sampling, sample preparation and measurement*

ISO 3086, *Iron ores — Experimental methods for checking the bias of sampling*

ISO 11323, *Iron ore and direct reduced iron — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11323 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Principle

Dry the test portion in air at 105 °C and measure the loss in mass. Express the moisture content as the mass loss relative to the original mass of the sample as a mass fraction (%).

5 Apparatus

5.1 Drying pan, with a smooth surface, free from contamination and capable of accommodating the specified quantity of a test portion in a layer of nominal thickness not greater than 31,5 mm.

5.2 Drying oven, equipped with a temperature indicator and control apparatus capable of regulating the temperature at any point in the oven at 105 °C ± 5 °C and so designed as to maintain this temperature with a current of air to ensure efficient drying but without any loss of sample, and fitted with a fan that allows for both the circulation and change of air.

5.3 Weighing device, with readability equivalent to at least 0,01 % of the [Table 1](#) minimum test portion mass. The weighing device should be protected from the influence of heat.

The capacity of the weighing device shall be enough for the combined mass of the drying pan and the initial mass of the test portion.

6 Samples

Test samples that have been taken and prepared in accordance with ISO 3082 shall be used. The mass of a test portion, in relation to its nominal top size, is specified in [Table 1](#), in accordance with ISO 3082:2017, 10.6.

The nominal top size of the moisture test sample shall be 31,5 mm or less. Samples with a nominal top size greater than 31,5 mm shall be crushed prior to extraction of test samples for moisture determination. When it is difficult to conduct crushing and dividing owing to a sample being adhesive or excessively wet, the sample may be partially dried in accordance with the procedure in [Annex A](#).

For convenience, the test portion of mass 10 kg for ore of particle size less than 31,5 mm may be divided into two portions, each of which is subjected to moisture measurement. In calculating the results, the mean of the two values of initial mass and the mean of the two values of the drying loss in mass should be used.

Table 1 — Minimum mass of test portion

Nominal top size of test portion mm		Minimum mass of test portion kg
Over	Up to and including	
22,4	31,5	10
10,0	22,4	5
—	10,0	1

7 Procedure

7.1 Number of moisture measurements

Carry out one moisture measurement per test portion on the number of test portions specified in [Table 2](#), in accordance with the conditions of preparation of the test sample.

In order to minimize losses of moisture to the atmosphere, it is necessary to perform all the initial weighings of the test portions as quickly as possible after obtaining those test portions.

Table 2 — Number of test portions

Preparation of test sample	Number of partial samples per lot	Number of test portions to be tested
From gross sample	—	4 per gross sample
From partial sample	2	4 per partial sample
	3 to 7	2 minimum per partial sample
	≥ 8	1 minimum per partial sample
From increment	—	1 minimum per increment

7.2 Reference methods

7.2.1 General

The moisture determination shall be conducted in accordance with [7.2.2](#) or, optionally for ores with 8 % or more of combined water, in accordance with [7.2.3](#).

7.2.2 Normal reference method

Apply the following procedure.

- a) Spread the test portion in a layer of nominal thickness not greater than 31,5 mm in the tared drying pan (5.1) and determine the total mass immediately. Record the total mass, the mass of the drying pan, the initial mass of the test portion (m_1) and the numerical value of 0,05 % of m_1 . To reduce drying time, it is recommended that the layer-thickness of the sample be kept as low as possible. It should be specified for particular ores by check experiments carried out beforehand.
- b) Place the drying pan with the test portion in the drying oven (5.2) set at 105 °C, and maintain this temperature for not less than 4 h. Remove the drying pan with the test portion from the drying oven and weigh it immediately while still hot in order to minimize any reabsorption of moisture. Otherwise, weigh the test portion after cooling in air in a container having a close-fitting airtight lid. In each case, report the method of weighing.
- c) Once more, place the drying pan with the test portion in the drying oven, heat for a further 1 h, and then repeat the weighing.
- d) Repeat the procedure described in item c) until the difference in mass between subsequent measurements becomes 0,05 % or less of the initial mass of the test portion. Record the total mass and the mass of the test portion after each additional hour of drying (m_2 and onwards).

7.2.3 Optional reference method for ores of high combined water content

For ores containing 8 % or more combined water, the following procedure may be applied.

- a) Spread the test portion in a layer of nominal thickness not greater than 31,5 mm in the tared drying pan (5.1) and determine the total mass immediately. Record the total mass, the mass of the drying pan and the initial mass of the test portion (m_1).
- b) Place the drying pan with the test portion in the drying oven (5.2) set at 105 °C and maintain this temperature for not less than 24 h. Remove the drying pan with the test portion from the drying oven and weigh it immediately while still hot in order to minimize any reabsorption of moisture. Otherwise, weigh the test portion after cooling in air in a container having a close-fitting airtight lid. Record the total mass and the mass of the test portion after drying (m_2). In each case, report the method of weighing.

7.3 Alternative methods

7.3.1 General

Alternative methods refer to the potential use of different technology, such as ovens that do not rely on convection drying alone, or to procedures that potentially differ in terms of oven temperature (up to 140 °C) and time from what is described in 7.2, but which do not deviate from the conditions stipulated in Clause 6 and 7.1 (minimum mass of test portion and number of portions to be tested).

Such alternative methods or modifications for determining the moisture content are allowed where check experiments carried out beforehand, which demonstrate satisfactorily to all parties concerned that an equivalent moisture result is obtained when compared to the applicable reference method specified in 7.2. This demonstration shall include ISO 3086 bias testing using a relevant bias of no more than 0,05 % moisture and where the confidence interval includes the zero. Further, the precision of the alternative method shall be demonstrated by ISO 3085 to be the same or better than achieved by the applicable reference method.

If the sample is subsequently to be used for multiple use, the chemistry, LOI and size distribution of the dried remains shall be checked by means of ISO 3086 to ensure they are not different to dried remains from equivalent reference moisture testing methods. If any changes are identified, the alternative method shall be discarded.

7.3.2 Adjustment of drying time only

In the case where an alternative method changes only the drying times specified in [7.2.2](#) in order to eliminate repeat weighings for verification of constant mass, then it is only necessary to demonstrate equivalence of precision and moisture result.

8 Verification

Regular checking of apparatus and procedures is essential to verify the test results. Checks shall be carried out prior to the commencement of a routine test in accordance with this document and at regular intervals thereafter. The frequency of checking is a matter for each laboratory to determine. A detailed record of all verification activities shall be maintained for the following items:

- sprinkled water measurement:
 - volumenometer;
- rainfall measurement:
 - rain gauge;
- moisture test:
 - oven temperature/temperature regulation;
 - circulation and change of air in oven;
 - weighing device.

9 Calculation and expression of results

9.1 Test portion

The result of the determination of the moisture content, w_i , expressed as a mass fraction (%), for each test portion, is given by [Formula \(1\)](#) and reported to the second decimal place:

$$w_i = \frac{m_1 - m_2}{m_1} \times 100 \quad (1)$$

where

m_1 is the initial mass, in grams, of the test portion;

m_2 is the mass, in grams, of the test portion after drying.

An illustration of moisture determination of a random test portion is shown in an example test report in [Table D.1](#).

9.2 Lot

9.2.1 The moisture content of a lot is given by one of the [Formulae \(2\)](#) to [\(6\)](#), as the occasion may demand, and reported to the first decimal place.

Sprinkled water and/or rainwater over iron ore during loading and/or unloading operation, i.e. moisture added after/before the point where sampling has taken place, shall be corrected in accordance with the procedure specified in [Annex B](#).

9.2.2 When moisture determination is conducted on the gross sample from the lot, the moisture of the lot is determined as follows.

When the range of the four test results does not exceed $1,3r$, as given in [Table 3](#), the arithmetic mean \bar{w} of the four results shall be the moisture content, expressed as a mass fraction (%), of the lot as given by [Formula \(2\)](#):

$$\bar{w} = \frac{w_1 + w_2 + w_3 + w_4}{4} \quad (2)$$

where w_1 , w_2 , w_3 and w_4 are the results of the determinations of the moisture contents, expressed as a mass fraction (%), on each of the four test portions.

When the range of the four test results exceeds $1,3r$, as given in [Table 3](#), the median shall be taken as the moisture content of the lot. The median of four test results is defined as the mean of the two non-extreme test results.

Table 3 — Repeatability limit of moisture determination on the gross sample

Average of moisture content \bar{w} mass fraction (%)	Repeatability limit r^a mass fraction (%)	Repeatability limit $1,3r$ mass fraction (%)
$\bar{w} \leq 3$	0,20	0,26
$3 < \bar{w} \leq 6$	0,25	0,33
$6 < \bar{w}$	0,31	0,40

^a The theoretical background of the repeatability limit is shown in [Annex C](#).

An illustration of moisture determination of a gross sampled lot with four test portions, where the range of the four moistures do not exceed $1,3r$, is shown in an example test report in [Table D.2](#).

An illustration of moisture determination of a gross sampled lot with four test portions, where the range of the four moistures exceed $1,3r$, is shown in an example test report in [Table D.3](#).

9.2.3 When mass-basis sampling has been performed and moisture determination is conducted on each partial sample, the weighted mean, \bar{w} , of the results from all the partial samples, considering the number of increments for each partial sample, shall be the moisture content, expressed as a mass fraction (%), of the lot, as given by [Formula \(3\)](#):

$$\bar{w} = \frac{\sum_{i=1}^k N_i \bar{w}_i}{\sum_{i=1}^k N_i} \quad (3)$$

where

k is the number of partial samples;

N_i is the number of increments in the i th partial sample;

\bar{w}_i is the result of the determination of the moisture content, expressed as a mass fraction (%), of the i th partial sample, in accordance with [Table 2](#), using either four or two as the number of test portions.

When partial samples are used and four test portions are conducted in any partial sample, the criteria established in [9.2.2](#) may be applied.

Illustrations of moisture determination of mass-basis sampled lots with two, four and eight partial samples are shown in the example test reports given in [Annex D](#) in [Tables D.4, D.6 and D.8](#), respectively.

If it is impracticable to sample the lot as a whole, or desirable to sample a lot in separate parts of unequal mass as in the case of time-basis sampling, the moisture content of each part shall be determined independently and the weighted mean, \bar{w} , of the results, expressed as a mass fraction (%), of the lot calculated from the individual results using [Formula \(4\)](#):

$$\bar{w} = \frac{\sum_{i=1}^k m_i \bar{w}_i}{\sum_{i=1}^k m_i} \quad (4)$$

where

k is the number of partial samples;

m_i is the mass of the i th part;

\bar{w}_i is the result of the determination of the moisture content, expressed as a mass fraction (%), of the i th part.

Illustrations of moisture determination of time-basis sampled lots with two, four and eight partial samples are shown in the example test reports given in [Annex D](#), in [Tables D.5, D.7 and D.9](#), respectively.

9.2.4 When moisture determination is conducted on each increment during mass basis sampling, the arithmetic mean, \bar{w} , of the results for all increments obtained in accordance with [9.1](#) shall be the moisture content, expressed as a mass fraction (%), of the lot as given by [Formula \(5\)](#):

$$\bar{w} = \frac{\sum_{i=1}^n w_i}{n} \quad (5)$$

where

n is the number of increments;

w_i is the result of the determination of the moisture content, expressed as a mass fraction (%), of the i th increment.

An illustration of moisture determination of a mass-basis sampled lot where moisture is individually determined for each of 30 increments, is shown in an example test report in [Table D.10](#).

When moisture determination is conducted on each increment during time basis sampling, the weighted mean, \bar{w} , of the results for all increments obtained in accordance with [9.1](#) shall be the moisture content, expressed as a mass fraction (%), of the lot as given by [Formula \(6\)](#):

$$\bar{w} = \frac{\sum_{i=1}^k m_i w_i}{\sum_{i=1}^k m_i} \quad (6)$$

where

k is the number of increments;

m_i is the mass of the i th part that the increment represents;

\bar{w}_i is the increment moisture content, expressed as a mass fraction (%).

An illustration of moisture determination of a time-basis sampled lot, where moisture is individually determined for each of 25 increments, is shown in an example test report in [Table D.11](#).

10 Test report

The test report shall contain the following information:

- a) a reference to this document, i.e. ISO 3087:2020;
- b) the details necessary for the identification of the sample;
- c) the results of the test;
- d) the reference number of the result;
- e) the details of the procedure (including apparatus, temperature and time used in the test);
- f) any characteristics noticed during the determination, and any operation not specified in this document;
- g) the date of the test.

Examples of test reports are shown in [Annex D](#).

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020

Annex A (informative)

Determination of moisture content of adhesive or wet iron ores

A.1 General

When it is difficult to conduct sieving, crushing, and dividing, owing to a sample being adhesive or excessively wet, the sample may be partially dried until preparation can be conducted without difficulty.

In this case, the moisture content of the lot shall be obtained by using the partial drying method in accordance with the procedure specified in this annex. In handling the test sample and weighing the initial mass and partially dried mass of the test sample, attention shall be paid to ensuring the measurement precision of the partially dried moisture content.

A.2 Procedure

A.2.1 Determine the initial mass of the test sample.

A.2.2 Spread the test sample in a uniform thickness and dry it in air or in a drying apparatus at a temperature no higher than 105 °C. The choice of temperature and time for this partial drying stage shall not exceed a point where an ore is likely to reabsorb moisture during subsequent processing.

A.2.3 After partial drying, again determine the mass of the test sample.

A.2.4 Calculate the partially dried moisture content, w_p , expressed as a mass fraction (%), of the test sample using [Formula \(A.1\)](#):

$$w_p = \frac{m'_1 - m'_2}{m'_1} \times 100 \quad (\text{A.1})$$

where

m'_1 is the initial mass, in grams, of the test sample;

m'_2 is the mass, in grams, of the test sample after partial drying.

A.2.5 Prepare the test portions for moisture measurement from the partially dried sample in accordance with the procedure in ISO 3082.

A.2.6 Determine the drying loss of the test portion in accordance with [7.2](#) and calculate the additional moisture content, expressed as a mass fraction (%), in accordance with [9.1](#).

A.2.7 Calculate the total (as received) moisture content, w_{pd} , expressed as a mass fraction (%), of the test sample using [Formula \(A.2\)](#):

$$w_{pd} = w_p + \frac{100 - w_p}{100} \times w_d \quad (\text{A.2})$$

where w_d is the additional moisture content obtained in accordance with [9.1](#) after partial drying, expressed as a mass fraction (%).

A.2.8 Determine the moisture content, as a mass fraction (%), of the lot in accordance with [9.2](#).

A.2.9 If the mass of the moisture sample is not large, the entire quantity of the sample may be dried in order to conduct the moisture determination in accordance with the method specified in the body of this document.

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020

Annex B (normative)

Corrections for sprinkled water and/or rainwater

B.1 General

B.1.1 In many countries, strict environmental regulations must be observed in the iron ore and steel industry. When water is sprinkled over iron ore during loading and/or unloading operations to prevent dust evolution, the moisture content of a lot shall be corrected, in accordance with the procedure specified in this annex, for the mass of water sprinkled.

This annex also describes a method for correcting the moisture content of a lot containing rainwater.

B.1.2 Water is sprinkled for the following reasons:

- a) environmental regulations at loading and/or unloading ports;
- b) difficulty of handling iron ores due to ore characteristics, weather conditions, handling equipment, etc.

B.1.3 Correction for rainwater shall be made whenever rainfall occurs during the loading or unloading operations, and the moisture content of the lot is known to have been affected.

B.2 Corrections for sprinkled water

B.2.1 General

In the case of unloading a lot, sprinkled water refers to water sprinkled (or sprayed) in the vessel holds and/or on any sections extending to a point where samples are taken. In the case of loading of a lot, sprinkled water refers to water sprinkled in the holds and/or on the loading conveyors located after the point where moisture samples are taken.

Two methods of correction for sprinkled water are mentioned in this subclause. One refers to water added before the sampling point during unloading operations, the other to water added after the sampling point during loading operations.

B.2.2 Measurement of sprinkled water

The measurement of sprinkled water shall be made with a volumenometer having an accuracy of $\pm 5\%$. The volume obtained shall be converted to a mass, m_3 , in tonnes, by multiplying it by the density of the sprinkled water.

NOTE Fresh water is assumed to have a density of 1 t/m^3 .

B.2.3 Mass of lot

The mass of the lot, m_4 , in tonnes, as received or as despatched without sprinkled water or rainwater, or the mass of the lot, m_5 , in tonnes as received or as despatched containing sprinkled water or rainwater,

should be determined by draught survey or by other internationally recognized means, such as weightometer or weigh hopper.

NOTE In the examples given in [B.2.4](#), [B.2.5](#), [B.3.6](#), [B.3.7](#), [B.4](#) and [B.5](#), it is assumed that the mass of the lot has been determined by draught survey. In these instances, the determination of mass is conducted either before any sprinkled water or rainwater is added (unloading operations) or after all sprinkled water or rainwater has been added (loading operations).

If a weightometer or weigh hopper is used, special care shall be taken to ensure that corrections take into account the relative position of the weighing device and the sampling point. For example, during unloading operations, if sampling is conducted immediately after the weighing device, no corrections for sprinkled water or rainwater are necessary. However, corrections may be necessary if the sampling point is remote from the weighing device.

B.2.4 Calculation of moisture content corrected for sprinkled water added during unloading operations prior to taking moisture samples

The moisture content of the lot, w_s , expressed as a mass fraction (%), corrected for sprinkled water is given by [Formula \(B.1\)](#) and reported to the first decimal place:

$$w_s = \bar{w} - (100 - \bar{w}) \frac{m_3}{m_4} f \quad (\text{B.1})$$

where

\bar{w} is the mean value of the moisture content, expressed as a mass fraction (%), of a sample taken containing sprinkled water, calculated to the second decimal place;

m_3 is the mass, in tonnes, of sprinkled water;

m_4 is the mass, in tonnes, of the lot as received without sprinkled water, as determined in [B.2.3](#);

f is a predetermined factor to correct for water lost during sprinkling.

NOTE In determining a suitable f factor, the following factors are considered on a case-by-case basis:

- atmospheric conditions:
 - humidity;
 - air temperature;
 - wind effects;
 - rainfall;
- ore type/ore characteristics:
 - sizing;
 - mineralogy;
 - porosity/texture;
 - moisture content;
- sprinkler arrangement/geometry;
- chemical reagents/additives in water.

B.2.5 Calculation of moisture content corrected for sprinkled water added during loading operations after taking moisture samples

The moisture content of the lot, w_s , expressed as a mass fraction (%), corrected for sprinkled water, is given by [Formula \(B.2\)](#) and reported to the first decimal place:

$$w_s = \bar{w} + (100 - \bar{w}) \frac{m_3}{m_5} f \quad (\text{B.2})$$

where

\bar{w} is the mean value of the moisture content, expressed as a mass fraction (%), of a sample taken prior to sprinkled water, calculated to the second decimal place;

m_3 is the mass, in tonnes, of sprinkled water;

m_5 is the mass, in tonnes, of the lot containing sprinkled water, as determined in [B.2.3](#);

f is a predetermined factor to correct for water lost during sprinkling.

B.3 Corrections for rainwater

B.3.1 General

The moisture content of the lot shall be determined from the as-tested moisture content by allowing for the influx of rainwater into the vessel's hold(s), and/or onto the handling equipment during both loading and unloading operations.

Two methods of correction for rainwater are mentioned in this subclause. One refers to rainwater influx before the sampling point during unloading operations, the other to rainwater influx after the sampling point during loading operations.

B.3.2 Effective area caught in the rain

The effective area exposed to the rain shall be calculated by summation of the areas specified below, rounded to the nearest square metre.

- a) Hatch(es): The open area, in square metres, of the hatch(es) through which the lot is exposed to the rain shall be calculated on the basis of the drawings provided on board the carrying vessel.
- b) Surge hopper(s): The open area, in square metres, of the hopper(s) used during handling the lot and exposed to the rain shall be calculated on the basis of drawings of the hopper(s).
- c) Belt conveyor(s): The open area, in square metres, of the belt conveyor(s) shall be calculated by multiplying the effective belt width by the length exposed to the rain during transportation of the lot between the vessel and the point where moisture samples are taken.

B.3.3 Duration of rainy periods

The duration of rainy periods shall be determined from the time of the opening of the hatches to completion of sampling.

B.3.4 Amount of rainwater

The amount of rainwater shall be determined by means of an approved rain gauge placed close to the loading or the unloading port. The amount of rainwater shall be measured to the nearest millimetre.

B.3.5 Mass of rainwater

The mass, m_R , in tonnes, of rainwater is given by [Formula \(B.3\)](#) and rounded off to the nearest unit:

$$m_R = \frac{AR\rho}{1\,000} \quad (\text{B.3})$$

where

A is the effective area, in square metres, exposed to the rain, as calculated in [B.3.2](#);

R is the quantity, in millimetres, of rainwater obtained in [B.3.4](#);

ρ is the density, expressed in tonnes per cubic metre, of rainwater (usually $\rho = 1 \text{ t/m}^3$).

B.3.6 Calculation of moisture content corrected for rainwater ingress during unloading operations prior to taking moisture samples

When a lot is partially or totally exposed to the rain during unloading operations prior to taking moisture samples, the moisture content, w_R , expressed as a mass fraction (%), of the lot corrected for rainwater is given by [Formula \(B.4\)](#) and reported to the first decimal place:

$$w_R = \bar{w} - (100 - \bar{w}) \frac{m_R}{m_4} \quad (\text{B.4})$$

where

\bar{w} is the mean value of the moisture content, expressed as a mass fraction (%), of a sample taken containing rainwater, calculated to the second decimal place;

m_R is the mass, in tonnes, of rainwater;

m_4 is the mass, in tonnes, of the lot as received without rainwater, as determined in [B.2.3](#).

B.3.7 Calculation of moisture content corrected for rainwater ingress during loading operations after taking moisture samples

When a lot is partially or totally exposed to rain during loading operations after taking moisture samples, the moisture content, w_R , expressed as a mass fraction (%), of the lot corrected for rainwater is given by [Formula \(B.5\)](#) and reported to the first decimal place:

$$w_R = \bar{w} + (100 - \bar{w}) \frac{m_R}{m_5} \quad (\text{B.5})$$

where

\bar{w} is the mean value of the moisture content, expressed as a mass fraction (%), of a sample taken prior to rain, calculated to the second decimal place;

m_R is the mass, in tonnes, of rainwater;

m_5 is the mass, in tonnes, of the lot containing rainwater, as determined in [B.2.3](#).

B.4 Corrections for both sprinkled water and rainwater ingress during unloading operations prior to taking moisture samples

The corrected moisture content, w_o , expressed as a mass fraction (%), of a lot which has been wetted with both sprinkled water and rainwater prior to taking moisture samples, is given by [Formula \(B.6\)](#) and reported to the first decimal place:

$$w_o = \bar{w} - (100 - \bar{w}) \frac{(m_3 f + m_R)}{m_4} \quad (\text{B.6})$$

where f , m_3 , m_4 , m_R and \bar{w} are as previously defined.

B.5 Corrections for both sprinkled water and rainwater ingress during loading operations after taking moisture samples

The corrected moisture content, w_o , expressed as a mass fraction (%), of a lot which has been wetted with both sprinkled water and rainwater after taking moisture samples is given by [Formula \(B.7\)](#) and reported to the first decimal place:

$$w_o = \bar{w} + (100 - \bar{w}) \frac{(m_3 f + m_R)}{m_5} \quad (\text{B.7})$$

where f , m_3 , m_5 , m_R and \bar{w} are as previously defined.

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020

Annex C (informative)

Precision of moisture measurement

This document assumes that single test results have the precision shown as β_{PM} in [Table C.1](#).

When two test portions have been prepared from a single test sample and subjected to moisture measurement in the same laboratory, the test results will generally agree to within the repeatability limit, which is given as r in [Table 3](#) and which may be calculated as $\sqrt{2}\beta_{PM}$.

Table C.1 — Precision of moisture measurement

Average moisture content \bar{w} mass fraction (%)	Precision β_{PM} mass fraction (%)
$\bar{w} \leq 3$	$\pm 0,14$
$3 < \bar{w} \leq 6$	$\pm 0,18$
$6 < \bar{w}$	$\pm 0,22$

STANDARDSISO.COM : Click to view the full PDF of ISO 3087:2020

Annex D (informative)

Examples of test reports

Eleven examples of test reports are shown in [Tables D.1](#) to [D.11](#).

[Table D.1](#) is a test report for moisture measurement on a test portion whereas the rest all pertain to the calculation of the moisture content of lots.

Table D.1 — Example of a test report for calculating moisture measurement of a test portion

Moisture determination of a single random test portion in accordance with ISO 3087:2020, 9.1, Formula (1)		
Date	5 May 2012	
Type of iron ore	DR high grade lump	
Nominal top size of ore	22,4 mm	
Test portion minimum mass per ISO 3087:2020, Table 1	5 kg	
Identity of test portion	D45E	
Remarks	<i>Testing of a single portion from a test sample whether as part of gross sample, partial sample or increment</i>	
Laboratory reference number	D45E-5-IV-12	
Laboratory technician	TE Sterman	
Total mass before drying (g)	(1)	6 015,4
Mass of drying pan (g)	(2)	949,8
Initial mass of test portion (g)	(3) = (1) - (2)	5 065,6
0,05 % of initial mass of test portion (g)	(4) = (3) / 2 000	2,5
Total mass after 4 h drying (g)	(5)	5 804,8
Total mass after further 1 h drying (g)	(6)	5 795,2
Difference after 5 h drying	(5) - (6)	9,6
Total mass after another 1 h drying (g)	(7)	5 793,5
Difference after 6 h drying	(6) - (7)	1,7
Final drying loss (g)	(8) = (1) - (7)	221,9
Value of moisture measurement, w_i (%)	(9) = 8 / 3	4,38 %

The difference after 5 h drying (5) - (6) was 9,6 g and exceeded (4). Consequently, another 1 h drying was conducted.

The difference after 6 h drying (6) - (7) became less than (4), therefore drying of this test portion was terminated after the second 1 h interval.

**Table D.2 — Example test report showing recording and calculation for determining moisture content of a lot from a gross sample
(test portions' average moisture used)**

Moisture determination of a lot through a gross sample in accordance with ISO 3087:2020, 9.2.2	
Date	15 December 2015
Type of iron ore	Medium grade coarse fines
Nominal top size of ore	17,5 mm
Test portion minimum mass per ISO 3087:2020, Table 1	5 kg
Identity and quantity of lot	Lot 2016-426, 229 727 t
Duration of loading	25,6 h
Remarks	Four test portions per gross sample as per ISO 3087:2020, Table 2. Moisture of lot calculated as per ISO 3087:2020, Formula (2)
Laboratory reference number	MGC-F-15-XII-15
Laboratory technician	E Spinactor
Test portion #	
Total mass before drying (g)	(1) 6 004,1
Mass of drying pan (g)	(2) 957,2
Initial mass of test portion (g)	(3) = (1) - (2) 5 046,9
0,05 % of initial mass of test portion (g)	(4) = (3) / 2 000 2,52
Total mass after 4 h drying (g)	(5) 5 800,3
Total mass after further 1 h drying (g)	(6) 5 793,1
Difference after 5 h drying (g)	(5) - (6) 7,2
Total mass after another 1 h drying (g)	(7) 5 792,1
Difference after 6 h drying (g)	(6) - (7) 1,0
Final drying loss (g)	(8) = (1) - (7) 2120
Test portion moisture content, w_i	(9) = 8 / 3 4,20 %
Test portion moisture content range	0,18 %
Repeatability $\times 1,3$ (see Table 3)	0,33 %
Moisture content of lot	(Average of w_i) 4,3 %

If sample containers and storage conditions prevent moisture change of moisture partial samples, moisture gross samples may be prepared for whole lots (see ISO 3082:2017).

Table D.3 — Example test report showing recording and calculation for determining moisture content of a lot from a gross sample (test portions' median moisture used)

Moisture determination of a lot through a gross sample in accordance with ISO 3087:2020, 9.2.2						
Date	29 March 2018					
Type of iron ore	High grade fines					
Nominal top size of ore	6,3 mm					
Test portion minimum mass per ISO 3087:2020, Table 1	1 kg					
Identity and quantity of lot	201803-21, 122 574 t					
Duration of loading	9,5 h					
Remarks	Four test portions per gross sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.2					
Laboratory reference number	LGF339					
Laboratory technician	AS Sayer					
Test portion #	GS-TP1	GS-TP2	GS-TP3	GS-TP4		
Total mass before drying (g)	1 500,7	1 502,8	1 494,1	1 497,2		
Mass of drying pan (g)	475,3	475,1	475,7	475,2		
Initial mass of test portion (g)	1 025,4	1 027,7	1 018,4	1 022,0		
0,05 % of initial mass of test portion (g)	0,51	0,51	0,51	0,51		
Total mass after 4 h drying (g)	1 476,7	1 477,1	1 474,6	1 472,2		
Total mass after further 1 h drying (g)	1 473,3	1 473,9	1 470,1	1 471,2		
Difference after 5 h drying (g)	3,4	3,2	4,5	1,0		
Total mass after another 1 h drying (g)	1 472,8	1 473,7	1 469,6	1 470,7		
Difference after 6 h drying (g)	0,5	0,2	0,5	0,5		
Final drying loss (g)	27,9	29,1	24,5	26,5		
Test portion moisture content, w_i	2,72 %	2,83 %	2,41 %	2,59 %		
Test portion moisture content range	0,43 %					
Repeatability × 1,3 (see Table 3)	0,26 %					
Moisture content of lot	(Median of w_i) 2,7 %					

If sample containers and storage conditions prevent moisture change of moisture partial samples, moisture gross samples may be prepared for whole lots (see ISO 3082:2017).

Table D.4 — Example test report showing recording and calculation for determining moisture content of a lot from two partial samples (mass-basis sampling)

Moisture determination of mass-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3												
Date	30 June 2017											
Type of iron ore	Kumbung CID sinter fines											
Nominal top size of ore	9,5 mm											
Test portion minimum mass per ISO 3087:2020, Table 1	1 kg											
Identity and quantity of lot	KC725BS, 69 000 t											
Duration of loading	7,8 h											
Remarks	Four test portions per partial sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.3, Formula (3)											
Laboratory reference number	CPEL 2017-001											
Laboratory technician	A Nalyst											
Partial sample #						PS1			PS2			
Quantity of primary increments per partial sample (N_i) (1)						80			80			
Sum of primary increments of all partial samples (2) = S (1)						160						
Test portion number #	PS1-TP1	PS1-TP2	PS1-TP3	PS1-TP4	PS2-TP1	PS2-TP2	PS2-TP3	PS2-TP4				
Total mass before drying (g) (3)	1 615,3	1 710,1	1 570,9	1 680,3	1 570,5	1 621,1	1 725,2	1 702,7				
Mass of drying pan (g) (4)	475,1	476,3	472,7	477,8	474,1	475,4	476,8	474,7				
Initial mass of test portion (g) (5) = (3) - (4)	1 140,2	1 233,8	1 098,2	1 202,5	1 096,4	1 145,7	1 248,4	1 228,0				
0,05 % of initial mass of test portion (g) (6) = (5) / 2 000	0,57	0,62	0,55	0,60	0,55	0,57	0,62	0,61				
Total mass after 4 h drying (g) (7)	1 530,3	1 620,4	1 485,9	1 590,6	1 485,4	1 536,0	1 634,2	1 611,6				
Drying loss (g) (8) = (3) - (7)	85,0	89,7	85,0	89,7	85,1	85,1	91,0	91,1				
Total mass after 5 h drying (g) (9)	1 510,8	1 601,2	1 469,9	1 569,6	1 468,8	1 515,1	1 615,1	1 592,2				
Drying loss (g) (10) = (3) - (9)	104,5	108,9	101,0	110,7	101,7	106,0	110,1	110,5				
Additional drying loss (g) (11) = (10) - (8)	19,5	19,2	16,0	21,0	16,6	20,9	19,1	19,4				
Total mass after 6 h drying (g) (12)	1 509,9	1 600,4	1 469,1	1 569,0	1 468,1	1 514,4	1 614,2	1 591,4				
Drying loss (g) (13) = (3) - (12)	105,4	109,7	1 01,8	111,3	102,4	106,7	111,0	111,3				

Table D.4 (continued)

Moisture determination of mass-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3												
Additional drying loss (g)	(14) = (13) - (10)	0,9	0,8	0,8	0,6	0,7	0,7	0,7	0,7	0,9	0,8	0,8
Total mass after 7 h drying (g)	(15)	1 509,7	1 599,8	1 468,8	—	1 467,9	1 514,3	1 613,8	1 590,9	1 613,8	1 590,9	1 590,9
Drying loss (g)	(16) = (15) - (3)	105,6	110,3	102,1	—	102,6	106,8	111,4	111,8	111,4	111,8	111,8
Additional drying loss (g)	(17) = (16) - (13)	0,2	0,6	0,3	—	0,2	0,1	0,4	0,5	0,4	0,5	0,5
Test portion moisture content	(18) = (max. of 10,13,16) / (5)	9,26 %	8,94 %	9,30 %	9,26 %	9,36 %	9,32 %	8,92 %	9,10 %	9,32 %	8,92 %	9,10 %
Range of partial sample moistures	(19) = (max. of 18) - (min. of 18)	0,36 %										0,43 %
Repeatability × 1,3 (see ISO 3087:2020, Table 3)		0,40 %										0,40 %
Partial sample moisture (\bar{w})	(20) = f(18)	9,19 %	(Average)		9,21 %		(Median)					
Weighted moisture number per partial sample	(21) = (1) × (20)	7,3508										7,3690
Sum of weighted moisture numbers	(22) = Σ (21)	14,719 9										
Weighted average moisture of lot	(23) = (22) / (2)	9,2 %										

A minimum of two parts and eight tests are required for a lot mass below 70 kt (see ISO 3082:2017, Table 7).

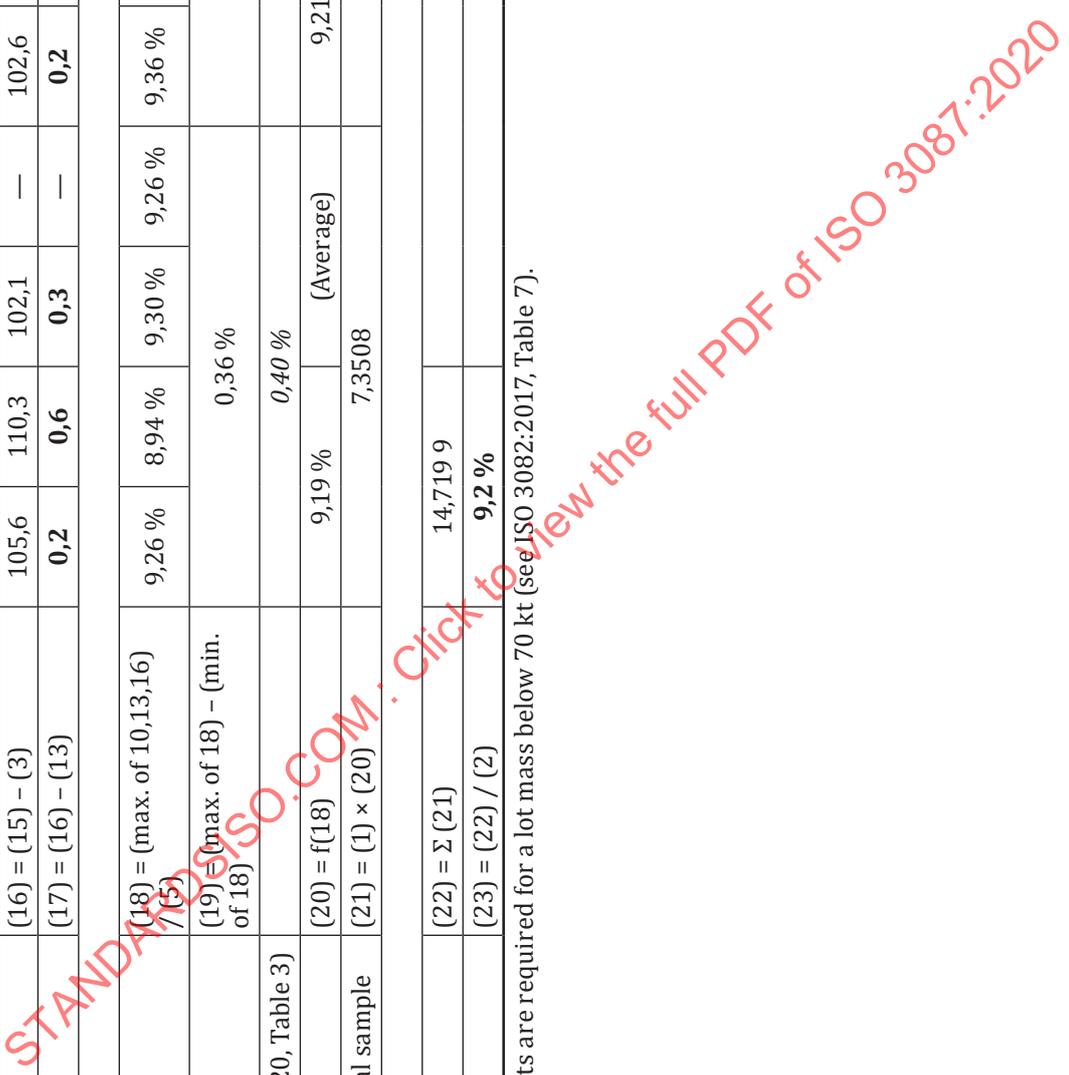


Table D.5 — Example test report showing recording and calculation for determining moisture content of a lot from two partial samples (time-basis sampling)

Moisture determination of time-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3												
Date	30 July 2017											
Type of iron ore	Low phos fines											
Nominal top size of ore	8 mm											
Test portion minimum mass per ISO 3087:2020, Table 1	1 kg											
Identity and quantity of lot	Lot 2016-426, 52 kt											
Duration of loading	12,3 h											
Remarks	Two test portions per partial sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.3, Formula (4)											
Laboratory reference number	LGGF-30-XI-16											
Laboratory technician	IN Spector											
Partial sample #						PS1			PS2			
Mass of the <i>i</i> th part (m_i) (t)	(1)					25 878 t			26 001 t			
Sum of <i>i</i> th part mass for all partial samples (t)	(2) = S (1)											
Test portion number #	PS1-TP1	PS1-TP2	PS1-TP3	PS1-TP4	PS1-TP1	PS1-TP2	PS1-TP3	PS1-TP4	PS2-TP1	PS2-TP2	PS2-TP3	PS2-TP4
Total mass before drying (g)	1 565,0	1 602,1	1 632,4	1 598,6	1 533,4	1 571,8	1 533,4	1 571,8	1 533,4	1 571,8	1 573,6	1 602,2
Mass of drying pan (g)	532,6	532,5	533,1	532,8	531,9	532,7	532,8	532,7	531,9	532,4	532,4	531,8
Initial mass of test portion (g)	1 032,4	1 069,6	1 099,3	1 065,8	1 001,5	1 039,1	1 065,8	1 039,1	1 001,5	1 041,2	1 041,2	1 070,4
0,05 % of initial mass of test portion (g)	0,52	0,53	0,55	0,53	0,50	0,52	0,53	0,52	0,50	0,52	0,52	0,54
Total mass after 4 h drying (g)	1 487,6	1 519,3	1 548,4	1 518,1	1 466,8	1 492,6	1 518,1	1 466,8	1 466,8	1 492,6	1 497,5	1 519,9
Drying loss (g)	77,4	82,8	84,0	80,5	66,6	79,2	80,5	66,6	66,6	79,2	76,1	82,3
Total mass after 5 h drying (g)	1 484,0	1 518,3	1 546,0	1 516,1	1 464,4	1 489,9	1 516,1	1 464,4	1 464,4	1 489,9	1 495,2	1 517,8
Drying loss (g)	81,0	83,8	86,4	82,5	69,0	81,9	82,5	69,0	69,0	81,9	78,4	84,4
Additional drying loss (g)	3,6	1,0	2,4	2,0	2,4	2,7	2,0	2,4	2,4	2,7	2,3	2,1
Total mass after 6 h drying (g)	1 483,3	1 517,7	1 545,6	1 515,0	1 463,6	1 489,4	1 515,0	1 463,6	1 463,6	1 489,4	1 494,2	1 517,4

Table D.5 (continued)

Moisture determination of time-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3												
Drying loss (g)	(13) = (3) - (12)	81,7	84,4	86,8	83,6	69,8	82,4	79,4	84,8			
Additional drying loss (g)	(14) = (13) - (10)	0,7	0,6	0,4	1,1	0,8	0,5	1,0	0,4			
Total mass after 7 h drying (g)	(15)	1 483,1	1 517,6	—	1 514,6	1 463,3	—	1 493,3	—			
Drying loss (g)	(16) = (15) - (3)	81,9	84,5	—	84,0	70,1	—	80,3	—			
Additional drying loss (g)	(17) = (16) - (13)	0,2	0,1	—	0,4	0,3	—	0,9	—			
Total mass after 8 h drying (g)	(18)	—	—	—	—	—	—	1 492,8	—			
Drying loss (g)	(19) = (18) - (3)	—	—	—	—	—	—	80,8	—			
Additional drying loss (g)	(20) = (19) - (16)	—	—	—	—	—	—	0,5	—			
Test portion moisture content w_i	(21) = (max. of 10,13,16,19)/(5)	7,93 %	7,90 %	7,90 %	7,88 %	7,00 %	7,93 %	7,76 %	7,92 %			
Range of partial sample moistures	(22) = range(21)	0,05 %										
Repeatability $\times 1,3$ (see ISO 3087:2020, Table 3)		0,40 %										
Partial sample moisture content (\bar{w}_j)	(23) = f(21)	7,90 %	(Average)		7,84 %							(Median)
Weighted moisture number per partial sample	(24) = (1) \times (23)	2 045,038 6										2 038,809 7
Sum of weighted moisture numbers	(25) = Σ (24)	4 083,848 4										
Weighted average moisture of lot	(26) = (25) / (2)	7,9 %										

A minimum of two parts and eight tests are required for a lot mass below 70 kt (see ISO 3082:2017, Table 7).

Table D.6 — Example test report showing recording and calculation for determining moisture content of a lot from four partial samples (mass-basis sampling)

Moisture determination of mass-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3												
Date	30 November 2016											
Type of iron ore	DR high grade lump											
Nominal top size of ore	18 mm											
Test portion minimum mass per ISO 3087:2020, Table 1	5 kg											
Identity and quantity of lot	Lot 2016-426, 128 kt											
Duration of loading	7,9 h											
Remarks	Two test portions per partial sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.3, Formula (3)											
Laboratory reference number	LGCF-30-XI-17											
Laboratory technician	NS Pectori											
Partial sample #	PS1	PS2	PS3	PS4								
Number of primary increments per partial sample (N _i)	14	14	14	13								
Sum of i th part mass for all partial samples					55							
Test portion number #	PS1-TP1	PS1-TP2	PS2-TP1	PS2-TP2	PS3-TP1	PS3-TP2	PS4-TP1	PS4-TP2				
Total mass before drying (g)	1 565,1	1 602,0	1 632,4	1 598,6	1 543,4	1 569,8	1 573,7	1 601,2				
Mass of drying pan (g)	532,6	532,5	533,1	532,8	531,9	532,7	532,4	531,8				
Initial mass of test portion (g)	1 032,5	1 069,5	1 099,3	1 065,8	1 011,5	1 037,1	1 041,3	1 069,4				
0,05 % of initial mass of test portion (g)	0,52	0,53	0,55	0,53	0,51	0,52	0,52	0,53				
Total mass after 4 h drying (g)	1 487,6	1 519,3	1 548,4	1 518,1	1 466,8	1 492,6	1 497,5	1 519,9				
Drying loss (g)	(7) = (3) - (7)											
Total mass after 5 h drying (g)	1 484,0	1 518,3	1 546,0	1 516,1	1 464,4	1 489,9	1 495,2	1 517,8				
Drying loss (g)	(10) = (3) - (9)											
Additional drying loss (g)	(11) = (10) - (8)											
Total mass after 6 h drying (g)	1 483,3	1 517,7	1 545,6	1 515,0	1 463,6	1 489,4	1 494,2	1 517,4				
Drying loss (g)	(13) = (3) - (12)											

Table D.6 (continued)

Moisture determination of mass-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3										
Additional drying loss (g)	(14) = (13) - (10)	0,7	0,6	0,4	1,1	0,8	0,5	1,0	0,4	
Total mass after 7 h drying (g)	(15)	1 483,1	1 517,6	—	1 514,6	1 463,3	—	1 493,3	—	
Drying loss (g)	(16) = (15) - (3)	82,0	84,4	—	84,0	80,1	—	80,4	—	
Additional drying loss (g)	(17) = (16) - (13)	0,2	0,1	—	0,4	0,3	—	0,9	—	
Total mass after 8 h drying (g)	(18)	—	—	—	—	—	—	1 492,8	—	
Drying loss (g)	(19) = (18) - (3)	—	—	—	—	—	—	80,9	—	
Additional drying loss (g)	(20) = (19) - (16)	—	—	—	—	—	—	0,5	—	
Test portion moisture content	(21) = (max. of 10,13,16,19) / (5)	7,94 %	7,89 %	7,90 %	7,88 %	7,92 %	7,75 %	7,77 %	7,84 %	
Partial sample moisture content (\bar{w}_j)	(22) = average (21)	7,92 %	7,89 %	7,90 %	7,89 %	7,84 %	7,80 %	7,80 %	7,80 %	
Weighted moisture number per partial sample	(23) = (1) × (22)	1,108 3	1,104 3	1,104 4	1,104 4	1,097 0	1,014 3	1,014 3	1,014 3	
Sum of weighted moisture numbers	(24) = Σ (23)	4,324 1								
Weighted average moisture of lot	(25) = (24) / (2)	7,9 %								

A minimum of four parts and eight tests are required for a lot mass between 100 kt and 150 kt (see ISO 3082:2017, Table 7).

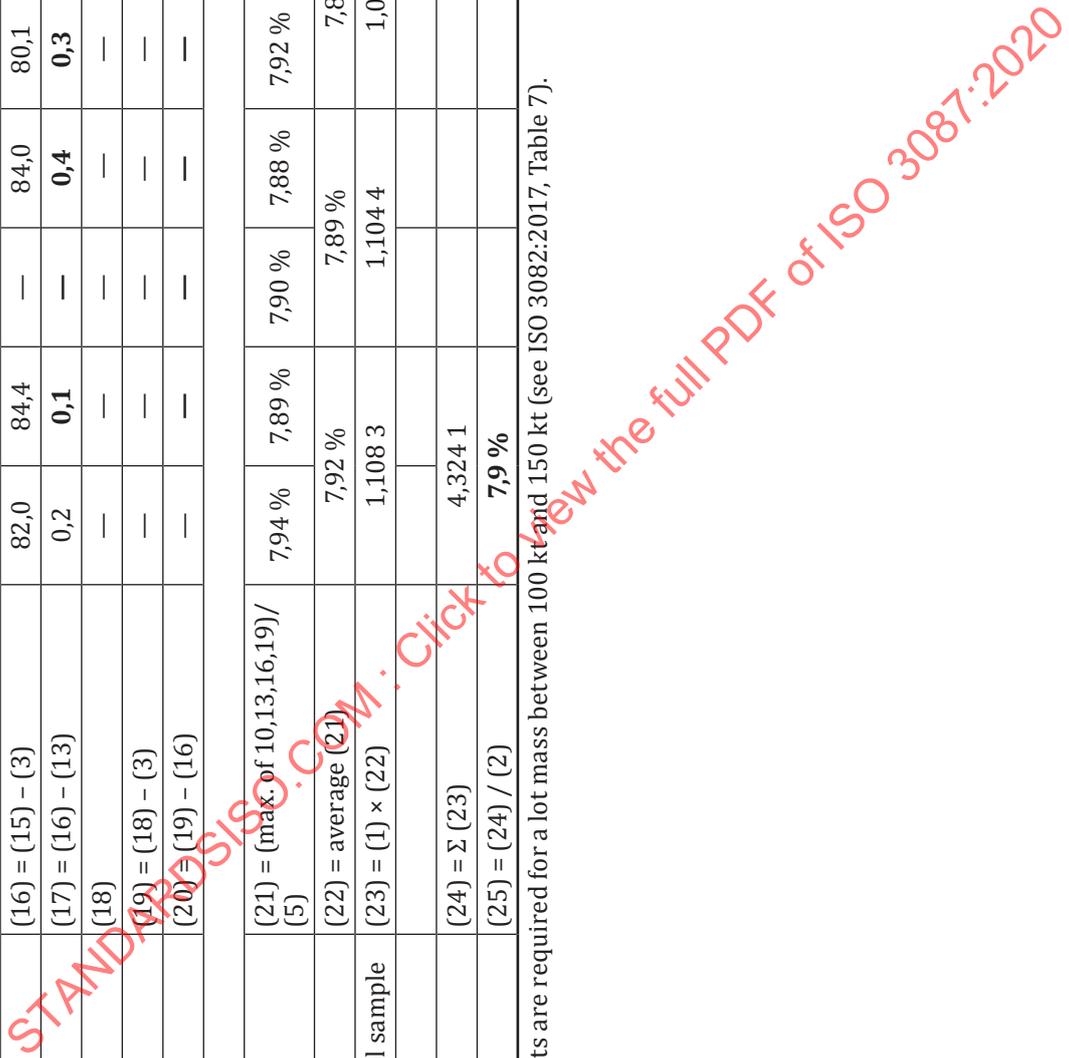


Table D.7 — Example test report showing recording and calculation for determining moisture content of a lot from four partial samples (time-basis sampling)

Moisture determination of time-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3											
Date	30 November 2016										
Type of iron ore	Low grade coarse fines										
Nominal top size of ore	16 mm										
Test portion minimum mass per ISO 3087:2020, Table 1	5 kg										
Identity and quantity of lot	Lot 2016-426, 128 kt										
Duration of loading	7,9 h										
Remarks	Two test portions per partial sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.3, Formula (4)										
Laboratory reference number	LGCF-30-XI-16										
Laboratory technician	RI Specton										
Partial sample #	PS1	PS2	PS3	PS4							
Mass of the <i>i</i> th part (m_i) (t)	32 023	31 721	32 397	31 983							
Sum of <i>i</i> th part mass for all partial samples (t) (2) = S (1)	128 124										
Test portion number #	PS1-TP1	PS1-TP2	PS2-TP1	PS2-TP2	PS3-TP1	PS3-TP2	PS4-TP1	PS4-TP2			
Total mass before drying (g)	1 565,0	1 602,0	1 632,4	1 598,6	1 543,4	1 569,8	1 573,7	1 601,2			
Mass of drying pan (g)	532,6	532,5	533,1	532,8	531,9	532,7	532,4	531,8			
Initial mass of test portion (g)	1 032,4	1 069,5	1 099,3	1 065,8	1 011,5	1 037,1	1 041,3	1 069,4			
0,05 % of initial mass of test portion (g)	0,52	0,53	0,55	0,53	0,51	0,52	0,52	0,53			
Total mass after 4 h drying (g)	1 487,6	1 519,3	1 548,4	1 518,1	1 466,8	1 492,6	1 497,5	1 519,9			
Drying loss (g)	77,4	82,7	84,0	80,5	76,6	77,2	76,2	81,3			
Total mass after 5 h drying (g)	1 484,0	1 518,3	1 546,0	1 516,1	1 464,0	1 489,9	1 495,2	1 517,8			
Drying loss (g)	81,0	83,7	86,4	82,5	79,0	79,9	78,5	83,4			
Additional drying loss (g)	3,6	1,0	2,4	2,0	2,4	2,7	2,3	2,1			
Total mass after 6 h drying (g)	1 483,3	1 517,7	1 545,6	1 515,0	1 463,6	1 489,4	1 494,2	1 517,4			

Table D.7 (continued)

Moisture determination of time-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3											
Drying loss (g)	(13) = (3) - (12)	81,7	84,3	86,8	83,6	79,8	80,4	79,5	83,8		
Additional drying loss (g)	(14) = (13) - (10)	0,7	0,6	0,4	1,1	0,8	0,5	1,0	0,4		
Total mass after 7 h drying (g)	(15)	1 483,1	1 517,6	—	1 514,6	1 463,3	—	1 493,3	—		
Drying loss (g)	(16) = (15) - (3)	81,9	84,4	—	84,0	80,1	—	80,4	—		
Additional drying loss (g)	(17) = (16) - (13)	0,2	0,1	—	0,4	0,3	—	0,9	—		
Total mass after 8 h drying (g)	(18)	—	—	—	—	—	—	1 492,8	—		
Drying loss (g)	(19) = (18) - (3)	—	—	—	—	—	—	80,9	—		
Additional drying loss (g)	(20) = (19) - (16)	—	—	—	—	—	—	0,5	—		
Test portion moisture content w_i	(21) = (max. of 10, 13, 16, 19) / (5)	7,93 %	7,89 %	7,90 %	7,88 %	7,92 %	7,75 %	7,77 %	7,84 %		
Partial sample moisture content (\bar{w}_i)		7,91 %		7,89 %		7,84 %		7,80 %			
Weighted moisture number per partial sample	(22) = (1) × (21)	2 533,741 4		2 502,364 6		2 538,518 6		2 495,522 3			
Sum of weighted moisture numbers	(23) = Σ (22)	10 070,146 8									
Weighted average moisture of lot	(24) = (23) / (2)	7,9 %									

A minimum of four parts and eight tests are required for a lot mass between 100 kt and 150 kt (see ISO 3082:2017, Table 7).

Table D.8 — Example test report showing recording and calculation for determining moisture content of a lot from eight partial samples (mass-basis sampling)

Moisture determination of mass-basis partial sampled lot in accordance with ISO 3087:2020, 9.2.3											
Date	14 May 2012										
Type of iron ore	DR high grade lump										
Nominal top size of ore	22,4 mm										
Test portion minimum mass per ISO 3087:2020, Table 1	5 kg										
Identity and quantity of lot	Lot D45E, 162 675 t										
Duration of loading	14 h										
Remarks	Single test portion per partial sample as per ISO 3087:2020, Table 2 Moisture of lot calculated as per ISO 3087:2020, 9.2.3, Formula (3)										
Laboratory reference number	DOL 20120505-01										
Laboratory technician	A Sayers										
Partial sample #	PS1	PS2	PS3	PS4	PS5	PS6	PS7	PS8			
Quantity of primary increments per partial sample (N _i) (1)	14	13	14	14	15	14	15	12			
Sum of primary increments of all partial samples (2) = S (1)	111										
Test portion #	PS1-TP1	PS2-TP1	PS3-TP1	PS4-TP1	PS5-TP1	PS6-TP1	PS7-TP1	PS8-TP1			
Total mass before drying (g) (3)	6 015,0	6 110,0	5 970,0	6 280,0	5 970,0	6 021,0	6 123,0	6 378,0			
Mass of drying pan (g) (4)	950,1	952,6	945,4	955,5	948,2	950,7	953,6	949,2			
Initial mass of test portion (g) (5) = (3) - (4)	5 064,9	5 157,4	5 024,6	5 324,5	5 021,8	5 070,3	5 169,4	5 428,8			
0,05 % of initial mass of test portion (g) (6) = (5) / 2 000	2,53	2,58	2,51	2,66	2,51	2,54	2,58	2,71			
Total mass after 4 h drying (g) (7)	5 821,2	5 998,4	5 868,3	6 093,5	5 828,5	5 898,5	5 970,0	6 171,7			
Drying loss (g) (8) = (3) - (7)	193,8	111,6	101,7	186,5	141,5	122,5	153,0	206,3			
Total mass after 5 h drying (g) (9)	5 790,1	5 899,3	5 797,5	6 064,9	5 767,8	5 806,6	5 908,2	6 156,0			
Drying loss (g) (10) = (3) - (9)	224,9	210,7	172,5	215,1	202,2	214,4	214,8	222,0			
Additional drying loss (g) (11) = (10) - (8)	31,1	99,1	70,8	28,6	60,7	91,9	61,8	15,7			
Total mass after 6 h drying (g) (12)	5 789,3	5 896,0	5 756,8	6 062,2	5 752,4	5 804,2	5 905,3	6 154,1			