

Reverse

INTERNATIONAL STANDARD



3228

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

**Rolling bearings — Bearings with spherical outside surface and extended inner ring width — Cast and pressed housings**

*Roulements — Roulements à surface extérieure sphérique et à bague intérieure large — Paliers moulés et paliers emboutis*

First edition — 1974-08-01

STANDARDSISO.COM : Click to view the full PDF of ISO 3228:1974

UDC 621.822.6

Ref. No. ISO 3228-1974 (E)

Descriptors : rolling bearings, bearings, dimensions.

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 3228 was drawn up by Technical Committee ISO/TC 4, *Rolling bearings*, and circulated to the Member Bodies in May 1973.

It has been approved by the Member Bodies of the following countries:

Austria	Italy	Turkey
Brazil	Netherlands	United Kingdom
Czechoslovakia	Poland	U.S.A.
France	Spain	U.S.S.R.
Germany	Sweden	Yugoslavia
Hungary	Switzerland	
India	Thailand	

This International Standard has also been approved by the International Union of Railways (UIC).

The Member Bodies of the following countries expressed disapproval of the document on technical grounds:

Australia  
Japan  
Romania

# Rolling bearings – Bearings with spherical outside surface and extended inner ring width – Cast and pressed housings

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies boundary dimensions for cast and pressed housings for rolling bearings with spherical outside surface and extended inner ring width for which boundary dimensions are given in ISO 2264, *Rolling bearings – Bearings with spherical outside surface and extended inner ring width*. It deals with both plummer block housings and flanged housings. The inclusion of relubrication features is optional, but when provided they should intersect the zone specified in ISO 2264 in such a way that lubricant will satisfactorily feed from the housing through this zone. The exact design of the relubrication features is not otherwise controlled by this International Standard.

## 2 SYMBOLS AND DIMENSIONS

The symbols shown in the figures and given in the tables denote nominal dimensions.

Where "max." is shown in the tables, this indicates that the value is both the largest nominal and the largest actual value permitted.

Where "min." is shown in the tables, this indicates that the value is both the smallest nominal and the smallest actual value permitted.

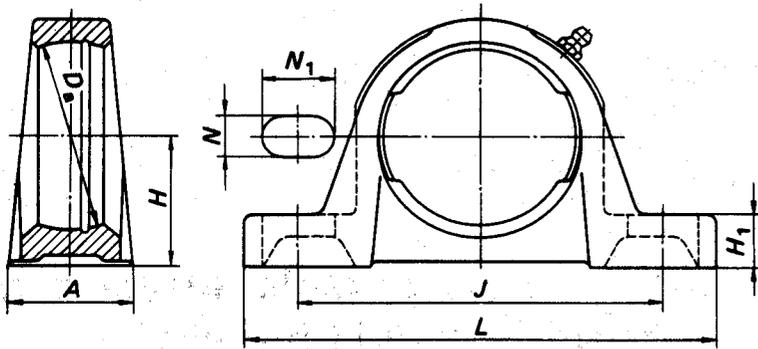


TABLE 1 – Cast plummer block housings

Dimensions in millimetres

$D_a$	$L$ max.	$A$ max.	$J$	$H_1$ max.	$H$	$N$ min.	$N_1$ min.
40	128	39	96	16	30,2	11,5	16
47	128	39	96	16	33,3	11,5	16
52	140	39	105	17	36,5	11,5	16
62	166	48	121	19	42,9	14	19
72	167	48	126	20	47,6	14	19
80	185	55	136	20	49,2	14	19
85	191	55	146	22	54	14	19
90	207	61	159	23	57,2	18	20,5
100	220	61	172	25	63,5	18	20,5
110	242	71	186	27	69,9	18	22

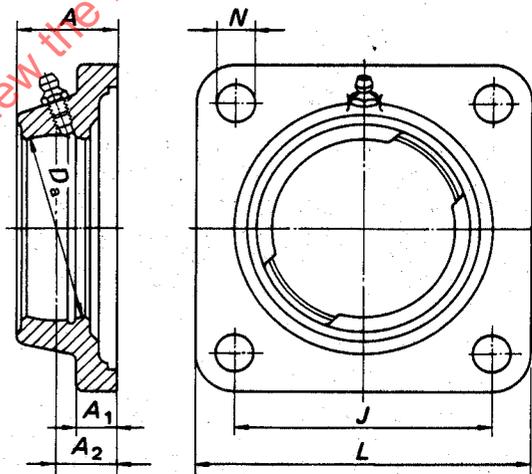


TABLE 2 – Cast flanged housings, square

Dimensions in millimetres

$D_a$	$L$ max.	$A$ max.	$J$	$A_1$ max.	$A_2$	$N$
40	77	28	54	13	17	11,5
47	86	34	63,5	15	19	11,5
52	96	35	70	15	19	11,5
62	109	38	82,5	16	20	11,5
72	118	38	92	17	21	14
80	131	42	101,5	17	24	14
85	137	42	105	18	24	16
90	144	46	111	20	28	18
100	163	50	130	21	31	18
110	175	55	143	21	34	18

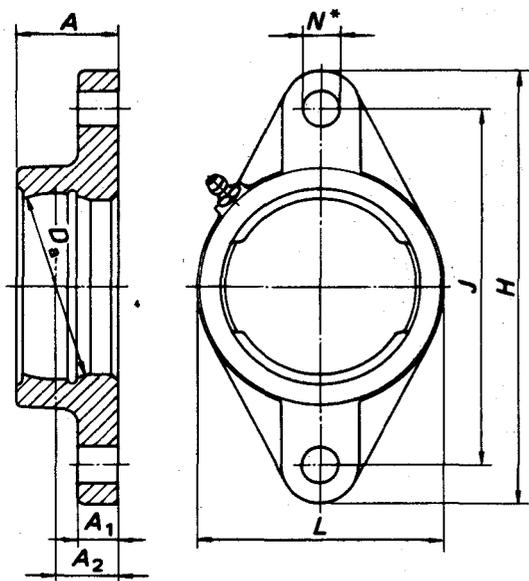


TABLE 3 — Cast flanged housings, oval

Dimensions in millimetres

$D_a$	$H$ max.	$L$ max.	$A$ max.	$J$	$A_1$ max.	$A_2$	$N^*$
40	99	57	28	76,5	13	17	11,5
47	113	61	34	90	15	19	11,5
52	125	70	35	99	15	19	11,5
62	142	83	38	116,5	16	20	11,5
72	156	96	38	130	17	21	14
80	172	105	42	143,5	17	24	14
85	180	111	42	148,5	18	24	16
90	190	116	46	157	20	28	18
100	217	134	50	184	21	31	18
110	235	138	55	202	21	34	18

\* The hole may alternatively be square with the side equal to  $N$ .

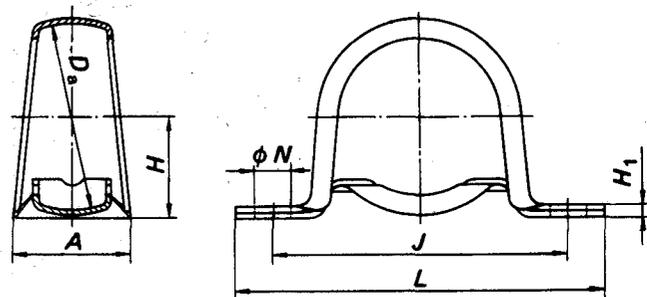


TABLE 4 — Pressed plumber block housings

Dimensions in millimetres

$D_a$	$L$ max.	$A$ max.	$J$	$H_1$ max.	$H$	$N$
40	86	26	68	3,5	22,2	9,5
47	99	32	76	3,5	25,4	9,5
52	108	32	86	4	28,6	11,5
62	119	38	95	4	33,3	11,5
72	130	41	106	5	39,7	11,5
80	148	43	120	5	43,7	13
85	156	45	128	6	46,8	13

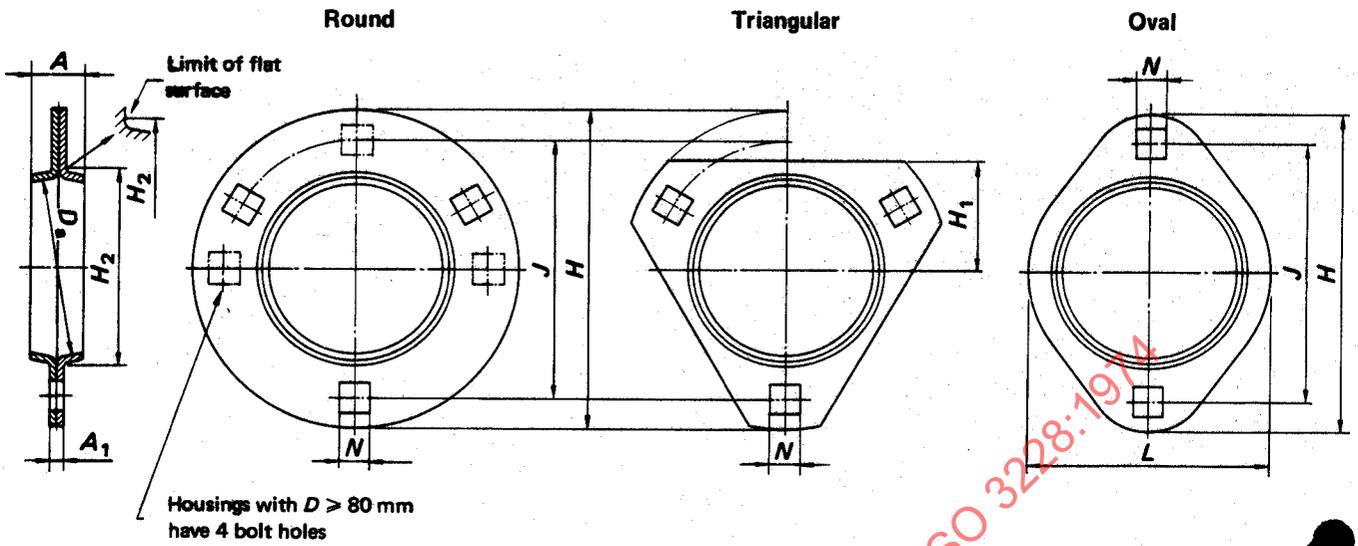


TABLE 5 — Pressed flanged housings.  
Round, triangular and oval.

Dimensions in millimetres

$D_a$	$H$ max.	$L$ max.	$A$ max.	$J$	$A_1$ max.	$H_1$ max.	$H_2$ max.	$N$
40	81	59	15	63,5	4	29	49	7,1
47	91	67	16	71,5	4,5	34	55	8,7
52	96	71	18	76	4,5	35	60	8,7
62	113	85	20	90,5	5,5	41	71	10,5
72	123	94	21	100	5,5	45	81	10,5
80	148	—	23	119	7	—	91	13,5
85	150	—	23	120,5	7	—	97	13,5
90	156	—	25	127	8	—	102	13,5
100	167	—	26	138	8	—	113	13,5