
**Information technology — JPEG 2000
image coding system: Core coding
system**

**AMENDMENT 5: Enhancements for digital
cinema and archive profiles (additional frame
rates)**

*Technologies de l'information — Système de codage d'images
JPEG 2000: Système de codage de noyau —*

*AMENDEMENT 5: Améliorations pour le cinéma numérique et les
profils d'archive (taux de trame supplémentaire)*

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15444-1:2004/Amd5:2013



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Amendment 5 to ISO/IEC 15444-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*, in collaboration with ITU-T. The identical text is published as ITU-T Rec. T.800 (08/2002)/Amd.5.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 15444-1:2004/AMD5:2013

INTERNATIONAL STANDARD

RECOMMENDATION ITU-T

Information technology – JPEG 2000 image coding system: Core coding system

Amendment 5

Enhancements for digital cinema and archive profiles
(additional frame rates)**1) Annex A**

- a) *The following material should be placed immediately after Table A.45. This replaces all text that previously followed Table A.45 up to but not including Table A.47.*

A.10.1 Codestream restrictions for digital cinema applications including archiving

In addition to the profiles defined in Table A.10, five profiles are defined for digital cinema and archiving applications as detailed in Table A.46. The first two, in form of Profile-3 and Profile-4, are primarily intended for distribution. In addition, the three profiles listed under profile indication numbers 5 to 7 are intended for archiving and production purposes. The two extended scalable profiles (Profile-5 and Profile-6) are intended to be used for easily accessible archives. The long-term storage profile (Profile-7) is intended for original camera capture or post-production workflows.

Table A.46 – Codestream restrictions for digital cinema applications

	2K digital cinema profile	4K digital cinema profile	Scalable 2K digital cinema profile	Scalable 4K digital cinema profile	Long-term storage profile
SIZ marker segment					
Profile Indication	R _{siz} =3	R _{siz} =4	R _{siz} =5	R _{siz} =6	R _{siz} =7
Image size	X _{siz} ≤ 2048, Y _{siz} ≤ 1080	X _{siz} ≤ 4096, Y _{siz} ≤ 2160	X _{siz} ≤ 2048, Y _{siz} ≤ 1080	X _{siz} ≤ 4096, Y _{siz} ≤ 2160	X _{siz} ≤ 16384, Y _{siz} ≤ 8640
Tiles	one tile for the whole image: Y _{Tsiz} + Y _{TOSiz} ≥ Y _{siz} X _{Tsiz} + X _{TOSiz} ≥ X _{siz}	one tile for the whole image: Y _{Tsiz} + Y _{TOSiz} ≥ Y _{siz} X _{Tsiz} + X _{TOSiz} ≥ X _{siz}	one tile for the whole image: Y _{Tsiz} + Y _{TOSiz} ≥ Y _{siz} X _{Tsiz} + X _{TOSiz} ≥ X _{siz}	one tile for the whole image: Y _{Tsiz} + Y _{TOSiz} ≥ Y _{siz} X _{Tsiz} + X _{TOSiz} ≥ X _{siz}	One tile for the whole image or minimum tile size: Y _{Tsiz} + Y _{TOSiz} ≥ 512 X _{Tsiz} + X _{TOSiz} ≥ 1024
Image and tile origin	X _O _{siz} = Y _O _{siz} = X _T _O _{siz} = Y _T _O _{siz} = 0	X _O _{siz} ≠ Y _O _{siz} = X _T _O _{siz} = Y _T _O _{siz} = 0	X _O _{siz} = Y _O _{siz} = X _T _O _{siz} = Y _T _O _{siz} = 0	X _O _{siz} = Y _O _{siz} = X _T _O _{siz} = Y _T _O _{siz} = 0	X _O _{siz} = Y _O _{siz} = X _T _O _{siz} = Y _T _O _{siz} = 0
Sub-sampling	X _R _{siz} ' = Y _R _{siz} ' = 1	X _R _{siz} ' = Y _R _{siz} ' = 1	X _R _{siz} ' = Y _R _{siz} ' = 1	X _R _{siz} ' = Y _R _{siz} ' = 1	No restriction
Number of components	C _{siz} = 3	C _{siz} = 3	C _{siz} = 3	C _{siz} = 3	C _{siz} ≤ 8
Bitdepth	S _{siz} ' = 11 (i.e., 12 bit unsigned)	S _{siz} ' = 11 (i.e., 12 bit unsigned)	S _{siz} ' = 11 (i.e., 12 bit unsigned)	S _{siz} ' = 11 (i.e., 12 bit unsigned)	No restriction
RGN marker segment	Disallowed, i.e., no region of interest	Disallowed, i.e., no region of interest	Disallowed, i.e., no region of interest	Disallowed, i.e., no region of interest	Disallowed, i.e., no region of interest
COD/COC marker segments	Main header only	Main header only	Main header only	Main header only	Main header only
Coding style	Scod, Scoc = 0000 0esp, where p=1, e=0 or e=1, s=0 or s=1 NOTE – p=1: precincts defined in SPcodli/SPcocl	Scod, Scoc = 0000 0esp, where p=1, e=0 or e=1, s=0 or s=1 NOTE – p=1: precincts defined in SPcodli/SPcocl	Scod, Scoc = 0000 0esp, where e=s=0, and p=1 NOTE – e=0: EPH marker shall not be used s=0: SOP marker shall not be used p=1: precincts defined in SPcodli/SPcocl	Scod, Scoc = 0000 0esp, where e=s=0, and p=1 NOTE – e=0: EPH marker shall not be used s=0: SOP marker shall not be used p=1: precincts defined in SPcodli/SPcocl	Scod, Scoc = 0000 0esp, where e=s=1, and p=0 or 1 NOTE – e: EPH marker shall be used s: SOP marker may be used p: precincts with PPx=15 and PPy=15 or defined in SPcodli/SPcocl
Progression order	CPRL	CPRL	CPRL	CPRL	CPRL
Number of layers	L=1	L=1	L=2	L=2	L ≤ 5
Multiple component transform	All component transforms defined in ITU-T Rec. T.800 ISO/IEC 15444-1 may be used.	All component transforms defined in ITU-T Rec. T.800 ISO/IEC 15444-1 may be used.	All component transforms defined in ITU-T Rec. T.800 ISO/IEC 15444-1 may be used.	All component transforms defined in ITU-T Rec. T.800 ISO/IEC 15444-1 may be used.	All component transforms defined in ITU-T Rec. T.800 ISO/IEC 15444-1 may be used.

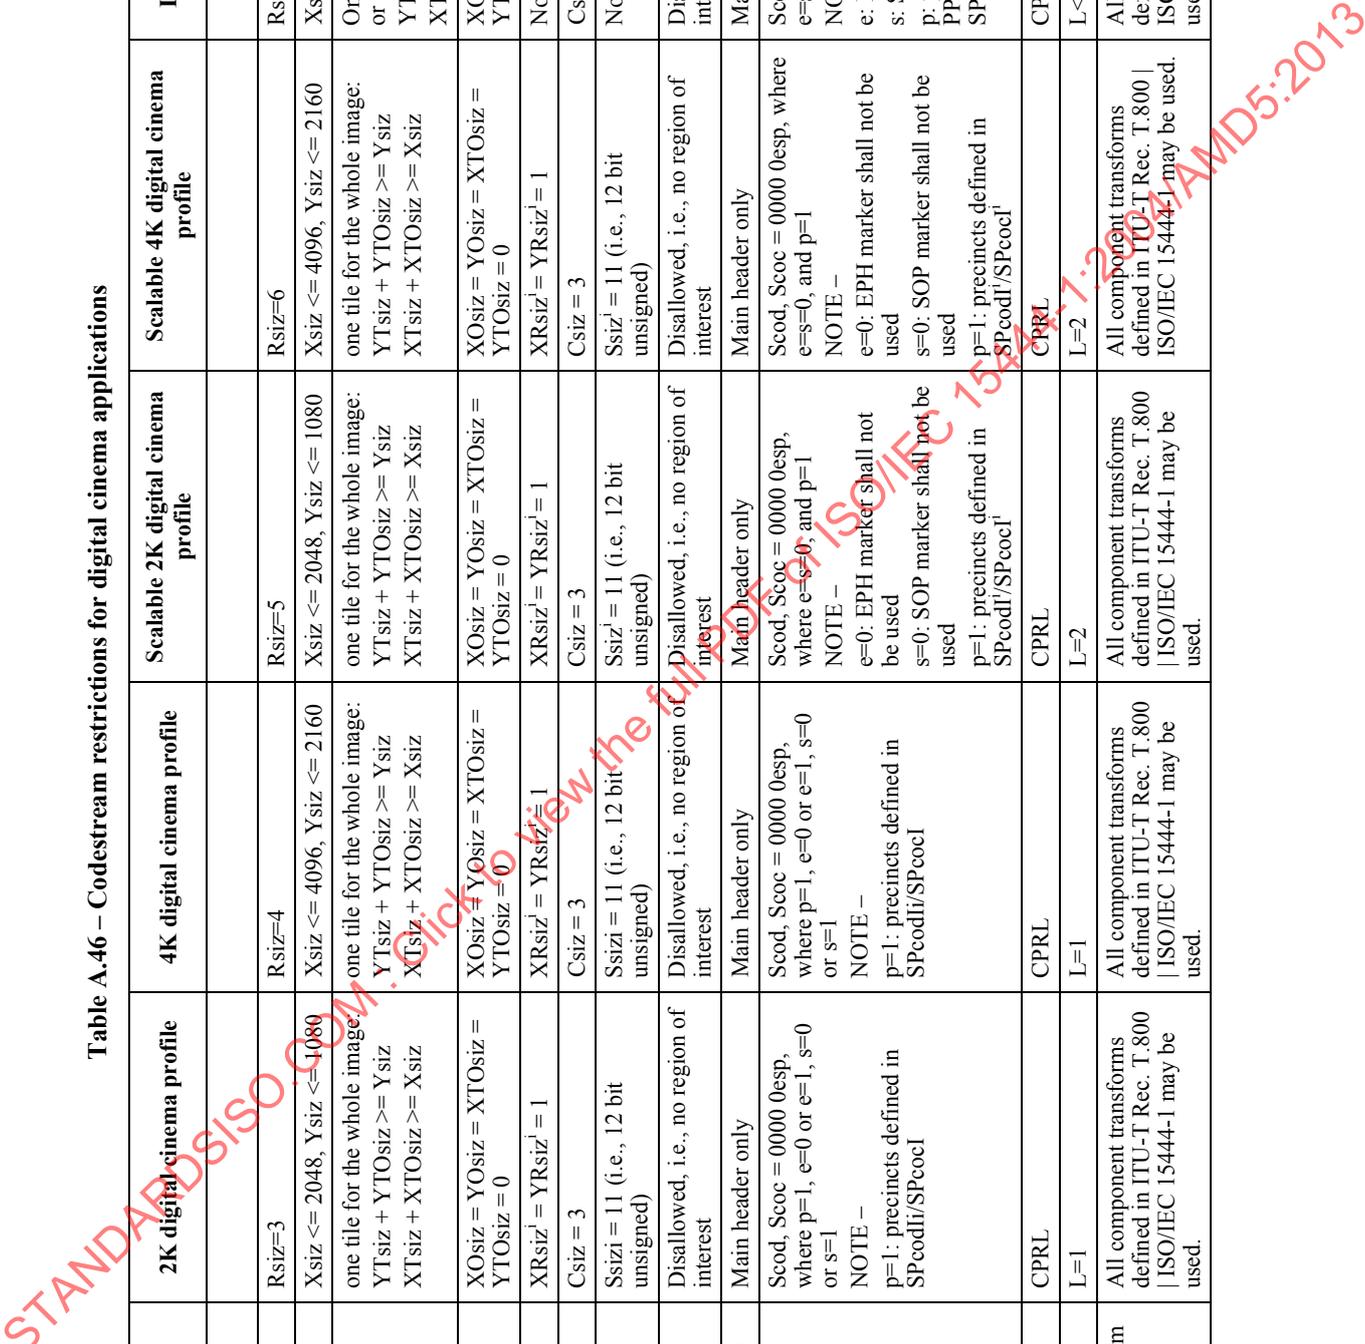


Table A.46 – Codestream restrictions for digital cinema applications

	2K digital cinema profile	4K digital cinema profile	Scalable 2K digital cinema profile	Scalable 4K digital cinema profile	Long-term storage profile
Number of decomposition levels	NL <= 5 Every component of every image of a distribution shall have the same number of wavelet transform levels. The number of deployed decomposition levels shall be set accordingly in all COD and COC markers.	1 <= NL <= 6 Every component of every image of a distribution shall have the same number of wavelet transform levels. The number of deployed decomposition levels shall be set accordingly in all COD and COC markers.	NL <= 5 Every component of every image of a codestream shall have the same number of wavelet transform levels. The number of deployed decomposition levels shall be set accordingly in all COD and COC markers.	1 <= NL <= 6 Every component of every image of a codestream shall have the same number of wavelet transform levels. The number of deployed decomposition levels shall be set accordingly in all COD and COC markers.	No restriction, with respect to: (Xsiz-XOsize)/D(I) <= 64 (Ysiz-YOsize)/D(I) <= 64 and D(I)=pow(2,NL) for each component I Every component of every image of a codestream shall have the same number of wavelet transform levels. The number of deployed decomposition levels shall be set accordingly in all COD and COC markers.
Code-block size	xcb=ycb=5 The corresponding values shall be set accordingly in all deployed COD and COC markers.	xcb=ycb=5 The corresponding values shall be set accordingly in all deployed COD and COC markers.	xcb = ycb = 5 The corresponding values shall be set accordingly in all deployed COD and COC markers.	xcb = ycb = 5 The corresponding values shall be set accordingly in all deployed COD and COC markers.	xcb <= 6, ycb <= 6 The corresponding values shall be set accordingly in all deployed COD and COC markers. Note that codeblock sizes might differ between the existing components.
Code-block style	SPeod, SPcoc = 0000 0000	SPeod, SPcoc = 0000 0000	SPeod, SPcoc = 0000 0000	SPeod, SPcoc = 0000 0000	SPeod, SPcoc = 00sp vtra where r = v = 0, and a, t, p, s = 0 or 1 NOTE – a = 1 for selective arithmetic coding bypass t = 1 for termination on each coding pass, p = 1 for predictive termination s = 1 for segmentation symbols

STANDARDSIS.COM - Click to view the full PDF of ISO/IEC 15444-1:2004/AMD5:2013

Table A.46 – Codestream restrictions for digital cinema applications

	2K digital cinema profile	4K digital cinema profile	Scalable 2K digital cinema profile	Scalable 4K digital cinema profile	Long-term storage profile
Transformation	5-3 reversible filter or 9-7 reversible filter The corresponding filter shall be set accordingly in all COD and COC markers.	5-3 reversible filter or 9-7 reversible filter The corresponding filter shall be set accordingly in all COD and COC markers.	9-7 irreversible filter The corresponding filter shall be set accordingly in all COD and COC markers.	9-7 irreversible filter The corresponding filter shall be set accordingly in all COD and COC markers.	9-7 irreversible filter 5-3 reversible filter The corresponding filter shall be set accordingly in all COD and COC markers.
Precinct size	PPx = PPy = 7 for NLLL band, else 8 The corresponding values shall be set accordingly in all COD and COC markers.	PPx = PPy = 7 for NLLL band, else 8 The corresponding values shall be set accordingly in all COD and COC markers.	PPx = PPy = 7 for NLLL band, else 8 The corresponding values shall be set accordingly in all COD and COC markers.	PPx = PPy = 7 for NLLL band, else 8 The corresponding values shall be set accordingly in all COD and COC markers.	PPx >= xcb, PPy >= ycb The corresponding values shall be set accordingly in all COD and COC markers. Note that the precinct sizes might differ between existing components.
Tile-parts	Each compressed image shall have exactly 3 tile parts. Each tile part shall contain all data from one colour component	Each compressed image shall have exactly 6 tile parts as depicted in Figure A.25 and Figure A.26. Each of the first 3 tile parts shall contain all data necessary to decompress one 2K colour component. Each of the next 3 tile parts shall contain all additional data necessary to decompress one 4K colour component.	Each compressed image shall have exactly 6 tile parts as depicted in Figure A.29. Each of the first 3 tile parts shall contain all data necessary to decompress one 2K colour component compatible to 2K digital cinema profile. Each of the next 3 tile parts shall contain all additional data necessary to decompress the rest of one 2K colour component.	Each compressed image shall have exactly 12 tile parts as depicted in Figures A.28, A.27 and A.25. Each of the first 3 tile parts shall contain all data necessary to decompress one 2K colour component compatible to 2K digital cinema profile. Each of the next 3 tile parts shall contain all additional data necessary to decompress one 4K colour component. Each of the next 3 tile parts shall contain all additional data necessary for the rest of one 2K colour component. Each of the next 3 tile parts shall contain all additional data necessary to decompress the rest of one 4K colour component.	Each compressed image tile shall consist of exactly Csize tile parts. Each tile part shall contain all data from one component of the considered tile.
Other markers					
Packed headers (PPM, PPT)	Disallowed	Disallowed	Disallowed	Disallowed	Disallowed

1 The use of the 9-7 irreversible filter is highly recommended to increase the usability for archives, since both the scalable 2K digital cinema profile and the scalable 4K digital cinema profile are restricted to this wavelet filter. In addition, digital cinema packages (DCPs) conform to the 9-7 filter.

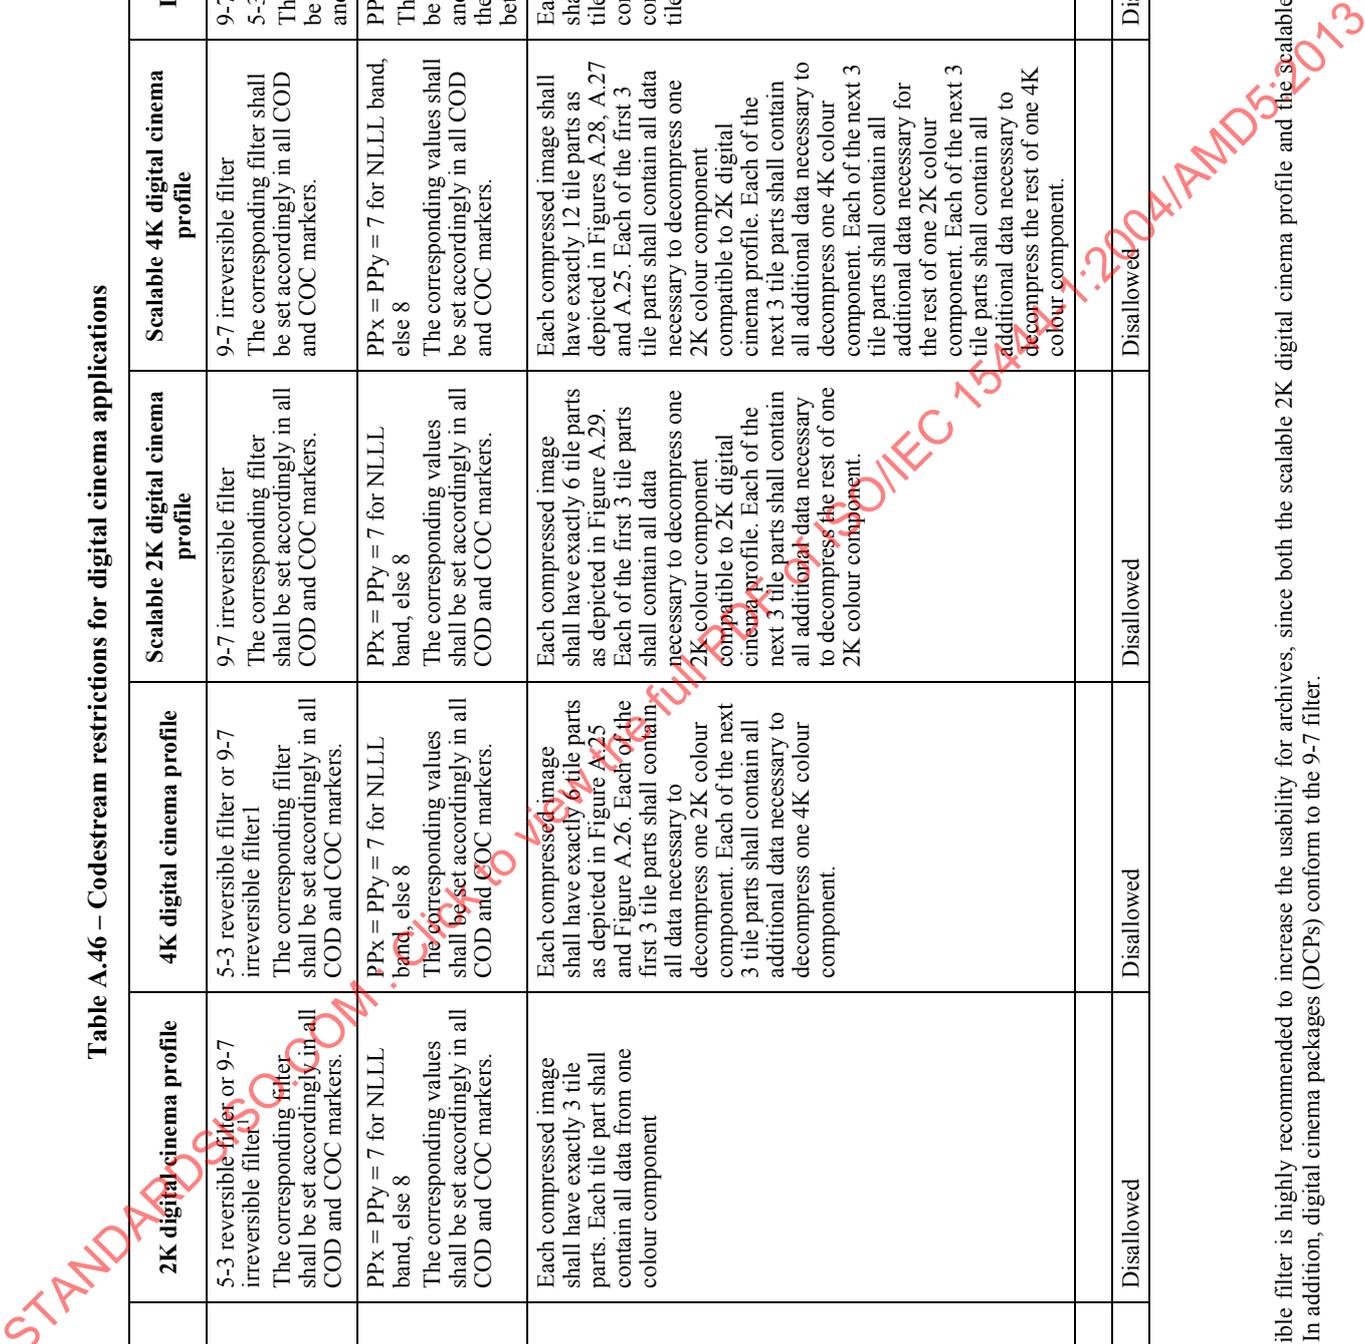


Table A.46 – Codestream restrictions for digital cinema applications

	2K digital cinema profile	4K digital cinema profile	Scalable 2K digital cinema profile	Scalable 4K digital cinema profile	Long-term storage profile
Tile-part lengths (TLM)	TLM marker segments are required in each image	TLM marker segments are required in each image	TLM marker segments are required in each image	TLM marker segments are required in each image	TLM marker segments are required in each image
Packet length, tile-part header (PLT)	Optional	Optional	For each tile-part a complete list of packet lengths shall be provided	For each tile-part a complete list of packet lengths shall be provided	For each tile-part a complete list of packet lengths shall be provided
QCD, QCC	Main header only	Main header only	Main header only	Main header only	Main header only
SOP, EPH	Optional	Optional	Disallowed	Disallowed	Each packet in any given tile-part shall be prepended with a SOP marker segment and each packet header in any given tile-part shall be postpended with an EPH marker segment
POC marker	Disallowed	There shall be exactly one POC marker segment in the main header. Other POC marker segments are disallowed. The POC marker segment shall specify exactly two progressions having the following parameters: First progression: RSpoc = 0, CSpoc = 0, LYEpoc = 1, REpoc = N_L , CEpoc = 3, Ppoc = 4 Second progression: RSpoc = N_L , CSpoc = 0, LYEpoc = 1, REpoc = N_L+1 , CEpoc = 3, Ppoc = 4	There shall be exactly one POC marker segment in the main header. Other POC marker segments are disallowed. The POC marker segment shall specify exactly two progressions having the following parameters: First progression: RSpoc = 0, CSpoc = 0, LYEpoc = 1, REpoc = N_L+1 , CEpoc = 3, Ppoc = 4 Second progression: RSpoc = 0, CSpoc = 0, LYEpoc = 2, REpoc = N_L+1 , CEpoc = 3, Ppoc = 4	There shall be exactly one POC marker segment in the main header. Other POC marker segments are disallowed. The POC marker segment shall specify exactly four progressions having the following parameters: First progression: RSpoc = 0, CSpoc = 0, LYEpoc = 1, REpoc = N_L , CEpoc = 3, Ppoc = 4 Second progression: RSpoc = N_L , CSpoc = 0, LYEpoc = 1, REpoc = N_L+1 , CEpoc = 3, Ppoc = 4 Third Progression: RSpoc = 0, CSpoc = 0, LYEpoc = 2, REpoc = N_L , CEpoc = 3, Ppoc = 4 Fourth Progression: RSpoc = N_L , CSpoc = 0, LYEpoc = 2, REpoc = N_L+1 , CEpoc = 3, Ppoc = 4	Disallowed
Application specific restrictions					

Table A.46 – Codestream restrictions for digital cinema applications

	2K digital cinema profile	4K digital cinema profile	Scalable 2K digital cinema profile	Scalable 4K digital cinema profile	Long-term storage profile
Error protection	Disallowed	Disallowed	Disallowed	Disallowed	The use of marker segments defined in ITU-T Rec. T.810 ISO/IEC 15444-1 for the detection, correction and protection against errors that may result from aging media is not mandatory but optional and recommended.
Maximum instantaneous bit-rate for all 3 colour components ²	Including possible PLT markers 250×10 ⁶ Bit/s	Including possible PLT markers 250×10 ⁶ Bit/s	Excluding PLT markers 500×10 ⁶ Bit/s	Excluding PLT markers 500×10 ⁶ Bit/s	No restrictions
Maximum instantaneous bit-rate for each single colour component including all relevant tile-part headers.	Including possible PLT markers 200×10 ⁶ Bit/s	Including possible PLT markers 200×10 ⁶ Bit/s for 2K portion of each component	Excluding PLT markers 400×10 ⁶ Bit/s	Excluding PLT markers 400×10 ⁶ Bit/s	No restrictions
Maximum instantaneous bit-rate for quality layer 0 of any image frame (aggregate of all 3 colour components) shall include relevant headers and markers assuring Digital Cinema packages can be obtained by simply stripping some tile parts.	–	–	Excluding PLT markers 250×10 ⁶ Bit/s	Excluding PLT markers 250×10 ⁶ Bit/s	No restrictions
Maximum instantaneous bit-rate for layer 0 of any single colour component of an image frame including all relevant tile-part headers.	–	–	Excluding PLT markers 200×10 ⁶ Bit/s	Excluding PLT markers 200×10 ⁶ Bit/s for 2K portion of each component	No restrictions
Maximum frame rate	60	30	60	30	No limitations

² The maximum instantaneous bit-rate must not be exceeded. The maximum admissible compressed bytes are explained in formula A-8.

In order to simplify access to the different codestream resolution, quality layer and component parts, codestreams in accordance with the profiles defined in Table A.46 have to follow a well-defined compressed image data ordering method defined by the following.

Figure A.25 shows the corresponding details for the position of the 4K information relative to the basic 2K information. Assuming N_L wavelet transform levels (N_L+1 resolutions), the rectangle labelled $2K_i$ ($i = 0, 1, 2$) contains all packets for colour component i , resolutions 0 through N_L-1 (and layer 1). The rectangle labelled $4K_i$ ($i = 0, 1, 2$) contains all packets for colour component i , resolution N_L (and layer 1).

Tile-part header	2K_0	Tile-part header	2K_1	Tile-part header	2K_2	Tile-part header	4K_0	Tile-part header	4K_1	Tile-part header	4K_2
------------------	------	------------------	------	------------------	------	------------------	------	------------------	------	------------------	------

Figure A.25 – Compressed data ordering showing the relative position of the 4K tile parts relative to the basic 2K tile parts.

For the 4K digital cinema profile, Figure A.26 defines the overall file structure.

Main header	4K tile parts (see Figure A.25)
-------------	------------------------------------

Figure A.26 – Codestream structure for 4K digital cinema profile

For the scalable 4K digital cinema profiles defined in Table A.46, Figure A.27 illustrates the relative compressed data layout of the 2K and 4K information belonging to the second quality layer. Assuming N_L wavelet transform levels (N_L+1 resolutions), the rectangle labelled Ext_2K_i ($i = 0, 1, 2$) contains all packets for colour component i , resolutions 0 through N_L-1 and layer 2. The rectangle labelled Ext_4K_i ($i = 0, 1, 2$) contains all packets for colour component i , resolution N_L and layer 2.

Tile-part header	Ext_2K_0	Tile-part header	Ext_2K_1	Tile-part header	Ext_2K_2	Tile-part header	Ext_4K_0	Tile-part header	Ext_4K_1	Tile-part header	Ext_4K_2
------------------	----------	------------------	----------	------------------	----------	------------------	----------	------------------	----------	------------------	----------

Figure A.27 – Extended tile parts for the scalable 4K digital cinema profile.

The overall file structure of the scalable 4K digital cinema profile results from concatenating the information of layer 1 and layer 2 as illustrated in Figure A.28.

Main header	4K tile parts (see Figure A.5)	Super4K tile parts (see Figure A.27)
-------------	-----------------------------------	---

Figure A.28 – Codestream structure for the scalable 4K digital cinema profile

Main header	Tile-part header	c0p*r*11	Tile-part header	c1p*r*11	Tile-part header	c2p*r*11	Tile-part header	c0p*r*12	Tile-part header	c0p*r*12	Tile-part header	c0p*r*12
-------------	------------------	----------	------------------	----------	------------------	----------	------------------	----------	------------------	----------	------------------	----------

Figure A.29 – Proposed codestream structure for the scalable 2K digital cinema profile. Assuming N_L wavelet transform levels (N_L+1 resolutions), the rectangle labelled $cip*r*11$ ($i = 0, 1, 2$) contains all packets for colour component i , all precincts, resolutions 0 through N_L and layer 1. The rectangle labelled $cip*r*12$ ($i = 0, 1, 2$) contains all packets for colour component i , resolutions 0 through N_L and layer 2.