



# AS136

SAE Technical Board rules provide that: "All technical reports, including standards approved and published by the Society of Automotive Engineers, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."

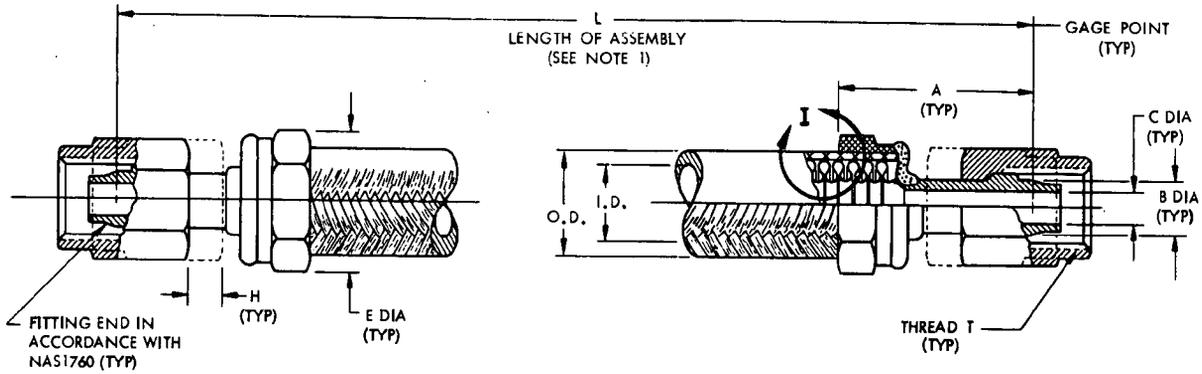

**DETAIL I**

TABLE I

HOSE ASSEMBLY SIZE CODE	HOSE SIZE (REF)	TUBE SIZE (REF)	A MAX.	B GAGE DIA. BASIC	C MIN. DIA. THRU	E ENVELOPE DIA. MAX.	H MIN.	THREAD T PER MIL-S-8879 (REF)	HOSE	
									I. D. MIN.	O. D. MAX.
04	1/4	1/4	1.25	.2930	.141	.900	.40	.4375-20UNJF-3B	.23	.56
06	3/8	3/8	1.38	.4120	.250	1.200	.40	.5625-18UNJF-3B	.34	.70
08	1/2	1/2	1.56	.5600	.360	1.300	.47	.7500-16UNJF-3B	.45	.86
10	5/8	5/8	1.75	.6730	.455	1.500	.53	.8750-14UNJF-3B	.57	1.00
12	3/4	3/4	1.94	.8100	.568	1.740	.53	1.0625-12UNJ-3B	.70	1.15
16	1	1	2.12	1.0620	.760	2.300	.53	1.3125-12UNJ-3B	.95	1.45
20	1-1/4	1-1/4	2.38	1.3160	.920	2.850	.54	1.6250-12UNJ-3B	1.20	1.75

TABLE II

HOSE ASSEMBLY LENGTH	AVAILABLE LENGTH INCREMENTS	LENGTH TOLERANCE
UNDER 10 INCHES	(NOT LESS THAN) 1/8 INCH	(PLUS OR MINUS) .062 INCH
10 to 36 INCHES	(NOT LESS THAN) 1/8 INCH	(PLUS OR MINUS) .125 INCH
36 to 50 INCHES	(NOT LESS THAN) 1/4 INCH	(PLUS OR MINUS) .250 INCH
OVER 50 INCHES	(NOT LESS THAN) 1/2 INCH	(PLUS OR MINUS) 1%

Issued 2-1-77 Revised

Society of Automotive Engineers, Inc.  
400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096

## AEROSPACE STANDARD

HOSE ASSEMBLY, METAL - MEDIUM PRESSURE, FLARELESS, WELDED, STRAIGHT TO STRAIGHT

# AS136

SH 1 OF 2