

REV.
D

AS1635

RATIONALE

AS1635D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

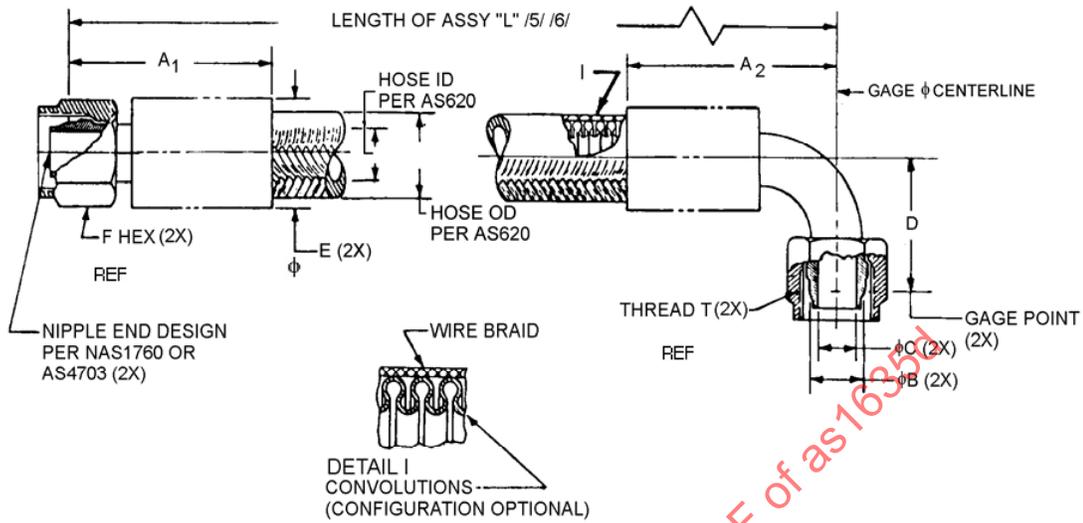


FIGURE 1 - HOSE ASSEMBLY

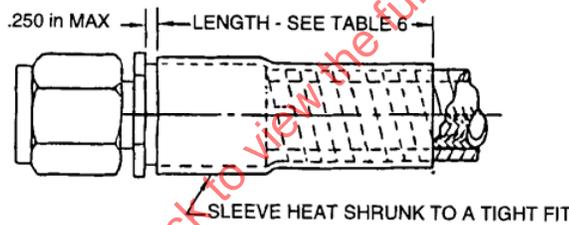



FIGURE 2 - SPIRAL AND POYESTER ABRASION COVER /7/, /8/

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY AS1635 SIZE CODE	HOSE ASSEMBLY SIZE REF	HOSE THREAD T PER AS8879 REF	A ₁ MAX	A ₂ MAX	Ø B GAGE BASIC	Ø C /9/ MIN	D MIN	D MAX	Ø E /10/ MAX WITHOUT SLEEVING	F HEX REF
04	.250	.4375-20 UNJF-3B	1.26	1.36	.2930	.132	.709	.779	.55	.56
06	.375	.5625-18 UNJF-3B	1.34	1.63	.4120	.256	.961	1.031	.68	.69
08	.500	.7500-16 UNJF-3B	1.52	1.85	.5600	.345	1.115	1.185	.86	.88
10	.625	.8750-14 UNJF-3B	1.71	2.20	.6730	.430	1.377	1.447	.95	1.00
12	.750	1.0625-12 UNJ -3B	1.89	2.67	.8100	.635	1.447	1.517	1.28	1.25
16	1.000	1.3125-12 UNJ -3B	2.00	3.03	1.0620	.835	1.880	1.950	1.47	1.50
20	1.250	1.6250-12 UNJ -3B	2.53	3.89	1.3160	1.085	2.183	2.253	1.70	1.81
24	1.500	1.8750-12 UNJ -3B	2.69	4.15	1.5650	1.310	2.653	2.723	2.00	2.12
32	2.000	2.5000-12 UNJ -3B	3.40	4.96	2.0680	1.780	2.980	3.050	2.56	2.75

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS1635D>

THIRD ANGLE PROJECTION

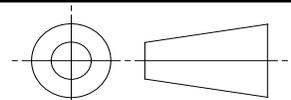

CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS620 /2/



AEROSPACE STANDARD

HOSE ASSEMBLY, CONVOLUTED, POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED CONDUCTIVE, FLARELESS, STRAIGHT TO 90°

AS1635
SHEET 1 OF 5

REV.
D

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

TABLE 2 - ASSEMBLY LENGTH TOLERANCE

+0.250/-0.125 in FOR LENGTHS UNDER 18 in
+0.500/-0.250 in FOR LENGTHS FROM 18 to 36 in EXL.
+1.000/-0.500 in FOR LENGTHS FROM 36 to 50 in EXL.
+2%/-1% FOR LENGTHS 50 in AND OVER

TABLE 3 - HOSE OR COVER OUTSIDE DIAMETER

COVER CODE	HOSE OR TYPE OF PROTECTIVE COVER	HOSE SIZE								UPPER TEMP. LIMIT °F	
		.250	.375	.500	.625	.750	1.00	1.25	1.50		2.00
-	HOSE ONLY PER AS620	.413/.477	.523/.587	.723/.787	.818/.882	1.028/1.092	1.266/1.330	1.494/1.558	1.758/1.822	2.293/2.357	-
B REF	SPIRAL ABRASION /7/	.505	.615	.825	.935	1.140	1.358	1.630	1.890	2.395	275
H	INTEGRAL FIRESLEEVE /11/	.710/.760	.798/.862	.978/1.055	1.100/1.202	1.300/1.392	1.478/1.610	1.718/1.840	1.968/2.120	2.480/2.564	400
N REF	FIRESLEEVE SIL/FG (AS1072) /11/ /12/ /13/	.900	1.030	1.150	1.380	1.590	1.800	2.060	2.320	2.740	400
K	INTEGRAL ABRASION /8/ (BRAIDED) POLYESTER	.468/.532	.598/.662	.808/.872	.888/.952	1.103/1.167	1.313/1.405	1.568/1.632	1.838/1.902	2.370/2.452	300
J	INTEGRAL FIRESLEEVE /14/	.653/.717	.763/.827	.963/1.027	1.058/1.122	1.268/1.332	1.498/1.562	-	-	2.480/2.564	400

TABLE 4 - HOSE ASSEMBLIES PHYSICAL CHARACTERISTICS

HOSE SIZE REF	OPERATING PRESSURE MAX PSI	PROOF PRESSURE MIN PSI	BURST PRESSURES ROOM TEMP MIN	BURST PRESSURES HIGH TEMP MIN	BEND RADIUS AT INSIDE OF BEND INCHES (HOSE ONLY)
			4000 PSI	2800 PSI	
04	1000	2000	4000	2800	1.25
06	1000	2000	4000	2800	2.25
08	1000	2000	4000	2800	2.88
10	1000	1800	3600	2500	3.00
12	1000	1800	3600	2500	3.75
16	1000	1800	3600	2500	5.00
20	1000	1800	3600	2500	6.25
24	750	1500	3000	2100	7.50
32	250	500	1000	700	10.00

TABLE 5 - WEIGHTS (NOM)

HOSE SIZE REF	HOSE ONLY LB/IN	HOSE WITH SPIRAL ABRASION COVER CODE B LB/IN	HOSE WITH INTEGRAL FIRESLEEVE COVER CODE H & J LB/IN	HOSE WITH TUBULAR FIRESLEEVE COVER CODE N LB/IN	HOSE WITH POLYESTER ABRASION COVER CODE K LB/IN	STRAIGHT END FITTING LB EACH	90° END FITTING LB EACH
04	.010	.011	—	.018	.009	.06	.07
06	.010	.014	.028	.021	.012	.11	.12
08	.022	.020	.032	.030	.018	.18	.20
10	.020	.025	.042	.035	.022	.27	.31
12	.027	.032	.050	.044	.028	.37	.45
16	.040	.039	.055	.057	.038	.56	.74
20	.055	.060	.070	.077	.045	.98	1.20
24	.060	.071	.082	.107	.058	1.48	1.74
32	.090	.105	.129	.142	.100	1.83	2.39

TABLE 6 - SLEEVE LENGTH

HOSE SIZE	LENGTH (INCHES)
04	2.00 ± .25
06	
08	2.50 ± .25
10	
12	3.00 ± .25
16	
20	3.50 ± .25
24	
32	4.00 ± .25

TABLE 7 - MINIMUM INSPECTION BALL SIZE
FOR VERIFYING HOSE ASSEMBLY ID /9/

HOSE SIZE REF	STRAIGHT END FITTING DIA IN	ELBOW END FITTING DIA IN
04	.119	.112
06	.230	.218
08	.310	.293
10	.387	.366
12	.572	.540
16	.752	.710
20	.976	.922
24	1.179	1.114
32	1.602	1.513



AEROSPACE STANDARD

HOSE ASSEMBLY, CONVOLUTED,
POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED
CONDUCTIVE, FLARELESS, STRAIGHT TO 90°

AS1635
SHEET 3 OF 5

REV.
D

TABLE 8 - LENGTH CORRECTION FACTORS

HOSE SIZE REF	STRAIGHT END FITTING	90° END FITTING
04	.16	0
06	.16	0
08	.19	0
10	.20	0
12	.23	0
16	.30	0
20	.30	0
24	.37	0
32	.37	0

NOTES:

1. MATERIALS: HOSE AND FITTINGS PER AS620, TYPE II, CLASS 1 OR 2, AS SPECIFIED BY PART NUMBER. CODE B, SPIRAL ABRASION COVER, BLACK NYLON COIL PER AS1294 CODE H AND J, INTEGRAL FIRESLEEVE, RED OR BROWN SILICONE CODE N, TUBULAR FIRESLEEVE, FIBERGLASS SILICONE PER AS1072 CODE K, INTEGRAL ABRASION SLEEVE, BRAIDED POLYESTER
- /2/ PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE ASSEMBLED BY AN ACCREDITED MANUFACTURER OR ASSEMBLING DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS620 FOR THIS STANDARD. SEE <http://www.pri.sae.org/QPL/as620.pdf> FOR CURRENT QPL ONLINE. NOTE THAT MANUFACTURERS AND ASSEMBLING DISTRIBUTORS ARE ACCREDITED BY PART NUMBER, SIZE AND MATERIAL ON THE PRI-QPL-AS620.
3. MARKING SHALL BE PER AS620 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE OR ON THE END FITTING COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOTION AND CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND.
4. CONSTRUCTION AND PERFORMANCE PER AS620. FITTINGS SHALL BE PERMANENTLY ATTACHED TO HOSE.
- /5/ LENGTH "L" IS A FOUR DIGIT NUMBER OF WHICH THE FIRST THREE DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE FOURTH DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "GAGE POINT." SEE TABLE 2 FOR LENGTH TOLERANCES.
- /6/ TO CONVERT "GAGE POINT" TO "GAGE POINT" TO "END" TO "END" MEASUREMENT, ADD TO "L" THE APPROPRIATE TABLE 8 CORRECTION FACTOR FOR EACH END FITTING.
- /7/ SPIRAL ABRASION COVER WHEN ASSEMBLED IN THE STRAIGHT CONDITION ON THE HOSE, SHALL HAVE AN AVERAGE GAP BETWEEN SPIRALS NOT EXCEEDING .05 in. DISPLACEMENT OF THE SPIRAL COVER, CAUSING A GREATER GAP, SHALL NOT BE CAUSE FOR REJECTION IF THE SPIRALS CAN BE REPOSITIONED TO MEET THE GAP REQUIREMENT. ENDS OF THE SPIRAL COVER SHALL BE TERMINATED WITH A LENGTH OF AMS-DTL-23053/5 BLACK POLYOLEFIN TUBING PER TABLE 6 AND FIGURE 2.
- /8/ BRAIDED POLYESTER ABRASION COVER SHALL FORM AN INTEGRAL, PERMANENT PART OF THE HOSE AND SHALL TERMINATE A MAXIMUM OF .625 in FROM THE END OF THE END FITTING COLLAR. ENDS OF POLYESTER ABRASION COVER MAY BE TERMINATED WITH A LENGTH OF AMS-DTL-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR, PER TABLE 6 AND FIGURE 2.
- /9/ HOSE ASSEMBLY INSIDE DIAMETER SHALL BE VERIFIED BY PASSING THE DESIGNATED, OR LARGER, SPHERICAL BALL PER TABLE 7 THROUGH THE HOSE ASSEMBLY.
- /10/ DISTANCE ACROSS CORNERS OF COUPLING NUT, NIPPLE HEX OR SOCKET HEX MAY EXCEED THIS DIMENSION.

	AEROSPACE STANDARD	AS1635 SHEET 4 OF 5	REV. D
	HOSE ASSEMBLY, CONVOLUTED, POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED CONDUCTIVE, FLARELESS, STRAIGHT TO 90°		