


FEDERAL SUPPLY CLASS
4730

REV.
A


AS1655

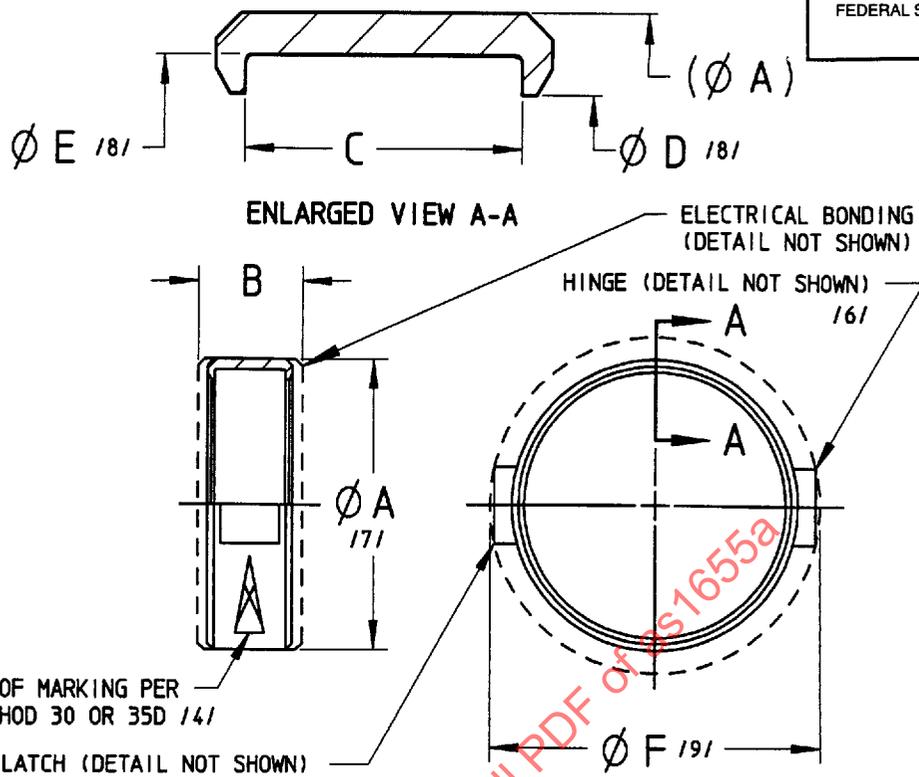

(R) TABLE 1 - COUPLING DIMENSIONS AND WEIGHTS

AS1655 DASH NUMBER	TUBE SIZE (REF)	A MAX /6/ 18/	B MAX /6/	C ±.003	D MAX /6/ 18/	E MIN /6/ 18/	F MAX /6/ 19/	LB/EA MAX ALUMINUM	LB/EA MAX CRES
05	.313	.78	.760	.599	.424	.556	1.250	TBD	TBD
06	.375	.84	.760	.599	.486	.622	1.310	TBD	TBD
08	.500	1.12	.891	.609	.640	.766	1.600	.0350	.0960
10	.625	1.20	.891	.609	.765	.891	1.720	.0360	.102
12	.750	1.32	.971	.689	.925	1.071	1.850	.0440	.121
16	1.000	1.54	1.051	.769	1.190	1.347	2.100	.0540	.152
20	1.250	1.80	1.051	.769	1.440	1.597	2.350	.0590	.166
24	1.500	2.08	1.051	.769	1.690	1.867	2.600	.0660	.186
28	1.750	2.30	1.051	.769	1.940	2.118	2.850	.0720	.197
32	2.000	2.58	1.081	.799	2.193	2.391	3.100	.0840	.228
36	2.250	2.92	1.081	.799	2.443	2.640	3.350	.0970	.274
40	2.500	3.08	1.081	.799	2.693	2.891	3.600	.107	.302
48	3.000	3.74	1.081	.799	3.193	3.391	4.120	.156	.440
56	3.500	4.20	1.081	.799	3.693	3.905	4.620	.188	.530
64	4.000	4.84	1.081	.799	4.193	4.411	5.120	.257	.725

THIRD ANGLE PROJECTION

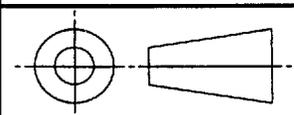

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1650

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

COUPLING, THREADLESS - FIXED CAVITY
FERRULE TYPE, SELF-BONDING

AS1655
SHEET 1 OF 2

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1992-03 REVISED 1995-11