


AS1716

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

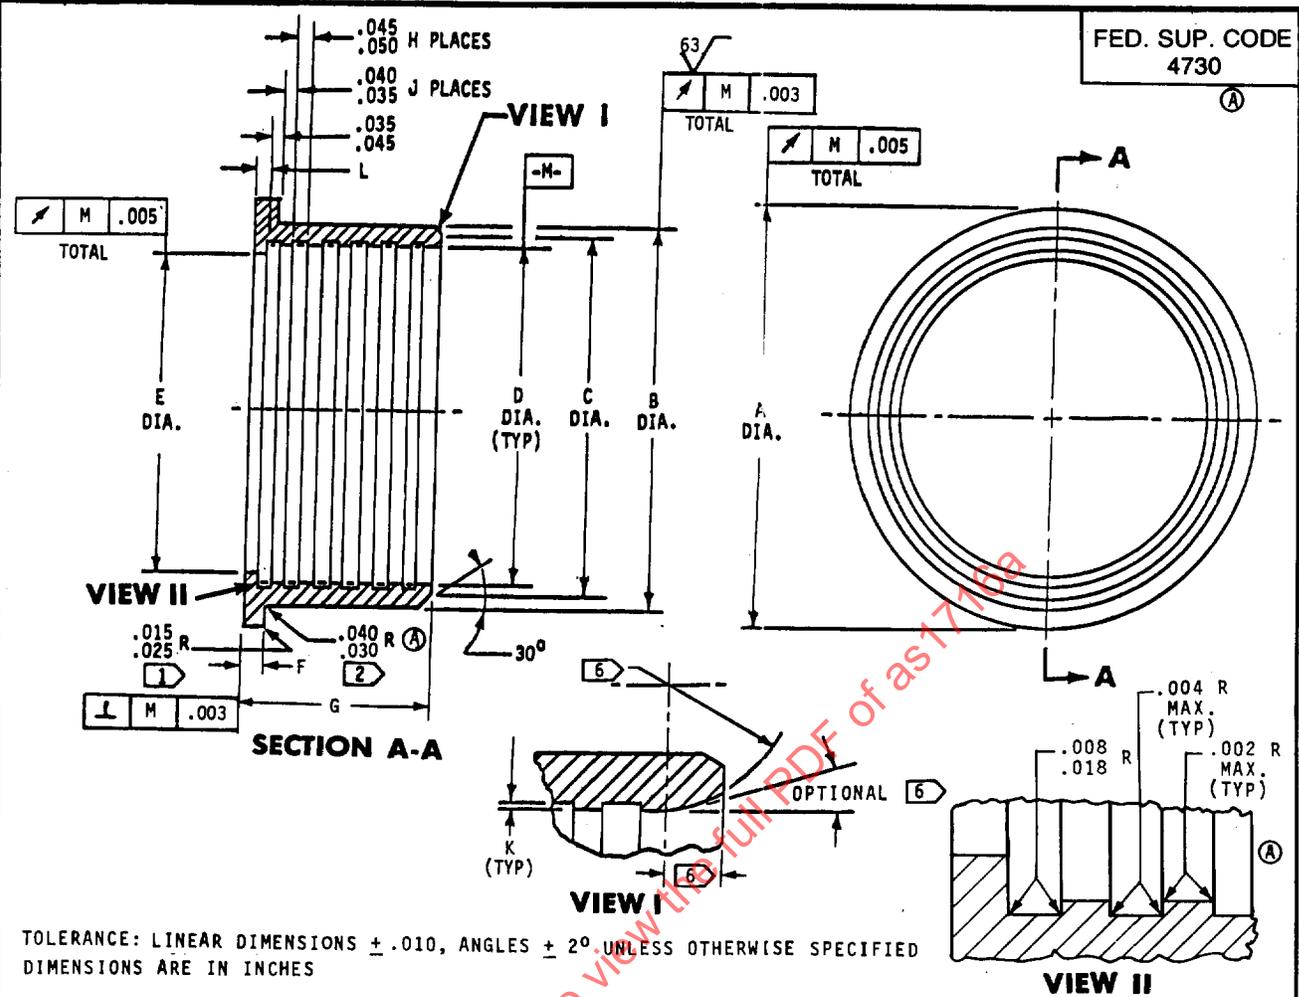

FERRULE DIMENSIONS AND WEIGHTS

AS1716 DASH NO.	TUBE O.D. (REF)	A DIA 3	B DIA + .000 - .005	C	D DIA 4	E $\pm .005$	F + .005 - .000	G	H PLCS.	J PLCS.	K 5	L	WEIGHT MAX LBS
08	1/2	.686	.625	.592	.504	.478	.035						.006
10	5/8	.811	.750	.717	.630	.604							.008
12	3/4	.989	.891	.859	.755	.729	.040	.555	4	4			.011
16	1	1.265	1.142	1.109	1.005	.979		.579					.014
20	1 1/4	1.515	1.392	1.359	1.256	1.230	.060					.045	.016
24	1 1/2	1.785	1.642	1.600	1.506	1.480							.024
28	1 3/4	2.035	1.892	1.850	1.756	1.730	.075	.685			.010	.035	.029
32	2	2.308	2.145	2.100	2.006	1.980							.034
36	2 1/4	2.558	2.395	2.350	2.257	2.220	.060						.039
40	2 1/2	2.808	2.645	2.600	2.507	2.465		.692	5	5			.042
48	3	3.308	3.145	3.100	3.007	2.965	.075					.065	.052
56	3 1/2	3.820	3.645	3.600	3.509	3.467		.722			.016	.055	.063
64	4	4.329	4.154	4.110	4.009	3.975	.075						.069
72	4 1/2	4.830	4.655	4.610	4.509	4.475		.770	6	6	.024	.090	.090
80	5	5.330	5.155	5.110	5.009	4.975	.075					.080	.114
88	5 1/2	5.830	5.655	5.610	5.511	5.475		.966	8	8			.124

PROCUREMENT SPECIFICATION

1	REV A	2	REV A		
---	-------	---	-------	--	--

LIST OF ACTIVE SHEETS

PREPARED BY SAE COMMITTEE G-3, AEROSPACE FITTINGS, HOSE AND TUBING ASSEMBLIES



AEROSPACE STANDARD
 FERRULE, COUPLING, FLEXIBLE, VARIABLE CAVITY,
 THREADED, FERRULE TUBE END.

AS1716
 SH 1 OF 2

Issued May 1982 Revised (A) January 1984