

REV. A

SAE AS3417

FEDERAL SUPPLY CLASS
5306

RATIONALE

FIGURE 1 REDRAWN FOR CLARITY, LIGHTENING HOLE AND TAIL CHAMFER BROUGHT INTO LINE WITH CURRENT PRACTICE AND DOCUMENT GENERALLY UPDATED


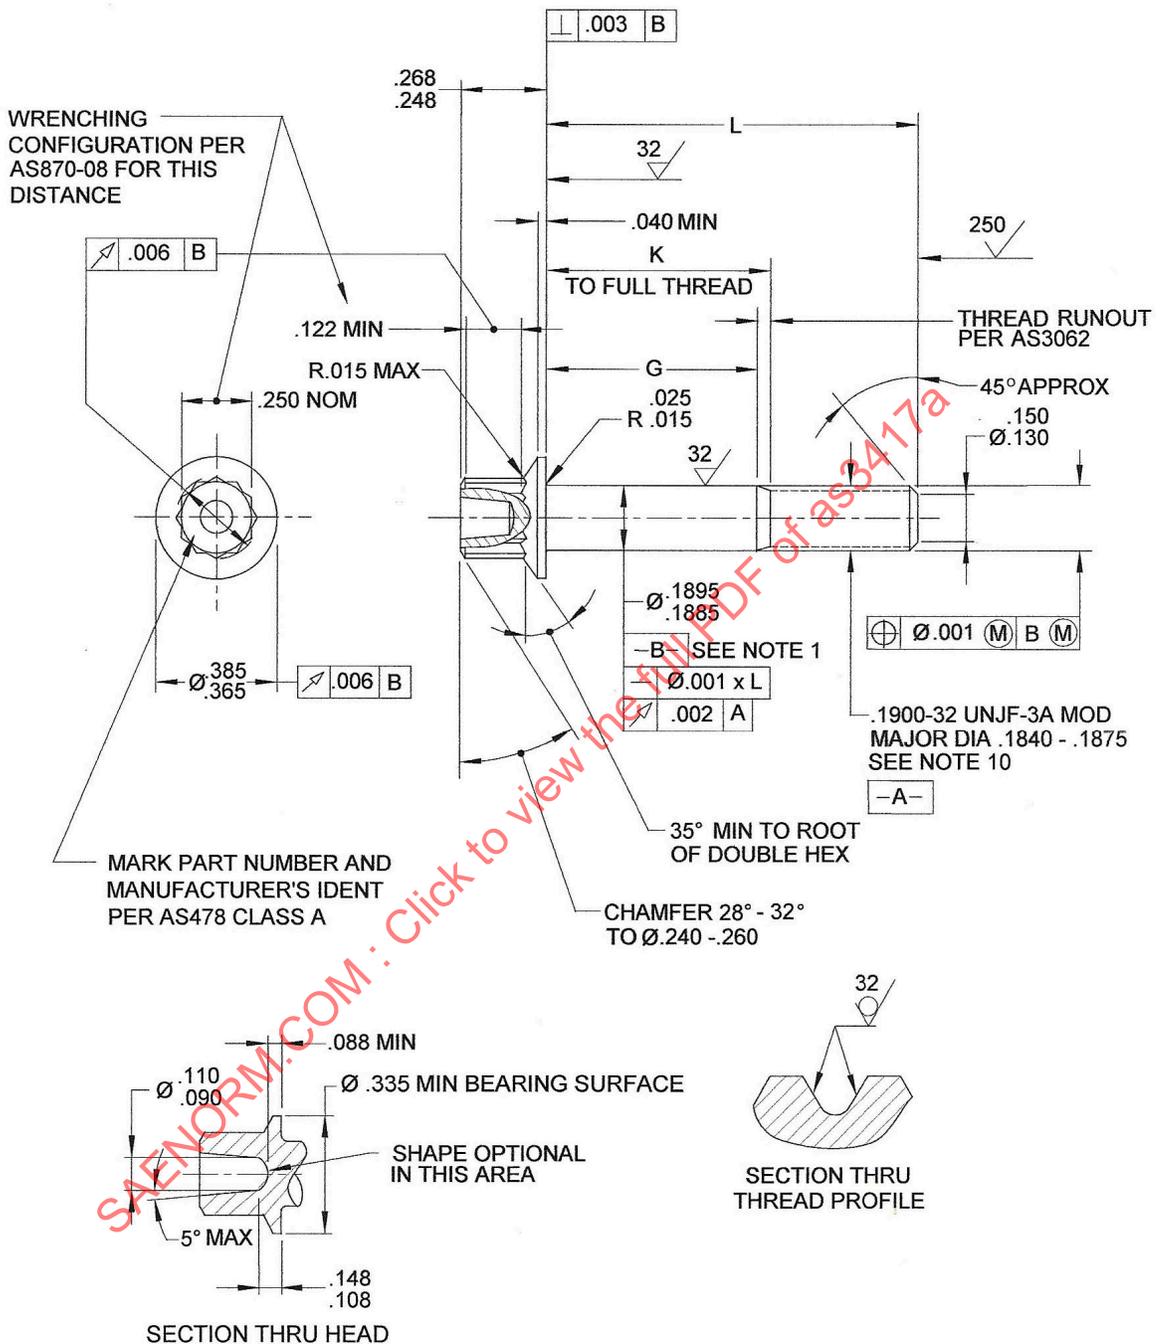


FIGURE 1 - BOLT

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3417A>

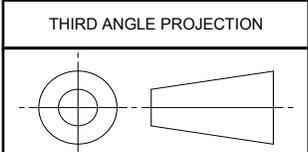

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION : AS7467

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
(R) BOLT, MACHINE, DOUBLE HEX EXTENDED WASHER HEAD, CLOSE TOLERANCE SHANK, UNS N07718 .1900-32 UNJF-3A (STRESS RUPTURE RESISTANT)

SAE AS3417
SHEET 1 OF 3

REV. A

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1985-12 REAFFIRMED 2006-05 REVISED 2011-10

TABLE 1 - DIMENSIONS

PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS lbs/100
AS3417-03	0.607	0.126	0.198	0.92
AS3417-04	0.669	0.188	0.260	0.97
AS3417-05	0.731	0.250	0.322	1.02
AS3417-06	0.794	0.312	0.385	1.08
AS3417-07	0.857	0.376	0.448	1.13
AS3417-08	0.919	0.438	0.510	1.18
AS3417-09	0.981	0.500	0.572	1.23
AS3417-10	1.044	0.562	0.635	1.28
AS3417-11	1.107	0.626	0.698	1.33
AS3417-12	1.169	0.688	0.760	1.38
AS3417-13	1.231	0.750	0.822	1.44
AS3417-14	1.294	0.812	0.885	1.49
AS3417-15	1.357	0.876	0.948	1.54
AS3417-16	1.419	0.938	1.010	1.59
AS3417-17	1.481	1.000	1.072	1.64
AS3417-18	1.544	1.062	1.135	1.70
AS3417-19	1.607	1.126	1.198	1.75
AS3417-20	1.669	1.188	1.260	1.80
AS3417-21	1.731	1.250	1.322	1.85
AS3417-22	1.794	1.312	1.385	1.91
AS3417-23	1.857	1.376	1.448	1.96
AS3417-24	1.919	1.438	1.510	2.01
AS3417-25	1.981	1.500	1.572	2.06
AS3417-26	2.044	1.562	1.635	2.11
AS3417-27	2.107	1.626	1.698	2.16
AS3417-28	2.169	1.688	1.760	2.21
AS3417-29	2.231	1.750	1.822	2.26
AS3417-30	2.294	1.812	1.885	2.32
AS3417-31	2.357	1.876	1.948	2.37
AS3417-32	2.419	1.938	2.010	2.42
AS3417-33	2.481	2.000	2.072	2.47
AS3417-34	2.544	2.062	2.135	2.53
AS3417-35	2.607	2.126	2.198	2.58
AS3417-36	2.669	2.188	2.260	2.63
AS3417-37	2.731	2.250	2.322	2.68
AS3417-38	2.794	2.312	2.385	2.74
AS3417-39	2.857	2.376	2.448	2.78
AS3417-40	2.919	2.438	2.510	2.84
AS3417-41	2.981	2.500	2.572	2.89
AS3417-42	3.044	2.562	2.635	2.94
AS3417-43	3.107	2.626	2.698	2.99
AS3417-44	3.169	2.688	2.760	3.04
AS3417-45	3.231	2.750	2.822	3.09
AS3417-46	3.294	2.812	2.885	3.15
AS3417-47	3.357	2.876	2.948	3.20
AS3417-48	3.419	2.938	3.010	3.25
AS3417-49	3.481	3.000	3.072	3.30
AS3417-50	3.544	3.062	3.135	3.36
AS3417-51	3.607	3.126	3.198	3.41
AS3417-52	3.669	3.188	3.260	3.46
AS3417-53	3.731	3.250	3.322	3.51
AS3417-54	3.794	3.312	3.385	3.56
AS3417-55	3.857	3.376	3.448	3.61