

AS3486


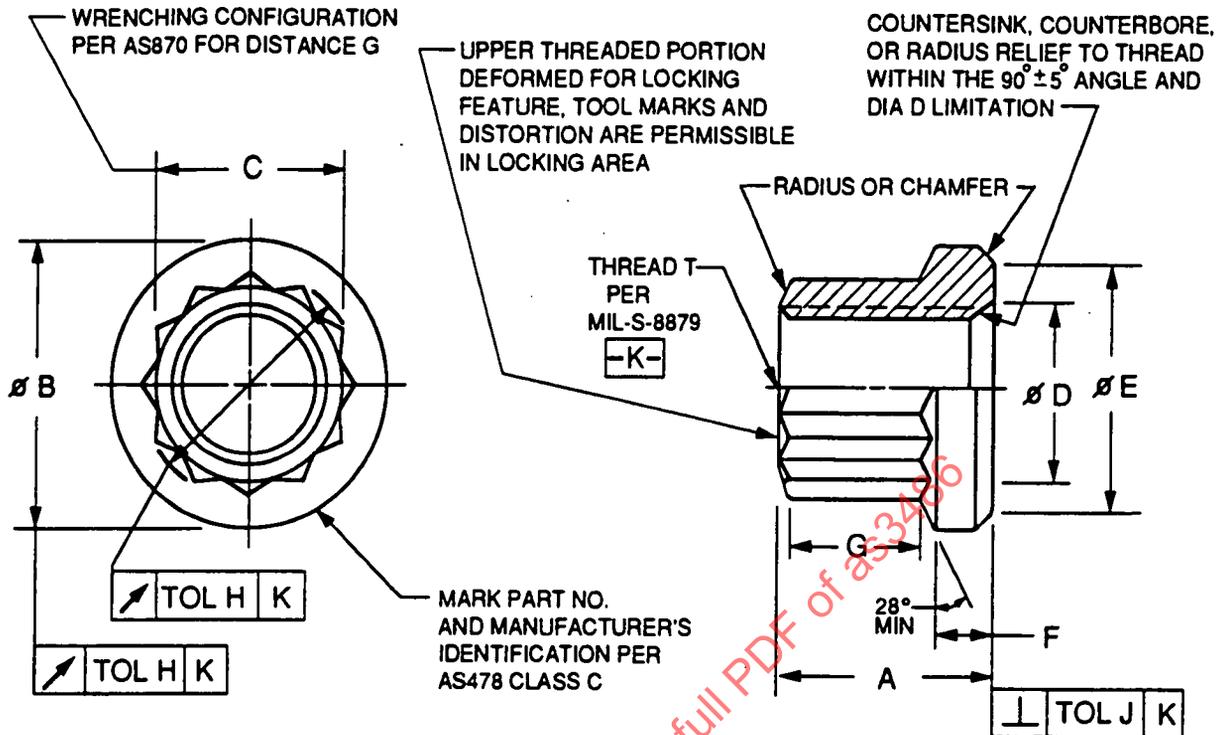


FIGURE 1

TABLE 1

PART NUMBER	T THREAD	A +.005/- .010	ϕB MAX	C NOM	ϕD MAX	ϕE MIN	F	G MIN	H	J	APPROX MASS LB/100
AS3486-09	.1900-32UNJF-3B	.245	.340	.2500	.220	.310	.035-.057	.125	.006	.004	.20
AS3486-10	.2500-28UNJF-3B	.317	.430	.3125	.280	.400	.045-.057	.185	.007	.005	.40
AS3486-11	.3125-24UNJF-3B	.355	.515	.3750	.345	.485	.055-.068	.195	.008	.005	.70
AS3486-12	.3750-24UNJF-3B	.453	.589	.4375	.405	.558	.075-.100	.250	.009	.005	1.00

THIRD ANGLE PROJECTION

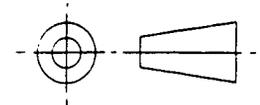

PREPARED BY COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT, SELF-LOCKING, 12 POINT,
REDUCED HEIGHT, DRY FILM,
UNS S66286

AS3486

SHEET 1 OF 2

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.