

REV.  
A

AS3548™

RATIONALE

FIGURE AND TABLE REDRAWN TO MAKE CLEARER, NOTES UPDATED WHERE REQUIRED. NEW NOTE REGARDING USAGE OF EXISTING STOCK ADDED, AMS2700 METHOD 2 ADDED.

MARK MANUFACTURER'S IDENTIFICATION PER AS478 CLASS C. LOCATION OPTIONAL

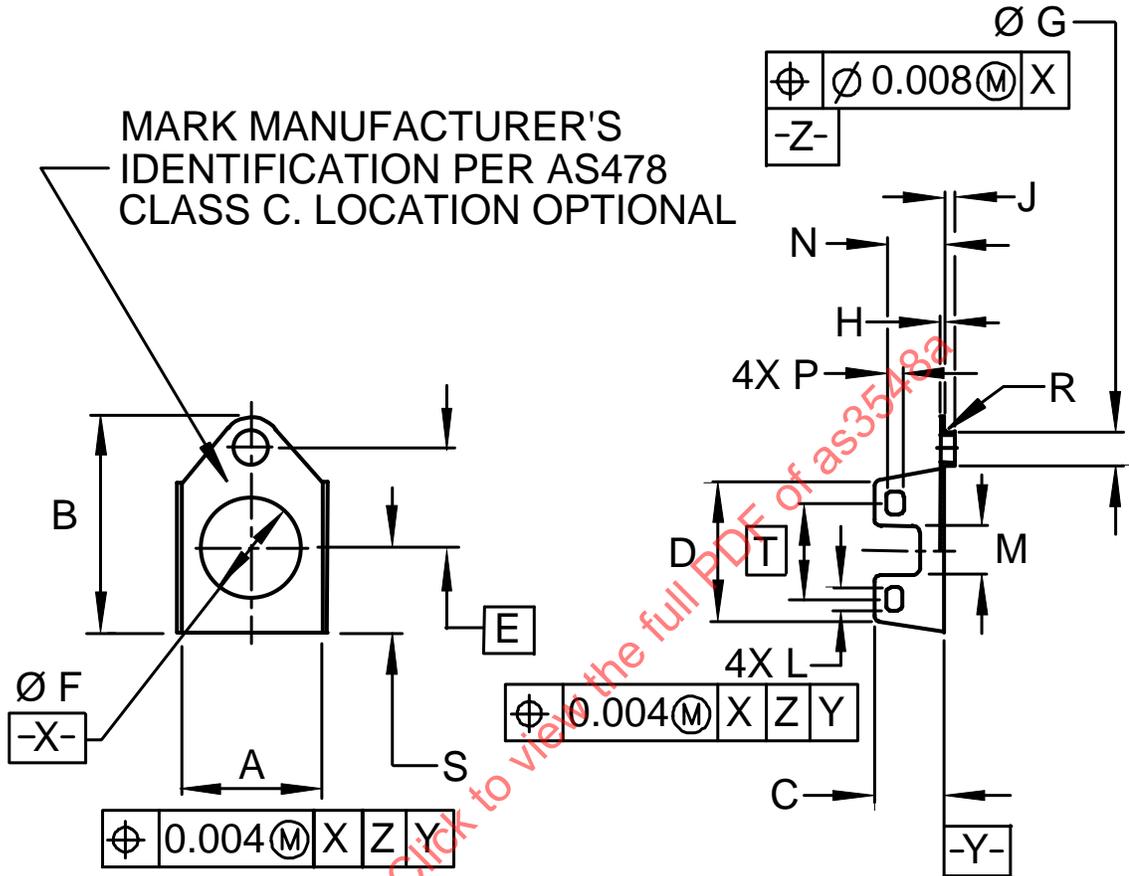



FIGURE 1

TABLE 1

PART NUMBER	A 000 -.008	B ±.004	C 000 -.001	D MAX	E	F MIN	G ±.002	H NOM	J ±.004
AS3548-01	.423	.679	.240	.430	.295	.291	.126	.031	.039
AS3548-02	.492	.770	.279	.470	.354	.354	.137	.035	.039
AS3548-03	.594	.929	.299	.594	.433	.433	.157	.039	.043
AS3548-04	.673	1.012	.314	.569	.500	.511	.157	.039	.043

For more information on this standard, visit  
<https://www.sae.org/standards/content/AS3548A>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS3550, SEE NOTE 3



**AEROSPACE STANDARD**

(R) BASKET,  
REMOVABLE SELF-LOCKING NUT,  
UNS S66286

AS3548™  
SHEET 1 OF 2

REV.  
A

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.