

REV.
A

AS4300


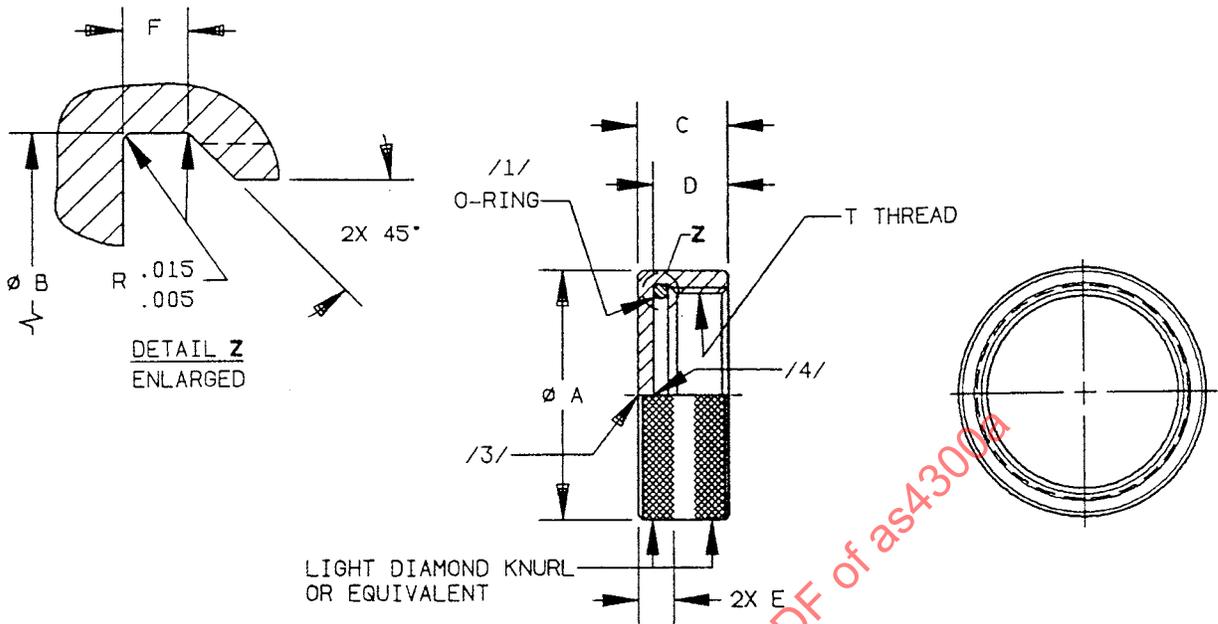


FIGURE 1 - FITTING ASSEMBLY, CAP FLARELESS

TABLE 1 - DIMENSIONS, O-RING SIZES AND WEIGHTS

BASIC NO. AS4300	TUBE SIZE /1/ /13/	T THREAD AS8879 -3B	A	B +.010 -.000	C	D +.010 -.020	E ±.020	F	O-RING SIZE /1/	WEIGHT LB/EA, MAX
02	.125	.3125-24UNJF	.562	.335	.388	.283	.100	.075	104	.0075
03	.188	.3750-24UNJF	.625	.391	.388	.283	.100	.075	106	.0089
04	.250	.4375-20UNJF	.688	.455	.430	.325	.125	.075	108	.0114
05	.312	.5000-20UNJF	.750	.517	.430	.325	.125	.075	109	.0130
06	.375	.5625-18UNJF	.812	.581	.458	.353	.125	.075	110	.0155
08	.500	.7500-16UNJF	.938	.776	.492	.387	.125	.075	113	.0179
10	.625	.8750-14UNJF	1.125	.897	.537	.432	.150	.075	115	.0291
12	.750	1.0625-12UNJ	1.312	1.080	.597	.492	.150	.075	118	.0403
14	.875	1.1875-12UNJ	1.438	1.206	.597	.492	.150	.075	120	.0460
16	1.000	1.3125-12UNJ	1.562	1.330	.597	.492	.150	.075	122	.0519
20	1.250	1.6250-12UNJ	1.875	1.643	.630	.530	.200	.113	220	.0707
24	1.500	1.8750-12UNJ	2.125	1.893	.630	.530	.200	.113	223	.0852
32	2.000	2.5000-12UNJ	2.750	2.518	.630	.530	.200	.113	228	.1474

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: NONE

SAE Aerospace
An SAE International Group

(R)

AEROSPACE STANDARD

FITTING ASSEMBLY, CAP, FLARELESS,
PROTECTIVE CLOSURE, LOW PRESSURE

AS4300
SHEET 1 OF 2

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1992-01 REVISED 2002-01 REAFFIRMED 2007-11