

REV.  
B

SAE AS4471

RATIONALE

AS4471B HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

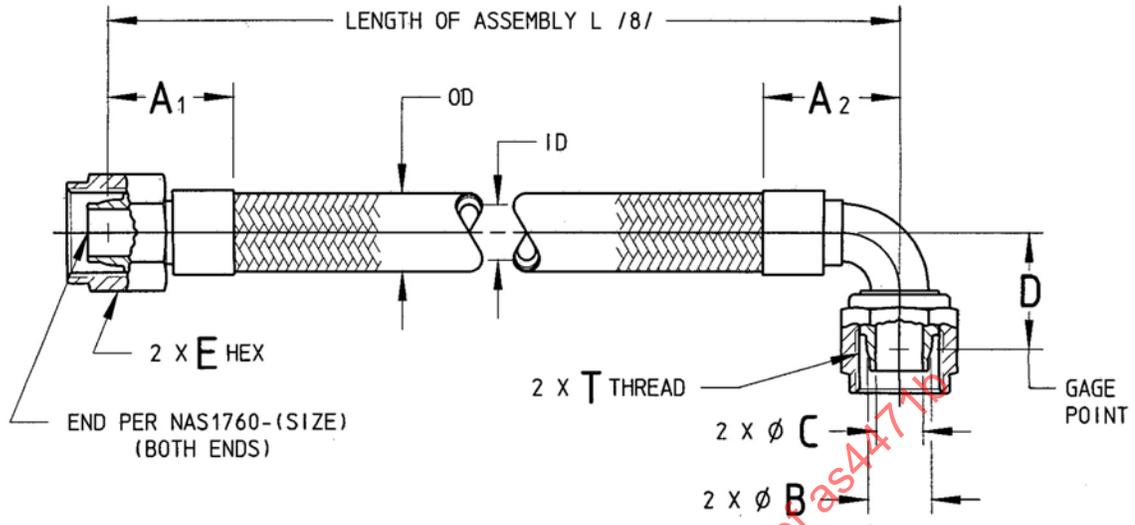



FIGURE 1 - HOSE ASSEMBLY

TABLE 1 - HOSE ASSEMBLY DIMENSIONS

BASIC NO. AND SIZE CODE	HOSE SIZE (REF)	THREAD T PER AS8879 (REF)	E HEX ACROSS FLATS (REF)	ID (REF)	OD MIN	OD MAX
AS4471-04	.250	.4375-20UNJF-3B	.56	.250	.37	.48
AS4471-06	.375	.5625-18UNJF-3B	.69	.375	.53	.59
AS4471-08	.500	.7500-16UNJF-3B	.88	.500	.65	.73
AS4471-10	.625	.8750-14UNJF-3B	1.00	.625	.81	.85
AS4471-12	.750	1.0625-12UNJ-3B	1.25	.750	.94	.98
AS4471-16	1.000	1.3125-12UNJ-3B	1.50	1.000	1.19	1.23

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS4471B>

THIRD ANGLE PROJECTION

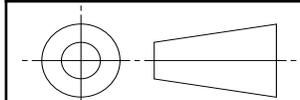

CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS4468 /2/

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

HOSE ASSEMBLY, LINED SILICONE,  
125 PSI, FLARELESS, POTABLE WATER,  
STRAIGHT TO 90°

**SAE AS4471**  
SHEET 1 OF 3

REV.  
B

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

TABLE 2 - END FITTING DIMENSIONS

BASIC NO. AND SIZE CODE	A <sub>1</sub> MAX	A <sub>2</sub> MAX	B GAGE	C (REF)	D MIN	D MAX
AS4471-04	1.18	1.24	.2930	.174	.66	.81
AS4471-06	1.27	1.32	.4120	.291	.75	.85
AS4471-08	1.28	1.44	.5600	.409	.98	1.11
AS4471-10	1.38	1.58	.6730	.495	1.21	1.33
AS4471-12	1.53	2.05	.8100	.646	1.37	1.57
AS4471-16	1.57	2.17	1.0620	.898	1.62	1.76

TABLE 3 - LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	PREFERRED INCREMENTS	TOLERANCE
UNDER 18 IN	(NOT LESS THAN) .125	+ .125/- .125
18 TO 36 IN EXCLUSIVE	(NOT LESS THAN) .250	+ .250/- .250
36 TO 100 IN EXCLUSIVE	(NOT LESS THAN) .500	+ .375/- .375
100 IN AND OVER	(NOT LESS THAN) 1.000	+ .5%/- .500

TABLE 4 - HOSE ASSEMBLY WEIGHT INFORMATION

HOSE SIZE CODE	HOSE LB/IN NOM (REF)	END FITTING LB/EA STRAIGHT NOM (REF)	END FITTING LB/EA 90° NOM (REF)	HOSE LENGTH	HOSE LENGTH
				CORRECTION FACTOR, INCH /9/ STRAIGHT	CORRECTION FACTOR, INCH /9/ 90°
04	.0038	.048	.050	.55	.61
06	.0064	.074	.077	.64	.64
08	.0081	.112	.125	.65	.77
10	.0111	.151	.176	.75	.95
12	.0137	.267	.295	.74	1.26
16	.0182	.358	.419	.78	1.39

## NOTES:

- MATERIAL AND FINISH: PER AS4468, TABLE 1. ALL FITTING COMPONENTS 300 SERIES CORROSION RESISTANT STEEL, PASSIVATED.
- PROCUREMENT SPECIFICATION: AS4468 EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED AND ASSEMBLED BY AN ACCREDITED MANUFACTURER OR ASSEMBLED BY AN ACCREDITED DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST (QPL) PRI QPL AS4468 FOR THIS STANDARD. SEE [www.eauditnet.com](http://www.eauditnet.com) FOR CURRENT QPL ON LINE.
- INTENDED USE: THESE HOSE ASSEMBLIES ARE INTENDED FOR USE IN POTABLE WATER SYSTEM INSTALLATIONS WHERE A HIGH DEGREE OF FLEXIBILITY IS REQUIRED.
- IDENTIFICATION: PER AS4468.