



AEROSPACE STANDARD	AS5127™/2	REV. C
	Issued	2000-09
	Revised	2020-07
Superseding AS5127/2B		
Test Method for Aerospace Firewall Sealant Flame Penetration		

RATIONALE

This is a Five-Year Review and update. Align specification material testing with new guidelines of FAA AC 20-135. Removed Class C requirement and testing associated with propane and bunsen burner testing of sealant. Provide for recommended sealant manufacturers minimum alternative sealant thicknesses. Specify instrumentation accuracy of the calorimeter (5.4) for heat flux density measuring device(s). Provide acceptable self-extinguishing time (7.2.3) for residual fuel burn off after withdrawal of ignition flame.

TABLE OF CONTENTS

1.	SCOPE.....	3
2.	REFERENCES.....	3
2.1	Applicable Documents.....	3
2.1.1	SAE Publications.....	3
2.1.2	U.S. Government Publications.....	3
2.2	Definitions.....	4
3.	CLASSIFICATION.....	4
4.	TEST PANELS.....	4
4.1	Preparation of Test Specimen.....	4
4.2	Panel Configuration.....	4
4.3	Flame Penetration Test Configuration.....	4
4.3.1	Sealed Assembly (Figure 1).....	4
4.3.2	Wire Connector Sealing Assembly (Figure 2).....	5
4.4	Test Panel Conditioning.....	5
5.	EQUIPMENT/APPARATUS.....	5
5.1	Test Burner.....	5
5.2	Burner Extension.....	5
5.3	Burner Fuel.....	5
5.4	Thermocouples.....	5
5.5	Heat Flux Density Measuring Device(s).....	5
5.6	Test Stand.....	5
5.7	Timer.....	5

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Tel: +1 724-776-4970 (outside USA)
 Fax: 724-776-0790
 Email: CustomerService@sae.org
SAE WEB ADDRESS: http://www.sae.org

For more information on this standard, visit
<https://www.sae.org/standards/content/AS5127/2C/>

6.	PROCEDURE	6
6.1	Conversion Oil Burner Test Method.....	6
6.1.1	Calibration Procedure	6
6.1.2	Test Procedure.....	6
7.	REPORTING.....	7
7.1	Record the following information for each specimen evaluated.	7
7.2	Report "Pass" or "Fail"	7
8.	NOTES.....	7
8.1	Revision Indicator.....	7
Figure 1	Sealing assembly	8
Figure 2	Wire bundle connector sealing assembly	9
Figure 3	Oil burner cone details	10
Figure 4	Air tube reducing cone	11
Figure 5	Typical fire test setup	12

SAENORM.COM : Click to view the full PDF of as5127_2C

1. SCOPE

This SAE Aerospace Standard (AS) describes the test methods to determine the flammability performance and capability to control the passage of, and effects from, fire on aircraft firewall sealing compounds. The methods are based requirements of FAR Part 25 Sections 25.865, 25.867, 25.1191, and 25.1193 and may be used to demonstrate compliance with the requirements established by FAA AC 20-135. This standard shall be used in conjunction with applicable material specifications.

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or +1 724-776-4970 (outside USA), www.sae.org.

AMS5517	Steel, Corrosion Resistant, Sheet and Strip, 18Cr - 8Ni (301), Cold Rolled, 125 ksi (862 MPa) Tensile Strength
AIR4069	Sealing of Integral Fuel Tanks
AS5127	Aerospace Standard Test Methods for Aerospace Sealants, Methods for Preparing Aerospace Sealant Test Specimens
AS8028	Powerplant Fire Detection Instruments, Thermal and Flame Contact Types (Reciprocating and Turbine Engine Powered Aircraft)
AS34501	Connectors, Receptacle, Electrical, Wall Mounting, Rear Release, Crimp Contact, AN Type

2.1.2 U.S. Government Publications

Copies of these documents are available online at <https://quicksearch.dla.mil>.

FAR 25.865	Fire Protection: Flight Controls, Engine Mounts, and Other Flight Structure
FAR 25.867	Fire Protection: Other Components
FAR 25.1191	Powerplant Fire Protection: Firewalls
FAR 25.1193	Powerplant Fire Protection: Cowling and Nacelle Skin
FAA AC 20-135	Powerplant Installation and Propulsion System Component Fire Protection Test Methods, Standards and Criteria

2.2 Definitions

2.2.1 FIREWALL

A structure designed to prevent a hazardous quantity of air, fluid, or flame from exiting a fire zone and causing hazard to the aircraft. Firewalls shall be fireproof.

2.2.2 FIRE RESISTANT

The ability of sealant materials to prevent flame penetration from a severe fire of extended duration at least as well as aluminum alloy in dimensions appropriate for their purpose. Sealant materials are demonstrated to be fire resistant by meeting the requirements of this test for an exposure time of 5 minutes.

2.2.3 FIREPROOF

The ability of sealant materials to prevent flame penetration from a severe fire of extended duration at least, as well as steel in dimensions appropriate for their purpose. Sealant materials are demonstrated to be fireproof by meeting the requirements of this test for an exposure time of 15 minutes.

2.2.4 HEAT FLUX DENSITY

The rate of thermal energy in Btu/ft²/s of the flame.

2.2.5 EXPOSURE TIME

The length of time the burner flame is applied to the specimen.

3. CLASSIFICATION

Class A - Fire Resistant: 5-minute exposure time.

Class B - Fireproof: 15-minute exposure time.

4. TEST PANELS

4.1 Preparation of Test Specimen

Unless otherwise specified, test panels shall be prepared in accordance with AS5127. Where not referenced in controlling material specification, test in duplicate.

4.2 Panel Configuration

4.2.1 Unless otherwise specified by the specific aircraft configuration, fabricate test panels for Class A and B materials in accordance with Figures 1 and 2 using 301 CRES sheets conforming to AMS5517, 0.063-inch (1.6-mm) thick and commercially available stainless-steel fasteners (bolts, nuts, and washers). The backside of the panel shall be protected from exposure to the flame.

4.3 Flame Penetration Test Configuration

4.3.1 Sealed Assembly (Figure 1)

Seal all faying surfaces, apply fillet seal (flame side only), seal holes and slots, wet install fasteners, and overcoat fastener heads (flame side only) per Figure 1. AIR4069 paragraphs 11.1.2.4, 11.1.2.5, and 11.1.3 may be used as reference for sealant application techniques. For any variations in dimensions between AIR4069 and this specification, this specification takes precedence unless sealant manufacturer recommends alternative minimum material coating diameters and thicknesses. Cure sealant in accordance with manufacturer's instructions and sealing processing procedures. Test sealed panel in accordance with applicable procedure specified in Section 6.

4.3.2 Wire Connector Sealing Assembly (Figure 2)

This panel uses a 2.25 x 2.25 x 0.125 inch (57 x 57 x 3 mm) plate of AMS5517 CRES steel to blank off an opening simulating an AS34501 wiring connector penetration. Seal all faying surfaces, including the simulating connector plate, apply fillet seal (flame side only) to all panels and connector plate, wet install all fasteners, and overcoat all fasteners heads (flame side only) per Figure 2. AIR4069 paragraphs 11.1.2.4, 11.1.2.5, and 11.1.3 may be used as reference for sealant application techniques. For any variations in dimensions between AIR4069 and this specification, this specification takes precedence unless sealant manufacturer recommends alternative minimum material coating diameters and thicknesses. Cure sealant in accordance with manufacturer's instructions or sealing processing procedures. Test sealed panel in accordance with applicable procedure specified in Section 6.

4.4 Test Panel Conditioning

Unless otherwise specified by the aircraft condition requirements, test panels shall be conditioned at 77 °F ± 5 °F (25 °C ± 3 °C) and 50% ± 5% relative humidity for a minimum of 24 hours.

5. EQUIPMENT/APPARATUS

5.1 Test Burner

A modified gun-type conversion oil burner such as the Park Model DPL 3400 or equivalent shall be used (6.1.1). The burner used shall be capable of delivering a minimum flame temperature of 2000 °F (1093 °C) and a minimum heat flux of 9.3 Btu/ft²/s (10.6 W/cm²/s) at the specimen location.

5.2 Burner Extension

A stainless steel funnel extension fabricated in accordance with Figure 3 shall be used for the gun-type conversion oil burner in accordance with 5.1. The funnel shall have an oblong exit 6 inches (152 mm) high by 11 inches (279 mm) wide. The funnel shall be installed on the gun-type conversion oil burner with the air tube shown in Figure 4. The air tube reducer, Figure 4, may or may not be required if an alternate oil test burner model is utilized.

5.3 Burner Fuel

SAE No. 2 diesel, kerosene, or equivalent shall be used for burner fuel when using the oil burner.

5.4 Thermocouples

A thermocouple rake containing five ungrounded Chromel-Alumel (Type K) nominal 22 to 30 AWG conductor thermocouples sheathed in closed 0.063 inch (1.6 mm) stainless-steel or inconel tubes, or equivalent, shall be provided. The thermocouples shall be aligned in a row 1.0 inch ± 0.1 inch (25 mm ± 2 mm) apart.

5.5 Heat Flux Density Measuring Device(s)

A calorimeter to be used in testing must be a 0 to 15 Btu/ft²/s (0 to 17 W/cm²/s) calorimeter, accurate to ±3%. A Medtherm Corp, Huntsville, Alabama, calorimeter Model #64-10-20, or equivalent, has been found suitable, but is not specified as required, for this test. FAA circular AC 20-135 describes a suitable flux-tube system.

5.6 Test Stand

A test stand shall be provided to maintain the position of the thermocouple rake, calorimeter, and test specimen. The test stand shall include a provision for moving the burner in/out of the test position. The test stand shall also include a provision for positioning the thermocouple rake such that it is parallel to the burner face with the thermocouple junctions on the diameter or major axis of the burner extension. Suitable test setup is shown in Figure 5.

5.7 Timer

A stop watch or other device, calibrated and graduated to the nearest 1 second, shall be used to measure the time of application of the burner flame.

6. PROCEDURE

6.1 Conversion Oil Burner Test Method

6.1.1 Calibration Procedure

- 6.1.1.1 Place the thermocouple rake on the test stand above the centerline of the burner extension. The distance used to position the rake is approximately 4 inches (102 mm) from the burner cone exit. Connect the thermocouples to a suitable recording device.
- 6.1.1.2 Light the burner, allow a 5-minute warm-up, and move the burner into calibration position.
- 6.1.1.3 Begin monitoring the temperatures indicated by the thermocouples after 2 minutes. Adjust as necessary to the air flow to the burner in order to achieve a minimum average thermocouple reading of 2000 °F (1093 °C) across the array. Uniformity of the flame should be such that all thermocouples indicate a temperature of 2000 °F ± 150 °F (1093 °C ± 83 °C).
- 6.1.1.4 Move it out of calibration position and remove the thermocouple rake. The burner may be turned off and on, as appropriate, to change specimens and/or calibration equipment. If the burner is turned off, it shall be warmed up for a 5-minute period before resuming testing or calibration measurements.
- 6.1.1.5 Replace the thermocouple rake with the calorimeter. Place the calorimeter at the same distance as the thermocouple rake, centered over the burner exit. Clean the calorimeter face with a soft tissue or cotton swab dabbed with alcohol, if required. Assure that there is water running through the calorimeter prior to taking heat flux measurements.
- 6.1.1.6 Move the burner into calibration position after a 5-minute warm up.
- 6.1.1.7 Measure the heat flux continuously or at intervals no greater than 10 seconds. If the heat flux is not at least 9.3 Btu/ft²/s (10.6 W/cm²/s), readjust the burner to achieve the proper heat flux. If burner adjustments are necessary, remove the calorimeter and repeat 6.1.1.1 through 6.1.1.7.

6.1.2 Test Procedure

- 6.1.2.1 Place the test specimen in position at the same distance from the burner as the thermocouple rake and calorimeter were placed during calibration.
- 6.1.2.2 Light the burner. Allow a 5-minute warm up and move the burner into test position.
- 6.1.2.3 Start the timer when the burner is positioned with the test specimen. The critical area of the test specimen shall be over the center of the burner.
- 6.1.2.4 Terminate the test by turning off the burner after a minimum of 5 minutes, as required for fire-resistant materials, or after a minimum of 15 minutes, as required for fireproof materials.
- 6.1.2.5 Note the condition of both faces of the test specimen.
- 6.1.2.6 Without adjusting the burner flame, repeat the temperature measurements described in 6.1.1.1 through 6.1.1.3. If the average temperature has decreased by more than 150 °F (83 °C), readjust the burner and repeat the test. If the average temperature has increased by more than 150 °F (83 °C), note the temperature reading on the test report.

7. REPORTING

7.1 Record the following information for each specimen evaluated.

7.1.1 Full identification of sealant being tested, and any conditioning performed.

7.1.2 Include the average flame temperature and heat flux density data for pre-test calibration, and the average temperature for post-test calibration.

7.1.3 Report the exposure time, and whether the material is fire resistant or fireproof.

7.1.4 Describe the condition of both the flame side and the non-flame side of the test specimen after test.

7.2 Report "Pass" or "Fail"

The following criteria will be used for judging the acceptability of the sealant. These criteria are not necessarily all inclusive; other criteria may be required by the approving agency or documents which reference this test method specification.

7.2.1 No flame penetration shall occur for the duration of the test.

7.2.2 Burning on the backside of the specimen is not acceptable. Significant burning on the side of the flame impingement shall be investigated to determine if a potential increase in hazard exists. Minor flashing on the side of flame impingement is acceptable.

7.2.3 Test specimens shall not continue to burn after withdrawal of the burner flame. Burn off from residual fuel acceptable provided it self-extinguishes within 1-minute.

7.2.4 Ultimate determination of acceptability shall be based on the ability of the sealant material to withstand exposure to the flame without resulting in a condition that will further increase hazard to the aircraft. Any additional acceptance criteria will be found in documents referencing this test method specification.

8. NOTES

8.1 Revision Indicator

A change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. An (R) symbol to the left of the document title indicates a complete revision of the document, including technical revisions. Change bars and (R) are not used in original publications, nor in documents that contain editorial changes only.

8.2 Dimensions and properties in inch units and the Fahrenheit temperatures are primary. Dimensions and properties in SI units and the Celsius temperatures are shown as the approximate equivalents of the primary units and are presented only for information.

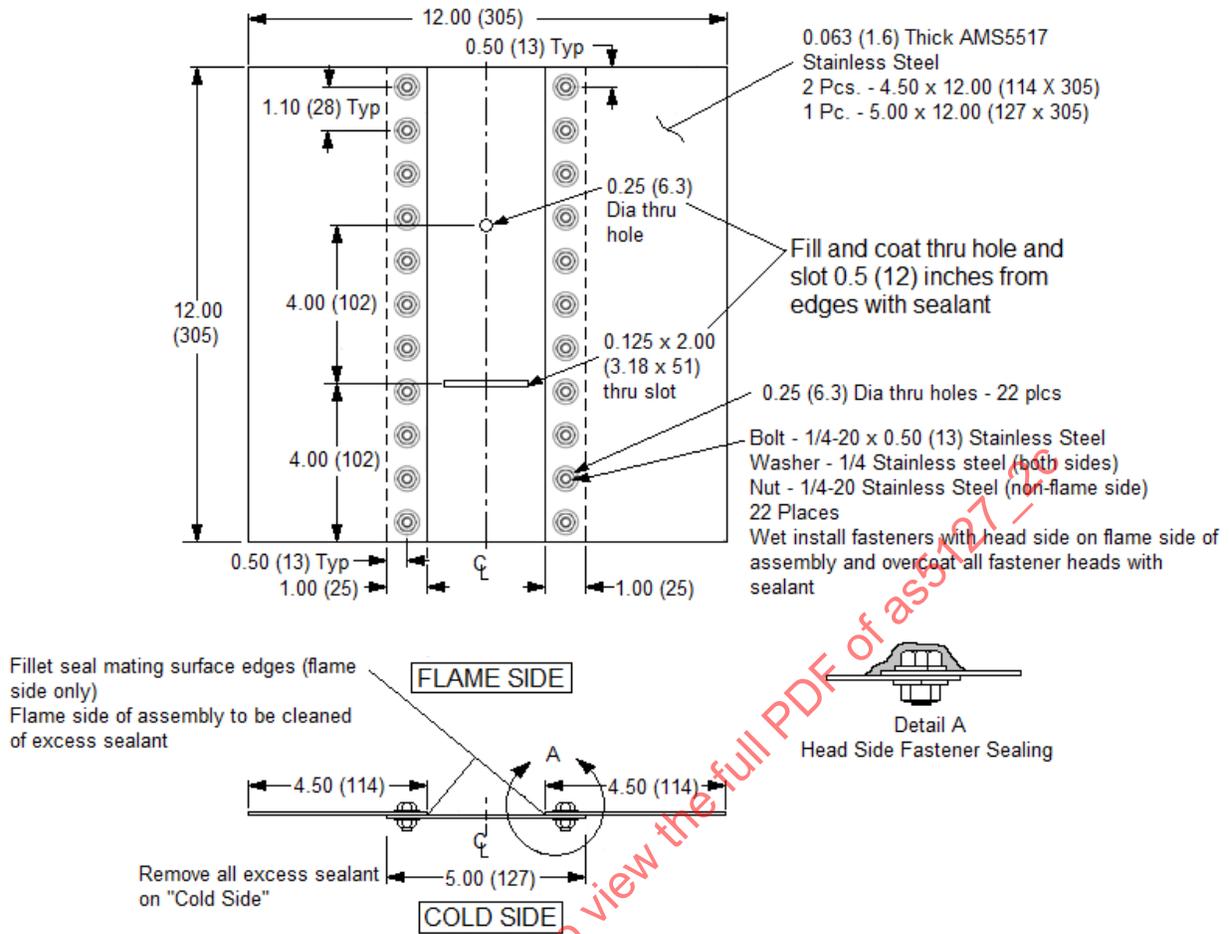


Figure 1 - Sealing assembly

NOTE: Dimensions are in inches (millimeters)

SAENORM.COM: Click to view the full PDF of as5127-2c

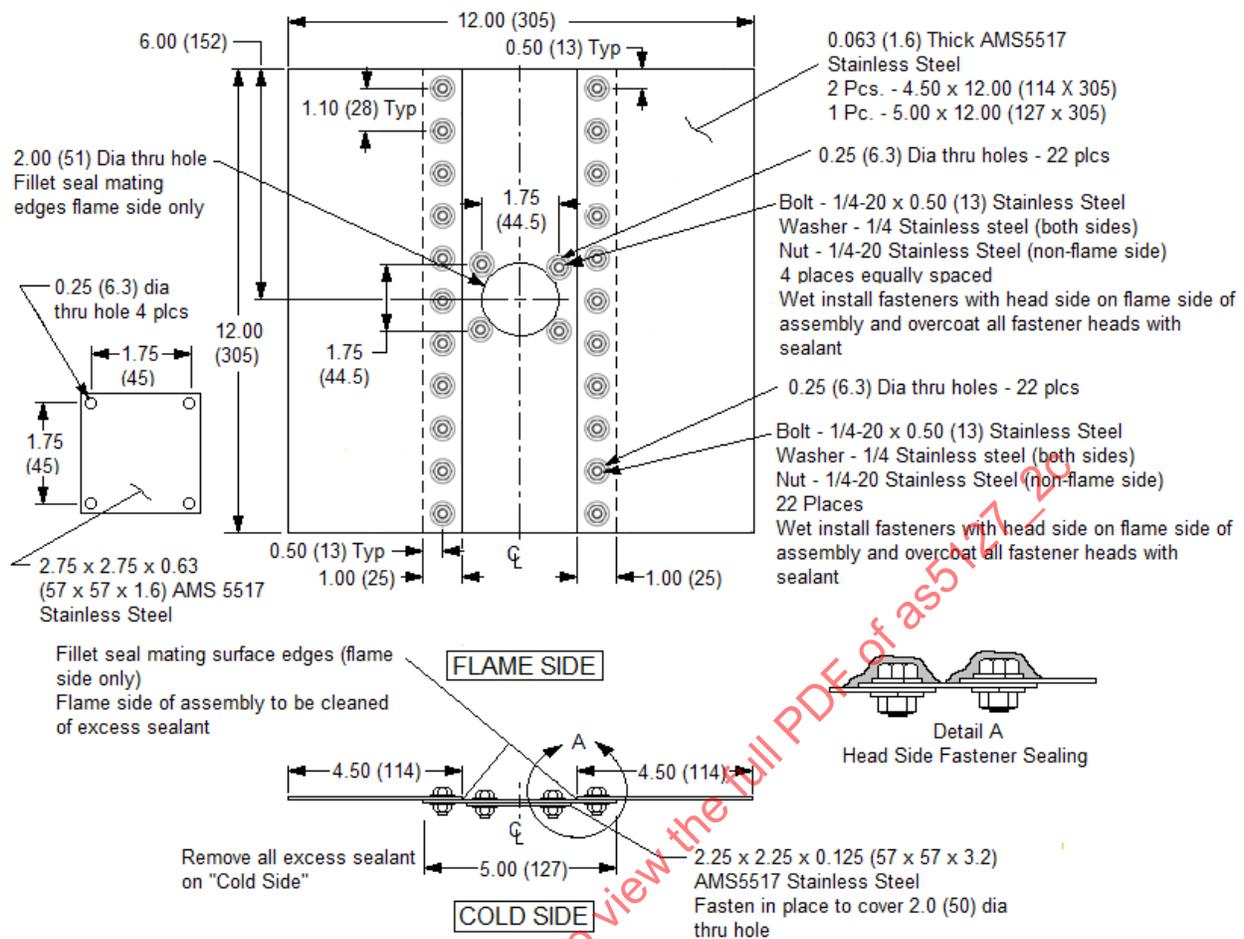


Figure 2 - Wire bundle connector sealing assembly

NOTE: Dimensions are in inches (millimeters)

SAENORM.COM Click to view the full PDF of as5127-2c