

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
4720

REV.
A

AS630

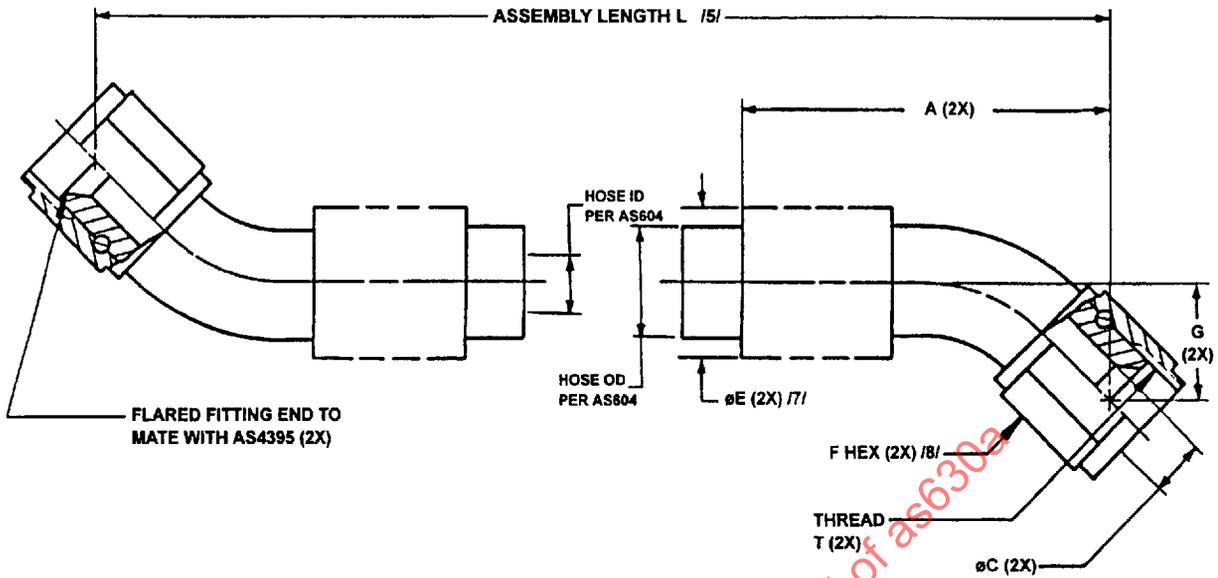


FIGURE 1 - HOSE AND FITTING DIMENSIONS

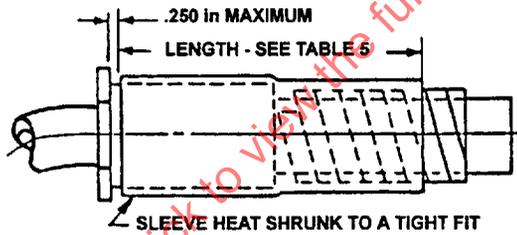


FIGURE 2 - TUBULAR/COIL ABRASION END /9/ /10/

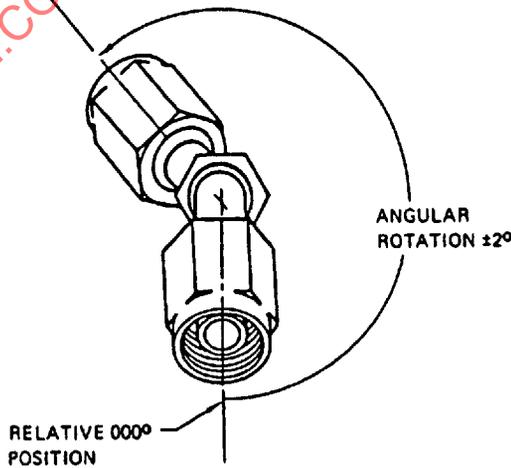


FIGURE 3 - FITTING ANGULAR ORIENTATION /18/

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

CUSTODIAN: SAE G-3/G-3D

PROCUREMENT SPECIFICATION: AS604 /2/

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

(R)

AEROSPACE STANDARD

HOSE ASSEMBLY, 3000 psi, TFE, FLARED,
45° TO 45°, HEAVYWEIGHT

AS630
SHEET 1 OF 6

REV.
A

Copyright 1999 Society of Automotive Engineers, Inc.
All rights reserved.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(724) 772-8510
(724) 776-4970

FAX: (724) 776-0243
FAX: (724) 776-0700

Distributed under license from the IHS Archive

SAE WEB ADDRESS: <http://www.sae.org>

Printed in the U.S.A.

ISSUED 1984-07 REVISED 1999-01

REV. A

AS630

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	THREAD T PER MIL-S-8879 (REF)	A		E MAX WITHOUT SLEEVING	F HEX (REF)
			MAX	C /6/ MIN		
AS630E	.250	.4375-20 UNJF-3B	1.90	.135	.88	.56
AS630G	.375	.5625-18 UNJF-3B	2.25	.240	1.00	.69
AS630H	.500	.7500-16 UNJF-3B	2.65	.340	1.20	.88
AS630J	.625	.8750-14 UNJF-3B	3.19	.410	1.41	1.00
AS630K	.750	1.0625-12 UNJ-3B	3.56	.510	1.69	1.25
AS630M	1.00	1.3125-12 UNJ-3B	4.35	.760	2.00	1.50
AS630N	1.25	1.6250-12 UNJ-3B	4.50	.925	2.13	2.00

TABLE 1 (CONTINUED)

HOSE ASSEMBLY NO. AND SIZE CODE	HOSE ASSEMBLY SIZE (REF)	G		INSPECTION BALL SIZE /6/ DIA IN
		MIN	MAX	
AS630E	.250	.280	.450	.115
AS630G	.375	.370	.565	.204
AS630H	.500	.430	.645	.289
AS630J	.625	.510	.675	.349
AS630K	.750	.590	.720	.434
AS630M	1.00	.760	.820	.646
AS630N	1.25	1.120	1.180	.786

SAENORM.COM : Click to view the full PDF of AS630a

 <p>SAE The Engineering Society For Advancing Mobility Land Sea Air and Space INTERNATIONAL 400 Commonwealth Drive, Warrendale, PA 15096-0001</p>	AEROSPACE STANDARD	AS630 SHEET 2 OF 6	REV. A
	(R) HOSE ASSEMBLY, 3000 psi, TFE, FLARED, 45° TO 45°, HEAVYWEIGHT		

REV.
A

AS630

TABLE 2 - HOSE OR SLEEVE OUTSIDE DIAMETER /13/

SLEEVE CODE	SLEEVE MATERIAL	TEMP. LIMIT °F	HOSE SIZE .250	HOSE SIZE .375	HOSE SIZE .500	HOSE SIZE .625	HOSE SIZE .750	HOSE SIZE 1.00	HOSE SIZE 1.25
NONE	(-) INDICATES HOSE ONLY, NO SLEEVE	400	.455 .395	.595 .535	.735 .675	.935 .875	1.090 1.030	1.410 1.350	1.650 1.590
A	ABRASION SLEEVE TUBULAR (TFE-AS1291-CODE B) /9/	400	.540 .468	.715 .635	.855 .770	1.025 .960	1.195 1.125	1.515 1.445	1.825 1.755
B	ABRASION SLEEVE COIL (NYLON AS1294) /10/	275	.509 .413	.684 .584	.809 .733	1.005 .923	1.170 1.088	1.492 1.408	1.750 1.690
C	FIRESLEEVE (AS1072 SIL-FG) (15 min) /11/ /12/ /17/	400	.688 .562	.875 .750	1.000 .875	1.250 1.125	1.375 1.250	1.750 1.625	2.000 1.875
E	ABRASION SLEEVE SHRINK-ON (FEP) /15/	350	.458 .417	.638 .592	.773 .727	.973 .927	1.148 1.102	1.438 1.392	1.688 1.632
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073 - CODE B) /15/	275	.490 .443	.670 .618	.795 .745	.997 .937	1.174 1.112	1.482 1.428	1.740 1.680
G	FIRESLEEVE (AS1072 SIL-FG) (5 min) /11/ /12/ /16/	400	.688 .562	.875 .750	1.000 .875	1.250 1.125	1.375 1.250	1.750 1.625	2.000 1.875
H	FIRESLEEVE INTEGRAL SILICONE (15 min) /17/	400	.700 .640	.880 .820	1.000 .940	1.203 1.143	1.343 1.283	1.656 1.596	1.906 1.846
J	FIRESLEEVE INTEGRAL SILICONE (5 min) /16/	400	.705 .645	.880 .820	1.005 .945	1.217 1.143	1.382 1.280	1.748 1.593	1.906 1.846
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER /14/	300	.505 .480	.675 .645	.795 .765	.985 .955	1.150 1.120	1.470 1.440	1.720 1.680
L	ABRASION SLEEVE COIL (PTFE-AS1293) /10/	400	.522 .449	.692 .622	.817 .747	1.007 .937	1.172 1.102	1.492 1.422	1.750 1.690

TABLE 3 - ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 in	±.125 in
18 TO 36 in, EXCLUSIVE	±.250 in
36 TO 50 in, EXCLUSIVE	±.500 in
50 in AND OVER	±1%

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

(R) HOSE ASSEMBLY, 3000 psi, TFE, FLARED,
45° TO 45°, HEAVYWEIGHT

AS630
SHEET 3 OF 6

REV. A

REV. A
AS630

TABLE 4 - WEIGHTS (NOMINAL)

HOSE OR SLEEVE CODE	HOSE OR TYPE SLEEVE	UNITS	HOSE SIZE						
			.250	.375	.500	.625	.750	1.00	1.25
NONE	HOSE ONLY	LB/IN	.012	.028	.040	.062	.086	.140	.154
A	ABRASION SLEEVE (TFE-AS1291-B)	LB/IN	.003	.004	.004	.005	.007	.009	.011
B	ABRASION SLEEVE (NYLON AS1294)	LB/IN	.001	.002	.003	.003	.004	.005	.007
C	FIRESLEEVE (15 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025
E	ABRASION SLEEVE (FEP)	LB/IN	.002	.003	.003	.005	.006	.007	.009
F	ABRASION SLEEVE (AS1073B)	LB/IN	.002	.003	.003	.004	.005	.006	.008
G	FIRESLEEVE (5 min) AS1072	LB/IN	.007	.010	.011	.015	.017	.021	.025
H	FIRESLEEVE INTEGRAL (15 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190
J	FIRESLEEVE INTEGRAL (5 min) ON HOSE	LB/IN	.022	.042	.056	.081	.102	.154	.190
K	ABRASION SLEEVE POLYESTER WITH HOSE	LB/IN	.013	.028	.039	.060	.082	.130	.160
L	ABRASION SLEEVE (PTFE-AS1293)	LB/IN	.003	.004	.005	.005	.006	.007	.009
NONE	FIRESLEEVE CLAMP (*)	LB/EA	.020	.020	.025	.026	.026	.033	.038
NONE	FITTING END (45°) (*)	LB/EA	.075	.135	.220	.306	.584	.820	1.510

(*) NOTE: FIRESLEEVE CLAMP AND FITTING END ARE IN POUNDS EACH.

TABLE 5 - SLEEVE LENGTH

HOSE SIZE	LENGTH (INCHES)
.250	2.00 ± .25
.375	
.500	2.50 ± .25
.625	
.750	3.00 ± .25
1.00	
1.25	3.50 ± .25