

AS85052/4

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85052/4, NOTICE 1, AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85052/4, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of AS85052/4

THIRD ANGLE PROJECTION



ISSUED 2001-03 REAFFIRMED 2007-01

CUSTODIAN: SAE G-3



AEROSPACE STANDARD

CLAMP SUPPORT - LOOP CLAMP

AS85052/4
SHEET 1 OF 3

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85052/4

THE COMPLETE REQUIREMENTS FOR PROCURING THE WASHERS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE IN EFFECT OF SPECIFICATION MIL-C-85052.

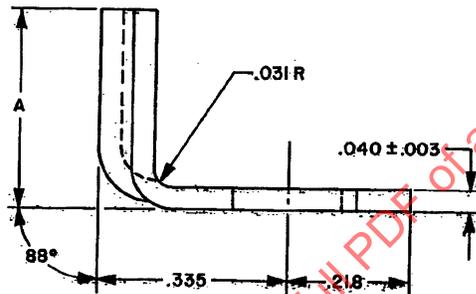
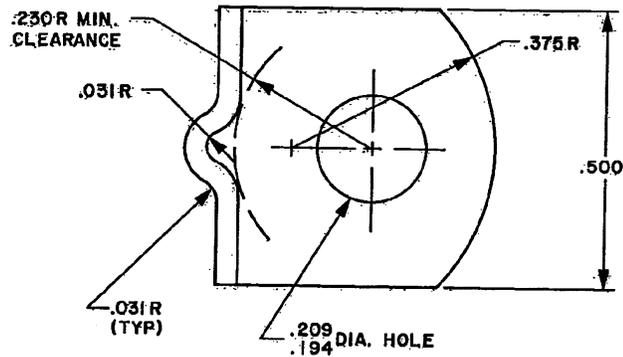


TABLE I

DASH NUMBER	FOR USE ON MIL-C-85052 /1, /2, & /3	A.
-1012	-10	.470
	-12	
-1416	-14	.580
	-16	
-1820	-18	.700
	-20	
-2224	-22	.820
	-24	

REQUIREMENTS

- MARKING - THE MANUFACTURER'S IDENTIFICATION, THE SIZE, AND THE SPECIFICATION SHEET NUMBER.
- MATERIAL - 17-7PH, CORROSION RESISTANT STEEL PER MIL-S-25043, ANNEALED. STRESS RELIEVE AND HEAT TREAT TO TH1100 CONDITION PER MIL-H-6875, AFTER FORMING.
- FINISH - PASSIVATE PER QQ-P-35.
- PART NUMBER- PART NUMBERS SHALL CONSIST OF THE FOLLOWING: (IN SEQUENCE).

1. THE LETTER "M".
 2. THE GENERAL SPECIFICATION NUMBER.
 3. A SLASH, AND SLASH NUMBER OF THIS SPECIFICATION SHEET.
 4. A DASH, AND THE APPROPRIATE SIZE DASH NUMBERS FROM TABLE I.
- EXAMPLE: M85052/4-1416