

REV.
A

AS9286

FEDERAL SUPPLY CLASS
5306

RATIONALE

UPDATE STANDARD, INTRODUCE SYMBOLS FOR GEOMETRIC FORM CONTROLS PER ANSI Y14.5 AND REPLACE MIL-S-8879 WITH AS8879.

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9286A NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.


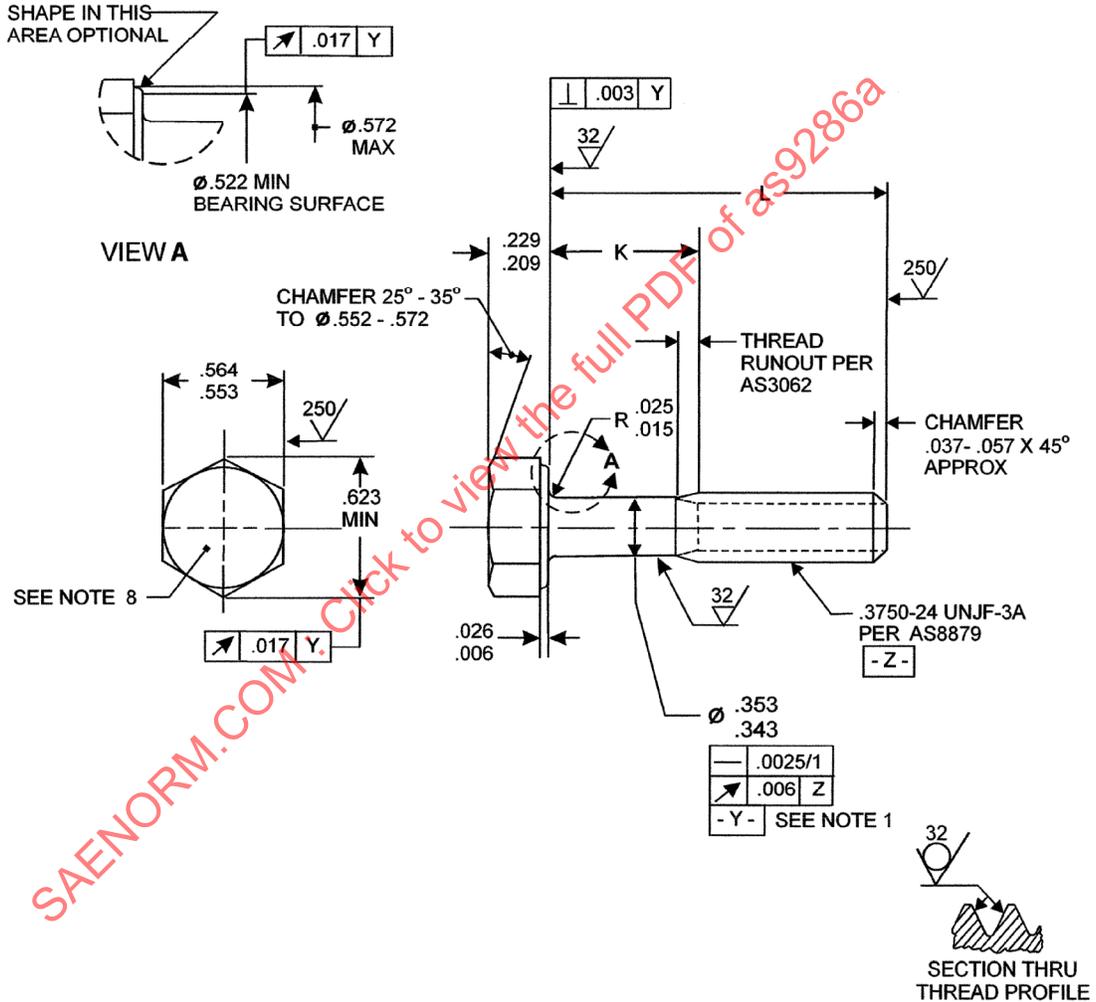


FIGURE 1 - BOLT

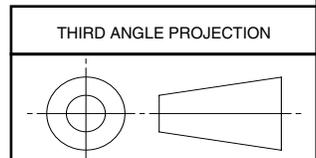

CUSTODIAN: SAE E-25

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BOLT, MACHINE - HEXAGON HEAD, PD SHANK,
BLACK OXIDE, STEEL UNS G87400, 125 KSI MIN,
.3750-24 UNJF-3A

AS9286
SHEET 1 OF 3

**REV.
A**

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1999-12 REAFFIRMED 2004-07 REVISED 2006-06

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	L	K	APPROX. MASS LB/100	PART NUMBER	L	K	APPROX. MASS LB/100
MS9286-04	.615 - .635	.088 - .108	3.35	MS9286-31	2.865 - 2.885	1.815 - 1.875	9.41
MS9286-05	.678 - .698	.088 - .108	3.52	MS9286-32	2.990 - 3.010	1.940 - 2.000	9.74
MS9286-06	.740 - .760	.088 - .108	3.69	MS9286-33	3.115 - 3.135	2.065 - 2.125	10.08
MS9286-07	.802 - .822	.088 - .108	3.86	MS9286-34	3.240 - 3.260	2.190 - 2.250	10.41
MS9286-08	.865 - .885	.088 - .108	4.03	MS9286-35	3.365 - 3.385	2.315 - 2.375	10.75
MS9286-09	.928 - .948	.088 - .108	4.20	MS9286-36	3.490 - 3.510	2.440 - 2.500	11.09
MS9286-10	.990 - 1.010	.088 - .108	4.37	MS9286-37	3.615 - 3.635	2.565 - 2.625	11.42
MS9286-11	1.052 - 1.072	.088 - .108	4.53	MS9286-38	3.740 - 3.760	2.690 - 2.750	11.76
MS9286-12	1.115 - 1.135	.088 - .125	4.70	MS9286-39	3.865 - 3.885	2.815 - 2.875	12.09
MS9286-13	1.178 - 1.198	.128 - .188	4.87	MS9286-40	3.990 - 4.010	2.940 - 3.000	12.43
MS9286-14	1.240 - 1.260	.190 - .250	5.04	MS9286-41	4.115 - 4.135	3.065 - 3.125	12.77
MS9286-15	1.302 - 1.322	.252 - .312	5.21	MS9286-42	4.240 - 4.260	3.190 - 3.250	13.10
MS9286-16	1.365 - 1.385	.315 - .375	5.37	MS9286-43	4.365 - 4.385	3.315 - 3.375	13.44
MS9286-17	1.428 - 1.448	.378 - .438	5.54	MS9286-44	4.490 - 4.510	3.440 - 3.500	13.77
MS9286-18	1.490 - 1.510	.440 - .500	5.71	MS9286-45	4.615 - 4.635	3.565 - 3.625	14.11
MS9286-19	1.552 - 1.572	.502 - .562	5.88	MS9286-46	4.740 - 4.760	3.690 - 3.750	14.45
MS9286-20	1.615 - 1.635	.565 - .625	6.05	MS9286-47	4.865 - 4.885	3.815 - 3.875	14.78
MS9286-21	1.678 - 1.698	.628 - .688	6.21	MS9286-48	4.990 - 5.010	3.940 - 4.000	15.12
MS9286-22	1.740 - 1.760	.690 - .750	6.38	MS9286-49	5.115 - 5.135	4.065 - 4.125	15.45
MS9286-23	1.865 - 1.885	.815 - .875	6.72	MS9286-50	5.240 - 5.260	4.190 - 4.250	15.79
MS9286-24	1.990 - 2.010	.940 - 1.000	7.05	MS9286-51	5.365 - 5.385	4.315 - 4.375	16.13
MS9286-25	2.115 - 2.135	1.065 - 1.125	7.39	MS9286-52	5.490 - 5.510	4.440 - 4.500	16.46
MS9286-26	2.240 - 2.260	1.190 - 1.250	7.73	MS9286-53	5.615 - 5.635	4.565 - 4.625	16.80
MS9286-27	2.365 - 2.385	1.315 - 1.375	8.06	MS9286-54	5.740 - 5.760	4.690 - 4.750	17.13
MS9286-28	2.490 - 2.510	1.440 - 1.500	8.40	MS9286-55	5.865 - 5.885	4.815 - 4.875	17.47
MS9286-29	2.615 - 2.635	1.565 - 1.625	8.73	MS9286-56	5.990 - 6.010	4.940 - 5.000	17.81
MS9286-30	2.740 - 2.760	1.690 - 1.750	9.07				