

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A
AS9567


FEDERAL SUPPLY CLASS
5306

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9567, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9567a

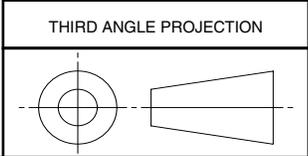

CUSTODIAN: SAE E-25

ISSUED 1998-08 REVISED 2003-11

<p>An SAE International Group</p>	AEROSPACE STANDARD		AS9567 SHEET 1 OF 3	REV. A
	(R) BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, PD SHANK, 130 KSI MIN, .3125-24 UNJF-3A			

Copyright © 2003 SAE International
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790
 Tel: 724-776-4970 (outside USA) Email: custsvc@sae.org
 SAE WEB ADDRESS: <http://www.sae.org>

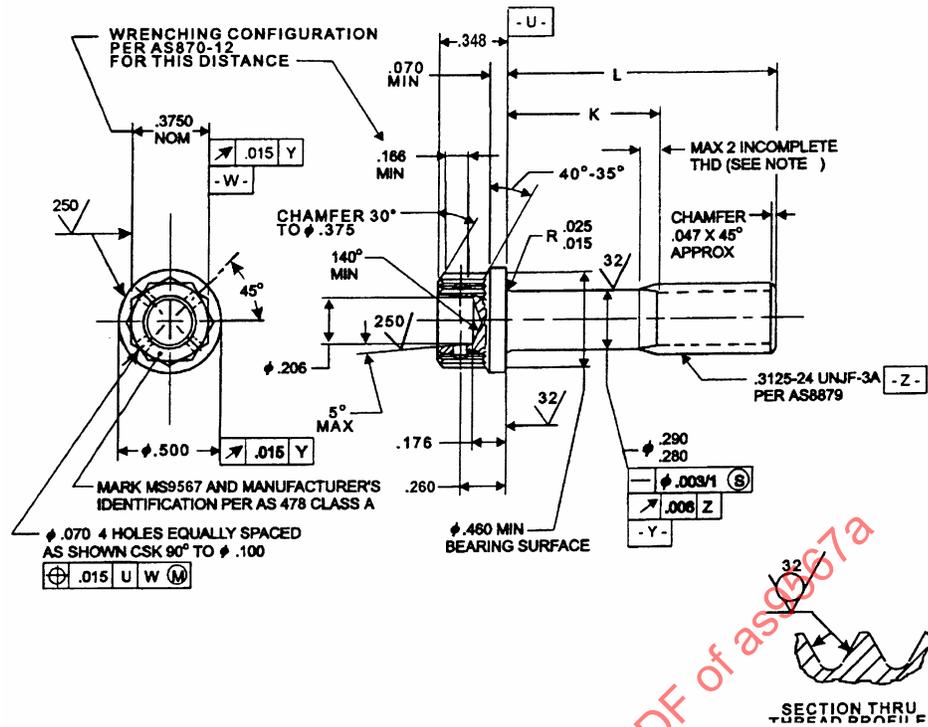


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	L	K	APPROX. MASS LB/100	PART NUMBER	L	K	APPROX. MASS LB/100
MS9567-04	.500	.088-.108	2.06	MS9567-19	1.438	.502-.562	3.75
MS9567-05	.562	.088-.108	2.17	MS9567-20	1.500	.565-.625	3.87
MS9567-06	.625	.088-.108	2.28	MS9567-21	1.562	.628-.688	3.98
MS9567-07	.688	.088-.108	2.39	MS9567-22	1.625	.690-.750	4.10
MS9567-08	.750	.088-.108	2.51	MS9567-23	1.688	.752-.812	4.22
MS9567-09	.812	.088-.108	2.62	MS9567-24	1.750	.815-.875	4.33
MS9567-10	.875	.088-.108	2.73	MS9567-59	1.812	.878-.938	4.44
MS9567-41	.938	.088-.108	2.85	MS9567-25	1.875	.940-1.000	4.55
MS9567-12	1.000	.088-.125	2.96	MS9567-60	1.938	1.012-1.062	4.66
MS9567-13	1.062	.128-.188	3.07	MS9567-26	2.000	1.065-1.125	4.77
MS9567-14	1.125	.190-.250	3.19	MS9567-27	2.125	1.190-1.250	5.00
MS9567-15	1.188	.252-.312	3.30	MS9567-28	2.250	1.315-1.375	5.23
MS9567-16	1.250	.315-.375	3.41	MS9567-29	2.375	1.440-1.500	5.45
MS9567-17	1.312	.378-.438	3.52	MS9567-30	2.500	1.565-1.625	5.67
MS9567-18	1.375	.440-.500	3.64	MS9567-31	2.625	1.690-1.750	5.90
				MS9567-32	2.750	1.815-1.875	6.13
				MS9567-33	2.875	1.940-2.000	6.36