

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9902A, AMENDMENT 1, AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9902A, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as9902

AS9902

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

THIRD ANGLE PROJECTION



ISSUED 1999-10

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

PLUG, MACHINE THREAD DRILLED,
PREFORMED PACKING MIL-S-8879
THREAD

AS9902
SHEET 1 OF 3

AS9902

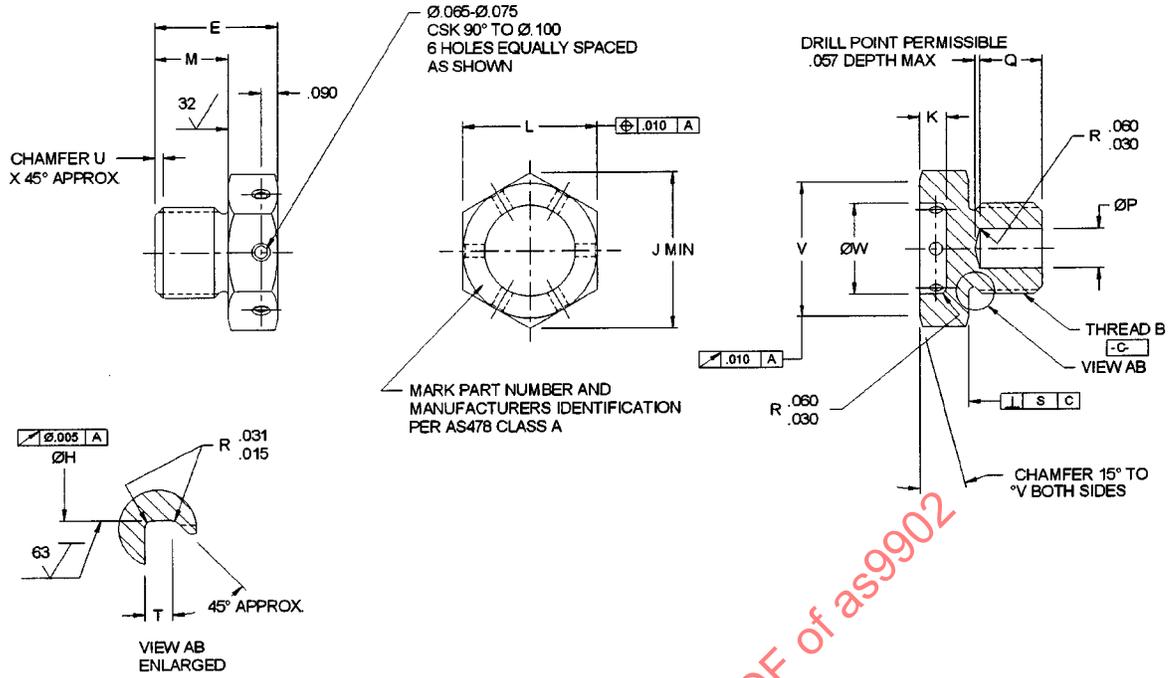


TABLE 1. DASH NUMBER AND DIMENSIONS

DASH NUMBER	THREAD B	B	$\varnothing H$ +.002 -.003	J MIN	K	L	M	$\varnothing P$	Q	S	T +.015 -.000	U	V	$\varnothing W$	APPROX WEIGHT LB/100
01	250-28 UNJF-3A	.560	.196	.482	.150	.430-.439	.320	-	-	.003	.063	.020-.050	.438	.250	1.183
02	.3125-24 UNJF-3A	.600	.250	.522	.150	.553-.564	.360	-	-	.003	.063	.020-.050	.562	.312	2.055
03	.375-24 UNJF-3A	.600	.312	.694	.150	.616-.627	.360	-	-	.003	.063	.020-.050	.625	.375	2.646
04	4375-20 UNJF-3A	.660	.364	.766	.150	.679-.690	.400	-	-	.003	.075	.030-.060	.688	.438	3.657
05	500-20 UNJF-3A	.670	.426	.837	.150	.741-.752	.400	.219	.340	.003	.075	.030-.060	.750	.500	4.277
06	5625-18 UNJF-3A	.680	.481	.907	.150	.803-.814	.400	.219	.340	.003	.083	.040-.070	.812	.562	5.307
07	625-18 UNJF-3A	.730	.544	.978	.160	.865-.877	.440	.312	.380	.003	.083	.040-.070	.875	.625	6.334
08	750-16 UNJF-3A	.730	.660	1.121	.160	.990-1.002	.440	.438	.400	.003	.094	.040-.070	1.000	.750	7.995
09	.8125-16 UNJ-3A	.740	.722	1.191	.160	1.052-1.064	.440	.500	.400	.003	.094	.040-.070	1.082	.812	9.199
10	.875-14 UNJF-3A	.740	.773	1.263	.160	1.115-1.127	.440	.548	.400	.003	.107	.050-.080	1.125	.875	10.122
11	1.000-12 UNJF-3A	.780	.862	1.475	.190	1.301-1.314	.440	.657	.400	.005	.125	.050-.080	1.312	1.000	14.808
12	1.0625-12 UNJ-3A	.830	.945	1.475	.200	1.301-1.314	.480	.719	.400	.005	.125	.050-.080	1.312	1.000	15.891
14	1.1875-12 UNJ-3A	.830	1.070	1.619	.200	1.427-1.440	.480	.844	.400	.005	.125	.050-.080	1.438	1.125	18.582
16	1.3125-12 UNJ-3A	.840	1.195	1.833	.200	1.614-1.627	.480	.969	.400	.005	.125	.050-.080	1.625	1.312	23.416
18	1.500-12 UNJF-3A	.840	1.382	1.974	.200	1.738-1.752	.480	1.156	.400	.005	.125	.050-.080	1.750	1.438	27.369
20	1.625-12 UNJ-3A	.850	1.507	2.117	.200	1.863-1.877	.480	1.281	.400	.005	.125	.050-.080	1.875	1.562	31.827
24	1.875-12 UNJ-3A	.860	1.756	2.402	.200	2.113-2.127	.480	1.531	.400	.005	.125	.050-.080	2.124	1.812	40.949
28	2.250-12 UNJ-3A	.870	2.131	2.830	.200	2.400-2.502	.480	1.906	.400	.005	.125	.050-.080	2.500	2.188	56.454
32	2.500-12 UNJ-3A	.870	2.381	3.115	.200	2.738-2.752	.480	2.156	.400	.005	.125	.050-.080	2.750	2.438	67.139